DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
1 of 40	01/06/21
BUSINESS UNIT	BUYER
14018300	ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

VENDOR ADDRESS:

CENTURY TEL SERVICE GROUP, LLC
DBA CENTURY LINK
100 CENTURYLINK DR
MONROE LA 71203-2041

CONTRACT NUMBER
92858 O4

AN AWARD HAS BEEN MADE TO THE VENDOR/CONTRACTOR NAMED ABOVE FOR THE SERVICES AS LISTED BELOW FOR THE PERIOD:

JANUARY 12, 2021 THROUGH JANUARY 11, 2026

THIS CONTRACT IS NOT AN EXCLUSIVE CONTRACT TO FURNISH THE SERVICES SHOWN BELOW, AND DOES NOT PRECLUDE THE PURCHASE OF SIMILAR SERVICES FROM OTHER SOURCES.

THE STATE RESERVES THE RIGHT TO EXTEND THE PERIOD OF THIS CONTRACT BEYOND THE TERMINATION DATE WHEN MUTUALLY AGREEABLE TO THE VENDOR/CONTRACTOR AND THE STATE OF NEBRASKA.

Original/Bid Document 6264 Z1

Contract to supply and deliver Next Generation 911 Emergency Services IP Network (ESInet) and Next Generation Core Services (NGCS) to the State of Nebraska as per the attached specifications for the period January 12, 2021 through January 11, 2026. The contract may be renewed for five (5) additional one (1) year periods when mutually agreeable to the vendor and the State of Nebraska.

Vendor Contact: Bjorn Johnson, Sr Account Manager - SLED
Phone (Office): 605-977-2820
Phone (Cell): 605-321-6188
Fax: 605-339-5652
E-Mail: Bjorn.Johnson@centurylink.com

(1/6/21 sc)

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
1	REG 1 SC ESINET MRC EST QTY .0214 X 2019 EST POPULATION INITIAL AWARD YEAR 1	66,552.0001	$	1.0000	66,552.00
2	REG 1 SC ESINET MRC EST QTY .0214 X 2019 EST POPULATION INITIAL AWARD YEAR 2	66,552.0001	$	1.0000	66,552.00
3	REG 1 SC ESINET MRC EST QTY .0214 X 2019 EST POPULATION INITIAL AWARD YEAR 3	66,552.0001	$	1.0000	66,552.00
4	REG 1 SC ESINET MRC EST QTY .0214 X 2019 EST POPULATION INITIAL AWARD YEAR 4	66,552.0001	$	1.0000	66,552.00
5	REG 1 SC ESINET MRC	66,552.0001	$	1.0000	66,552.00

DocuSigned by:
Mike Hybl 1/12/2021
A64B00F7E0DB42E...
Public Service Commission

DocuSigned by:
Annette Walton 1/13/2021
2358B0EE0E87446...
BUYER

DocuSigned by:
1/13/2021
6F1A26D8C1B2454...
MATERIEL ADMINISTRATOR

DS PK

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
2 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	EST QTY .0214 X 2019 EST POPULATION INITIAL AWARD YEAR 5				
6	REG 1 SC ESINET MRC EST QTY .0214 X 2019 EST POPULATION REN 1 YEAR 6	66,552.0001	$	1.0000	66,552.00
7	REG 1 SC ESINET MRC EST QTY .0214 X 2019 EST POPULATION REN 2 YEAR 7	66,552.0001	$	1.0000	66,552.00
8	REG 1 SC ESINET MRC EST QTY .0214 X 2019 EST POPULATION REN 3 YEAR 8	66,552.0001	$	1.0000	66,552.00
9	REG 1 SC ESINET MRC EST QTY .0214 X 2019 EST POPULATION REN 4 YEAR 9	66,552.0001	$	1.0000	66,552.00
10	REG 1 SC ESINET MRC EST QTY .0214 X 2019 EST POPULATION REN 5 YEAR 10	66,552.0001	$	1.0000	66,552.00
11	REG 1 SC A911 ROUTING SVC BCF MRC EST QTY .0304 X 2019 POPULATION INITIAL AWARD YEAR 1	94,624.1304	$	1.0000	94,624.13
12	REG 1 SC A911 ROUTING SVC BCF MRC EST QTY .0304 X 2019 POPULATION INITIAL AWARD YEAR 2	94,624.1304	$	1.0000	94,624.13
13	REG 1 SC A911 ROUTING SVC BCF MRC EST QTY .0304 X 2019 POPULATION INITIAL AWARD YEAR 3	94,624.1304	$	1.0000	94,624.13
14	REG 1 SC A911 ROUTING SVC BCF MRC EST QTY .0304 X 2019 POPULATION INITIAL AWARD YEAR 4	94,624.1304	$	1.0000	94,624.13
15	REG 1 SC A911 ROUTING SVC BCF MRC EST QTY .0304 X 2019 POPULATION INITIAL AWARD YEAR 5	94,624.1304	$	1.0000	94,624.13

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
3 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
16	REG 1 SC A911 ROUTING SVC BCF MRC EST QTY .0304 X 2019 POPULATION REN 1 YEAR 6	94,624.1304	$	1.0000	94,624.13
17	REG 1 SC A911 ROUTING SVC BCF MRC EST QTY .0304 X 2019 POPULATION REN 2 YEAR 7	94,624.1304	$	1.0000	94,624.13
18	REG 1 SC A911 ROUTING SVC BCF MRC EST QTY .0304 X 2019 POPULATION REN 3 YEAR 8	94,624.1304	$	1.0000	94,624.13
19	REG 1 SC A911 ROUTING SVC BCF MRC EST QTY .0304 X 2019 POPULATION REN 4 YEAR 9	94,624.1304	$	1.0000	94,624.13
20	REG 1 SC A911 ROUTING SVC BCF MRC EST QTY .0304 X 2019 POPULATION REN 5 YEAR 10	94,624.1304	$	1.0000	94,624.13
21	REG 1 SC 13 ADD ON MRC EST QTY .0163 X 2019 POPULATION INITIAL AWARD YEAR 1	50,691.3087	$	1.0000	50,691.31
22	REG 1 SC 13 ADD ON MRC EST QTY .0163 X 2019 POPULATION INITIAL AWARD YEAR 2	50,691.3087	$	1.0000	50,691.31
23	REG 1 SC 13 ADD ON MRC EST QTY .0163 X 2019 POPULATION INITIAL AWARD YEAR 3	50,691.3087	$	1.0000	50,691.31
24	REG 1 SC 13 ADD ON MRC EST QTY .0163 X 2019 POPULATION INITIAL AWARD YEAR 4	50,691.3087	$	1.0000	50,691.31
25	REG 1 SC 13 ADD ON MRC EST QTY .0163 X 2019 POPULATION INITIAL AWARD YEAR 5	50,691.3087	$	1.0000	50,691.31
26	REG 1 SC 13 ADD ON MRC EST QTY .0163 X 2019 POPULATION REN 1 YEAR 6	50,691.3087	$	1.0000	50,691.31

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
4 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
27	REG 1 SC 13 ADD ON MRC EST QTY .0163 X 2019 POPULATION REN 2 YEAR 7	50,691.3087	$	1.0000	50,691.31
28	REG 1 SC 13 ADD ON MRC EST QTY .0163 X 2019 POPULATION REN 3 YEAR 8	50,691.3087	$	1.0000	50,691.31
29	REG 1 SC 13 ADD ON MRC EST QTY .0163 X 2019 POPULATION REN 4 YEAR 9	50,691.3087	$	1.0000	50,691.31
30	REG 1 SC 13 ADD ON MRC EST QTY .0163 X 2019 POPULATION REN 5 YEAR 10	50,691.3807	$	1.0000	50,691.38
31	REG 1 SC LDB ALI MRC EST QTY .0083 X 2019 POPULATION INITIAL AWARD YEAR 1	25,697.3320	$	1.0000	25,697.33
32	REG 1 SC LDB ALI MRC EST QTY .0083 X 2019 POPULATION INITIAL AWARD YEAR 2	25,697.3320	$	1.0000	25,697.33
33	REG 1 SC LDB ALI MRC EST QTY .0083 X 2019 POPULATION INITIAL AWARD YEAR 3	25,697.3320	$	1.0000	25,697.33
34	REG 1 SC LDB ALI MRC EST QTY .0083 X 2019 POPULATION INITIAL AWARD YEAR 4	25,697.3320	$	1.0000	25,697.33
35	REG 1 SC LDB ALI MRC EST QTY .0083 X 2019 POPULATION INITIAL AWARD YEAR 5	25,697.3320	$	1.0000	25,697.33
36	REG 1 SC LDB ALI MRC EST QTY .0083 X 2019 POPULATION REN 1 YEAR 6	25,697.3320	$	1.0000	25,697.33
37	REG 1 SC LDB ALI MRC EST QTY .0083 X 2019 POPULATION REN 2 YEAR 7	25,697.3320	$	1.0000	25,697.33
38	REG 1 SC LDB ALI MRC EST QTY .0083 X 2019 POPULATION REN 3 YEAR 8	25,697.3320	$	1.0000	25,697.33

DS
AW
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
5 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
39	REG 1 SC LDB ALI MRC EST QTY .0083 X 2019 POPULATION REN 4 YEAR 9	25,697.3320	$	1.0000	25,697.33
40	REG 1 SC LDB ALI MRC EST QTY .0083 X 2019 POPULATION REN 5 YEAR 10	25,697.3320	$	1.0000	25,697.33
41	REG 1 SC NETWORK MONITOR MRC EST QTY .0008 X 2019 POPULATION INITIAL AWARD YEAR 1	2,519.9990	$	1.0000	2,520.00
42	REG 1 SC NETWORK MONITOR MRC EST QTY .0008 X 2019 POPULATION INITIAL AWARD YEAR 2	2,519.9990	$	1.0000	2,520.00
43	REG 1 SC NETWORK MONITOR MRC EST QTY .0008 X 2019 POPULATION INITIAL AWARD YEAR 3	2,519.9990	$	1.0000	2,520.00
44	REG 1 SC NETWORK MONITOR MRC EST QTY .0008 X 2019 POPULATION INITIAL AWARD YEAR 4	2,519.9990	$	1.0000	2,520.00
45	REG 1 SC NETWORK MONITOR MRC EST QTY .0008 X 2019 POPULATION INITIAL AWARD YEAR 5	2,519.9990	$	1.0000	2,520.00
46	REG 1 SC NETWORK MONITOR MRC EST QTY .0008 X 2019 POPULATION REN 1 YEAR 6	2,519.9990	$	1.0000	2,520.00
47	REG 1 SC NETWORK MONITOR MRC EST QTY .0008 X 2019 POPULATION REN 2 YEAR 7	2,519.9990	$	1.0000	2,520.00
48	REG 1 SC NETWORK MONITOR MRC EST QTY .0008 X 2019 POPULATION REN 3 YEAR 8	2,519.9990	$	1.0000	2,520.00
49	REG 1 SC NETWORK MONITOR MRC EST QTY .0008 X 2019 POPULATION REN 4 YEAR 9	2,519.9990	$	1.0000	2,520.00
50	REG 1 SC NETWORK MONITOR MRC EST QTY .0008 X 2019 POPULATION REN 5 YEAR 10	2,519.9990	$	1.0000	2,520.00

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
6 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
51	REG 1 SC SIP INGRESS TO CORES MRC EST QTY .0075 X 2019 POPULATION INITIAL AWARD YEAR 1	23,358.8160	$	1.0000	23,358.82
52	REG 1 SC SIP INGRESS TO CORES MRC EST QTY .0075 X 2019 POPULATION INITIAL AWARD YEAR 2	23,358.8160	$	1.0000	23,358.82
53	REG 1 SC SIP INGRESS TO CORES MRC EST QTY .0075 X 2019 POPULATION INITIAL AWARD YEAR 3	23,358.8160	$	1.0000	23,358.82
54	REG 1 SC SIP INGRESS TO CORES MRC EST QTY .0075 X 2019 POPULATION INITIAL AWARD YEAR 4	23,358.8160	$	1.0000	23,358.82
55	REG 1 SC SIP INGRESS TO CORES MRC EST QTY .0075 X 2019 POPULATION INITIAL AWARD YEAR 5	23,358.8160	$	1.0000	23,358.82
56	REG 1 SC SIP INGRESS TO CORES MRC EST QTY .0075 X 2019 POPULATION REN 1 YEAR 6	23,358.8160	$	1.0000	23,358.82
57	REG 1 SC SIP INGRESS TO CORES MRC EST QTY .0075 X 2019 POPULATION REN 2 YEAR 7	23,358.8160	$	1.0000	23,358.82
58	REG 1 SC SIP INGRESS TO CORES MRC EST QTY .0075 X 2019 POPULATION REN 3 YEAR 8	23,358.8160	$	1.0000	23,358.82
59	REG 1 SC SIP INGRESS TO CORES MRC EST QTY .0075 X 2019 POPULATION REN 4 YEAR 9	23,358.8160	$	1.0000	23,358.82
60	REG 1 SC SIP INGRESS TO CORES MRC	23,358.8160	$	1.0000	23,358.82

DS
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
7 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	EST QTY .0075 X 2019 POPULATION REN 5 YEAR 10				
61	REG 1 SC UPS NON RECUR COST INITIAL AWARD YEAR 1	2,880.0000	$	1.0000	2,880.00
62	REG 1 SC LABOR NON RECUR COST INITIAL AWARD YEAR 1	3,486.0000	$	1.0000	3,486.00
63	REG 1 SC CCS DEFAULT ROUTS NRC INITIAL AWARD YEAR 1	1,820.0400	$	1.0000	1,820.04
64	REG 1 SC OPT TSP PROVIS INSTALL RESTORE NON RECUR COST INITIAL AWARD YEAR 1	578.0000	$	1.0000	578.00
65	REG 2 SE ESINET MRC EST QTY .0108 X 2019 EST POPULATION INITIAL AWARD YEAR 1	66,551.9999	$	1.0000	66,552.00
66	REG 2 SE ESINET MRC EST QTY .0108 X 2019 EST POPULATION INITIAL AWARD YEAR 2	66,551.9999	$	1.0000	66,552.00
67	REG 2 SE ESINET MRC EST QTY .0108 X 2019 EST POPULATION INITIAL AWARD YEAR 3	66,551.9999	$	1.0000	66,552.00
68	REG 2 SE ESINET MRC EST QTY .0108 X 2019 EST POPULATION INITIAL AWARD YEAR 4	66,551.9999	$	1.0000	66,552.00
69	REG 2 SE ESINET MRC EST QTY .0108 X 2019 EST POPULATION INITIAL AWARD YEAR 5	66,551.9999	$	1.0000	66,552.00
70	REG 2 SE ESINET MRC EST QTY .0108 X 2019 EST POPULATION REN 1 YEAR 6	66,551.9999	$	1.0000	66,552.00
71	REG 2 SE ESINET MRC EST QTY .0108 X 2019 EST POPULATION REN 2 YEAR 7	66,551.9999	$	1.0000	66,552.00

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
8 of 40	01/06/21
BUSINESS UNIT	BUYER
14018300	ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
72	REG 2 SE ESINET MRC EST QTY .0108 X 2019 EST POPULATION REN 3 YEAR 8	66,551.9999	$	1.0000	66,552.00
73	REG 2 SE ESINET MRC EST QTY .0108 X 2019 EST POPULATION REN 4 YEAR 9	66,551.9999	$	1.0000	66,552.00
74	REG 2 SE ESINET MRC EST QTY .0108 X 2019 EST POPULATION REN 5 YEAR 10	66,551.9999	$	1.0000	66,552.00
75	REG 2 SE A911 ROUTING SVC BCF MRC EST QTY .0154 X 2019 POPULATION INITIAL AWARD YEAR 1	94,624.1321	$	1.0000	94,624.13
76	REG 2 SE A911 ROUTING SVC BCF MRC EST QTY .0154 X 2019 POPULATION INITIAL AWARD YEAR 2	94,624.1321	$	1.0000	94,624.13
77	REG 2 SE A911 ROUTING SVC BCF MRC EST QTY .0154 X 2019 POPULATION INITIAL AWARD YEAR 3	94,624.1321	$	1.0000	94,624.13
78	REG 2 SE A911 ROUTING SVC BCF MRC EST QTY .0154 X 2019 POPULATION INITIAL AWARD YEAR 4	94,624.1321	$	1.0000	94,624.13
79	REG 2 SE A911 ROUTING SVC BCF MRC EST QTY .0154 X 2019 POPULATION INITIAL AWARD YEAR 5	94,624.1321	$	1.0000	94,624.13
80	REG 2 SE A911 ROUTING SVC BCF MRC EST QTY .0154 X 2019 POPULATION REN 1 YEAR 6	94,624.1321	$	1.0000	94,624.13
81	REG 2 SE A911 ROUTING SVC BCF MRC EST QTY .0154 X 2019 POPULATION REN 2 YEAR 7	94,624.1321	$	1.0000	94,624.13
82	REG 2 SE A911 ROUTING	94,624.1321	$	1.0000	94,624.13

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
9 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	SVC BCF MRC EST QTY .0154 X 2019 POPULATION REN 3 YEAR 8				
83	REG 2 SE A911 ROUTING SVC BCF MRC EST QTY .0154 X 2019 POPULATION REN 4 YEAR 9	94,624.1321	$	1.0000	94,624.13
84	REG 2 SE A911 ROUTING SVC BCF MRC EST QTY .0154 X 2019 POPULATION REN 5 YEAR 10	94,624.1321	$	1.0000	94,624.13
85	REG 2 SE I3 ADD ON MRC EST QTY .0082 X 2019 POPULATION INITIAL AWARD YEAR 1	50,691.3110	$	1.0000	50,691.31
86	REG 2 SE I3 ADD ON MRC EST QTY .0082 X 2019 POPULATION INITIAL AWARD YEAR 2	50,691.3110	$	1.0000	50,691.31
87	REG 2 SE I3 ADD ON MRC EST QTY .0082 X 2019 POPULATION INITIAL AWARD YEAR 3	50,691.3110	$	1.0000	50,691.31
88	REG 2 SE I3 ADD ON MRC EST QTY .0082 X 2019 POPULATION INITIAL AWARD YEAR 4	50,691.3110	$	1.0000	50,691.31
89	REG 2 SE I3 ADD ON MRC EST QTY .0082 X 2019 POPULATION INITIAL AWARD YEAR 5	50,691.3110	$	1.0000	50,691.31
90	REG 2 SE I3 ADD ON MRC EST QTY .0082 X 2019 POPULATION REN 1 YEAR 6	50,691.3110	$	1.0000	50,691.31
91	REG 2 SE I3 ADD ON MRC EST QTY .0082 X 2019 POPULATION REN 2 YEAR 7	50,691.3110	$	1.0000	50,691.31
92	REG 2 SE I3 ADD ON MRC EST QTY .0082 X 2019 POPULATION REN 3 YEAR 8	50,691.3110	$	1.0000	50,691.31
93	REG 2 SE I3 ADD ON MRC EST QTY .0082 X 2019 POPULATION	50,691.3110	$	1.0000	50,691.31

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
10 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	REN 4 YEAR 9				
94	REG 2 SE I3 ADD ON MRC EST QTY .0082 X 2019 POPULATION REN 5 YEAR 10	50,691.3110	$	1.0000	50,691.31
95	REG 2 SE LDB ALI MRC EST QTY .0042 X 2019 POPULATION INITIAL AWARD YEAR 1	25,697.3294	$	1.0000	25,697.33
96	REG 2 SE LDB ALI MRC EST QTY .0042 X 2019 POPULATION INITIAL AWARD YEAR 2	25,697.3294	$	1.0000	25,697.33
97	REG 2 SE LDB ALI MRC EST QTY .0042 X 2019 POPULATION INITIAL AWARD YEAR 3	25,697.3294	$	1.0000	25,697.33
98	REG 2 SE LDB ALI MRC EST QTY .0042 X 2019 POPULATION INITIAL AWARD YEAR 4	25,697.3294	$	1.0000	25,697.33
99	REG 2 SE LDB ALI MRC EST QTY .0042 X 2019 POPULATION INITIAL AWARD YEAR 5	25,697.3294	$	1.0000	25,697.33
100	REG 2 SE LDB ALI MRC EST QTY .0042 X 2019 POPULATION REN 1 YEAR 6	25,697.3294	$	1.0000	25,697.33
101	REG 2 SE LDB ALI MRC EST QTY .0042 X 2019 POPULATION REN 2 YEAR 7	25,697.3294	$	1.0000	25,697.33
102	REG 2 SE LDB ALI MRC EST QTY .0042 X 2019 POPULATION REN 3 YEAR 8	25,697.3294	$	1.0000	25,697.33
103	REG 2 SE LDB ALI MRC EST QTY .0042 X 2019 POPULATION REN 4 YEAR 9	25,697.3294	$	1.0000	25,697.33
104	REG 2 SE LDB ALI MRC EST QTY .0042 X 2019 POPULATION REN 5 YEAR 10	25,697.3294	$	1.0000	25,697.33
105	REG 2 SE NETWORK MONITOR MRC EST QTY .0004 X 2019 POPULATION	2,519.9979	$	1.0000	2,520.00

DS
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
11 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	INITIAL AWARD YEAR 1				
106	REG 2 SE NETWORK MONITOR MRC EST QTY .0004 X 2019 POPULATION INITIAL AWARD YEAR 2	2,519.9979	$	1.0000	2,520.00
107	REG 2 SE NETWORK MONITOR MRC EST QTY .0004 X 2019 POPULATION INITIAL AWARD YEAR 3	2,519.9979	$	1.0000	2,520.00
108	REG 2 SE NETWORK MONITOR MRC EST QTY .0004 X 2019 POPULATION INITIAL AWARD YEAR 4	2,519.9979	$	1.0000	2,520.00
109	REG 2 SE NETWORK MONITOR MRC EST QTY .0004 X 2019 POPULATION INITIAL AWARD YEAR 5	2,519.9979	$	1.0000	2,520.00
110	REG 2 SE NETWORK MONITOR MRC EST QTY .0004 X 2019 POPULATION REN 1 YEAR 6	2,519.9979	$	1.0000	2,520.00
111	REG 2 SE NETWORK MONITOR MRC EST QTY .0004 X 2019 POPULATION REN 2 YEAR 7	2,519.9979	$	1.0000	2,520.00
112	REG 2 SE NETWORK MONITOR MRC EST QTY .0004 X 2019 POPULATION REN 3 YEAR 8	2,519.9979	$	1.0000	2,520.00
113	REG 2 SE NETWORK MONITOR MRC EST QTY .0004 X 2019 POPULATION REN 4 YEAR 9	2,519.9979	$	1.0000	2,520.00
114	REG 2 SE NETWORK MONITOR MRC EST QTY .0004 X 2019 POPULATION REN 5 YEAR 10	2,519.9979	$	1.0000	2,520.00
115	REG 2 SE SIP INGRESS TO CORES MRC EST QTY .0038 X 2019 POPULATION INITIAL AWARD YEAR 1	23,359.0911	$	1.0000	23,359.09
116	REG 2 SE SIP INGRESS TO CORES MRC EST QTY .0038 X 2019 POPULATION INITIAL AWARD YEAR 2	23,359.0911	$	1.0000	23,359.09

DS
AW
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
12 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
117	REG 2 SE SIP INGRESS TO CORES MRC EST QTY .0038 X 2019 POPULATION INITIAL AWARD YEAR 3	23,359.0911	$	1.0000	23,359.09
118	REG 2 SE SIP INGRESS TO CORES MRC EST QTY .0038 X 2019 POPULATION INITIAL AWARD YEAR 4	23,359.0911	$	1.0000	23,359.09
119	REG 2 SE SIP INGRESS TO CORES MRC EST QTY .0038 X 2019 POPULATION INITIAL AWARD YEAR 5	23,359.0911	$	1.0000	23,359.09
120	REG 2 SE SIP INGRESS TO CORES MRC EST QTY .0038 X 2019 POPULATION REN 1 YEAR 6	23,359.0911	$	1.0000	23,359.09
121	REG 2 SE SIP INGRESS TO CORES MRC EST QTY .0038 X 2019 POPULATION REN 2 YEAR 7	23,359.0911	$	1.0000	23,359.09
122	REG 2 SE SIP INGRESS TO CORES MRC EST QTY .0038 X 2019 POPULATION REN 3 YEAR 8	23,359.0911	$	1.0000	23,359.09
123	REG 2 SE SIP INGRESS TO CORES MRC EST QTY .0038 X 2019 POPULATION REN 4 YEAR 9	23,359.0911	$	1.0000	23,359.09
124	REG 2 SE SIP INGRESS TO CORES MRC EST QTY .0038 X 2019 POPULATION REN 5 YEAR 10	23,359.0911	$	1.0000	23,359.09
125	REG 2 SE UPS NON RECUR COST INITIAL AWARD YEAR 1	2,880.0000	$	1.0000	2,880.00
126	REG 2 SE LABOR NON RECUR COST INITIAL AWARD YEAR 1	3,486.0000	$	1.0000	3,486.00
127	REG 2 SE CCS DEFAULT ROUTS NRC	1,820.0400	$	1.0000	1,820.04

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
13 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	INITIAL AWARD YEAR 1				
128	REG 2 SE OPT TSP PROVIS INSTALL RESTOR NON RECUR COST INITIAL AWARD YEAR 1	578.0000	$	1.0000	578.00
129	REG 3 METRO ESINET MRC EST QTY .0072 X 2019 EST POPULATION INTITIAL AWARD YEAR 2	66,552.0001	$	1.0000	66,552.00
130	REG 3 METRO ESINET MRC EST QTY .0072 X 2019 EST POPULATION INTITIAL AWARD YEAR 3	66,552.0001	$	1.0000	66,552.00
131	REG 3 METRO ESINET MRC EST QTY .0072 X 2019 EST POPULATION INTITIAL AWARD YEAR 4	66,552.0001	$	1.0000	66,552.00
132	REG 3 METRO ESINET MRC EST QTY .0072 X 2019 EST POPULATION INTITIAL AWARD YEAR 5	66,552.0001	$	1.0000	66,552.00
133	REG 3 METRO ESINET MRC EST QTY .0072 X 2019 EST POPULATION REN 1 YEAR 6	66,552.0001	$	1.0000	66,552.00
134	REG 3 METRO ESINET MRC EST QTY .0072 X 2019 EST POPULATION REN 2 YEAR 7	66,552.0001	$	1.0000	66,552.00
135	REG 3 METRO ESINET MRC EST QTY .0072 X 2019 EST POPULATION REN 3 YEAR 8	66,552.0001	$	1.0000	66,552.00
136	REG 3 METRO ESINET MRC EST QTY .0072 X 2019 EST POPULATION REN 4 YEAR 9	66,552.0001	$	1.0000	66,552.00
137	REG 3 METRO ESINET MRC EST QTY .0072 X 2019 EST POPULATION REN 5 YEAR 10	66,552.0001	$	1.0000	66,552.00
138	REG 3 METRO A911 ROUTE SVC BCF MRC EST QTY .0102 X 2019 POPULATION INITIAL AWARD YEAR 2	94,624.1300	$	1.0000	94,624.13
139	REG 3 METRO A911 ROUTE	94,624.1300	$	1.0000	94,624.13

DS
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
14 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	SVC BCF MRC EST QTY .0102 X 2019 POPULATION INITIAL AWARD YEAR 3				
140	REG 3 METRO A911 ROUTE SVC BCF MRC EST QTY .0102 X 2019 POPULATION INITIAL AWARD YEAR 4	94,624.1300	$	1.0000	94,624.13
141	REG 3 METRO A911 ROUTE SVC BCF MRC EST QTY .0102 X 2019 POPULATION INITIAL AWARD YEAR 5	94,624.1300	$	1.0000	94,624.13
142	REG 3 METRO A911 ROUTE SVC BCF MRC EST QTY .0102 X 2019 POPULATION REN 1 YEAR 6	94,624.1300	$	1.0000	94,624.13
143	REG 3 METRO A911 ROUTE SVC BCF MRC EST QTY .0102 X 2019 POPULATION REN 2 YEAR 7	94,624.1300	$	1.0000	94,624.13
144	REG 3 METRO A911 ROUTE SVC BCF MRC REN 3 YEAR 8	94,624.1300	$	1.0000	94,624.13
145	REG 3 METRO A911 ROUTE SVC BCF MRC EST QTY .0102 X 2019 POPULATION REN 4 YEAR 9	94,624.1300	$	1.0000	94,624.13
146	REG 3 METRO A911 ROUTE SVC BCF MRC EST QTY .0102 X 2019 POPULATION REN 5 YEAR 10	94,624.1300	$	1.0000	94,624.13
147	REG 3 METRO I3 ADD ON MRC EST QTY .0055 X 2019 POPULATION INITIAL AWARD YEAR 2	50,691.3067	$	1.0000	50,691.31
148	REG 3 METRO I3 ADD ON MRC EST QTY .0055 X 2019 POPULATION INITIAL AWARD YEAR 3	50,691.3067	$	1.0000	50,691.31
149	REG 3 METRO I3 ADD ON MRC EST QTY .0055 X 2019 POPULATION	50,691.3067	$	1.0000	50,691.31

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
15 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	INITIAL AWARD YEAR 4				
150	REG 3 METRO I3 ADD ON MRC EST QTY .0055 X 2019 POPULATION INITIAL AWARD YEAR 5	50,691.3067	$	1.0000	50,691.31
151	REG 3 METRO I3 ADD ON MRC EST QTY .0055 X 2019 POPULATION REN 1 YEAR 6	50,691.3067	$	1.0000	50,691.31
152	REG 3 METRO I3 ADD ON MRC EST QTY .0055 X 2019 POPULATION REN 2 YEAR 7	50,691.3067	$	1.0000	50,691.31
153	REG 3 METRO I3 ADD ON MRC EST QTY .0055 X 2019 POPULATION REN 3 YEAR 8	50,691.3067	$	1.0000	50,691.31
154	REG 3 METRO I3 ADD ON MRC EST QTY .0055 X 2019 POPULATION REN 4 YEAR 9	50,691.3067	$	1.0000	50,691.31
155	REG 3 METRO I3 ADD ON MRC EST QTY .0055 X 2019 POPULATION REN 5 YEAR 10	50,691.3067	$	1.0000	50,691.31
156	REG 3 METRO LDB ALI MRC EST QTY .0028 X 2019 POPULATION INITIAL AWARD YEAR 2	25,697.3314	$	1.0000	25,697.33
157	REG 3 METRO LDB ALI MRC EST QTY .0028 X 2019 POPULATION INITIAL AWARD YEAR 3	25,697.3314	$	1.0000	25,697.33
158	REG 3 METRO LDB ALI MRC EST QTY .0028 X 2019 POPULATION INITIAL AWARD YEAR 4	25,697.3314	$	1.0000	25,697.33
159	REG 3 METRO LDB ALI MRC EST QTY .0028 X 2019 POPULATION INITIAL AWARD YEAR 5	25,697.3314	$	1.0000	25,697.33
160	REG 3 METRO LDB ALI MRC EST QTY .0028 X 2019 POPULATION REN 1 YEAR 6	25,697.3314	$	1.0000	25,697.33
161	REG 3 METRO LDB ALI MRC EST QTY .0028 X 2019 POPULATION	25,697.3314	$	1.0000	25,697.33

DS
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
16 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	REN 2 YEAR 7				
162	REG 3 METRO LDB ALI MRC EST QTY .0028 X 2019 POPULATION REN 3 YEAR 8	25,697.3314	$	1.0000	25,697.33
163	REG 3 METRO LDB ALI MRC EST QTY .0028 X 2019 POPULATION REN 4 YEAR 9	25,697.3314	$	1.0000	25,697.33
164	REG 3 METRO LDB ALI MRC EST QTY .0028 X 2019 POPULATION REN 5 YEAR 10	25,697.3314	$	1.0000	25,697.33
165	REG 3 METRO NETWORK MONITOR MRC EST QTY .003 X 2019 POPULATION INITIAL AWARD YEAR 2	2,520.0036	$	1.0000	2,520.00
166	REG 3 METRO NETWORK MONITOR MRC EST QTY .003 X 2019 POPULATION INITIAL AWARD YEAR 3	2,520.0036	$	1.0000	2,520.00
167	REG 3 METRO NETWORK MONITOR MRC EST QTY .003 X 2019 POPULATION INITIAL AWARD YEAR 4	2,520.0036	$	1.0000	2,520.00
168	REG 3 METRO NETWORK MONITOR MRC EST QTY .003 X 2019 POPULATION INITIAL AWARD YEAR 5	2,520.0036	$	1.0000	2,520.00
169	REG 3 METRO NETWORK MONITOR MRC EST QTY .003 X 2019 POPULATION REN 1 YEAR 6	2,520.0036	$	1.0000	2,520.00
170	REG 3 METRO NETWORK MONITOR MRC EST QTY .003 X 2019 POPULATION REN 2 YEAR 7	2,520.0036	$	1.0000	2,520.00
171	REG 3 METRO NETWORK MONITOR MRC EST QTY .003 X 2019 POPULATION REN 3 YEAR 8	2,520.0036	$	1.0000	2,520.00

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
17 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
172	REG 3 METRO NETWORK MONITOR MRC EST QTY .003 X 2019 POPULATION REN 4 YEAR 9	2,520.0036	$	1.0000	2,520.00
173	REG 3 METRO NETWORK MONITOR MRC EST QTY .003 X 2019 POPULATION REN 5 YEAR 10	2,520.0036	$	1.0000	2,520.00
174	REG 3 METRO SIP INGRESS TO CORES MRC EST QTY .0025 X 2019 POPULATION INITIAL AWARD YEAR 2	23,358.4311	$	1.0000	23,358.43
175	REG 3 METRO SIP INGRESS TO CORES MRC EST QTY .0025 X 2019 POPULATION INITIAL AWARD YEAR 3	23,358.4311	$	1.0000	23,358.43
176	REG 3 METRO SIP INGRESS TO CORES MRC EST QTY .0025 X 2019 POPULATION INITIAL AWARD YEAR 4	23,358.4311	$	1.0000	23,358.43
177	REG 3 METRO SIP INGRESS TO CORES MRC EST QTY .0025 X 2019 POPULATION INITIAL AWARD YEAR 5	23,358.4311	$	1.0000	23,358.43
178	REG 3 METRO SIP INGRESS TO CORES MRC EST QTY .0025 X 2019 POPULATION REN 1 YEAR 6	23,358.4311	$	1.0000	23,358.43
179	REG 3 METRO SIP INGRESS TO CORES MRC EST QTY .0025 X 2019 POPULATION REN 2 YEAR 7	23,358.4311	$	1.0000	23,358.43
180	REG 3 METRO SIP INGRESS TO CORES MRC EST QTY .0025 X 2019 POPULATION REN 3 YEAR 8	23,358.4311	$	1.0000	23,358.43
181	REG 3 METRO SIP INGRESS TO CORES MRC	23,358.4311	$	1.0000	23,358.43

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
18 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	EST QTY .0025 X 2019 POPULATION REN 4 YEAR 9				
182	REG 3 METRO SIP INGRESS TO CORES MRC EST QTY .0025 X 2019 POPULATION REN 5 YEAR 10	23,358.4311	$	1.0000	23,358.43
183	REG 3 METRO UPS NON RECUR COST INITIAL AWARD YEAR 2	2,880.0000	$	1.0000	2,880.00
184	REG 3 METRO LABOR NON RECUR COST INITIAL AWARD YEAR 2	3,486.0000	$	1.0000	3,486.00
185	REG 3 METRO CCS DEFAULT ROUTS NRC INITIAL AWARD YEAR 2	1,820.0400	$	1.0000	1,820.04
186	REG 3 METRO OPT TSP PROVIS INSTALL RESTORE NON RECUR COST INITIAL AWARD YEAR 2	578.0000	$	1.0000	578.00
187	REG 4 NC ESINET MRC EST QTY .1965 X 2019 EST POPULATION INITIAL AWARD YEAR 2	66,552.0000	$	1.0000	66,552.00
188	REG 4 NC ESINET MRC EST QTY .1965 X 2019 EST POPULATION INITIAL AWARD YEAR 3	66,552.0000	$	1.0000	66,552.00
189	REG 4 NC ESINET MRC EST QTY .1965 X 2019 EST POPULATION INITIAL AWARD YEAR 4	66,552.0000	$	1.0000	66,552.00
190	REG 4 NC ESINET MRC EST QTY .1965 X 2019 EST POPULATION INITIAL AWARD YEAR 5	66,552.0000	$	1.0000	66,552.00
191	REG 4 NC ESINET MRC EST QTY .1965 X 2019 EST POPULATION REN 1 YEAR 6	66,552.0000	$	1.0000	66,552.00
192	REG 4 NC ESINET MRC EST QTY .1965 X 2019 EST POPULATION REN 2 YEAR 7	66,552.0000	$	1.0000	66,552.00

DS
AW
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
19 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
193	REG 4 NC ESINET MRC EST QTY .1965 X 2019 EST POPULATION REN 3 YEAR 8	66,552.0000	$	1.0000	66,552.00
194	REG 4 NC ESINET MRC EST QTY .1965 X 2019 EST POPULATION REN 4 YEAR 9	66,552.0000	$	1.0000	66,552.00
195	REG 4 NC ESINET MRC EST QTY .1965 X 2019 EST POPULATION REN 5 YEAR 10	66,552.0000	$	1.0000	66,552.00
196	REG 4 NC A911 ROUTE SVC BCF MRC EST QTY .2794 X 2019 POPULATION INITIAL AWARD YEAR 2	94,624.1316	$	1.0000	94,624.13
197	REG 4 NC A911 ROUTE SVC BCF MRC EST QTY .2794 X 2019 POPULATION INITIAL AWARD YEAR 3	94,624.1316	$	1.0000	94,624.13
198	REG 4 NC A911 ROUTE SVC BCF MRC EST QTY .2794 X 2019 POPULATION INITIAL AWARD YEAR 4	94,624.1316	$	1.0000	94,624.13
199	REG 4 NC A911 ROUTE SVC BCF MRC EST QTY .2794 X 2019 POPULATION INITIAL AWARD YEAR 5	94,624.1316	$	1.0000	94,624.13
200	REG 4 NC A911 ROUTE SVC BCF MRC EST QTY .2794 X 2019 POPULATION REN 1 YEAR 6	94,624.1316	$	1.0000	94,624.13
201	REG 4 NC A911 ROUTE SVC BCF MRC EST QTY .2794 X 2019 POPULATION REN 2 YEAR 7	94,624.1316	$	1.0000	94,624.13
202	REG 4 NC A911 ROUTE SVC BCF MRC EST QTY .2794 X 2019 POPULATION REN 3 YEAR 8	94,624.1316	$	1.0000	94,624.13

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
20 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
203	REG 4 NC A911 ROUTE SVC BCF MRC EST QTY .2794 X 2019 POPULATION REN 4 YEAR 9	94,624.1316	$	1.0000	94,624.13
204	REG 4 NC A911 ROUTE SVC BCF MRC EST QTY .2794 X 2019 POPULATION REN 5 YEAR 10	94,624.1316	$	1.0000	94,624.13
205	REG 4 EC I3 ADD ON MRC EST QTY .1497 X 2019 POPULATION INITIAL AWARD YEAR 2	50,691.3087	$	1.0000	50,691.31
206	REG 4 EC I3 ADD ON MRC EST QTY .1497 X 2019 POPULATION INITIAL AWARD YEAR 3	50,691.3087	$	1.0000	50,691.31
207	REG 4 EC I3 ADD ON MRC EST QTY .1497 X 2019 POPULATION INITIAL AWARD YEAR 4	50,691.3087	$	1.0000	50,691.31
208	REG 4 EC I3 ADD ON MRC EST QTY .1497 X 2019 POPULATION INITIAL AWARD YEAR 5	50,691.3087	$	1.0000	50,691.31
209	REG 4 EC I3 ADD ON MRC EST QTY .1497 X 2019 POPULATION REN 1 YEAR 6	50,691.3087	$	1.0000	50,691.31
210	REG 4 EC I3 ADD ON MRC EST QTY .1497 X 2019 POPULATION REN 2 YEAR 7	50,691.3087	$	1.0000	50,691.31
211	REG 4 EC I3 ADD ON MRC EST QTY .1497 X 2019 POPULATION REN 3 YEAR 8	50,691.3087	$	1.0000	50,691.31
212	REG 4 EC I3 ADD ON MRC EST QTY .1497 X 2019 POPULATION REN 4 YEAR 9	50,691.3087	$	1.0000	50,691.31
213	REG 4 EC I3 ADD ON MRC EST QTY .1497 X 2019 POPULATION REN 5 YEAR 10	50,691.3087	$	1.0000	50,691.31
214	REG 4 NC LDB ALI MRC EST QTY .0759 X 2019 POPULATION	25,697.3315	$	1.0000	25,697.33

DS
AW
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
21 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	INITIAL AWARD YEAR 2				
215	REG 4 NC LDB ALI MRC EST QTY .0759 X 2019 POPULATION INITIAL AWARD YEAR 3	25,697.3315	$	1.0000	25,697.33
216	REG 4 NC LDB ALI MRC EST QTY .0759 X 2019 POPULATION INITIAL AWARD YEAR 4	25,697.3315	$	1.0000	25,697.33
217	REG 4 NC LDB ALI MRC EST QTY .0759 X 2019 POPULATION INITIAL AWARD YEAR 5	25,697.3315	$	1.0000	25,697.33
218	REG 4 NC LDB ALI MRC EST QTY .0759 X 2019 POPULATION REN 1 YEAR 6	25,697.3315	$	1.0000	25,697.33
219	REG 4 NC LDB ALI MRC EST QTY .0759 X 2019 POPULATION REN 2 YEAR 7	25,697.3315	$	1.0000	25,697.33
220	REG 4 NC LDB ALI MRC EST QTY .0759 X 2019 POPULATION REN 3 YEAR 8	25,697.3315	$	1.0000	25,697.33
221	REG 4 NC LDB ALI MRC EST QTY .0759 X 2019 POPULATION REN 4 YEAR 9	25,697.3315	$	1.0000	25,697.33
222	REG 4 NC LDB ALI MRC EST QTY .0759 X 2019 POPULATION REN 5 YEAR 10	25,697.3315	$	1.0000	25,697.33
223	REG 4 NC NETWORK MONITOR MRC EST QTY .0074 X 2019 POPULATION INITIAL AWARD YEAR 2	2,519.9999	$	1.0000	2,520.00
224	REG 4 NC NETWORK MONITOR MRC EST QTY .0074 X 2019 POPULATION INITIAL AWARD YEAR 3	2,519.9999	$	1.0000	2,520.00
225	REG 4 NC NETWORK MONITOR MRC EST QTY .0074 X 2019 POPULATION INITIAL AWARD YEAR 4	2,519.9999	$	1.0000	2,520.00
226	REG 4 NC NETWORK MONITOR MRC EST QTY .0074 X 2019 POPULATION	2,519.9999	$	1.0000	2,520.00

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
22 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	INITIAL AWARD YEAR 5				
227	REG 4 NC NETWORK MONITOR MRC EST QTY .0074 X 2019 POPULATION REN 1 YEAR 6	2,519.9999	$	1.0000	2,520.00
228	REG 4 NC NETWORK MONITOR MRC EST QTY .0074 X 2019 POPULATION REN 2 YEAR 7	2,519.9999	$	1.0000	2,520.00
229	REG 4 NC NETWORK MONITOR MRC EST QTY .0074 X 2019 POPULATION REN 3 YEAR 8	2,519.9999	$	1.0000	2,520.00
230	REG 4 NC NETWORK MONITOR MRC EST QTY .0074 X 2019 POPULATION REN 4 YEAR 9	2,519.9999	$	1.0000	2,520.00
231	REG 4 NC NETWORK MONITOR MRC EST QTY .0074 X 2019 POPULATION REN 5 YEAR 10	2,519.9999	$	1.0000	2,520.00
232	REG 4 NC SIP INGRESS TO CORES MRC EST QTY .0690 X 2019 POPULATION INITIAL AWARD YEAR 2	23,358.8474	$	1.0000	23,358.85
233	REG 4 NC SIP INGRESS TO CORES MRC EST QTY .0690 X 2019 POPULATION INITIAL AWARD YEAR 3	23,358.8474	$	1.0000	23,358.85
234	REG 4 NC SIP INGRESS TO CORES MRC EST QTY .0690 X 2019 POPULATION INITIAL AWARD YEAR 4	23,358.8474	$	1.0000	23,358.85
235	REG 4 NC SIP INGRESS TO CORES MRC EST QTY .0690 X 2019 POPULATION INITIAL AWARD YEAR 5	23,358.8474	$	1.0000	23,358.85
236	REG 4 NC SIP INGRESS TO CORES MRC EST QTY .0690 X 2019 POPULATION REN 1 YEAR 6	23,358.8474	$	1.0000	23,358.85
237	REG 4 NC SIP INGRESS	23,358.8474	$	1.0000	23,358.85

DS
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
23 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	TO CORES MRC EST QTY .0690 X 2019 POPULATION REN 2 YEAR 7				
238	REG 4 NC SIP INGRESS TO CORES MRC EST QTY .0690 X 2019 POPULATION REN 3 YEAR 8	23,358.8474	$	1.0000	23,358.85
239	REG 4 NC SIP INGRESS TO CORES MRC EST QTY .0690 X 2019 POPULATION REN 4 YEAR 9	23,358.8474	$	1.0000	23,358.85
240	REG 4 NC SIP INGRESS TO CORES MRC EST QTY .0690 X 2019 POPULATION REN 5 YEAR 10	23,358.8474	$	1.0000	23,358.85
241	REG 4 NC UPS NON RECUR COST INITIAL AWARD YEAR 2	2,880.0000	$	1.0000	2,880.00
242	REG 4 NC LABOR NON RECUR COST INITIAL AWARD YEAR 2	3,486.0000	$	1.0000	3,486.00
243	REG 4 NC CCS DEFAULT ROUTES NRC INITIAL AWARD YEAR 2	1,820.0400	$	1.0000	1,820.04
244	REG 4 NC OPT TSP PROVIS INSTALL RESTOR NON RECUR COST INITIAL AWARD YEAR 2	578.0000	$	1.0000	578.00
245	REG 5 EC ESINET MRC EST QTY .0307 X 2019 EST POPULATION INITIAL AWARD YEAR 1	66,552.0001	$	1.0000	66,552.00
246	REG 5 EC ESINET MRC EST QTY .0307 X 2019 EST POPULATION INITIAL AWARD YEAR 2	66,552.0001	$	1.0000	66,552.00
247	REG 5 EC ESINET MRC EST QTY .0307 X 2019 EST POPULATION INITIAL AWARD YEAR 3	66,552.0001	$	1.0000	66,552.00
248	REG 5 EC ESINET MRC EST QTY .0307 X 2019 EST POPULATION	66,552.0001	$	1.0000	66,552.00

DS
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
24 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	INITIAL AWARD YEAR 4				
249	REG 5 EC ESINET MRC EST QTY .0307 X 2019 EST POPULATION INITIAL AWARD YEAR 5	66,552.0001	$	1.0000	66,552.00
250	REG 5 EC ESINET MRC EST QTY .0307 X 2019 EST POPULATION REN 1 YEAR 6	66,552.0001	$	1.0000	66,552.00
251	REG 5 EC ESINET MRC EST QTY .0307 X 2019 EST POPULATION REN 2 YEAR 7	66,552.0001	$	1.0000	66,552.00
252	REG 5 EC ESINET MRC EST QTY .0307 X 2019 EST POPULATION REN 3 YEAR 8	66,552.0001	$	1.0000	66,552.00
253	REG 5 EC ESINET MRC EST QTY .0307 X 2019 EST POPULATION REN 4 YEAR 9	66,552.0001	$	1.0000	66,552.00
254	REG 5 EC ESINET MRC EST QTY .0307 X 2019 EST POPULATION REN 5 YEAR 10	66,552.0001	$	1.0000	66,552.00
255	REG 5 EC A911 ROUTE SVC BCF MRC EST QTY .0437 X 2019 POPULATION INITIAL AWARD YEAR 1	94,624.1313	$	1.0000	94,624.13
256	REG 5 EC A911 ROUTE SVC BCF MRC EST QTY .0437 X 2019 POPULATION INITIAL AWARD YEAR 2	94,624.1313	$	1.0000	94,624.13
257	REG 5 EC A911 ROUTE SVC BCF MRC EST QTY .0437 X 2019 POPULATION INITIAL AWARD YEAR 3	94,624.1313	$	1.0000	94,624.13
258	REG 5 EC A911 ROUTE SVC BCF MRC EST QTY .0437 X 2019 POPULATION INITIAL AWARD YEAR 4	94,624.1313	$	1.0000	94,624.13
259	REG 5 EC A911 ROUTE SVC BCF MRC	94,624.1313	$	1.0000	94,624.13

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
25 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	EST QTY .0437 X 2019 POPULATION INITIAL AWARD YEAR 5				
260	REG 5 EC A911 ROUTE SVC BCF MRC EST QTY .0437 X 2019 POPULATION REN 1 YEAR 6	94,624.1313	$	1.0000	94,624.13
261	REG 5 EC A911 ROUTE SVC BCF MRC EST QTY .0437 X 2019 POPULATION REN 2 YEAR 7	94,624.1313	$	1.0000	94,624.13
262	REG 5 EC A911 ROUTE SVC BCF MRC EST QTY .0437 X 2019 POPULATION REN 3 YEAR 8	94,624.1313	$	1.0000	94,624.13
263	REG 5 EC A911 ROUTE SVC BCF MRC EST QTY .0437 X 2019 POPULATION REN 4 YEAR 9	94,624.1313	$	1.0000	94,624.13
264	REG 5 EC A911 ROUTE SVC BCF MRC EST QTY .0437 X 2019 POPULATION REN 5 YEAR 10	94,624.1313	$	1.0000	94,624.13
265	REG 5 NE I3 ADD ON MRC EST QTY .0234 X 2019 POPULATION INITIAL AWARD YEAR 1	50,691.3076	$	1.0000	50,691.31
266	REG 5 NE I3 ADD ON MRC EST QTY .0234 X 2019 POPULATION INITIAL AWARD YEAR 2	50,691.3076	$	1.0000	50,691.31
267	REG 5 NE I3 ADD ON MRC EST QTY .0234 X 2019 POPULATION INITIAL AWARD YEAR 3	50,691.3076	$	1.0000	50,691.31
268	REG 5 NE I3 ADD ON MRC EST QTY .0234 X 2019 POPULATION INITIAL AWARD YEAR 4	50,691.3076	$	1.0000	50,691.31
269	REG 5 NE I3 ADD ON MRC EST QTY .0234 X 2019 POPULATION INITIAL AWARD YEAR 5	50,691.3076	$	1.0000	50,691.31

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
26 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
270	REG 5 NE I3 ADD ON MRC EST QTY .0234 X 2019 POPULATION REN 1 YEAR 6	50,691.3076	$	1.0000	50,691.31
271	REG 5 NE I3 ADD ON MRC EST QTY .0234 X 2019 POPULATION REN 2 YEAR 7	50,691.3076	$	1.0000	50,691.31
272	REG 5 NE I3 ADD ON MRC EST QTY .0234 X 2019 POPULATION REN 3 YEAR 8	50,691.3076	$	1.0000	50,691.31
273	REG 5 NE I3 ADD ON MRC EST QTY .0234 X 2019 POPULATION REN 4 YEAR 9	50,691.3076	$	1.0000	50,691.31
274	REG 5 NE I3 ADD ON MRC EST QTY .0234 X 2019 POPULATION REN 5 YEAR 10	50,691.3076	$	1.0000	50,691.31
275	REG 5 EC LDB ALI MRC EST QTY .0119 X 2019 POPULATION INITIAL AWARD YEAR 1	25,697.3325	$	1.0000	25,697.33
276	REG 5 EC LDB ALI MRC EST QTY .0119 X 2019 POPULATION INITIAL AWARD YEAR 2	25,697.3325	$	1.0000	25,697.33
277	REG 5 EC LDB ALI MRC EST QTY .0119 X 2019 POPULATION INITIAL AWARD YEAR 3	25,697.3325	$	1.0000	25,697.33
278	REG 5 EC LDB ALI MRC EST QTY .0119 X 2019 POPULATION INITIAL AWARD YEAR 4	25,697.3325	$	1.0000	25,697.33
279	REG 5 EC LDB ALI MRC EST QTY .0119 X 2019 POPULATION INITIAL AWARD YEAR 5	25,697.3325	$	1.0000	25,697.33
280	REG 5 EC LDB ALI MRC EST QTY .0119 X 2019 POPULATION REN 1 YEAR 6	25,697.3325	$	1.0000	25,697.33
281	REG 5 EC LDB ALI MRC EST QTY .0119 X 2019 POPULATION REN 2 YEAR 7	25,697.3325	$	1.0000	25,697.33

DS
AW
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
27 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
282	REG 5 EC LDB ALI MRC EST QTY .0119 X 2019 POPULATION REN 3 YEAR 8	25,697.3325	$	1.0000	25,697.33
283	REG 5 EC LDB ALI MRC EST QTY .0119 X 2019 POPULATION REN 4 YEAR 9	25,697.3325	$	1.0000	25,697.33
284	REG 5 EC LDB ALI MRC EST QTY .0119 X 2019 POPULATION REN 5 YEAR 10	25,697.3325	$	1.0000	25,697.33
285	REG 5 EC NETWORK MONITOR MRC EST QTY .0012 X 2019 POPULATION INITIAL AWARD YEAR 1	2,519.9991	$	1.0000	2,520.00
286	REG 5 EC NETWORK MONITOR MRC EST QTY .0012 X 2019 POPULATION INITIAL AWARD YEAR 2	2,519.9991	$	1.0000	2,520.00
287	REG 5 EC NETWORK MONITOR MRC EST QTY .0012 X 2019 POPULATION INITIAL AWARD YEAR 3	2,519.9991	$	1.0000	2,520.00
288	REG 5 EC NETWORK MONITOR MRC EST QTY .0012 X 2019 POPULATION INITIAL AWARD YEAR 4	2,519.9991	$	1.0000	2,520.00
289	REG 5 EC NETWORK MONITOR MRC EST QTY .0012 X 2019 POPULATION INITIAL AWARD YEAR 5	2,519.9991	$	1.0000	2,520.00
290	REG 5 EC NETWORK MONITOR MRC EST QTY .0012 X 2019 POPULATION REN 1 YEAR 6	2,519.9991	$	1.0000	2,520.00
291	REG 5 EC NETWORK MONITOR MRC EST QTY .0012 X 2019 POPULATION REN 2 YEAR 7	2,519.9991	$	1.0000	2,520.00
292	REG 5 EC NETWORK MONITOR MRC EST QTY .0012 X 2019 POPULATION REN 3 YEAR 8	2,519.9991	$	1.0000	2,520.00
293	REG 5 EC NETWORK MONITOR MRC EST QTY .0012 X 2019 POPULATION REN 4 YEAR 9	2,519.9991	$	1.0000	2,520.00

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
28 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
294	REG 5 EC NETWORK MONITOR MRC EST QTY .0012 X 2019 POPULATION REN 5 YEAR 10	2,519.9991	$	1.0000	2,520.00
295	REG 5 EC SIP INGRESS TO CORES MRC EST QTY .0108 X 2019 POPULATION INITIAL AWARD YEAR 1	23,358.7885	$	1.0000	23,358.79
296	REG 5 EC SIP INGRESS TO CORES MRC EST QTY .0108 X 2019 POPULATION INITIAL AWARD YEAR 2	23,358.7885	$	1.0000	23,358.79
297	REG 5 EC SIP INGRESS TO CORES MRC EST QTY .0108 X 2019 POPULATION INITIAL AWARD YEAR 3	23,358.7885	$	1.0000	23,358.79
298	REG 5 EC SIP INGRESS TO CORES MRC EST QTY .0108 X 2019 POPULATION INITIAL AWARD YEAR 4	23,358.7885	$	1.0000	23,358.79
299	REG 5 EC SIP INGRESS TO CORES MRC EST QTY .0108 X 2019 POPULATION INITIAL AWARD YEAR 5	23,358.7885	$	1.0000	23,358.79
300	REG 5 EC SIP INGRESS TO CORES MRC EST QTY .0108 X 2019 POPULATION REN 1 YEAR 6	23,358.7885	$	1.0000	23,358.79
301	REG 5 EC SIP INGRESS TO CORES MRC EST QTY .0108 X 2019 POPULATION REN 2 YEAR 7	23,358.7885	$	1.0000	23,358.79
302	REG 5 EC SIP INGRESS TO CORES MRC EST QTY .0108 X 2019 POPULATION REN 3 YEAR 8	23,358.7885	$	1.0000	23,358.79
303	REG 5 EC SIP INGRESS TO CORES MRC EST QTY .0108 X 2019 POPULATION REN 4 YEAR 9	23,358.7885	$	1.0000	23,358.79

DS
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
29 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
304	REG 5 EC SIP INGRESS TO CORES MRC EST QTY .0108 X 2019 POPULATION REN 5 YEAR 10	23,358.7885	$	1.0000	23,358.79
305	REG 5 NE LNG NON RECUR COST INITIAL AWARD YEAR 1	1,820.0400	$	1.0000	1,820.04
306	REG 5 EC UPS NON RECUR COST INITIAL AWARD YEAR 1	2,880.0000	$	1.0000	2,880.00
307	REG 5 EC LABOR NON RECUR COST INITIAL AWARD YEAR 1	3,486.0000	$	1.0000	3,486.00
308	REG 5 EC CCS DEFAULT ROUTES NRC INITIAL AWARD YEAR 1	1,820.0400	$	1.0000	1,820.04
309	REG 5 EC OPT TSP PROVIS INSTALL RESTOR NON RECUR COST INITIAL AWARD YEAR 1	578.0000	$	1.0000	578.00
310	REG 6 NE ESINET MRC EST QTY .0486 X 2019 EST POPULATION INITIAL AWARD YEAR 2	66,552.0000	$	1.0000	66,552.00
311	REG 6 NE ESINET MRC EST QTY .0486 X 2019 EST POPULATION INITIAL AWARD YEAR 3	66,552.0000	$	1.0000	66,552.00
312	REG 6 NE ESINET MRC EST QTY .0486 X 2019 EST POPULATION INITIAL AWARD YEAR 4	66,552.0000	$	1.0000	66,552.00
313	REG 6 NE ESINET MRC EST QTY .0486 X 2019 EST POPULATION INITIAL AWARD YEAR 5	66,552.0000	$	1.0000	66,552.00
314	REG 6 NE ESINET MRC EST QTY .0486 X 2019 EST POPULATION REN 1 YEAR 6	66,552.0000	$	1.0000	66,552.00
315	REG 6 NE ESINET MRC EST QTY .0486 X 2019 EST POPULATION REN 2 YEAR 7	66,552.0000	$	1.0000	66,552.00
316	REG 6 NE ESINET MRC	66,552.0000	$	1.0000	66,552.00

DS
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
30 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	EST QTY .0486 X 2019 EST POPULATION REN 3 YEAR 8				
317	REG 6 NE ESINET MRC EST QTY .0486 X 2019 EST POPULATION REN 4 YEAR 9	66,552.0000	$	1.0000	66,552.00
318	REG 6 NE ESINET MRC EST QTY .0486 X 2019 EST POPULATION REN 5 YEAR 10	66,552.0000	$	1.0000	66,552.00
319	REG 6 NE A911 ROUTE SVC BCF MRC EST QTY .0690 X 2019 POPULATION INITIAL AWARD YEAR 2	94,624.1313	$	1.0000	94,624.13
320	REG 6 NE A911 ROUTE SVC BCF MRC EST QTY .0690 X 2019 POPULATION INITIAL AWARD YEAR 3	94,624.1313	$	1.0000	94,624.13
321	REG 6 NE A911 ROUTE SVC BCF MRC EST QTY .0690 X 2019 POPULATION INITIAL AWARD YEAR 4	94,624.1313	$	1.0000	94,624.13
322	REG 6 NE A911 ROUTE SVC BCF MRC EST QTY .0690 X 2019 POPULATION INITIAL AWARD YEAR 5	94,624.1313	$	1.0000	94,624.13
323	REG 6 NE A911 ROUTE SVC BCF MRC EST QTY .0690 X 2019 POPULATION REN 1 YEAR 6	94,624.1313	$	1.0000	94,624.13
324	REG 6 NE A911 ROUTE SVC BCF MRC EST QTY .0690 X 2019 POPULATION REN 2 YEAR 7	94,624.1313	$	1.0000	94,624.13
325	REG 6 NE A911 ROUTE SVC BCF MRC EST QTY .0690 X 2019 POPULATION REN 3 YEAR 8	94,624.1313	$	1.0000	94,624.13
326	REG 6 NE A911 ROUTE SVC BCF MRC	94,624.1313	$	1.0000	94,624.13

DS
AW
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
31 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	EST QTY .0690 X 2019 POPULATION REN 4 YEAR 9				
327	REG 6 NE A911 ROUTE SVC BCF MRC EST QTY .0690 X 2019 POPULATION REN 5 YEAR 10	94,624.1313	$	1.0000	94,624.13
328	REG 6 NE I3 ADD ON MRC EST QTY .0370 X 2019 POPULATION INITIAL AWARD YEAR 2	50,691.3080	$	1.0000	50,691.31
329	REG 6 NE I3 ADD ON MRC EST QTY .0370 X 2019 POPULATION INITIAL AWARD YEAR 3	50,691.3080	$	1.0000	50,691.31
330	REG 6 NE I3 ADD ON MRC EST QTY .0370 X 2019 POPULATION INITIAL AWARD YEAR 4	50,691.3080	$	1.0000	50,691.31
331	REG 6 NE I3 ADD ON MRC EST QTY .0370 X 2019 POPULATION INITIAL AWARD YEAR 5	50,691.3080	$	1.0000	50,691.31
332	REG 6 NE I3 ADD ON MRC EST QTY .0370 X 2019 POPULATION REN 1 YEAR 6	50,691.3080	$	1.0000	50,691.31
333	REG 6 NE I3 ADD ON MRC EST QTY .0370 X 2019 POPULATION REN 2 YEAR 7	50,691.3080	$	1.0000	50,691.31
334	REG 6 NE I3 ADD ON MRC EST QTY .0370 X 2019 POPULATION REN 3 YEAR 8	50,691.3080	$	1.0000	50,691.31
335	REG 6 NE I3 ADD ON MRC EST QTY .0370 X 2019 POPULATION REN 4 YEAR 9	50,691.3080	$	1.0000	50,691.31
336	REG 6 NE I3 ADD ON MRC EST QTY .0370 X 2019 POPULATION REN 5 YEAR 10	50,691.3080	$	1.0000	50,691.31
337	REG 6 NE LDB ALI MRC EST QTY .0188 X 2019 POPULATION INITIAL AWARD YEAR 2	25,697.3319	$	1.0000	25,697.33

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
32 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
338	REG 6 NE LDB ALI MRC EST QTY .0188 X 2019 POPULATION INITIAL AWARD YEAR 3	25,697.3319	$	1.0000	25,697.33
339	REG 6 NE LDB ALI MRC EST QTY .0188 X 2019 POPULATION INITIAL AWARD YEAR 4	25,697.3319	$	1.0000	25,697.33
340	REG 6 NE LDB ALI MRC EST QTY .0188 X 2019 POPULATION INITIAL AWARD YEAR 5	25,697.3319	$	1.0000	25,697.33
341	REG 6 NE LDB ALI MRC EST QTY .0188 X 2019 POPULATION REN 1 YEAR 6	25,697.3319	$	1.0000	25,697.33
342	REG 6 NE LDB ALI MRC EST QTY .0188 X 2019 POPULATION REN 2 YEAR 7	25,697.3319	$	1.0000	25,697.33
343	REG 6 NE LDB ALI MRC EST QTY .0188 X 2019 POPULATION REN 3 YEAR 8	25,697.3319	$	1.0000	25,697.33
344	REG 6 NE LDB ALI MRC EST QTY .0188 X 2019 POPULATION REN 4 YEAR 9	25,697.3319	$	1.0000	25,697.33
345	REG 6 NE LDB ALI MRC EST QTY .0188 X 2019 POPULATION REN 5 YEAR 10	25,697.3319	$	1.0000	25,697.33
346	REG 6 NE NETWORK MONITOR MRC EST QTY .0018 X 2019 POPULATION INITIAL AWARD YEAR 2	2,520.0002	$	1.0000	2,520.00
347	REG 6 NE NETWORK MONITOR MRC EST QTY .0018 X 2019 POPULATION INITIAL AWARD YEAR 3	2,520.0002	$	1.0000	2,520.00
348	REG 6 NE NETWORK MONITOR MRC EST QTY .0018 X 2019 POPULATION INITIAL AWARD YEAR 4	2,520.0002	$	1.0000	2,520.00
349	REG 6 NE NETWORK MONITOR MRC EST QTY .0018 X 2019 POPULATION INITIAL AWARD YEAR 5	2,520.0002	$	1.0000	2,520.00

DS
AW
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
33 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
350	REG 6 NE NETWORK MONITOR MRC EST QTY .0018 X 2019 POPULATION REN 1 YEAR 6	2,520.0002	$	1.0000	2,520.00
351	REG 6 NE NETWORK MONITOR MRC EST QTY .0018 X 2019 POPULATION REN 2 YEAR 7	2,520.0002	$	1.0000	2,520.00
352	REG 6 NE NETWORK MONITOR MRC EST QTY .0018 X 2019 POPULATION REN 3 YEAR 8	2,520.0002	$	1.0000	2,520.00
353	REG 6 NE NETWORK MONITOR MRC EST QTY .0018 X 2019 POPULATION REN 4 YEAR 9	2,520.0002	$	1.0000	2,520.00
354	REG 6 NE NETWORK MONITOR MRC EST QTY .0018 X 2019 POPULATION REN 5 YEAR 10	2,520.0002	$	1.0000	2,520.00
355	REG 6 NE SIP INGRESS TO CORES MRC EST QTY .0170 X 2019 POPULATION INITIAL AWARD YEAR 2	23,358.8075	$	1.0000	23,358.81
356	REG 6 NE SIP INGRESS TO CORES MRC EST QTY .0170 X 2019 POPULATION INITIAL AWARD YEAR 3	23,358.8075	$	1.0000	23,358.81
357	REG 6 NE SIP INGRESS TO CORES MRC EST QTY .0170 X 2019 POPULATION INITIAL AWARD YEAR 4	23,358.8075	$	1.0000	23,358.81
358	REG 6 NE SIP INGRESS TO CORES MRC EST QTY .0170 X 2019 POPULATION INITIAL AWARD YEAR 5	23,358.8075	$	1.0000	23,358.81
359	REG 6 NE SIP INGRESS TO CORES MRC EST QTY .0170 X 2019 POPULATION REN 1 YEAR 6	23,358.8075	$	1.0000	23,358.81
360	REG 6 NE SIP INGRESS TO CORES MRC EST QTY .0170 X 2019 POPULATION	23,358.8075	$	1.0000	23,358.81

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
34 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	REN 2 YEAR 7				
361	REG 6 NE SIP INGRESS TO CORES MRC EST QTY .0170 X 2019 POPULATION REN 3 YEAR 8	23,358.8075	$	1.0000	23,358.81
362	REG 6 NE SIP INGRESS TO CORES MRC EST QTY .0170 X 2019 POPULATION REN 4 YEAR 9	23,358.8075	$	1.0000	23,358.81
363	REG 6 NE SIP INGRESS TO CORES MRC EST QTY .0170 X 2019 POPULATION REN 5 YEAR 10	23,358.8075	$	1.0000	23,358.81
364	REG 6 NE UPS NON RECUR COST INITIAL AWARD YEAR 2	2,880.0000	$	1.0000	2,880.00
365	REG 6 NE LABOR NON RECUR COST INITIAL AWARD YEAR 2	3,486.0000	$	1.0000	3,486.00
366	REG 6 NE CCS DEFAULT ROUTES NRC INITIAL AWARD YEAR 2	1,820.0400	$	1.0000	1,820.04
367	REG 6 NE OPT TSP PROVIS INSTALL RESTOR NON RECUR COST INITIAL AWARD YEAR 2	578.0000	$	1.0000	578.00
368	REG 7 METRO W ESINET MRC EST QTY .0879 X 2019 EST POPULATION INITIAL AWARD YEAR 2	66,552.0000	$	1.0000	66,552.00
369	REG 7 METRO W ESINET MRC EST QTY .0879 X 2019 EST POPULATION INITIAL AWARD YEAR 3	66,552.0000	$	1.0000	66,552.00
370	REG 7 METRO W ESINET MRC EST QTY .0879 X 2019 EST POPULATION INITIAL AWARD YEAR 4	66,552.0000	$	1.0000	66,552.00
371	REG 7 METRO W ESINET MRC EST QTY .0879 X 2019 EST POPULATION INITIAL AWARD YEAR 5	66,552.0000	$	1.0000	66,552.00
372	REG 7 METRO W ESINET MRC	66,552.0000	$	1.0000	66,552.00

DS
AW
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
35 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	EST QTY .0879 X 2019 EST POPULATION REN 1 YEAR 6				
373	REG 7 METRO W ESINET MRC EST QTY .0879 X 2019 EST POPULATION REN 2 YEAR 7	66,552.0000	$	1.0000	66,552.00
374	REG 7 METRO W ESINET MRC EST QTY .0879 X 2019 EST POPULATION REN 3 YEAR 8	66,552.0000	$	1.0000	66,552.00
375	REG 7 METRO W ESINET MRC EST QTY .0879 X 2019 EST POPULATION REN 4 YEAR 9	66,552.0000	$	1.0000	66,552.00
376	REG 7 METRO W ESINET MRC EST QTY .0879 X 2019 EST POPULATION REN 5 YEAR 10	66,552.0000	$	1.0000	66,552.00
377	REG 7 METRO W A911 ROUTE SVC BCF MRC EST QTY .1250 X 2019 INITIAL AWARD YEAR 2	94,624.1318	$	1.0000	94,624.13
378	REG 7 METRO W A911 ROUTE SVC BCF MRC EST QTY .1250 X 2019 INITIAL AWARD YEAR 3	94,624.1318	$	1.0000	94,624.13
379	REG 7 METRO W A911 ROUTE SVC BCF MRC EST QTY .1250 X 2019 INITIAL AWARD YEAR 4	94,624.1318	$	1.0000	94,624.13
380	REG 7 METRO W A911 ROUTE SVC BCF MRC EST QTY .1250 X 2019 INITIAL AWARD YEAR 5	94,624.1318	$	1.0000	94,624.13
381	REG 7 METRO W A911 ROUTE SVC BCF MRC EST QTY .1250 X 2019 REN 1 YEAR 6	94,624.1318	$	1.0000	94,624.13
382	REG 7 METRO W A911 ROUTE SVC BCF MRC EST QTY .1250 X 2019 REN 2 YEAR 7	94,624.1318	$	1.0000	94,624.13

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
36 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
383	REG 7 METRO W A911 ROUTE SVC BCF MRC EST QTY .1250 X 2019 REN 3 YEAR 8	94,624.1318	$	1.0000	94,624.13
384	REG 7 METRO W A911 ROUTE SVC BCF MRC EST QTY .1250 X 2019 REN 4 YEAR 9	94,624.1318	$	1.0000	94,624.13
385	REG 7 METRO W A911 ROUTE SVC BCF MRC EST QTY .1250 X 2019 REN 5 YEAR 10	94,624.1318	$	1.0000	94,624.13
386	REG 7 METRO W I3 ADD ON MRC EST QTY .0669 X 2019 POPULATION INITIAL AWARD YEAR 2	50,691.3083	$	1.0000	50,691.31
387	REG 7 METRO W I3 ADD ON MRC EST QTY .0669 X 2019 POPULATION INITIAL AWARD YEAR 3	50,691.3083	$	1.0000	50,691.31
388	REG 7 METRO W I3 ADD ON MRC EST QTY .0669 X 2019 POPULATION INITIAL AWARD YEAR 4	50,691.3083	$	1.0000	50,691.31
389	REG 7 METRO W I3 ADD ON MRC EST QTY .0669 X 2019 POPULATION INITIAL AWARD YEAR 5	50,691.3083	$	1.0000	50,691.31
390	REG 7 METRO W I3 ADD ON MRC EST QTY .0669 X 2019 POPULATION REN 1 YEAR 6	50,691.3083	$	1.0000	50,691.31
391	REG 7 METRO W I3 ADD ON MRC EST QTY .0669 X 2019 POPULATION REN 2 YEAR 7	50,691.3083	$	1.0000	50,691.31
392	REG 7 METRO W I3 ADD ON MRC EST QTY .0669 X 2019 POPULATION REN 3 YEAR 8	50,691.3083	$	1.0000	50,691.31
393	REG 7 METRO W I3 ADD ON MRC EST QTY .0669 X 2019 POPULATION REN 4 YEAR 9	50,691.3083	$	1.0000	50,691.31

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
37 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
394	REG 7 METRO W I3 ADD ON MRC EST QTY .0669 X 2019 POPULATION REN 5 YEAR 10	50,691.3083	$	1.0000	50,691.31
395	REG 7 METRO W LDB ALI MRC EST QTY .0339 X 2019 POPULATION INITIAL AWARD YEAR 2	25,697.3311	$	1.0000	25,697.33
396	REG 7 METRO W LDB ALI MRC EST QTY .0339 X 2019 POPULATION INITIAL AWARD YEAR 3	25,697.3311	$	1.0000	25,697.33
397	REG 7 METRO W LDB ALI MRC EST QTY .0339 X 2019 POPULATION INITIAL AWARD YEAR 4	25,697.3311	$	1.0000	25,697.33
398	REG 7 METRO W LDB ALI MRC EST QTY .0339 X 2019 POPULATION INITIAL AWARD YEAR 5	25,697.3311	$	1.0000	25,697.33
399	REG 7 METRO W LDB ALI MRC EST QTY .0339 X 2019 POPULATION REN 1 YEAR 6	25,697.3311	$	1.0000	25,697.33
400	REG 7 METRO W LDB ALI MRC EST QTY .0339 X 2019 POPULATION REN 2 YEAR 7	25,697.3311	$	1.0000	25,697.33
401	REG 7 METRO W LDB ALI MRC EST QTY .0339 X 2019 POPULATION REN 3 YEAR 8	25,697.3311	$	1.0000	25,697.33
402	REG 7 METRO W LDB ALI MRC EST QTY .0339 X 2019 POPULATION REN 4 YEAR 9	25,697.3311	$	1.0000	25,697.33
403	REG 7 METRO W LDB ALI MRC EST QTY .0339 X 2019 POPULATION REN 5 YEAR 10	25,697.3311	$	1.0000	25,697.33
404	REG 7 METRO W NETWORK MONITOR MRC EST QTY .0033 X 2019 POPULATION INITIAL AWARD YEAR 2	2,520.0002	$	1.0000	2,520.00
405	REG 7 METRO W NETWORK MONITOR MRC EST QTY .0033 X 2019 POPULATION	2,520.0002	$	1.0000	2,520.00

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
38 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	INITIAL AWARD YEAR 3				
406	REG 7 METRO W NETWORK MONITOR MRC EST QTY .0033 X 2019 POPULATION INITIAL AWARD YEAR 4	2,520.0002	$	1.0000	2,520.00
407	REG 7 METRO W NETWORK MONITOR MRC EST QTY .0033 X 2019 POPULATION INITIAL AWARD YEAR 5	2,520.0002	$	1.0000	2,520.00
408	REG 7 METRO W NETWORK MONITOR MRC EST QTY .0033 X 2019 POPULATION REN 1 YEAR 6	2,520.0002	$	1.0000	2,520.00
409	REG 7 METRO W NETWORK MONITOR MRC EST QTY .0033 X 2019 POPULATION REN 2 YEAR 7	2,520.0002	$	1.0000	2,520.00
410	REG 7 METRO W NETWORK MONITOR MRC EST QTY .0033 X 2019 POPULATION REN 3 YEAR 8	2,520.0002	$	1.0000	2,520.00
411	REG 7 METRO W NETWORK MONITOR MRC EST QTY .0033 X 2019 POPULATION REN 4 YEAR 9	2,520.0002	$	1.0000	2,520.00
412	REG 7 METRO W NETWORK MONITOR MRC EST QTY .0033 X 2019 POPULATION REN 5 YEAR 10	2,520.0002	$	1.0000	2,520.00
413	REG 7 METRO W SIP INGRESS TO CORES MRC EST QTY .0308 X 2019 POPULATION INITIAL AWARD YEAR 2	23,358.8628	$	1.0000	23,358.86
414	REG 7 METRO W SIP INGRESS TO CORES MRC EST QTY .0308 X 2019 POPULATION INITIAL AWARD YEAR 3	23,358.8628	$	1.0000	23,358.86
415	REG 7 METRO W SIP INGRESS	23,358.8628	$	1.0000	23,358.86

DS
AO
BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
39 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	TO CORES MRC EST QTY .0308 X 2019 POPULATION INITIAL AWARD YEAR 4				
416	REG 7 METRO W SIP INGRESS TO CORES MRC EST QTY .0308 X 2019 POPULATION INITIAL AWARD YEAR 5	23,358.8628	$	1.0000	23,358.86
417	REG 7 METRO W SIP INGRESS TO CORES MRC EST QTY .0308 X 2019 POPULATION REN 1 YEAR 6	23,358.8628	$	1.0000	23,358.86
418	REG 7 METRO W SIP INGRESS TO CORES MRC EST QTY .0308 X 2019 POPULATION REN 2 YEAR 7	23,358.8628	$	1.0000	23,358.86
419	REG 7 METRO W SIP INGRESS TO CORES MRC EST QTY .0308 X 2019 POPULATION REN 3 YEAR 8	23,358.8628	$	1.0000	23,358.86
420	REG 7 METRO W SIP INGRESS TO CORES MRC EST QTY .0308 X 2019 POPULATION REN 4 YEAR 9	23,358.8628	$	1.0000	23,358.86
421	REG 7 METRO W SIP INGRESS TO CORES MRC EST QTY .0308 X 2019 POPULATION REN 5 YEAR 10	23,358.8628	$	1.0000	23,358.86
422	REG 7 METRO W UPS NON RECUR COST INITIAL AWARD YEAR 2	2,880.0000	$	1.0000	2,880.00
423	REG 7 METRO W LABOR NON RECUR COST INITIAL AWARD YEAR 2	3,486.0000	$	1.0000	3,486.00
424	REG 7 METRO W CCS DEFAULT ROUTES NRC INITIAL AWARD YEAR 2	1,820.0400	$	1.0000	1,820.04
425	REG 7 METRO W OPT TSP PROV INSTAL RESTO	578.0000	$	1.0000	578.00

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

STATE OF NEBRASKA SERVICE CONTRACT AWARD

State Purchasing Bureau
1526 K Street, Suite 130
Lincoln, Nebraska 68508

Telephone: (402) 471-6500
Fax: (402) 471-2089

PAGE	ORDER DATE
40 of 40	01/06/21
BUSINESS UNIT 14018300	BUYER ANNETTE WALTON (AS)

VENDOR NUMBER: 1910319

CONTRACT NUMBER
92858 O4

Line	Description	Quantity	Unit of Measure	Unit Price	Extended Price
	NON RECUR COST				
	INITIAL AWARD YEAR 2				
	Total Order				**17,450,444.76**

DS

BUYER INITIALS

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

ADDENDUM ONE TO CONTRACT AWARD
Terms and Conditions
Contract 92858 O4 Next Generation 911 Emergency Services IP Network (ESInet) and Next Generation Core Services (NGCS)
Between
The State of Nebraska and CenturyLink Communications, LLC d/b/a Lumen Technologies Group

The following clauses, Addendum One of Contract 92858 O4 have been reviewed and agreed upon between CenturyLink Communications, LLC d/b/a Lumen Technologies Group "Contractor" and the State of Nebraska "State". This Addendum will become part of the contract for Next Generation 911 ESInet and NGCS. The clauses of this Addendum shall supersede, prevail and govern in the case of any inconsistencies with the clauses indicated in Sections II - IV of the Request for Proposal. This Addendum becomes effective on the date it is executed by all parties ("Effective Date").

By signing this Addendum, the Contractor guarantees compliance with the provisions stated herein, agrees to the clauses and certifies Contractor maintains a drug free work place environment.

II. TERMS AND CONDITIONS

If a conflict or ambiguity arises after the Addendum to Contract Award have been negotiated and agreed to, the Addendum to Contract Award shall be interpreted as follows:

1. If only one Party has a particular clause then that clause shall control;
2. If both Parties have a similar clause, but the clauses do not conflict, the clauses shall be read together;
3. If both Parties have a similar clause, but the clauses conflict, the State's clause shall control.

A. GENERAL

The contract resulting from this solicitation shall incorporate the following documents:

1. Request for Proposal and Addenda;
2. Amendments to the solicitation;
3. Questions and Answers;
4. Bidder's proposal (Solicitation and properly submitted documents, and Contractor BAFO);
5. The executed Contract and Addendum One to Contract, if applicable; and,
6. Amendments/Addendums to the Contract.

These documents constitute the entirety of the contract.

Unless otherwise specifically stated in a future contract amendment, in case of any conflict between the incorporated documents, the documents shall govern in the following order of preference with number one (1) receiving preference over all other documents and with each lower numbered document having preference over any higher numbered document: 1) Amendment to the executed Contract with the most recent dated amendment having the highest priority, 2) Addendum One to Contract and 3) the Contractor's Cost Proposal 2 BAFO ("Contractor BAFO"), 4) Amendments to solicitation and any Questions and Answers, 5) the original solicitation document and any Addenda 6) the bidder's submitted proposal, including any submitted Service Attachments.

Notwithstanding any other document submitted by the Contractor in its proposal, including but not limited to, the Contractor's service attachments, Contractor agrees to be bound by and comply with the Option C Revision One Technical Requirements ("Technical Requirements") and provide those services and service level as described in the Contractor's response to the Technical Requirements.

Any ambiguity or conflict in the contract discovered after its execution, not otherwise addressed herein, shall be resolved in accordance with the rules of contract interpretation as established in the State of Nebraska.

B. NOTIFICATION

Contractor and State shall identify the contract manager who shall serve as the point of contact for the executed contract.

Communications regarding the executed contract shall be in writing and shall be deemed to have been given if delivered personally or mailed, by U.S. Mail, postage prepaid, return receipt requested, to the parties at their

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

respective addresses set forth below, or at such other addresses as may be specified in writing by either of the parties. All notices, requests, or communications shall be deemed effective upon personal delivery or five (5) calendar days following deposit in the mail.

Either party may change its address for notification purposes by giving notice of the change, and setting forth the new address and an effective date.

C. BUYER'S REPRESENTATIVE

The State reserves the right to appoint a Buyer's Representative to manage (or assist the Buyer in managing) the contract on behalf of the State. The Buyer's Representative will be appointed in writing, and the appointment document will specify the extent of the Buyer's Representative authority and responsibilities. If a Buyer's Representative is appointed, the Contractor will be provided a copy of the appointment document, and is required to cooperate accordingly with the Buyer's Representative. The Buyer's Representative has no authority to bind the State to a contract, amendment, addendum, or other change or addition to the contract.

D. GOVERNING LAW (Statutory)

Notwithstanding any other provision of this contract, or any amendment or addendum(s) entered into contemporaneously or at a later time, the parties understand and agree that, (1) the State of Nebraska is a sovereign state and its authority to contract is therefore subject to limitation by the State's Constitution, statutes, common law, and regulation; (2) this contract will be interpreted and enforced under the laws of the State of Nebraska; (3) any action to enforce the provisions of this agreement must be brought in the State of Nebraska per state law; (4) the person signing this contract on behalf of the State of Nebraska does not have the authority to waive the State's sovereign immunity, statutes, common law, or regulations; (5) the indemnity, limitation of liability, remedy, and other similar provisions of the final contract, if any, are entered into subject to the State's Constitution, statutes, common law, regulations, and sovereign immunity; and, (6) all terms and conditions of the final contract, including but not limited to the clauses concerning third party use, licenses, warranties, limitations of liability, governing law and venue, usage verification, indemnity, liability, remedy or other similar provisions of the final contract are entered into specifically subject to the State's Constitution, statutes, common law, regulations, and sovereign immunity.

The Parties must comply with all applicable local, state and federal laws, ordinances, rules, orders, and regulations.

E. BEGINNING OF WORK

The bidder shall not commence any billable work until a valid contract has been fully executed by the State and the awarded bidder. The awarded bidder will be notified in writing when work may begin.

F. AMENDMENT

This Contract may be amended in writing, within scope, upon the agreement of both parties.

G. CHANGE ORDERS OR SUBSTITUTIONS

The State and the Contractor, upon the written agreement, may make changes to the contract within the general scope of the solicitation. Changes may involve specifications, the quantity of work, or such other items as the State may find necessary or desirable. Corrections of any deliverable, service, or work required pursuant to the contract shall not be deemed a change. The Contractor may not claim forfeiture of the contract by reasons of such changes.

The Contractor shall prepare a written description of the work required due to the change and an itemized cost sheet for the change. Changes in work and the amount of compensation to be paid to the Contractor shall be determined in accordance with applicable unit prices if any, a pro-rated value, or through negotiations. The State shall not incur a price increase for changes that should have been included in the Contractor's proposal, were foreseeable, or result from difficulties with or failure of the Contractor's proposal or performance.

No change shall be implemented by the Contractor until approved by the State, and the Contract is amended to reflect the change and associated costs, if any. If there is a dispute regarding the cost, but both parties agree that immediate implementation is necessary, the change may be implemented, and cost negotiations may continue with both Parties retaining all remedies under the contract and law.

In the event any product is discontinued or replaced upon mutual consent during the contract period or prior to delivery, the State reserves the right to amend the contract or purchase order to include the alternate product at the same price.

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

*****Contractor will not substitute any item that has been awarded without prior written approval of SPB*****

H. VENDOR PERFORMANCE REPORT(S)

The State may document any instance(s) of products or services delivered or performed which exceed or fail to meet the terms of the purchase order, contract, and/or solicitation specifications. The State Purchasing Bureau may contact the Vendor regarding any such report. Vendor performance report(s) will become a part of the permanent record of the Vendor.

I. NOTICE OF POTENTIAL CONTRACTOR BREACH

If Contractor breaches the contract or anticipates breaching the contract, the Contractor shall immediately give written notice to the State. The notice shall explain the breach or potential breach, a proposed cure, and may include a request for a waiver of the breach if so desired. The State may, in its discretion, temporarily or permanently waive the breach. By granting a waiver, the State does not forfeit any rights or remedies to which the State is entitled by law or equity, or pursuant to the provisions of the contract.

J. BREACH; DAMAGES LIMITATIONS

1. Breach. Either Party may terminate the contract, in whole or in part, if the other Party materially breaches its duty to perform its obligations under the contract in a timely and proper manner. Termination requires written notice of default and a thirty (30) calendar day (or longer at the non-breaching Party's discretion considering the gravity and nature of the default) cure period. Said notice shall be delivered by Certified Mail, Return Receipt Requested, or in person with proof of delivery. Allowing time to cure a failure or breach of contract does not waive the right to terminate the contract for the same or different contract breach which may occur at a different time. In case of a material default of the Contractor, the State will provide written notice of default and a minimum thirty (30) calendar day period to cure. If Contractor is unable to cure the default within the cure period to the reasonable satisfaction of the State, the State may contract the service from other sources and hold the Contractor responsible for any excess cost occasioned thereby up to the Damage Cap outlined in Section J.2 below .

The State's failure to make payment shall not be a breach, and the Contractor shall retain all available statutory remedies and protections.

2. Damages Limitations. Unless and to the extent a court of competent jurisdiction finally determines that this Section J.2 is in contravention of Section 1 or Section 3 of Article XIII of the Nebraska State Constitution, the damages limitations set forth herein will apply. Neither party will be liable for any damages for lost profits, lost revenues, loss of goodwill, or loss of anticipated savings arising out of the performance or failure to perform under this Contract or any Service Attachment. Contractor's total aggregate liability for direct damages and cost of purchasing replacement services as outlined in Section J.1 above, arising from or related to this Contract will not exceed the total Contract amount, including all renewals ("Damage Cap"). The Damage Cap shall not apply (i) in the event of death or injury or (ii) to the indemnification obligations and responsibilities as described in Section II.M., Indemnification. NOTWITHSTANDING THE FOREGOING, CONTRACTOR WILL NOT BE LIABLE FOR ANY DAMAGE THAT IS CAUSED BY INFORMATION PROVIDED TO THE STATE BY ANY OTHER DATA PROVIDER(S).

3. Service Levels.

(a) Any "Service Level" commitments applicable to Services are contained in the Technical Requirements applicable to each Service. If Contractor does not meet a Service Level, Contractor will issue to the State a credit as described in subsection J.3.c. Such credit must be issued to the State within sixty (60) calendar days after the date of the Service Level event for which the credit is owed. Contractor's maintenance log and trouble ticketing systems are used to calculate Service Level events and such maintenance log and trouble ticketing system must accurately account for and record all Service Level events. Scheduled maintenance and force majeure events are considered excused outages.

(b) The request for credit must be made within 60 calendar days after the end of the month in which the event occurred. Total monthly credits will not exceed the charges for the affected Service for that month. The Contractor shall report and discuss all events in which there was non-performance, outage, failure to deliver or defects in the service and shall discuss all credits due or potentially due to the State at least once per month at a time mutually agreeable to the State and the Contractor. The Contractor shall prepare the necessary documentation to identify the affected Service and the credits due for the State to review and submit to the Contractor. Remedies to Customer for any non-performance, outages, failures to deliver or defects in service are contained in the Service Levels applicable to the affected Service. Unless and to the extent a court of

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

competent jurisdiction finally determines that this provision is in contravention of Section 1 or Section 3 of Article XIII of the Nebraska State Constitution such remedies shall be the State's sole remedies for the first instance of non-performance, outages, failures or defects in service. Nothing in this subsection shall be construed to waive, restrict, or limit (i) the State's remedies in the event of death or injury, or (ii) the Contractor's indemnification obligations and responsibilities as described in Section II.M., Indemnification.

Notwithstanding any clause or provision found in the Contractor's response to the RFP or Service Attachments, this Section J.3. is intended to control and supersede any other provision and clause within the documents that comprise this Contract regarding credits that conflict with this section.

Notwithstanding any clause or provision found in or referenced in this Contract, neither the Nebraska Public Service Commission nor any other agency or instrumentality of the State of Nebraska waives any constitutional authority, statutory authority, or jurisdiction with respect to the regulation of any telecommunications carrier, including, without limitation, that which is set forth in Neb. Rev. Stat. § 75-109.01, to the extent such authority or regulation is applicable to the Services provided under this Contract.

(c) Contractor agrees to the Technical Requirements for the Services as outlined in Attachment C, SLAs 1-23 of the Contractor's response to the RFP. If the Services provided do not meet the technical requirements in Attachment C and only to the extent they are not outage related, Contractor will remedy any such Service technical non-adherence within thirty (30) calendar days. If the Services are not remedied back to the technical requirements contained in Attachment C, SLAs 1-23 after thirty (30) calendar days, Contractor will apply a credit of ten percent (10%) of the MRC attributable to the affected circuit or portion of the Services for each thirty-day period until remedied. The Contractor shall apply a credit for outages in accordance with SLA 23 in Attachment C and shall repair and remedy the outage in accordance with the Technical Requirements.

K. NON-WAIVER OF BREACH

The acceptance of late performance with or without objection or reservation by a Party shall not waive any rights of the Party nor constitute a waiver of the requirement of timely performance of any obligations remaining to be performed.

L. SEVERABILITY

If any term or condition of the contract is declared by a court of competent jurisdiction to be illegal or in conflict with any law, the validity of the remaining terms and conditions shall not be affected, and the rights and obligations of the parties shall be construed and enforced as if the contract did not contain the provision held to be invalid or illegal.

M. INDEMNIFICATION

1. GENERAL

The Contractor agrees to defend, indemnify, and hold harmless the State and its employees, volunteers, agents, and its elected and appointed officials from and against any and all third party claims, liens, demands, damages, liability, actions, causes of action, or judgments filed against the State and related to personal injury, death, or tangible property loss or damage, to the extent proximately caused by the willful misconduct or negligence of the Contractor, its employees, subcontractors, consultants, representatives, and agents, as related to performance under this Contract. Contractor's obligations under this section are contingent upon the State: (i) providing prompt notice of such claim to Contractor in writing, (ii) providing Contractor with sole control and authority over the defense and/or settlement of such claim, provided that the State shall have the opportunity to review and approve any settlement that may admit liability on the part of the State, and (iii) cooperating with Contractor (at Contractor's expense) in the defense and/or settlement of such claim upon Contractor's written request. Notwithstanding the foregoing, this section does not require Contractor to indemnify for or defend against claims or damages arising from the negligent acts of the State and its employees, volunteers, agents, and its elected and appointed officials.

2. INTELLECTUAL PROPERTY

The Contractor agrees it will, at its sole cost and expense, defend and indemnify the State from and against any and all third party claims arising on or after the Effective Date filed against the State and alleging that a Service, as provided by Contractor or Contractor's subcontractors, consultants, representatives, or agents, infringes, any patent, copyright, trade secret, trademark, or other intellectual property right ("IP Right") of such third party; provided, however, foregoing will not apply to any claim based on: (i) the combination of Service with other non-Contractor products, services or functionality, (ii) Contractor's design or modification of a Service in accordance with the State's specific written instructions, specifications or requirements if Contractor did not have actual

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

knowledge at the time of implementing such design or modification that such design or modification infringed the IP Right of a third party; (iii) use or operation by or on behalf of the State of a Service other than in accordance with the Contract or other written documentation provided by Contractor; (iv) content, data, or other information provided by or on behalf of the State ("State Content"). Contractor's obligations under this section are contingent upon the State (i) giving the Contractor prompt notice in writing of the claim (ii) providing Contractor with sole control and authority over the defense and/or settlement of such claim provided that the State shall have the opportunity to review and approve any settlement that may admit liability on the part of the State, and (iii) cooperating with Contractor (at Contractor's expense) in the defense and/or settlement of such claim upon Contractor's written request.. The Contractor may not settle any infringement claim that will affect the State's use of the affected intellectual property without the State's prior written consent, which may not be unreasonably withheld.

If a judgment or settlement is obtained or reasonably anticipated against the State's use of any intellectual property for which the Contractor has a defense or indemnity obligation under this Section 2, the Contractor may, at the Contractor's sole cost and expense, promptly modify the item or items which were determined to be infringing, obtain for the State the right to continue using the Service consistent with the Contract, or provide the State with a non-infringing substitute that provides the State with equivalent functionality.

Notwithstanding the foregoing, any third-party service, system, customer premises equipment ("CPE"), equipment or software provided under this Agreement (each, a "Third Party Item") is provided without any obligation of Contractor to defend or indemnify the State against any claim of infringement of any IP Right arising in connection with any such Third Party Item, except that Contractor shall pass through to the State any contractual obligations of a third party provider of any such Third Party Item to defend or indemnify the State against such claims. The foregoing states Contractor's only obligations (and the State's sole and exclusive remedy) for any claims, actions, liabilities, damages or losses arising in connection with alleged or actual infringement, violation or misappropriation of an IP Right by the Services.

3. PERSONNEL

The Contractor shall, at its expense, indemnify and hold harmless the State from and against any claim with respect to withholding taxes, worker's compensation, employee benefits, or any other similar claim, demand, liability, damage, or loss relating to any of the personnel, including subcontractor's and their employees, provided by the Contractor to perform the services under this Agreement.

4. SELF-INSURANCE

The State of Nebraska is self-insured for any loss and purchases excess insurance coverage pursuant to Neb. Rev. Stat. § 81-8,239.01 (Reissue 2008). If there is a presumed loss under the provisions of this agreement, Contractor may file a claim with the Office of Risk Management pursuant to Neb. Rev. Stat. §§ 81-8,829 – 81-8,306 for review by the State Claims Board. The State retains all rights and immunities under the State Miscellaneous (§ 81-8,294), Tort (§ 81-8,209), and Contract Claim Acts (§ 81-8,302), as outlined in Neb. Rev. Stat. § 81-8,209 et seq. and under any other provisions of law and accepts liability under this agreement to the extent provided by law.

5. The Parties acknowledge that Attorney General for the State of Nebraska is required by statute to represent the legal interests of the State, and that any provision of this indemnity clause is subject to the statutory authority of the Attorney General.

N. ATTORNEY'S FEES

In the event of any litigation, appeal, or other legal action to enforce any provision of the contract, the Parties agree to pay all expenses of such action, as permitted by law and if ordered by the court, including attorney's fees and costs, if the other Party prevails.

O. PERFORMANCE BOND

The Contractor maybe required to supply a bond executed by a corporation authorized to contract surety in the State of Nebraska, payable to the State of Nebraska, which shall be valid for the life of the contract to include any renewal and/or extension periods. The amount of the bond must be $500,000. The bond will guarantee that the Contractor will faithfully perform all requirements, terms and conditions of the contract. Failure to comply shall be grounds for forfeiture of bond as liquidated damages. Amount of forfeiture will be

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

determined by the agency based on loss to the State. The bond will be returned when the contract has been satisfactorily completed as solely determined by the State, after termination or expiration of the contract.

P. ASSIGNMENT, SALE, OR MERGER: AFFILIATES

Assignment, Sale, or Merger. Either Party may assign the contract upon mutual written agreement of the other Party. Such agreement shall not be unreasonably withheld.

The Contractor retains the right to enter into a sale, merger, acquisition, internal reorganization, or similar transaction involving Contractor's business. Contractor agrees to cooperate with the State in executing amendments to the contract to allow for the transaction. If a third party or entity is involved in the transaction, the Contractor will remain responsible for performance of the contract until such time as the person or entity involved in the transaction agrees in writing to be contractually bound by this contract and perform all obligations of the contract.

Affiliates. Contractor may use a Contractor affiliate, subcontractor or a third party to provide Service to Customer, but Contractor will remain responsible to Customer for Service delivery and performance.

Q. CONTRACTING WITH OTHER NEBRASKA POLITICAL SUB-DIVISIONS OF THE STATE OR ANOTHER STATE

The Contractor may, but shall not be required to, allow agencies, as defined in Neb. Rev. Stat. §81-145, to use this contract. The terms and conditions, including price, of the contract may not be amended. The State shall not be contractually obligated or liable for any contract entered into pursuant to this clause. A listing of Nebraska political subdivisions may be found at the website of the Nebraska Auditor of Public Accounts.

The Contractor may, but shall not be required to, allow other states, agencies or divisions of other states, or political subdivisions of other states to use this contract. The terms and conditions, including price, of this contract shall apply to any such contract, but may be amended upon mutual consent of the Parties. The State of Nebraska shall not be contractually or otherwise obligated or liable under any contract entered into pursuant to this clause. The State shall be notified if a contract is executed based upon this contract.

R. FORCE MAJEURE

Neither Party shall be liable for any costs or damages, or for default resulting from its inability to perform any of its obligations under the contract due to a natural or manmade event outside the control and not the fault of the affected Party ("Force Majeure Event"). The Party so affected shall immediately make a written request for relief to the other Party and shall have the burden of proof to justify the request. The other Party may grant the relief requested; relief may not be unreasonably withheld. Labor disputes with the impacted Party's own employees will not be considered a Force Majeure Event.

S. CONFIDENTIALITY

All Confidential Information provided by the Parties or acquired by a Party on behalf of the other Party shall be regarded as confidential information. Except to the extent required by an open records act or similar law, or order by the Attorney General or a court order, neither party will disclose or use (except as expressly permitted by, or required to achieve the purposes of, the Contract) the Confidential Information received from the other party. A party may disclose Confidential Information if required to do so by a governmental agency, by operation of law, or if necessary in any proceeding to establish rights or obligations under the Contract. All Confidential Information provided or acquired shall be handled in accordance with federal and state law, and each party will limit disclosure and access to Confidential Information to those of its employees, contractors, attorneys or other representatives who reasonably require such access to accomplish the Contract's purposes and who are subject to confidentiality obligations at least as restrictive as those contained herein. Should said confidentiality be breached by a Party, the Party shall promptly notify the other Party of said breach and take prompt corrective action. "Confidential Information" means any commercial or operational information disclosed by one party to the other in connection with the Contract and does not include any information that: (a) is in the public domain without a breach of confidentiality; (b) is obtained from a third party without violation of any obligation of confidentiality; or (c) is independently developed by a party without reference to the Confidential Information of the other party. This Contract is considered public and is not Confidential Information.

It is incumbent upon the Parties to inform their officers and employees of the penalties for improper disclosure imposed by the Privacy Act of 1974, 5 U.S.C. 552a. Specifically, 5 U.S.C. 552a (i)(1), which is made applicable by 5 U.S.C. 552a (m)(1), provides that any officer or employee, who by virtue of his/her employment or official position has possession of or access to agency records which contain individually identifiable information, the disclosure of which is prohibited by the Privacy Act or regulations established thereunder, and who knowing

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

that disclosure of the specific material is prohibited, willfully discloses the material in any manner to any person or agency not entitled to receive it, shall be guilty of a misdemeanor and fined not more than $5,000.

T. EARLY TERMINATION

The contract may be terminated as follows:

1. The State and the Contractor, by mutual written agreement, may terminate the contract at any time.

2. Notwithstanding any clause or provision in Contractor's submitted documents, the State, in its sole discretion, may terminate the Contract, in whole or in part, for any reason upon sixty (60) calendar day's written notice to the Contractor. Such termination shall not relieve the Contractor of warranty or other service obligations incurred under the terms of the contract. In the event of termination for cause or default, the Contractor shall be entitled to payment, determined on a pro rata basis, for products or services satisfactorily performed or provided. In the event of termination for convenience, the State shall remain liable for all reasonable costs directly incurred by Contractor up to the date of termination if such costs were for the sole purpose(s) of performing its obligations pursuant to this Contract, including but not limited to 100% of the costs incurred for special construction relative to providing the Service(s) and third-party expenses. Special construction costs are those unanticipated costs for construction required to provide the services to the State. These charges will be determined upon termination according to Contractor records. Such records must contain accurate and specific information that clearly support and validate the costs the Contractor seeks to recover. Such records must be delivered to the State upon request and the State is not obligated to pay any such costs until such records are delivered if requested by the State.

3. The State may terminate the contract immediately for the following reasons:

- **a.** if directed to do so by statute;
- **b.** Contractor has made an assignment for the benefit of creditors, has admitted in writing its inability to pay debts as they mature, or has ceased operating in the normal course of business;
- **c.** a trustee or receiver of the Contractor or of any substantial part of the Contractor's assets has been appointed by a court;
- **d.** fraud, misappropriation, embezzlement, malfeasance, misfeasance, or illegal conduct pertaining to performance under the contract by its Contractor, its employees, officers, directors, or shareholders;
- **e.** an involuntary proceeding has been commenced by any Party against the Contractor under any one of the chapters of Title 11 of the United States Code and (i) the proceeding has been pending for at least sixty (60) calendar days; or (ii) the Contractor has consented, either expressly or by operation of law, to the entry of an order for relief; or (iii) the Contractor has been decreed or adjudged a debtor;
- **f.** a voluntary petition has been filed by the Contractor under any of the chapters of Title 11 of the United States Code;
- **g.** Contractor intentionally discloses Confidential Information; and,
- **h.** In the event funding is no longer available.

U. CONTRACT CLOSEOUT

Upon contract closeout for any reason the Contractor shall within 30 calendar days, unless stated otherwise herein:

1. Transfer all completed or partially completed deliverables to the State;
2. Transfer ownership and title to all completed or partially completed deliverables to the State;
3. Return to the State all information and data, unless the Contractor is permitted to keep the information or data by contract or rule of law. Contractor may retain one copy of any information or data as required to comply with applicable work product documentation standards or as are automatically retained in the course of Contractor's routine back up procedures;
4. Cooperate with any successor Contactor, person or entity in the assumption of any or all of the obligations of this contract;
5. Cooperate with any successor Contactor, person or entity with the transfer of information or data related to this contract;
6. Return or vacate any state owned real or personal property; and,
7. Return all data in a mutually acceptable format and manner.

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

Nothing in this Section should be construed to require the Contractor to surrender intellectual property, real or personal property, or information or data owned by the Contractor for which the State has no legal claim.

V. **Critical 9-1-1 Circuits.** The Federal Communications Commission's 9-1-1 reliability rules mandate the identification and tagging of certain circuits or equivalent data paths that transport 9-1-1 calls and information ("9-1-1 Data") to public safety answering points. These circuits or equivalent data paths are defined as Critical 911 Circuits in 47 C.F.R. Section 9.19(a)(5). Contractor policies require tagging of any circuits or equivalent data paths used to transport 9-1- 1 Data. Customer will cooperate with Contractor regarding compliance with these rules and policies and will notify Contractor of all Services Customer purchases under this Agreement utilized as Critical 911 Circuits or for 9-1-1 Data.

W. **Acceptable Use Policy and Data Protection.** The State must comply with the Contractor Acceptable Use Policy ("AUP"), as such policy existed on the Effective Date, which is available at http://www.centurylink.com/legal, for Services purchased under this Agreement and acknowledge the CenturyLink Privacy Policy, as such policy existed on the Effective Date, which is available at http://www.centurylink.com/aboutus/legal/privacy-policy.html. The State will comply with all laws and regulations that apply to the State's use of the Services.

X. **Reports.**

1. Contractor shall provide the following reports at least once per month:

- **a.** Network Latency Report, pop-to-pop and pop-to-endpoint;
- **b.** Network Packet Loss Report;
- **c.** Network Jitter Report;
- **d.** Mean Opinion Score (MOS) report (voice quality);
- **e.** Trouble Ticket Report, showing a list of tickets opened, closed (including prior period tickets), still open, by severity level, including details such as time/date opened, time/date resolved, time to restore service, reason for ticket, resolution; and
- **f.** Calls processed by NGCS by call type (wireline, wireless, VoIP, text) and destination PSAP.

2. Contractor shall provide a detailed report on a specific outage, including length of outage, the detailed cause(s), and detailed steps to restore service ("Reason for Outage Report" or "RFO") within a commercially reasonable time period of receiving such request from the State, with a goal of 10 calendar days.

III. CONTRACTOR DUTIES

A. INDEPENDENT CONTRACTOR / OBLIGATIONS

It is agreed that the Contractor is an independent contractor and that nothing contained herein is intended or should be construed as creating or establishing a relationship of employment, agency, or a partnership.

Notwithstanding any use of affiliates, subcontractors, and third parties as set forth in the Contract, the Contractor is solely responsible for fulfilling the contract. The Contractor or the Contractor's representative shall be the sole point of contact regarding all contractual matters.

The Contractor shall secure, at its own expense, all personnel required to perform the services under the contract. The personnel the Contractor uses to fulfill the contract shall have no contractual or other legal relationship with the State; they shall not be considered employees of the State and shall not be entitled to any compensation, rights or benefits from the State, including but not limited to, tenure rights, medical and hospital care, sick and vacation leave, severance pay, or retirement benefits.

By-name personnel commitments made in the Contractor's proposal shall not be changed without the prior consent of the State which shall not be unreasonably withheld. Replacement of these personnel, if approved by the State, shall be with personnel of equal or greater ability and qualifications.

All personnel assigned by the Contractor to the contract shall be employees of the Contractor or a subcontractor, and shall be fully qualified to perform the work required herein. Personnel employed by the Contractor or a subcontractor to fulfill the terms of the contract shall remain under the sole direction and control of the Contractor or the subcontractor respectively.

With respect to its employees, the Contractor agrees to be solely responsible for the following:

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

1. Any and all pay, benefits, and employment taxes and/or other payroll withholding;
2. Any and all vehicles used by the Contractor's employees, including all insurance required by state law;
3. Damages incurred by Contractor's employees within the scope of their duties under the contract;
4. Maintaining Workers' Compensation and health insurance that complies with state and federal law and submitting any reports on such insurance to the extent required by governing law;
5. Determining the hours to be worked and the duties to be performed by the Contractor's employees; and,
6. All claims on behalf of any person arising out of employment or alleged employment (including without limit claims of discrimination alleged against the Contractor, its officers, agents, or subcontractors or subcontractor's employees).

If the Contractor intends to utilize any subcontractor, the subcontractor's level of effort, tasks, and time allocation should be clearly defined in the bidder's proposal. The Contractor shall agree that it will not utilize any subcontractors not specifically included in its proposal in the performance of the contract without the prior written authorization of the State.

The State reserves the right to require the Contractor to reassign or remove from the project any Contractor or subcontractor employee for lawful or ethical reasons.

If the State receives a complaint about the behavior or conduct of Contractor's employees or any subcontractor employee, the State shall notify the Contractor and reserves the right to ask them to be reassigned or removed from the project.

B. EMPLOYEE WORK ELIGIBILITY STATUS

The Contractor is required and hereby agrees to use a federal immigration verification system to determine the work eligibility status of employees physically performing services within the State of Nebraska. A federal immigration verification system means the electronic verification of the work authorization program authorized by the Illegal Immigration Reform and Immigrant Responsibility Act of 1996, 8 U.S.C. 1324a, known as the E-Verify Program, or an equivalent federal program designated by the United States Department of Homeland Security or other federal agency authorized to verify the work eligibility status of an employee.

If the Contractor is an individual or sole proprietorship, the following applies:

1. The Contractor must complete the United States Citizenship Attestation Form, available on the Department of Administrative Services website at http://das.nebraska.gov/materiel/purchasing.html.

2. The completed United States Attestation Form should be submitted with the solicitation response.

3. If the Contractor indicates on such attestation form that he or she is a qualified alien, the Contractor agrees to provide the US Citizenship and Immigration Services documentation required to verify the Contractor's lawful presence in the United States using the Systematic Alien Verification for Entitlements (SAVE) Program.

4. The Contractor understands and agrees that lawful presence in the United States is required and the Contractor may be disqualified or the contract terminated if such lawful presence cannot be verified as required by Neb. Rev. Stat. §4-108.

C. COMPLIANCE WITH CIVIL RIGHTS LAWS AND EQUAL OPPORTUNITY EMPLOYMENT / NONDISCRIMINATION (Statutory)

The Contractor shall comply with all applicable local, state, and federal statutes and regulations regarding civil rights laws and equal opportunity employment. The Nebraska Fair Employment Practice Act prohibits Contractors of the State of Nebraska, and their subcontractors, from discriminating against any employee or applicant for employment, with respect to hire, tenure, terms, conditions, compensation, or privileges of employment because of race, color, religion, sex, disability, marital status, or national origin (Neb. Rev. Stat. §48-1101 to 48-1125). The Contractor guarantees compliance with the Nebraska Fair Employment Practice Act, and breach of this provision shall be regarded as a material breach of contract. The Contractor shall insert a similar provision in all subcontracts for goods and services to be covered by any contract resulting from this solicitation.

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

D. COOPERATION WITH OTHER CONTRACTORS

Contractor may be required to work with or in close proximity to other contractors or individuals that may be working on same or different projects. The Contractor shall agree to cooperate with such other contractors or individuals, and shall not commit or permit any act which may interfere with the performance of work by any other contractor or individual. Contractor is not required to compromise Contractor's intellectual property or proprietary information unless expressly required to do so by this contract.

E. PERMITS, REGULATIONS, LAWS

The contract price shall include the cost of all royalties, licenses, permits, and approvals, whether arising from patents, trademarks, copyrights or otherwise, that are in any way involved in the contract. The Contractor shall obtain and pay for all royalties, licenses, and permits, and approvals necessary for the execution of the contract. The Contractor must guarantee that it has the full legal right to the materials, supplies, equipment, software, and other items used to execute this contract.

F. DELIVERABLES

The State shall have the right to publish, duplicate, use, and disclose all information and data developed or obtained by the Contractor on behalf of the State, including, but not limited to, general diagrams of the network design for Nebraska and other such documents and records specific to the Services the State receives under this Contract ("collectively, Deliverables"), if Deliverables are specifically contemplated in the Contract and paid for by the State. For clarity, the parties agree that KMZ files and other highly confidential documents and records do not constitute Deliverables, but may be viewed by the State upon request by the State and in compliance with the Contractor's reasonable security process that the Contractor has implemented for the purpose of keeping such documents and records confidential. Such documents and records shall always be available for the State to view during the Term of this Contract, in accordance with Contractor's reasonable security policies and the State's ongoing agreement to Contractor's policies. For the avoidance of doubt, such highly confidential information, including but not limited to KMZ files, shall not be considered Deliverables under this Contract and under no circumstances will become information that the State owns. The State's access to such highly confidential information after the Term of this Contract shall be subject to Contractor's reasonable security policies concerning such information.

The State shall own and hold exclusive title to any Deliverable developed as a result of this contract and paid for by the State. Contractor shall have no ownership interest or title, and shall not patent, license, or copyright, duplicate, transfer, sell, or exchange, the Deliverables.

G. INSURANCE REQUIREMENTS

The Contractor shall throughout the term of the contract maintain insurance as specified herein and provide the State a current Certificate of Insurance/Acord Form (COI) verifying the coverage. The Contractor shall not commence work on the contract until the insurance is in place. If Contractor subcontracts any portion of the Contract the Contractor must, throughout the term of the contract, either:

1. Provide equivalent insurance for each subcontractor and provide a COI verifying the coverage for the subcontractor;
2. Require each subcontractor to have equivalent insurance and provide written notice to the State that the Contractor has verified that each subcontractor has the required coverage; or,
3. Provide the State with copies of each subcontractor's Certificate of Insurance evidencing the required coverage.

The Contractor shall not allow any subcontractor to commence work until the subcontractor has equivalent insurance. The failure of the State to require a COI, or the failure of the Contractor to provide a COI or require subcontractor insurance shall not limit, relieve, or decrease the liability of the Contractor hereunder.

In the event that any policy written on a claims-made basis terminates or is canceled during the term of the contract or within one (1) year of termination or expiration of the contract, the contractor shall obtain an extended discovery or reporting period, or a new insurance policy, providing coverage required by this contract for the term of the contract and one (1) year following termination or expiration of the contract.

If by the terms of any insurance a mandatory deductible is required, or if the Contractor elects to increase the mandatory deductible amount, the Contractor shall be responsible for payment of the amount of the deductible in the event of a paid claim.

Notwithstanding any other clause in this Contract, the State may recover up to the liability limits of the insurance policies required herein.

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

1. WORKERS' COMPENSATION INSURANCE

The Contractor shall take out and maintain during the life of this contract the statutory Workers' Compensation and Employer's Liability Insurance for all of the contactors' employees to be engaged in work on the project under this contract and, in case any such work is sublet, the Contractor shall require the subcontractor similarly to provide Worker's Compensation and Employer's Liability Insurance for all of the subcontractor's employees to be engaged in such work. This policy shall be written to meet the statutory requirements for the state in which the work is to be performed, including Occupational Disease. **The policy shall include a waiver of subrogation in favor of the State. The COI shall contain the mandatory COI subrogation waiver language found hereinafter**. The amounts of such insurance shall not be less than the limits stated hereinafter. For employees working in the State of Nebraska, the policy must be written by an entity authorized by the State of Nebraska Department of Insurance to write Workers' Compensation and Employer's Liability Insurance for Nebraska employees.

2. COMMERCIAL GENERAL LIABILITY INSURANCE AND COMMERCIAL AUTOMOBILE LIABILITY INSURANCE

The Contractor shall take out and maintain during the life of this contract such Commercial General Liability Insurance and Commercial Automobile Liability Insurance as shall protect Contractor and any subcontractor performing work covered by this contract from claims for damages for bodily injury, including death, as well as from claims for property damage, which may arise from operations under this contract, whether such operation be by the Contractor or by any subcontractor or by anyone directly or indirectly employed by either of them, and the amounts of such insurance shall not be less than limits stated hereinafter.

The Commercial General Liability Insurance shall be written on an **occurrence basis**, and provide Premises/Operations, Products/Completed Operations, Independent Contractors, Personal Injury, and Contractual Liability coverage. **The policy shall include the State, and others as required by the contract documents, Additional Insured(s). This policy shall be primary, and any insurance or self-insurance carried by the State shall be considered secondary and non-contributory**. **The COI shall contain the mandatory COI liability waiver language found hereinafter.** The Commercial Automobile Liability Insurance shall be written to cover all Owned, Non-owned, and Hired vehicles.

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

REQUIRED INSURANCE COVERAGE	
COMMERCIAL GENERAL LIABILITY	
General Aggregate	$2,000,000
Products/Completed Operations Aggregate	$2,000,000
Personal/Advertising Injury	$1,000,000 per occurrence
Bodily Injury/Property Damage	$1,000,000 per occurrence
Medical Payments	$10,000 any one person
Damage to Rented Premises (Fire)	$300,000 each occurrence
Contractual	Included
XCU Liability (Explosion, Collapse, and Underground Damage)	Included
Independent Contractors	Included
Abuse & Molestation	Included
If higher limits are required, the Umbrella/Excess Liability limits are allowed to satisfy the higher limit.	
WORKER'S COMPENSATION	
Employers Liability Limits	$500K/$500K/$500K
Statutory Limits- All States	Statutory - State of Nebraska
Voluntary Compensation	Statutory
COMMERCIAL AUTOMOBILE LIABILITY	
Bodily Injury/Property Damage	$1,000,000 combined single limit
Include All Owned, Hired & Non-Owned Automobile liability	Included
Motor Carrier Act Endorsement	Where Applicable
UMBRELLA/EXCESS LIABILITY	
Over Primary Insurance	$2,000,000 per occurrence
PROFESSIONAL LIABILITY	
All Other Professional Liability (Errors & Omissions)	$1,000,000 Per Claim / Aggregate
COMMERCIAL CRIME	
Crime/Employee Dishonesty Including 3rd Party Fidelity	$1,000,000
CYBER LIABILITY	
Breach of Privacy, Security Breach, Denial of Service, Remediation, Fines and Penalties	$10,000,000
MANDATORY COI SUBROGATION WAIVER LANGUAGE	
"Workers' Compensation policy shall include a waiver of subrogation in favor of the State of Nebraska."	
MANDATORY COI LIABILITY WAIVER LANGUAGE	
"Commercial General Liability & Commercial Automobile Liability policies shall name the State of Nebraska as an Additional Insured and the policies shall be primary and any insurance or self-insurance carried by the State shall be considered secondary and non-contributory as additionally insured."	

3. EVIDENCE OF COVERAGE

The Contractor shall furnish the Contract Manager, with a certificate of insurance coverage complying with the above requirements prior to beginning work at:

State Purchasing Bureau
Attn: Buyer Annette Walton
Email: annette.walton@nebraska.gov

These certificates or the cover sheet shall reference the RFP number, and the certificates shall include the name of the company, policy numbers, effective dates, dates of expiration, and amounts and types of coverage afforded. If the State is damaged by the failure of the Contractor to maintain such insurance, then the Contractor shall be responsible for all reasonable costs properly attributable thereto.

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

Reasonable notice of cancellation of any required insurance policy must be submitted to the contract manager as listed above when issued and a new coverage binder shall be submitted immediately to ensure no break in coverage.

4. DEVIATIONS

The insurance requirements are subject to limited negotiation. Negotiation typically includes, but is not necessarily limited to, the correct type of coverage, necessity for Workers' Compensation, and the type of automobile coverage carried by the Contractor.

H. ANTITRUST

The Contractor hereby assigns to the State any and all claims for overcharges as to goods and/or services provided in connection with this contract resulting from antitrust violations which arise under antitrust laws of the United States and the antitrust laws of the State.

I. CONFLICT OF INTEREST

By submitting a proposal, bidder certifies that no relationship exists between the bidder and any person or entity which either is, or gives the appearance of, a conflict of interest related to this Request for Proposal or project.

Bidder further certifies that bidder will not employ any individual known by bidder to have a conflict of interest nor shall bidder take any action or acquire any interest, either directly or indirectly, which will conflict in any manner or degree with the performance of its contractual obligations hereunder or which creates an actual or appearance of conflict of interest.

If there is an actual or perceived conflict of interest, bidder shall provide with its proposal a full disclosure of the facts describing such actual or perceived conflict of interest and a proposed mitigation plan for consideration. The State will then consider such disclosure and proposed mitigation plan and either approve or reject as part of the overall bid evaluation.

J. STATE PROPERTY

The Contractor shall be responsible for the proper care and custody of any State-owned property which is furnished for the Contractor's use during the performance of the contract. The Contractor shall reimburse the State for any loss or damage of such property; normal wear and tear is expected.

K. SITE RULES AND REGULATIONS

The Contractor shall use its reasonable efforts to ensure that its employees, agents, and subcontractors comply with site rules and regulations while on State or any government premises. Site rules will be provided to Contractor in advance whenever possible. If the Contractor must perform on-site work outside of the daily operational hours set forth by the State, it must make arrangements with the State or any government to ensure access to the facility and the equipment has been arranged. No additional payment will be made by the State on the basis of lack of access, unless the State fails to provide access as agreed to in writing between the State and the Contractor.

L. ADVERTISING

The Contractor agrees not to refer to the contract award in advertising in such a manner as to state or imply that the company or its goods or services are endorsed or preferred by the State. Any publicity releases pertaining to the project shall not be issued without prior written approval from the State.

M. NEBRASKA TECHNOLOGY ACCESS STANDARDS (Statutory)

Contractor shall review the Nebraska Technology Access Standards, found at http://nitc.nebraska.gov/standards/2-201.html and ensure that products and/or services provided under the contract are in compliance or will comply with the applicable standards to the greatest degree possible. In the event such standards change during the Contractor's performance, the State may create an amendment to the contract to request the contract comply with the changed standard at a cost mutually acceptable to the parties.

N. DISASTER RECOVERY/BACK UP PLAN

The Contractor shall have a disaster recovery and back-up plan, of which a copy should be provided upon request to the State, which includes, but is not limited to equipment, personnel, facilities, and transportation, in order to continue delivery of goods and services as specified under the specifications in the contract in the event of a disaster.

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

O. DRUG POLICY

Contractor certifies it maintains a drug free work place environment to ensure worker safety and workplace integrity. Contractor agrees to provide a copy of its drug free workplace policy at any time upon request by the State.

P. WARRANTY

The Contractor represents and warrants that its services hereunder shall be performed by competent personnel and shall be of professional quality consistent with generally accepted industry standards for the performance of such services and shall comply in all respects with the requirements of this Agreement. For any breach of this warranty, the Contractor shall, for a period of ninety (90) calendar days from performance of the service, perform the services again, at no cost to the State, or if Contractor is unable to perform the services as warranted, Contractor shall reimburse the State all fees paid to Contractor for the unsatisfactory affected services for the prior ninety (90) calendar days. The rights and remedies of the parties under this warranty are in addition to any other rights and remedies of the parties provided by law or equity, including, without limitation actual damages, and, as applicable and awarded under the law, to a prevailing party, reasonable attorneys' fees and costs.

Disclaimer of Warranties. EXCEPT FOR THOSE EXPRESSLY SET FORTH IN THIS CONTRACT, CONTRACTOR MAKES NO WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR USE OR NON-INFRINGEMENT. IF CONTRACTOR INTEGRATES ANY RECORDS PROVIDED TO CONTRACTOR BY ANY OTHER DATA PROVIDER, FOR INCLUSION IN THE CUSTOMER'S 9-1-1 DATA, CONTRACTOR MAKES NO REPRESENTATION OR WARRANTY AND ASSUMES NO LIABILITY REGARDING THE ACCURACY OF THE DATA PROVIDED BY ANY OTHER DATA PROVIDER. IN ADDITION TO ANY OTHER DISCLAIMERS OF WARRANTY STATED IN THE AGREEMENT, CONTRACTOR MAKES NO WARRANTY, GUARANTEE, OR REPRESENTATION, EXPRESS OR IMPLIED, THAT ALL SECURITY THREATS AND VULNERABILITIES WILL BE DETECTED OR THAT THE PERFORMANCE OF THE SERVICES WILL RENDER CUSTOMER'S SYSTEMS INVULNERABLE TO SECURITY BREACHES.

IV. PAYMENT

A. PROHIBITION AGAINST ADVANCE PAYMENT (Statutory)

Neb. Rev. Stat. §§81-2403 states, "[n]o goods or services shall be deemed to be received by an agency until all such goods or services are completely delivered and finally accepted by the agency."

B. TAXES (Statutory)

The State is not required to pay taxes and assumes no such liability as a result of this solicitation. The Contractor may request a copy of the Nebraska Department of Revenue, Nebraska Resale or Exempt Sale Certificate for Sales Tax Exemption, Form 13 for their records. Any property tax payable on the Contractor's equipment which may be installed in a state-owned facility is the responsibility of the Contractor

C. INVOICES

Invoices for payments must be submitted by the Contractor to the agency requesting the services with sufficient detail to support payment. Public Service Commission State 911 Director 1200 N St. Lincoln, NE 68509. The terms and conditions included in the Contractor's invoice shall be deemed to be solely for the convenience of the parties. No terms or conditions of any such invoice shall be binding upon the State, and no action by the State, including without limitation the payment of any such invoice in whole or in part, shall be construed as binding or estopping the State with respect to any such term or condition, unless the invoice term or condition has been previously agreed to by the State as an amendment to the contract.

D. INSPECTION AND APPROVAL

Final inspection and approval of all work required under the contract shall be performed by the designated State officials.

The State and/or its authorized representatives shall have the right to enter any premises where the Contractor or subcontractor duties under the contract are being performed, and to inspect, monitor or otherwise evaluate the work being performed. All inspections and evaluations shall be at reasonable times and in a manner that will not unreasonably delay work.

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

E. PAYMENT (Statutory)

Payment will be made by the responsible agency in compliance with the State of Nebraska Prompt Payment Act (See Neb. Rev. Stat. §81-2403). Payment shall be made within forty-five (45) calendar days after such payment is due and a correct invoice is sent to the State. The State may require the Contractor to accept payment by electronic means such as ACH deposit. In no event shall the State be responsible or liable to pay for any goods and services provided by the Contractor prior to the Effective Date of the contract, and the Contractor hereby waives any claim or cause of action for any such services.

F. PAYMENT MILESTONES

1. Notwithstanding anything to the contrary in any other Contract document, including, but not limited to the BAFO Cost Proposal 2 as responded to by the Contractor ("Contractor BAFO"), the State will provide payment to the Contractor only for work actually performed and services actually delivered.

2. Contractor shall not invoice and the State shall have no obligation to pay, any Permissible Nonrecurring Charges, as described in subsection 4 below, or Monthly Recurring Charges for ESINet or Core Services with respect to any PSAP Region until:

(i) all testing necessary to provide such services to the related PSAP Region has been completed to the satisfaction of the State 911 Director; and

(ii) notwithstanding the above, acceptance will be assumed if no notice is received within fifteen (15) calendar days; and

(iii) such services are actually available and being provided to the related PSAP Region.

3. Monthly Recurring Charges set forth in the Contractor BAFO shall be divided pro-rata among the PSAP region, as follows:

a. Monthly Recurring Charges are based on the assumption that three PSAP Regions will be connected to fully operational ESINet and Core Services within 12 months of the date work began in accordance with this Contract ("Project Commencement") and the remaining four PSAP Regions will be connected to fully operational ESINet and Core Services within 24 months of Project Commencement.

b. The Monthly Recurring Charges per PSAP Region shall be as outlined in the Contractor BAFO and may begin only after the requirements of subsection 2 above are satisfied for such region. If a Monthly Recurring Charge may begin on a day other than the first of the month, such Monthly Recurring Charge shall be pro-rated for the amount of days the requirements of subsection 2 are met.

4. "Permissible Nonrecurring Charges means those startup costs, preparation for performance expenses, and similar expenses that Contractor may charge for and are agreed to in advance by the State, not to exceed the NRC as outlined in the Contractor BAFO

5. Any charges that were not outlined in Contractor BAFO must be mutually agreed to between the parties via a written amendment prior to such charges being incurred.

6. Taxes and Fees. Notwithstanding the foregoing in this Section F, the State is responsible for all taxes and fees arising in any jurisdiction imposed on the State, Contractor, or a Contractor affiliate incident to the provision, sale or use of Service. This includes value added, consumption, sales, use, gross receipts, withholding, excise, ad valorem, franchise or other taxes, fees, duties or surcharges (e.g., regulatory and 911 surcharges), along with similar charges stated in a Service Attachment (collectively "Taxes and Fees"). This does not include taxes based on Contractor's net income. Some Taxes and Fees, and costs of administering them, are recovered through a percentage surcharge(s) on the charges for Service. If the State is required by law to make any deduction or withholding of withholding Taxes from any payment due under this Agreement to Contractor, then, the State must increase the gross amount payable so that, after any deduction or withholding for such withholding Taxes, the net amount paid to Contractor will not be less than Contractor would have received had no such deduction or withholding been required. Charges for Service are exclusive of Taxes and Fees. The State may present Contractor with an exemption certificate that eliminates Contractor's obligation to pay certain Taxes and Fees. The exemption will apply prospectively. For additional details on taxes and surcharges that are assessed, visit www.lumen.com/taxes.

G. LATE PAYMENT (Statutory)

The Contractor may charge the responsible agency interest for late payment in compliance with the State of Nebraska Prompt Payment Act (See Neb. Rev. Stat. §81-2401 through 81-2408).

DocuSign Envelope ID: 8B563B73-908D-4EC4-92AC-25B4DC363CEA

H. SUBJECT TO FUNDING / FUNDING OUT CLAUSE FOR LOSS OF APPROPRIATIONS (Statutory)

The State's obligation to pay amounts due on the Contract for a fiscal years following the current fiscal year is contingent upon legislative appropriation of funds. Should said funds not be appropriated, the State may terminate the contract with respect to those payments for the fiscal year(s) for which such funds are not appropriated. The State will give the Contractor written notice thirty (30) calendar days prior to the effective date of termination. All obligations of the State to make payments after the termination date will cease. The Contractor shall be entitled to receive just and equitable compensation for any authorized work which has been satisfactorily completed as of the termination date. In no event shall the Contractor be paid for a loss of anticipated profit.

I. RIGHT TO AUDIT (First Paragraph is Statutory)

The State shall have the right to audit the Contractor's performance of this contract upon a thirty (30) calendar days' written notice. Contractor shall utilize generally accepted accounting principles, and shall maintain the accounting records, and other billing and service records and information relevant to the contract (Information) to enable the State to audit the contract. (Neb. Rev. Stat. §84-304 et seq.) The State may audit and the Contractor shall maintain, the Information during the term of the contract and for a period of five (5) years after the completion of this contract or until all issues or litigation initiated prior to the expiration of this records retention obligation are resolved, whichever is later. The Contractor shall make the Information available to the State at Contractor's place of business or a location acceptable to both Parties during normal business hours. If this is not practical or the Contractor so elects, the Contractor may provide electronic or paper copies of the Information. The State reserves the right to examine, make copies of, and take notes on any Information relevant to this contract, regardless of the form or the Information, how it is stored, or who possesses the Information. Under no circumstance will the Contractor be required to create or maintain documents not kept in the ordinary course of contractor's business operations, nor will contractor be required to disclose any information, including but not limited to product cost data, which is confidential or proprietary to contractor.

The Parties shall pay their own costs of the audit. Overpayments owed to the State shall be paid within ninety (90) days of written notice of the claim provided the Contractor shall have a right to vet and contest such findings. The Contractor agrees to correct any material weaknesses or condition found as a result of the audit. To the extent permitted by law, disputes must be submitted to Contractor in writing within 180 days from the date of the invoice or the right to dispute an invoice is waived.

This Addendum and any attachments hereto will become part of the Contract. Except as set forth in this Addendum, the Contract is unaffected and shall continue in full force and effect in accordance with its terms. If there is conflict between this Addendum and the Contract or any earlier addendum, the terms of this Addendum will prevail.

IN WITNESS WHEREOF, the parties have executed this Addendum as of the date of execution by both parties below.

State of Nebraska

DocuSigned by:
By: _____
6F1A26D8C1D24BC...
Name: Doug Carlson
Title: Materiel Administrator
Date: 1/13/2021

Contractor: CenturyLink Communications LLC d/b/a Lumen Technologies Group

DocuSigned by:
By: Dennis Fisher
37D99BD62DEE4BC...
Name: Dennis Fisher
Title: Director of Offer Management
Date: 1/12/2021

Public Service Commission

DocuSigned by:
By: Mike Hybl
A64B00F7E0DB42E...
Name: Mike Hybl
Title: Executive Director
Date: 1/12/2021

CENTURYLINK MASTER SERVICE AGREEMENT
CENTURYLINK MPLS (IPVPN AND VPLS) VPN SERVICE
SERVICE SCHEDULE

1. Applicability. This Service Schedule forms part of the Contract **92858 O4** between CenturyLink and Customer ("Agreement") and is applicable only where Customer orders CenturyLink MPLS (IPVPN and VPLS) VPN Service (which may also be called IP VPN, IPVPN, IPVPN Port, Private Port, IQ Networking Private Port, MPLS/IP VPN Port, VPN, NBIPVPN (Network Based IP VPN), Virtual Private Network, or IP Solutions Private Port on ordering, pricing, invoicing, or other documentation). Capitalized terms used but not defined herein have the definitions given to them in the Agreement. Customer expressly agrees that CenturyLink may use affiliates or third party suppliers to provide MPLS VPN Service, provided that CenturyLink remains responsible to Customer hereunder.

2. Service Description. MPLS VPN Service includes two (2) virtual private network ("VPN") services, IPVPN and VPLS, providing private site-to-site communications over CenturyLink's MPLS network. IPVPN utilizes Internet Protocol; VPLS is provided using Ethernet. Customer must purchase at least 2 ports to set up private site-to-site connections. The Service is connected to each site, including additional sites designated by Customer (together "Customer Sites") through the Customer port at either a circuit location address or a CenturyLink Point of Presence (PoP) as specified in the Order. Customer Sites will be connected to a port at one or more CenturyLink MPLS Network PoPs at a fixed data transmission rate. Standard network management web tools are also provided in conjunction with the MPLS VPN Services. The VPLS offer of Enterprise Switched Native LAN ("SNLAN") allows multiple Customer locations to interconnect within a single CenturyLink-defined metro area network ("MAN"). The VPLS offer of Extended Native LAN ("ENLAN") allows Customer to connect multiple SNLAN networks between MANs.

3. Additional features and functionality may include:

a. Enhanced Reporting. CenturyLink offers enhanced reporting features including Performance Assurance, Enhanced Management, and End to End Statistics (collectively these are referred to herein as "Enhanced Reporting"). Customer may subscribe to Performance Assurance and End to End Statistics for an additional charge. If available at Customer's location, Enhanced Management will be included with Customer's MPLS VPN Service at no additional charge. Customer may request information regarding the availability of Enhanced Management at any particular location. Where available, these features provide end-to-end reporting and SLA's for the following statistics: data delivery, latency and jitter that can be accessed by Customer via the CenturyLink provided customer portal.

b. Class of Service (CoS). Customer may purchase CoS where available providing the ability to prioritize certain identifiable traffic flows between MPLS network ports. Customer is solely responsible for the selection of classes of service as stated in the Order. If a Service Order references Premium Plus/Premium CIR (or PIR), the stated bandwidth is included in, and not in addition to, the Committed Information Rate or Peak Information Rate.

c. Smart Demarcation. In certain locations, where available, for VPN and VPLS services with Ethernet access in the domestic U.S. and VPLS services with Ethernet access outside of the U.S., CenturyLink provides 'Smart Demarcation' which is the supply and installation of a Smart Demarcation device (also referred to as a Network Interface Device or "NID") used for Ethernet connectivity fault management for up to 1Gbps port speeds at Customer Sites.

4. Charges. Customer shall be billed non-recurring charges ("NRC") and monthly recurring charges ("MRC") for MPLS VPN Services as set forth in the Option C Proposal 2 BAFO ("BAFO"). NRC includes applicable installation charges for local-access circuit and each port. MRC includes local-access charges, port connection charges and bandwidth charges. Bandwidth may be identified on an Order or pricing attachment as Bandwidth, Commit, Committed Information Rate (or CIR), or Peak Information Rate (or PIR). Other charges, including but not limited to usage based charges, may apply as stated in the BAFO. Where Customer orders MPLS VPN Services bundled with either CenturyLink Internet Services or Level 3 Enterprise Voice SIP Based Services (either combination is referred to herein as a "Converged Service") such charges will show on the invoice as Converged Services. For clarification, the Converged Service is treated as a single Service and if Customer wishes to unbundle or terminate a part of the Converged Service, and Customer will be required to execute new orders for the desired stand-alone Service.

5. The following services may be available at an additional charge to be set forth in an Order and pursuant to the separate Service Schedule for such services:

a. CenturyLink Internet Services. As part of a Converged Service, Customer may order Internet Services which are high speed symmetrical Internet services providing access to the CenturyLink IP Network and the global internet.

b. CenturyLink Enterprise Voice SIP Based Services. As part of a Converged Service, Customer may order SIP based enterprise voice for Public Switched Telephone Network connectivity, outbound (1+) access to U.S. (interstate and intrastate) and international locations, inbound (8XX) service, and international toll free calling.

c. Application Performance Management. As an optional service feature for IPVPN, where available Customer may subscribe to Application Performance Management ("APM") which provides near real-time information for live monitoring and historical data for analysis and reporting on all network traffic end-to-end, including advanced statistics on latency, jitter and packet loss, as well as general utilization by way of an inline Analysis Service Element ("ASE").

d. Managed Network Services. As an additional Service offering, where available Customer may order CenturyLink Managed Network Services ("MNS") in which Customer premises equipment ("CPE") is provided by either the Customer or CenturyLink, but in all cases is managed and maintained by CenturyLink. MNS may include, but is not limited to, Routers, IADs, SBCs, and firewalls.

© CenturyLink. All Rights Reserved.

e. Secure Access. As an additional Service offering, where available Customer may order Secure Access Site and Secure Access Cellular.

f. Managed Security Services. As an additional Service offering, if available Customer may order certain managed security services ("MSS") which may be available on a cloud-based (MSS-Cloud) solution. The MSS Cloud solution may also be referenced as a Secure Internet Access Firewall or SIA Firewall when ordered in conjunction with CenturyLink MPLS Service.

6. Customer Responsibilities. Customer is solely responsible for all equipment and other facilities used in connection with the Service which are not provided by CenturyLink. All IP addresses, if any, assigned to Customer by CenturyLink shall revert to CenturyLink upon termination of Service, and Customer shall cease using such addresses as of the effective date of termination. For installation of the Smart Demarcation device (NID) at Customer's Site, Customer shall (i) provide access at each Site for installation, implementation and maintenance ("Work") at scheduled times, (ii) make appropriate contact personnel available on- site for such Work, (iii) provide all necessary power distribution boxes, conduits, telco backboard space for equipment mounting, grounding, surge and lightning protection and associated hardware and power outlets within 4 feet (1 meter) of the location at which a NID is to be installed, (iv) provide all required extended demarcation inside wiring, including any necessary building alterations to meet wiring and any other site requirements, (v) ensure that the NID can be installed within 6 feet (2 meters) of the Customer provided equipment and the Customer provided or third party provided extension of the local access circuit demarcation, or otherwise provide additional cabling at the Customer's expense, (vi) clearly marking each telecommunications extended local access circuit demarcation point to allow the installer to connect the correct circuit to the correct NID interface, and (vii) connection of the NID to the Customer Router or LAN.

7. On-Net and Off-net Access. Access services provided entirely on the CenturyLink owned and operated network ("Network") are "On-Net Access Services". Additionally, CenturyLink may use third parties to reach Customer's site from the CenturyLink Network ("Off-Net Access Services"). Local Access may be provisioned utilizing one of the following service technologies: special access, ethernet local access, or wavelength local access

8. .**Installation Service Level.** CenturyLink will exercise commercially reasonable efforts to install each MPLS VPN Service on or before the Customer Commit Date for the particular Service. This installation Service Level shall not apply to Orders that contain incorrect information supplied by Customer or Orders that are altered at Customer request after submission and acceptance by CenturyLink. In the event CenturyLink does not meet this Installation Service Level for a particular MPLS VPN Service for reasons other than an Excused Outage, Customer will be entitled to a service credit for each day of delay equal to the charges 1 day of the pro rata share of the MRC associated with the affected MPLS VPN service up to a monthly maximum credit of 10 days.

9. Resale Restriction. Notwithstanding anything to the contrary in the Agreement, Customer is prohibited from reselling any Service provided pursuant to this Service Schedule except as expressly provided by CenturyLink, provided however, if Customer requests to resell any Converged Services such permission from CenturyLink must be in the form of an amendment signed by authorized representatives of both parties.

10. INTENTIONALLY DELETED.

11. Business Contact Information. Customer must provide to CenturyLink the names of and contact information ("Business Contact Information") for its employees ("Business Contacts") who have purchasing or other responsibilities relevant to CenturyLink's delivery of international Service under this Service Schedule. Customer consents to CenturyLink's and its affiliates or subcontractors' use and transfer to the United States of Business Contact Information for the purpose of: (a) fulfilling its obligations under this Service Schedule; and (b) providing information to Customer about CenturyLink's products and services via these Business Contacts. Customer represents that the Business Contact Information is accurate and that each Business Contact has consented to CenturyLink's processing of their Business Contact Information for the purposes set forth in this Service Schedule. The Business Contact Information provided by Customer has been collected, processed, and transferred in accordance with applicable laws, including, where applicable, any necessary notification to the relevant data protection authority in the territory in which Customer is established ("Authority"). Customer will notify CenturyLink promptly of staffing or other changes that affect CenturyLink's use of Business Contact Information. CenturyLink will have in place technical and organizational measures that ensure a level of security appropriate to the risk represented by the processing and the nature of the Business Contact Information and that protects such information against accidental or unlawful destruction or accidental loss, alteration, and unauthorized disclosure or access. CenturyLink will use the information only for the express purposes set forth in this Service Schedule. CenturyLink will identify a contact authorized to respond to inquiries concerning processing of Business Contact Information and will reasonably cooperate in good faith with Customer and the Authority concerning all such inquiries without excessive delays.

12. Withholding Taxes. All invoices will be issued to Customer and paid in the currency specified in the Order or pricing attachment. Customer will pay such invoices free of currency exchange costs or bank charges. Service charges are exclusive of taxes and presented without reduction for any Withholding Tax, all of which are the responsibility of the Customer. "Withholding Tax" means any amount or account of tax on sources of income which a payor is obliged to deduct from payments due to a recipient and account for or to any tax authority. In the event that any payment to be made to CenturyLink hereunder should be subject to reduction by reason of a Withholding Tax, Customer agrees to pay CenturyLink such amounts as would have been necessary so that the aggregate net amount received by CenturyLink after application of a Withholding Tax is the same amount as would have been received by CenturyLink if there had been no requirement to deduct or withhold such tax.

© CenturyLink. All Rights Reserved.

PRICING ATTACHMENT

For pricing, please refer to the Option C Proposal 2 BAFO ("BAFO").

© CenturyLink. All Rights Reserved.

CENTURYLINK MASTER SERVICE AGREEMENT
STATE, LOCAL AND EDUCATION GOVERNMENT AGENCIES VERSION
CENTURYLINK® LOCAL ACCESS SERVICE EXHIBIT

1. General. This Service Exhibit is applicable only where Customer orders CenturyLink Local Access Service (the "Service") and incorporates the terms of the Master Service Agreement or other service agreement and the RSS under which CenturyLink provides services to Customer (the "Agreement"). CenturyLink may subcontract any or all of the work to be performed under this Service Exhibit. All capitalized terms that are used but not defined in this Service Exhibit are defined in the Agreement or Order.

2. Service Description and Availability.

21 Description. Service provides the physical connection between the Service Address and the CenturyLink Domestic Network. If a generic demarcation point (such as a street address) is provided, the demarcation point for On-Net Access will be CenturyLink's Minimum Point of Entry (MPOE) at such location (as determined by CenturyLink). Off-Net Access demarcation points will be the off-net vendor's MPOE. If the Order identifies aspects of services that are procured by Customer directly from third parties, CenturyLink is not liable for such services. Customer may request additional wiring from the demarcation point to Customer's network interface equipment (where available). If Customer requests additional wiring, CenturyLink will notify Customer of the charge to be billed to Customer. Customer may either approve or disapprove CenturyLink providing the additional wiring. Additional wiring could entail electrical or optical cabling into 1) existing or new conduit or 2) bare placement in drop down ceilings, raised floors, or mounted to walls/ceilings. Once Service is accepted by Customer, the additional wiring then becomes property of and maintained by Customer. CenturyLink will maintain Service to the demarcation point only. Customer is responsible for any facility or equipment maintenance and repairs on Customer's side of the demarcation point. All equipment owned by CenturyLink remains property of CenturyLink. Customer disclaims any interest in any equipment, property or licenses used by CenturyLink to provide Service. CenturyLink will not provide Service to a residential location, even if business is conducted at that location. Service is not a standalone service and Customer must purchase the Service in connection with another CenturyLink service for which a local loop is required.

22 Types of Service Technologies. CenturyLink uses the following different technologies to provide Service. Some technologies or speeds may not be available in all areas or with certain types of Service.

(a) Special Access. "Special Access" means Service using digital signal bandwidths DS0, DS1 and DS3 or Optical Carrier signal bandwidths OC3, OC12, OC48 and OC192.

(b) Ethernet Local Access ("ELA"). ELA means Service under Ethernet technology and is available at bandwidths varying from 1 Mbps to 1,000 Mbps (1G) and 10G (Cross-Connect Access only).

(c) Wavelength Local Access. "Wavelength Local Access" means Service using wave division multiplexing technology. Wavelength Local Access is available at bandwidths of 1 GbE, 10 GbE LAN PHY, 2.5 G (OC48), 10 GbE WAN PHY (OC192), 40G, OTU1, OTU2, OTU3, 1G, 2G, 4G and 10G.

(d) DSL Local Access. "DSL Local Access" means access using digital subscriber line ("DSL") technology. DSL Local Access is available at bandwidths varying from 128 kbps/64 kbps to 15000 Mbps/1000 Mbps.

2.2.1 Use of IP Connection. In some locations, CenturyLink will enable the Service using "IP Connection" which is a Layer 3, symmetrical functionality that utilizes established IP and MPLS transport technologies. In such cases, Customer agrees that it will use IP Connection functionality only for the provision of either: (i) wireline broadband Internet access (as defined in applicable Federal Communications Commission orders and regulations), or (ii) wireline broadband Internet access plus additional information services, with wireline broadband Internet access constituting a principal use. CenturyLink can provision IP Connection functionality over multiple designs with MPLS transport supporting speeds up to 1G/1G.

23 Types of Service. CenturyLink offers the following three types of Service: CenturyLink Provided Access, Customer Provided Access or Cross-Connect Access.

231 CenturyLink Provided Access. "CenturyLink Provided Access" or "CLPA" means either On-Net Access or Off-Net Access. "On-Net Access" is provided on the CenturyLink owned and operated network. Any access not provided on the CenturyLink owned and operated network is "Off-Net Access." Customer may request a Preferred Provider for Off-Net Access from a list of available providers with whom CenturyLink has interconnect agreements. CenturyLink will attempt to use Customer's Preferred Provider, but both final routing and the provider actually used will be chosen by CenturyLink. If CenturyLink is unable to use Customer's Preferred Provider for a specific Service Address as designated in the pricing attachment or a quote, then the rate for Service at that Service Address may be subject to change. Where available for Special Access, ELA and Wavelength Local Access, Customer may request CenturyLink to provide a separate fiber facility path for a protection system between the local access provider's serving wire center and the Service Address ("Protect Route"). Protect Route uses backup electronics and two physically separate facility paths in the provisioning of Service. If the working facility or electronics fail, or the Service performance becomes impaired, the facility is designed to automatically switch to the Service protect path in order to maintain a near-continuous flow of information between locations. Special Access and ELA are also generally available as a central office meet point at a local access provider central office to which Customer has a dedicated connection. Unless otherwise covered by another SLA, On-Net Access is subject to the On-Net Local Access Service Level Agreement located at http://www.centurylink.com/legal/docs/Local-Access-SLA.pdf, which is subject to change.

232 Customer Provided Access. "Customer Provided Access" or "CPA" means a local loop that Customer orders from a local access provider to connect Customer's premises to the CenturyLink Domestic Network at a connection point specified by CenturyLink. CenturyLink will provide Customer with a limited letter of agency ("LOA"), which is incorporated by this reference, authorizing Customer

© CenturyLink. All Rights Reserved.

to act as CenturyLink's agent so that Customer's local access provider will connect Customer's premises to the CenturyLink Domestic Network. Customer will also need to execute a CPA-DAR Addendum for CPA POP with ELA or Wavelength Local Access. Customer will pay a CPA charge to CenturyLink when Customer uses the following: (a) Special Access CPA dedicated facilities or ELA CPA virtual local area network ("VLAN"), both of which are dedicated entrance facilities CenturyLink leases from a local access provider and that carry traffic only from CenturyLink; or (b) ELA CPA POP, which requires CenturyLink to provide space and power for the local access provider to install Ethernet equipment; or (c) Wavelength Local Access. Customer will pay a CPA charge to CenturyLink when Customer uses Special Access CPA non-dedicated facilities owned by local access providers and that carry traffic from multiple carriers, including CenturyLink, if the provider charges CenturyLink for those facilities. CPA ELA VLAN is an access type where CenturyLink will provision and assign an Ethernet virtual circuit from a CenturyLink POP to a Customer designated Ethernet facility leased from a common Ethernet service provider. This access will be used to connect to a CenturyLink VLAN assignment on a CenturyLink IQ® Networking Private Port or E-Line. CenturyLink will not bill customer a CPA charge for an IP layer 3 expansion site because Customer, not CenturyLink, is responsible for ordering a cross-connect from the IP layer 3 expansion site manager to meet CenturyLink in the IP layer 3 expansion site's meet-me-room. CPA is the responsibility of Customer and CenturyLink will not pay for or troubleshoot components of CPA.

2.3 Cross-Connect Access. "Cross-Connect Access" or "XCA" means: (a) an intra-POP connection between certain Customer facilities with direct access to the CenturyLink Domestic Network and the CenturyLink backbone access point (either (i) located within CenturyLink's transport area where CenturyLink allows Customer to bring its own fiber directly to the CenturyLink fiber under an executed Direct Connect Agreement ("Direct Connect") or (ii) in an area where Customer has leased space in a CPOP, a remote collocation site, or a collocation hotel under a Telecommunications Collocation License Agreement or (b) a connection between a CenturyLink-determined data center and a CenturyLink IQ Networking Port, Optical Wavelength Service ("OWS"), or E-Line ("Data Center Access") under an executed CenturyLink TS Service Exhibit with a CenturyLink IQ Networking, OWS or E-Line Service Exhibit. Data Center Access is available in bandwidths of 100 Mbps, 1G, and 10G (CenturyLink IQ Networking and OWS only). Direct Connect requires splicing of Customer and CenturyLink fibers and cross-connection of individual circuits.

2.4 RSS. Customer understands that Service is an interstate telecommunications service, as defined by Federal Communications Commission regulations and represents while using the Service, more than 10% of its usage will be interstate usage.

3. Ordering. Customer may submit requests for Service in a form designated by CenturyLink ("Order"). CenturyLink will notify Customer of acceptance of an Order for Service by delivering (in writing or electronically) the date by which CenturyLink will install Service (the "Customer Commit Date"), or by delivering the Service. Provision of Services is subject to availability of adequate capacity and CenturyLink's acceptance of an Order. In lieu of installation Service Level credits, if CenturyLink's installation of Service is delayed by more than 30 business days beyond the Customer Commit Date, Customer may terminate the affected Service without liability upon written notice to CenturyLink, provided such written notice is delivered prior to CenturyLink delivering a Connection Notice for the affected Service. This termination right will not apply where CenturyLink is constructing facilities to a new location not previously served by CenturyLink.

4. Charges. Customer will pay the rates set forth in the BAFO-Option C-Proposal 2-Cost Proposal ("BAFO"). CenturyLink invoices MRCs in advance and NRCs in arrears. If the delivery of a Connection Notice for any Service falls on any day other than the first day of the month, the first invoice to Customer will consist of: (a) the pro-rata portion of the applicable MRC covering the period from the delivery of the Connection Notice to the first day of the subsequent month; and (b) the MRC for the following month. Charges for Service will not be used to calculate Contributory Charges. Customer will receive the rates for Service as shown on the pricing attachment regardless of whether an NPA/NXX split or overlay occurs. If CenturyLink cannot complete installation due to Customer delay or inaction, CenturyLink may begin charging Customer and Customer must pay such charges.

4.1 Ancillary Charges. Ancillary charges applicable to Service include but are not limited to those ancillary services set forth in this section. If an ancillary charge applies in connection with provisioning a particular Service, CenturyLink will notify Customer of the ancillary charge to be billed to Customer. Customer may either approve or disapprove CenturyLink providing the ancillary service.

(a) Expedite. A local loop expedite charge applies to Orders where Customer requests the delivery of Service one or more days before the Customer Commit Date. Customer may only request to expedite CenturyLink Provided Access of Special Access and ELA Orders (where underlying local access provider allows CenturyLink to order an expedited service.)

(b) Construction. Construction charges apply if; (i) special construction is required to extend Service to the demarcation point; or (ii) other activities not covered under the Building Extension Service Service Schedule are required beyond the demarcation point, that cause CenturyLink to incur additional expenses for provisioning the Service ("Construction"). If Customer does not approve of the Construction charges after CenturyLink notifies Customer of the charges, the Service ordered will be deemed cancelled.

(c) Multiplexing. Customer may request multiplexing for Special Access where available. CenturyLink will multiplex lower level local loop into a higher local loop, or vice-versa, for an additional charge. CenturyLink offers multiplexing at a CPOP, at an On-Net Access building or at an ILEC/CLEC facility providing the Off-Net Access. For multiplexing at a CenturyLink On-Net Access building, CenturyLink provides multiplexed circuit handoffs to Customer at the same On-Net Access Service Address. For multiplexing at ILEC/CLEC facility, CenturyLink facilitates the delivery of multiplexed circuit handoffs to Customer at a single Service Address or at multiple Service Addresses per Customer's request. Multiplexing is generally available at DS1 and OCn circuit levels. Pricing for multiplexing at an ILEC/CLEC facility is on an individual case basis.

© CenturyLink. All Rights Reserved.

(d) Changes. Ancillary change charge applies where Customer requests CenturyLink to change a local loop to a different Service Address that is within the same Customer serving wire center as the existing local loop, but a Cancellation Charge does not apply.

5. Term; Cancellation.

5.1 INTENTIONALLY DELETED.

5.2 Cancellation and Termination Charges.

(a) INTENTIONALLY DELETED.

(b) INTENTIONALLY DELETED.

(c) Customer Provided Access—Cancellation of Connectivity after Delivery of a Connection Notice. To cancel CPA, Customer must provide CenturyLink with a written disconnect firm order confirmation ("DFOC") notice from Customer's CPA provider along with notice to cancel the CPA. If Customer fails to provide CenturyLink with the DFOC notice within 30 calendar days after CenturyLink's receipt of the notice to cancel the CPA, or if CenturyLink disconnects CPA for Cause, then CenturyLink may disconnect the CPA or require the CPA provider to do so. Customer will remain liable for charges for the connectivity to CPA (even if Customer cannot use the CPA) until: (i) Customer furnishes the required DFOC to CenturyLink; or (ii) either party cancels the associated CPA with the CPA provider.

6. Provisioning, Maintenance and Repair. CenturyLink may re-provision any local access circuits from one off-net provider to another or to On-Net Access and such changes will be treated as scheduled maintenance. Scheduled maintenance will not normally result in Service interruption. If scheduled maintenance requires Service interruption CenturyLink will: (1) provide Customer seven days' prior written notice, (2) work with Customer to minimize interruptions and (3) use commercially reasonable efforts to perform such maintenance between midnight and 6:00 a.m. local time. Customer may request a technician dispatch for Service problems. Before dispatching a technician, CenturyLink will notify Customer of the dispatch fee. CenturyLink will assess a dispatch fee if it determines the problem is on Customer's side of the demarcation point or was not caused by or attributable to CenturyLink's facilities or equipment on CenturyLink's side of the demarcation point. If third-party local access services are required for the Services, Customer will: (4) provide CenturyLink with circuit facility and firm order commitment information and design layout records to enable cross-connects to CenturyLink Service(s) (provided by CenturyLink subject to applicable charges), (5) cooperate with CenturyLink (including changing demarcation points and/or equipment and providing necessary LOAs) regarding circuit grooming or re-provisioning, and (6) where a related Service is disconnected, provide CenturyLink a written DFOC from the relevant third-party provider.

7. Other Terms.

7.1 General. Any references to a Revenue Commitment or Contributory Charges will not apply to this Service Exhibit.

7.2. INTENTIONALLY DELETED.

7.3 Out-of-Service Credit. For Services without a Service Level or applicable out-of-service credit for service interruption in a Tariff, this Out-of-Service Credit is the Service Level provision for purposes of the Agreement. Customer must request the Out-of-Service Credit and open a trouble ticket to report to CenturyLink the interruption of Service to CenturyLink. If CenturyLink causes Downtime, CenturyLink will give Customer a credit; such credit will be paid as a percentage of the Customer's MRC based on the ratio of the number of minutes of Downtime relative to the total number of minutes in the month when the Downtime occurred. No credits will be given where the Downtime is caused by: (a) the acts or omissions of Customer, its employees, contractors or agents or its End Users; (b) the failure or malfunction of equipment, applications or systems not owned or controlled by CenturyLink or its international service providers; (c) Force Majeure Events; (d) scheduled service maintenance, alteration or implementation; (e) the unavailability of required Customer personnel, including as a result of failure to provide CenturyLink with accurate, current contact information; (f) CenturyLink's lack of access to the Customer premises where reasonably required to restore the Service; (g) Customer's failure to release the Service for testing or repair and continuing to use the Service on an impaired basis; (h) CenturyLink's termination of Service for Cause or Customer's violation of the Use of Service provisions in this Appendix or in the applicable Service Exhibit; or (i) improper or inaccurate network specifications provided by Customer. "Downtime" is an interruption of Service confirmed by CenturyLink that is measured from the time Customer opens a trouble ticket with CenturyLink to the time Service has been restored. "Cause" means the failure of a party to perform a material obligation under the Agreement, which failure is not remedied: (a) for payment defaults by Customer, within five days of separate written notice from CenturyLink of such default; or (b) for any other material breach, within 30 days after written notice.

7.4 Service Notices. Notices for disconnection of Service must be submitted to CenturyLink via Email at: BusinessDisconnects@Centurylink.com. Notices of non-renewal for Services must be sent via e-mail to: CenturyLink, Attn.: CenturyLink NoRenew, e-mail: Norenew@centurylink.com. Notices for billing inquiries/disputes or requests for Service Level credits must be submitted to CenturyLink via Customer's portal at https://www.centurylink.com/business/login/ or via Email at: Care.Inquiry@Centurylink.com. All other routine operational notices will be provided by Customer to its CenturyLink sales representative.

7.5 Acceptable Use Policy and Use of Service. CenturyLink may also terminate Service for Cause under this Section where Customer's use of the Service: (a) is contrary to the Acceptable Use Policy incorporated by this reference and posted at

© CenturyLink. All Rights Reserved.

http://www.centurylink.com/legal/, (b) constitutes an impermissible traffic aggregation or Access Arbitrage, (c) avoids Customer's obligation to pay for communication services, and (d) violates the Use of Service terms or compliance terms. Customer may have obligations under 47 CFR 9.5 relating to 911 if Customer combines the Service with other products creating a VoIP or VoIP-like service that facilitates the transmission of voice services.

7.6 CPNI. CenturyLink is required by law to treat CPNI confidentially. Customer agrees that CenturyLink may share CPNI within its business operations (e.g., wireless, local, long distance, and broadband services divisions), and with businesses acting on CenturyLink's behalf, to determine if Customer could benefit from the wide variety of CenturyLink products and services, and in its marketing and sales activities. Customer may withdraw its authorization at any time by informing CenturyLink in writing. Customer's decision regarding CenturyLink's use of CPNI will not affect the quality of service CenturyLink provides Customer. "CPNI" means Customer Proprietary Network Information, which includes confidential account, usage, and billing-related information about the quantity, technical configuration, type, destination, location, and amount of use of a customer's telecommunications services. CPNI reflects the telecommunications products, services, and features that a customer subscribes to and the usage of such services, including call detail information appearing in a bill. CPNI does not include a customer's name, address, or telephone number.

7.7 Conflicts. If a conflict exists among the provisions of the Service Attachments, the order of priority will be as follows: the Service Exhibit and then the Agreement.

8. Definitions.

"CenturyLink Domestic Network" means the CenturyLink network located within the contiguous U.S., Alaska and Hawaii, which is comprised only of physical media, including switches, circuits, and ports that are operated by CenturyLink.

"CPOP" means a CenturyLink-owned physical point of presence that lies directly on the CenturyLink Domestic Network where direct interconnection between the CenturyLink Domestic Network and a local access provider's network is possible.

"Service Address" means the building where Customer receives Service. Only a building that is classified by CenturyLink as a business address can be a Service address.

© CenturyLink. All Rights Reserved.

CENTURYLINK MASTER SERVICE AGREEMENT
STATE, LOCAL AND EDUCATION GOVERNMENT AGENCIES VERSION
CENTURYLINK® LOCAL ACCESS SERVICE EXHIBIT

PRICING ATTACHMENT

For pricing, please refer to the Option C-Proposal 2 BAFO ("BAFO").

This Service Level Agreement ("SLA") only applies to On-Net Access circuits ("Service") ordered by CenturyLink's customer ("Customer") pursuant to a signed agreement ("Agreement") with CenturyLink Communications, LLC f/k/a Qwest Communications Company, LLC d/b/a CenturyLink QCC ("CenturyLink"). On April 1, 2014, Qwest Communications Company, LLC completed a name change to CenturyLink Communications, LLC. References in supporting agreements or other documents, to Qwest Communications Company, LLC or its predecessors are replaced with "CenturyLink Communications, LLC." Service terminates at CenturyLink's Minimum Point of Entry (MPOE) as determined by CenturyLink.

1. Definitions

"Calendar Month" refers to the period beginning at 12:00 midnight on the first day of a month and ending at 11:59 PM on the last day of that month.

2. Terms and Conditions

CenturyLink is offering Service in accordance with the applicable CenturyLink agreement. In the event of a conflict between the terms of this document and the Rate and Services Schedule or applicable CenturyLink agreement, the terms of this document will control.

© CenturyLink. All Rights Reserved.

To be eligible for an Outage Credit under this SLA, Customer must, in addition to complying with the other terms included in this SLA, (i) be in good standing with CenturyLink and current in their obligations, other than those invoices that are recognized as being in dispute, and (ii) submit necessary supporting documentation and request reimbursement or credits hereunder within 30 days of the Outage resolution. In the event Customer fails to comply with the condition set forth in the immediately preceding sentence, Customer will, with respect to that remedy, have waived its right to such remedy.

CenturyLink will determine the Outage Credits provided to Customer by totaling the eligible Outage minutes throughout the Calendar Month on an Affected Circuit, subject to the restrictions and exclusions in this SLA. Outage Credits for any Calendar Month must exceed $25.00 to be processed. In no case will CenturyLink provide credit to Customer for an Affected Circuit that exceeds the monthly recurring charge or the stated applicable maximum credit percentage.

CenturyLink will give notice to Customer of any scheduled maintenance as early as is practicable and a scheduled outage will under no circumstances be viewed as an Outage hereunder.

The remedies included in this SLA are Customer's sole and exclusive remedies for disruption of Service and will apply in lieu of any other Service interruption guarantee or credit, outage guarantee or credit or performance credit for which Customer might have otherwise been eligible.

If Customer receives an Outage Credit, Customer is not entitled to receive any other credit that may be available under the local access service provided or ordered by CenturyLink on behalf of Customer for the Affected Circuit in that Calendar Month.

Except as provided in this SLA, the objectives and related remedies set forth herein will not apply to CenturyLink services other than the Service.

3. Restrictions and Exclusions

An Outage will not be deemed to have occurred if the Service is unavailable or impaired due to any of the following:

(a) Interruptions on a circuit that is not an "Accepted Circuit" where an Accepted Circuit is one that CenturyLink and Customer have tested and mutually agree is working as ordered following provisioning of an order or change order;

(b) Interruptions caused by the negligence, error or omission of Customer or others authorized by Customer to use or modify Service;

(c) Interruptions due to failure of power at Customer premises or failure or poor performance of Customer's premises equipment;

(d) Interruptions during any period in which CenturyLink or its agents are not afforded access to the premises where Service is terminated, provided such access is reasonably necessary to prevent a degradation or to restore Service;

(e) Interruptions during any period when CenturyLink has posted on the CenturyLink Web site or communicated to Customer in any other manner that Customer's Service will be unavailable for maintenance or rearrangement purposes, or Customer has released Service to CenturyLink for the installation of a customer service order;

(f) Interruptions during any period when Customer elects not to release the circuit for testing and/or repair and continues to use it on an impaired basis;

(g) Interruptions resulting from force majeure events beyond the reasonable control of CenturyLink including, but not limited to, acts of God, government regulation, labor strikes, national emergency or war (declared or undeclared);

(h) Interruptions resulting from Customer's use of Service in an unauthorized or unlawful manner;

(i) Interruptions resulting from a CenturyLink disconnect for Customer's breach of a term set forth in the Agreement pursuant to which CenturyLink is providing Service to Customer;

(j) Interruptions resulting from incorrect, incomplete or inaccurate orders from Customer;

(k) Interruptions due to improper or inaccurate network specifications provided by Customer;

(l) Interruptions resulting from a failure of a carrier other than CenturyLink providing local access circuits; or

(m) Special configurations of the Service that have been mutually agreed to by CenturyLink and Customer; provided, however, CenturyLink may provide a separate service level agreement to Customer for those special configurations.

© CenturyLink. All Rights Reserved.

CENTURYLINK® DOMESTIC NETWORK DIVERSITY®
SERVICE EXHIBIT

1. General; Definitions. This Service Exhibit is applicable only where Customer orders Domestic Network Diversity (the "Service" or "Diversity") for underlying services in the continental United States and incorporates the terms of the Master Service Agreement or other service agreement and RSS, under which CenturyLink provides services to Customer (the "Agreement"). CenturyLink may subcontract any or all of the work to be performed under this Service Schedule. All capitalized terms that are used but not defined in this Service Exhibit are defined in the Agreement or Order. Customer may submit requests for Service in a form designated by CenturyLink ("Order").

"Card Diversity" means the secondary or diverse circuit that originates and/or terminates onto a separate card on the same device within the same CenturyLink POP as the primary circuit.

"CenturyLink Domestic Network" means the CenturyLink network located within the contiguous U.S., Alaska and Hawaii, which is comprised only of physical media, switches, including switches, circuits, and ports that are operated by CenturyLink.

"Dedicated IP Access" means a special access local loop connection, from the Customer premises to an IP POP ("POP").

"Device Diversity" means the secondary or diverse circuit that originates and/or terminates in a separate aggregation device (such as routers, switches) within the same IP POP as the primary service.

"ELA" or "Ethernet Local Access" means CenturyLink Provided Access using Ethernet over SONET technology and is available at bandwidths varying from 1 Mbps to 1,000 Mbps (1Gbps).

"IP POP" is a CenturyLink POP where IP edge routers are located on the CenturyLink Domestic Network and IQ Networking Service is available.

"IP POP Diversity" means the diverse circuit that originates and/or terminates in a physically separate IP POP from the primary circuit.
"CenturyLink POP" means a point of presence ("POP") on the CenturyLink Domestic Network.

"Pricing Attachment" means a document containing rates specific to the Service and is incorporated by reference and made a part of this Service Exhibit.

"Single Circuit Diversity" unless otherwise stated in this Service Exhibit, means an individual circuit on the CenturyLink Domestic Network that either: (a) is routed to, or; (b) avoids a specified geographic location along the circuit's path between the originating and terminating CenturyLink transport POP buildings, subject to availability.

"SLA" means the service level agreement specific to the Service.

"Special Access" means CenturyLink Provided Access using Digital Signal speeds DS-0, DS-1, and DS-3 or Optical Carrier signal speeds OC-3, OC-12, OC-48, and OC-192.

"Switch Diversity" means the secondary or diverse circuit that originates and/or terminates in a separate CenturyLink switch from the primary circuit. Depending on available network facilities, the circuits may originate and/or terminate at the same or different CenturyLink POP.

"Transport Diversity" means two or more diversely related circuits that are independently routed on the CenturyLink Domestic Network transport systems between the originating and terminating CenturyLink POP buildings, subject to availability. At Customer's request and subject to availability, CenturyLink will provision diversely related Underlying Services from different CenturyLink POP buildings in the originating and/or terminating cities. In some instances, the diverse circuit may share common network facilities, infrastructure, and/or buildings with the primary circuit.

"Underlying Service" means an approved CenturyLink service offering on the CenturyLink Domestic Network that also supports Diversity.

"Wavelength Local Access" means CenturyLink Provided Access using wave division multiplexing technology at bandwidths of 1 GbE, 10 GbE LAN PHY, 2.5 G (OC48), 10 GbE WAN PHY (OC192), 40G, OTU1, OTU2, OTU3, 1G, 2G, 4G and 10G.

2. Service.

2.1 Description. Diversity is an enhanced routing option that routes an Underlying Service according to either: (a) a Customer-defined routing between two or more diversely related circuit(s); or (b) a predefined path that either routes to or avoids a specified geographic location on the circuit path ("Single Circuit Diversity") according to Customer's requirements, unless otherwise noted below; and (c) identifies and maintains the diversely routed circuit(s) in the CenturyLink provisioning systems, until the Service is cancelled. Diversity does not provide switching and/or routing of Customer's digital transmissions between primary and diversely routed circuits in the event of a failure on any one circuit or port. CenturyLink only offers protection switching, if any, inherent with the Underlying Services. The Diversity options described in this Service Exhibit are subject to availability and technical feasibility. The SLA is effective as of the first day of the second month after initial installation of Service. The SLA provides Customer's sole and exclusive remedy for service interruptions or service deficiencies of any kind whatsoever for the Service. CenturyLink's Underlying Services include: Domestic Private Line Service, EPL, Optical Wavelength, IQ Networking Service (including Internet Ports and Private Ports), ATM Service, Frame Relay Service, Dedicated Domestic Outbound/Inbound Long Distance Service ("Long Distance"), and related Local Access Service. The Underlying Services will, except to the extent modified in this Service Exhibit, be offered pursuant to the terms and conditions of the Agreement, Service Exhibits, and/or RSS applicable to the Underlying Services.

2.2 Diversity Configurations. Diversity configurations vary based on the Underlying Service. See below for options, subject to available network facilities.

© CenturyLink. All Rights Reserved.

(a) **Domestic Private Line Diversity Service.** Domestic Private Line Diversity Service is offered at circuit speeds of DS-1, DS-3, OC-3, OC-12, and OC-48. CenturyLink does not offer DS-0 and Fractional DS-1 Domestic Private Line Diversity Services. CenturyLink's routing of the diverse Domestic Private Line circuit(s) is based on the route of the designated working path of the circuit(s). Domestic Private Line Diversity Service is offered in the following configurations, but not in combination: Single Circuit Diversity or Transport Diversity. In some instances, the diverse circuit may share common network facilities, infrastructure, and/or buildings with the primary circuit.

(b) **EPL Diversity Service.** EPL Diversity Service is offered at circuit speeds of 50 Mbps, 100 Mbps, 150 Mbps, 500 Mbps, 600 Mbps, and 1000 Mbps. CenturyLink's routing of the diverse EPL circuit(s) is based on the route of the designated working path of the circuit(s). EPL Diversity Service is offered in the following configurations, but not in combination: Single Circuit Diversity or Transport Diversity.

(c) **Optical Wavelength Diversity Service.** Optical Wavelength Diversity Service is offered as an unprotected point-to-point transmission path between an originating and terminating CenturyLink POP at circuit speeds of 1 GbE, 2.5 Gbps and 10 Gbps. Optical Wavelength Diversity Service is offered in the following configurations, but not in combination: Single Circuit Diversity or Transport Diversity.

(d) **IQ Networking Diversity Service.** IQ Networking is offered at circuit speeds of DS-1, IMA (2xDS-1 up to 8xDS-1s), DS-3, OC-3, OC-12, and OC-48 transmission rates. DS-1s within an Nx bundle must all connect to the same POP. IQ Networking Diversity Service is offered in the following configurations but not in combination: IP POP Diversity, Device Diversity, Card Diversity, or Single Circuit Diversity. IQ Networking Single Circuit Diversity on the CenturyLink Domestic Network means a circuit that is routed to a specified IP POP. The secondary or diverse circuit cannot be used to load-balance Customer's traffic. The secondary or diverse circuit may share common network facilities, infrastructure, and/or buildings with the primary circuit.

(e) **ATM/Frame Relay Diversity Service.** ATM Diversity Service is offered at circuit speeds of DS-1, IMA (2xDS-1 up to 8xDS- 1s), DS-3, OC-3, and OC-12 and Frame Relay Diversity Service is offered at circuit speeds of DS-1 and DS-3. DS-1s within an Nx bundle must all connect to the same POP. ATM/Frame Relay Diversity is offered in the following configurations, but not in combination: POP Diversity, Switch Diversity, Card Diversity, or Single Circuit Diversity. The diverse circuit may share common network facilities, infrastructure, and/or buildings with the primary circuit.

(f) **Long Distance Diversity Service.** Long Distance Diversity Service is offered at circuit speeds of DS-1, DS-3, OC-3, OC-12, and OC-48. The diverse circuit may share common network facilities, infrastructure, and/or buildings with the primary circuit. Long Distance Diversity Service is offered in the following configurations, but not in combination: Single Circuit Diversity, Switch Diversity, or Card Diversity. Long Distance Single Circuit Diversity on the CenturyLink Domestic Network means a circuit that is routed to a specified CenturyLink voice switch.

(g) **Local Access Diversity Service.** Local Access Diversity Service is an enhancement to Local Access that: (a) routes circuits based on Customer's reasonable routing requirements; and (b) identifies and maintains the Local Access circuits as diversely routed circuits in the CenturyLink provisioning systems. Local Access Diversity Service is offered with: (c) Special Access at circuit speeds of DS-1, 2xDS-1 up to 8xDS-1*, DS-3, OC-3, OC-12, and OC-48; (d) ELA at bandwidths varying from 1 Mbps to 1000 Mbps (1Gbps); or (e) Wavelength Local Access at 1 Gbps, 2.5 Gbps and 10 Gbps and may include CenturyLink ordering circuits utilizing alternate Central Offices or alternate Serving Wire Centers. DS-1s within an Nx bundle must all connect to the same POP. CenturyLink does not have direct control of the routing, installation, maintenance, performance, etc. of the third party local access facilities ordered on behalf of the Customer.

23 **Ordering of Diversity Services.** CenturyLink will notify Customer of acceptance of requested Service in the Order by delivering the date by which CenturyLink will install Service (the "Customer Commit Date"). CenturyLink will use commercially reasonable efforts to install each Service on or before the Customer Commit Date, but the inability of CenturyLink to deliver Service by that date will not be a default under the Agreement.

24 **Service Conditions.**

(a) CenturyLink will not provide special construction as part of the Service. Any requests for special construction are handled on an individual case basis.

(b) Customer understands and agrees that CenturyLink has no visibility into the location of fiber strands, conduits, and other network facilities of other carriers and that CenturyLink will not attempt to identify and/or manage other carrier's facilities as part of the Service. Furthermore, Customer understands and agrees that CenturyLink may rearrange (groom) Customer's circuits in accordance with standard CenturyLink network maintenance activities. If a CenturyLink-initiated network rearrangement removes the Customer's diversity, then CenturyLink will notify Customer to determine alternative Diversity solutions, if any.

(c) Customer may experience increased latency on diversely routed circuit(s) due to increased actual routing mileage.

(d) **Single Diverse Circuit Additional Mileage Charges.** If CenturyLink, in its sole discretion, determines that Customer's specified geographic routing criteria on a Single Circuit Diversity request results in excessive additional mileage, CenturyLink may charge Customer actual mileage charges on the Underlying Service.

(e) Customer acknowledges that diverse circuits must have traffic on them for CenturyLink to monitor connectivity.

© CenturyLink. All Rights Reserved.

3. Term. The term of this Service Exhibit will begin on the Effective Date of the Agreement (or, if applicable, an amendment to the Agreement if Customer adds this Service Exhibit after the Effective Date of the Agreement) and will continue until the termination of the last Service ordered under this Service Exhibit. Service will automatically terminate on the termination of the Underlying Service.

4. Charges. Customer will pay all Diversity charges set forth the Option C-Proposal 2 BAFO ("BAFO"). If backhaul routing is required to complete Customer's Diversity order for IQ Networking (including Internet Ports and Private Ports), ATM Service, Frame Relay Service, or Long Distance, Customer will pay the backhaul charges for each diversely routed circuit. CenturyLink will deliver written or electronic notice (a "Connection Notice") to Customer when Service is installed, at which time billing will commence ("Service Commencement Date"). The Service is not entitled to the CTA Discount. Additional rates, charges and fees for Service elements not identified in the Agreement are located in the applicable Tariff. "Tariff" includes as applicable: CenturyLink state tariffs, price lists, price schedules, administrative guidelines, catalogs, and rate and term schedules incorporated by this reference and posted at http://www.centurylink.com/tariffs.

5. Other Terms.

5.1 General. Any references to a Revenue Commitment or Contributory Charges will not apply to this Service Exhibit.

5.2. INTENTIONALLY DELETED.

5.3 Installation, Maintenance and Repair. The following are supplemental terms to the Scheduled Maintenance and Local Access section of the Agreement: (a) Provision of Services is subject to availability of adequate capacity and CenturyLink's acceptance of a complete Order Form and (b) Customer is responsible for any facility or equipment repairs on Customer's side of the demarcation point. Customer may request a technician dispatch for Service problems. Before dispatching a technician, CenturyLink will notify Customer of the dispatch fee. CenturyLink will assess a dispatch fee if it determines the problem is on Customer's side of the demarcation point or was not caused by CenturyLink's facilities or equipment on CenturyLink's side of the demarcation point. "Order Form" includes both order request forms and quotes issued by CenturyLink. If a CenturyLink service requires a quote to validate the Order Form pricing, the quote will take precedence over the order request form, but not over the Service Exhibit.

5.4 Service Notices. Notices for disconnection of Service must be submitted to CenturyLink via Email at: BusinessDisconnects@Centurylink.com. Notices of non-renewal for Services must be sent via e-mail to: CenturyLink, Attn.: CenturyLink NoRenew, e-mail: Norenew@centurylink.com. Notices for billing inquiries/disputes or requests for Service Level credits must be submitted to CenturyLink via Customer's portal at https://www.centurylink.com/business/login/ or via Email at: Care.Inquiry@Centurylink.com. All other routine operational notices will be provided by Customer to its CenturyLink sales representative.

5.5 Acceptable Use Policy and Use of Service. CenturyLink may also terminate Service for Cause under this Section where Customer's use of the Service: (a) is contrary to the Acceptable Use Policy incorporated by this reference and posted at http://www.centurylink.com/legal/, (b) constitutes an impermissible traffic aggregation or Access Arbitrage, (c) avoids Customer's obligation to pay for communication services, and (d) violates the Use of Service terms or compliance terms.

5.6 CPNI. CenturyLink is required by law to treat CPNI confidentially. Customer agrees that CenturyLink may share CPNI within its business operations (e.g., wireless, local, long distance, and broadband services divisions), and with businesses acting on CenturyLink's behalf, to determine if Customer could benefit from the wide variety of CenturyLink products and services, and in its marketing and sales activities. Customer may withdraw its authorization at any time by informing CenturyLink in writing. Customer's decision regarding CenturyLink's use of CPNI will not affect the quality of service CenturyLink provides Customer. "CPNI" means Customer Proprietary Network Information, which includes confidential account, usage, and billing-related information about the quantity, technical configuration, type, destination, location, and amount of use of a customer's telecommunications services. CPNI reflects the telecommunications products, services, and features that a customer subscribes to and the usage of such services,

© CenturyLink. All Rights Reserved.

including call detail information appearing in a bill. CPNI does not include a customer's name, address, or telephone number.

5.7 Conflicts. If a conflict exists among the provisions of the Service Attachments, the order of priority will be as follows: the Service Exhibit, the RSS or ISS, the general terms of the Agreement, SLA, SOW (if any) and Order Form, as applicable, and then any other documents attached or expressly incorporated into the Agreement. "ISS" means CenturyLink's Information Services Schedule incorporated by this reference and posted at: http://www.centurylink.com/tariffs/clc_info_services.pdf ."RSS" means as applicable: CenturyLink's Rates and Services Schedules incorporated by this reference and posted at http://www.centurylink.com/tariffs/fcc_clc_ixc_rss_no_2.pdf for CenturyLink's International RSS and at http://www.centurylink.com/tariffs/fcc_clc_ixc_rss_no_3.pdf for CenturyLink's Interstate RSS. "Tariff" includes as applicable: CenturyLink state tariffs, price lists, price schedules, administrative guidelines, catalogs, and rate and term schedules incorporated by this reference and posted at http://www.centurylink.com/tariffs.

© CenturyLink. All Rights Reserved.

For pricing, please refer to the Option C-Proposal2 BAFO ("BAFO").

 © CenturyLink. All Rights Reserved.

CENTURYLINK DOMESTIC NETWORK DIVERSITY
SERVICE LEVEL AGREEMENT
(not applicable to services offered under the CenturyLink Wholesale and Enhanced Services Agreements)

1. **Network Rearrangements.** In the event CenturyLink will perform a network rearrangement that materially affects Customer's Service such that the Diversity routing is terminated, then CenturyLink will provide prior notice in a commercially reasonable timeframe to Customer of an alternative Diverse routing of the affected circuit(s). Customer's existing charges of the Diversity enhancement and Underlying Service will not change as a result of Customer's acceptance of the alternative Diversity routing. Customer acceptance of alternative diverse routing will not be unreasonably withheld.

© CenturyLink, Inc. All Rights Reserved.

CENTURYLINK® MASTER SERVICE AGREEMENT
CENTURYLINK® SELECT ADVANTAGE® SERVICE EXHIBIT

1. General; Definitions. This Service Exhibit for Products and Services (collectively "Solutions") is attached to and subject in all respects to the CenturyLink Master Service Agreement, CenturyLink Total Advantage, or CenturyLink Loyal Advantage Agreement between CenturyLink QCC and Customer. Capitalized terms not defined herein are defined in the Agreement. CenturyLink QCC will provide Solutions under the terms of the Agreement, the Service Exhibit, the Purchase Order and/or SOW. This Service Exhibit may not be used for the purchase of voice, data or IP services. In the event of a conflict in any term of any documents that govern the provision of Solutions hereunder, the following order of precedence will apply in descending order of control: Addendum One to the Agreement, any SOW, any Detailed Description(s), this Service Exhibit, and any PO. With respect to the Agreement, "Service" is replaced by "Solution" as defined herein, and "Order Form" is replaced with "Purchase Order" as defined herein.

"Change Order" means any change, submitted by Customer to CenturyLink or CenturyLink to Customer, to a SOW that was previously agreed upon by CenturyLink and Customer. Customer will be responsible for all charges related to such SOW Change Order.

"CPE" means either: (a) Customer Purchased Equipment, or (b) Customer Premises Equipment; and consists of hardware, software and materials used in the transport and/or termination/storage of data and voice transmission.

"Detailed Description(s)" means the terms and conditions of the Solution provided by CenturyLink which are posted at http://www.centurylinkselectadvantage.com/.

"Products" means CPE and Software offerings from CenturyLink.

"Purchase Order" or "PO" means either (a) a written document issued by Customer for the procurement of Solutions from CenturyLink; or (b) a CenturyLink quote or service order signed by Customer.

"Services" means offerings from CenturyLink that (a) install, maintain or manage CPE; (b) support Customer network management objectives, or (c) are consulting, professional, technical, development, and/or design services.

"Software" means software license offerings.

"SOW" means a statement of work that provides specific details, agreed to by CenturyLink and Customer, relating to the Solution purchased under a PO or the SOW. Agreement on the terms of the SOW will be satisfied by CenturyLink sending the final version of the SOW to Customer; and Customer's signature on the SOW.

2. CenturyLink Select Advantage Solutions.

2.1 Purchase. Customer may purchase Solutions by issuing a PO to CenturyLink, or executing an SOW. Customer's purchase of Solutions is subject to Detailed Description(s) which are posted at http://www.centurylinkselectadvantage.com/ and are incorporated by this reference. Customer must register to create a username and password the first time the Web site is accessed to view these Detailed Descriptions. By issuing a PO or executing an SOW with CenturyLink, Customer warrants that Customer has read and agrees to the terms and conditions of the Detailed Description(s). CenturyLink reserves the right to amend the Detailed Description(s) effective upon posting to the Web site. Customer's continued use of the Solution constitutes acceptance of those changes. If a PO issued by Customer contains any preprinted terms, those terms will not amend, modify or supplement this Service Exhibit in any way whatsoever, notwithstanding any provisions in a PO to the contrary. Any PO or SOW must (a) reference and incorporate this Service Exhibit and its Effective Date, (b) contain the Customer's exact legal name, and (c) include any other requirements as may be further described in the Detailed Description(s).

2.2 Additional Responsibility. CUSTOMER IS RESPONSIBLE FOR AND WILL HOLD CENTURYLINK, ITS AFFILIATES, AGENTS AND CONTRACTORS HARMLESS FROM ALL THIRD PARTY CLAIMS, LIABILITIES, FINES, PENALTIES, COSTS AND EXPENSES BROUGHT DIRECTLY AGAINST CUSTOMER AND CAUSED BY CUSTOMER'S, CUSTOMER'S END USER'S OR CUSTOMER'S THIRD PARTY PROVIDER'S FAILURE TO PURCHASE OR IMPLEMENT EQUIPMENT THAT ENABLES THE RECEIPT AND TRANSMISSION OF DIRECT-DIAL "911" CALLS OR MULTI-LINE TELEPHONE SYSTEM NOTIFICATIONS TO DIRECTLY DIAL "911" OR TO RECEIVE OR TRANSMIT MULTI-LINE TELEPHONE SYSTEM NOTIFICATIONS, AS REQUIRED BY LAW, IN THE UNITED STATES.

3. INTENTIONALLY DELETED.

4. Charges. Charges for Solutions will be specified in Option C Proposal 2 BAFO ("BAFO") and are due and payable upon Customer's receipt of the invoice or as otherwise stated in the BAFO.

OMR #R085547

© CenturyLink, Inc. All Rights Reserved

CENTURYLINK® TOTAL ADVANTAGE® AGREEMENT
TELECOMMUNICATIONS SERVICE PRIORITY SERVICE EXHIBIT

1. General. CenturyLink QCC will provide Telecommunications Service Priority ("Service" or "TSP") for National Security/Emergency Preparedness ("NS/EP") pursuant to the terms and conditions of the Agreement and this Service Exhibit.

2. Service.

21 Description. Customer can assign a 12-digit alphanumeric code issued by the Office of Priority Telecommunications ("OPT") with the TSP control identifier ("TSP Authorization Code") to its interstate telecommunications services that are used to maintain a state of readiness or to respond to and manage any event or crisis as set forth in 47 CFR Part 64, Appendix A ("NS/EP Telecommunications Services"). The TSP Authorization Code provides TSP priority levels that identify the provisioning and restoration priority-level assignment for a particular circuit. Telecommunications Service Priority allows CenturyLink to provision and restore Customer's NS/EP Telecommunications Services with TSP Authorization Codes before services without such assignments as set forth in 47 CFR part 64, Appendix A. TSP Service is available on CenturyLink services that have a unique and identifiable circuit identification number. The Service is only provided per-circuit on an end-to-end basis where the entire circuit is provided by CenturyLink (whether on its network or through leased facilities) so that the entire circuit is included in the TSP designation. The underlying NS/EP Telecommunications Service is offered pursuant to the terms and conditions of the Agreement, Service Exhibit, and/or Services Schedule applicable to the service and separate rates. TSP service is only available to federal, state, and local government users and certain private sector organizations that have services that support an NS/EP function and is applied only to interstate telecommunications services, as defined by Federal Communications Commission regulations.

22 Ordering. CenturyLink will provide the Service in accordance with 47 CFR Part 64, Appendix A and if: (a) Customer provides CenturyLink with a valid TSP Authorization code issued by the OPT for each circuit, via an Order Form; and (b) the Order Form is accepted by CenturyLink. CenturyLink will not accept TSP assignments or orders without an assigned TSP Authorization Code. TSP restoration priorities must be requested and assigned via an Order Form before a service outage occurs in order to have priority restoration. .

3. Term; Cancellation. The Service will become effective upon CenturyLink's acceptance of an order form and will terminate upon Customer's written notice of termination to CenturyLink or OPT's revocation of the TSP Authorization Code. Service will automatically expire should Customer terminate the circuit. In the event Customer cancels Service, Customer will pay for the Service provided through the effective date of the cancellation.

4. Charges. Option C Proposal 2 BAFO ("BAFO") means the attached document containing Service rates, which is incorporated by reference and made a part of this Service Exhibit. Customer will pay all applicable MRCs and NRCs as set forth in the BAFO.

© CenturyLink, Inc. All Rights Reserved.

DATA SECURITY ADDENDUM

This Data Security Addendum ("Addendum") forms part of the service agreement ("Agreement") between Customer and CenturyLink and is applicable to the services provided by CenturyLink pursuant to the Agreement ("Services"). In the event of a conflict between the Agreement and this Addendum, the terms of this Addendum shall control.

CenturyLink has implemented the data security measures described in this Addendum and shall maintain them, or an equally secure equivalent, during the applicable term of the Services. These measures generally apply to CenturyLink's standard services and certain measures may not apply or may be applied differently to customized services, configurations, or environments ordered or as deployed by Customer. These measures have been implemented by CenturyLink to protect, directly or indirectly, the confidentiality, integrity and availability of Customer Data. As used in this Addendum, "Customer Data" means any data, content or information of Customer or its end users that is stored, transmitted, or otherwise processed using the CenturyLink Services.

1. COMPLIANCE WITH LAW, AUDIT REPORT

CenturyLink has adopted and implemented a corporate information security program as described below, which program is subject to reasonable changes by CenturyLink from time to time. CenturyLink has completed an AICPA sanctioned Type II audit report (SSAE18/ISAE3402 SOC 1 or SOC 2) for certain facilities/services and will continue to conduct such audits pursuant to a currently sanctioned or successor standard. Customer will be entitled to receive a copy of the then-available report upon request, which report is CenturyLink Confidential Information. Customer may make such report available to its end users subject to confidentiality terms provided by CenturyLink. Customer will ensure that all Customer Data complies with all applicable laws and appropriate information security practices, and nothing herein shall relieve Customer from its responsibility to select and implement such practices.

2. INFORMATION SECURITY PROGRAM

CenturyLink has implemented an information security program (the "Program") that includes reasonable measures designed to: (1) secure the confidentiality and integrity of Customer Data; (2) to the extent related to the Services and CenturyLink infrastructure, protect against foreseeable threats to the security or integrity of Customer Data; (3) protect against unauthorized access to, disclosure of or unauthorized use of Customer Data; and (4) provide that CenturyLink employees are aware of the need to maintain the confidentiality, integrity and security of Customer Data. CenturyLink will limit access to Customer Data to only those employees, agents, contractors or service providers of CenturyLink who need the information to carry out the purposes for which Customer Data was disclosed to CenturyLink.

The CenturyLink Program is modelled on the ISO27001:2013-based Information Security Management System ("ISMS"), which establishes the guidelines and general principles used for establishing, implementing, operating, monitoring, reviewing, maintaining and improving protections for CenturyLink information and Customer Data. The CenturyLink Program, in alignment with the ISMS, is designed to select adequate and proportionate security controls to protect information and provides general guidance on the commonly accepted goals of information security management and standard practices for controls in the following areas of information security management:

- Security policy
- Organization of information security
- Asset management
- Human resources security
- Physical and environmental security
- Communications and operations management
- Communications security
- Access control
- Information systems acquisition, development, and maintenance
- Information security incident management
- Business continuity management
- Compliance
- Cryptography
- Supplier relationships

CenturyLink has also implemented a formal information security policy and supporting methods and procedures, technical standards, and processes to reinforce the importance of information security throughout the organization ("Information Security Policy"). The Information Security Policy is in alignment with ISO 27002:2013 and is approved by the Chief Information Security Officer. The Information Security Policy outlines the requirements to maintain reasonable security for the Services. Employees and contractors with access to corporate information and Customer Data are

© CenturyLink. All Rights Reserved.

required to complete annual security training based on the Information Security Policy. The Information Security Policy includes the following:

- Physical Security Policy for data centers and Office Locations
- Electronic Use Policy including:
    - Email Usage
    - Wireless Networks
    - Internet Access
    - Anti-Virus control
- Password Management
- Remote and Home Working
- Computer Security Incident Response Plan
- Information Protection
- Third Party Connections Agreements
- Third Party Access
- Wireless Scanning
- Risk Management
- Vendor Management

3. SPECIFIC SECURITY CONTROLS

CenturyLink's security controls include:

- Logical access controls to manage access to Customer Data on a least privilege and need-to-know basis, including through the use of defined authority levels and job functions, unique IDs and passwords, strong (i.e. two-factor) authentication for remote access systems (and elsewhere as appropriate), and promptly revoking or changing access in response to terminations or changes in job functions.

- Password controls to manage and control password complexity and expiration. Any password controlling access to the CenturyLink infrastructure must be of a minimum length and complexity.

- Operational procedures and controls to provide that technology and information systems are configured and maintained according to prescribed internal standards.

- Network security controls, including the use of firewalls, layered DMZs, and updated intrusion detection/prevention systems to help protect systems from intrusion and/or limit the scope or success of any attack or attempt at unauthorized access.

- Vulnerability management procedures and technologies to identify, assess, mitigate and protect against new and existing security vulnerabilities and threats, including viruses, bots, and other malicious code.

- Approved anti-malware software is installed on CenturyLink equipment capable of running it where the risk of infection is high. It is configured to prevent users disabling the software where possible or altering its configuration without authorization. Periodic evaluations are performed to confirm whether systems continue to require (or not) antivirus software.

- Change management procedures outlining that modifications to CenturyLink technology and information assets are tested, approved, recorded, and monitored.

- Organizational management designed to ensure the proper development and maintenance of information security and technology policies, procedures and standards.

- Dedicated organizations with global responsibility for all physical security operations, security systems, access administration, and security controls within all CenturyLink-owned facilities and data centers. Third-party data

© CenturyLink. All Rights Reserved.

centers are utilized for certain services and, in such cases, certain physical security and other controls are reviewed by CenturyLink.

- Security policies which reinforce the importance of physical security of all company facilities including procedures specific to data center physical security. Data center security personnel are responsible for controlling data center access, monitoring local security alarms and managing all reported physical security-related events.

- CCTV (Closed Circuit Television) commonly deployed as a physical security control in high value facilities to deter, detect and identify intruders. The Corporate Security Operations Center (CSOC) provides global, 24/7 support with remote monitoring, management, administration and maintenance of the CCTV video surveillance systems used throughout CenturyLink.

- The Central Access Control Center (CACC) supports the distribution of all CenturyLink access badges and administration of access permissions within the access control system.

- Disposal procedures for different types and classifications of information which are documented and communicated to personnel. Employees have access to secure shredders for hardcopy. Electronic media are disposed of through certified disposal vendors.

- Pre-employment screening and background checks are conducted on incoming personnel in accordance with CenturyLink human resource on-boarding practices and applicable local law. The checks are dependent on, amongst other things: the role, location, any custom requirements, and can include: identity, drug, criminal, academic and credit checks.

- Annual security awareness training for CenturyLink employees and contractors working on CenturyLink premises. The training reflects current threats and encourages basic security good practice, access to and knowledge of Information Security Policy and procedures such as how to report an incident. Employees in particular positions receive supplementary security training and if a training or testing issue arises (e.g., internal phishing exercises), further guidance is provided. CenturyLink conducts a continuous program of phishing tests on staff to reinforce the requirement for awareness and good email and browsing habits and to assess the effectiveness of security awareness training. The company intranet and email system are used to disseminate flash announcements on security matters as appropriate.

4. SECURITY AUDITS.

Customer may, no more than once per year and at its own expense, audit CenturyLink's performance with respect to its security obligations under this Addendum ("Audit"). In the event Customer retains a third party to perform an Audit, CenturyLink may require additional documentation be executed by the third party auditor prior to granting access to a CenturyLink facility where Services are provided, and CenturyLink may, at its sole and reasonable discretion, decline to allow a third party access to a data center. CenturyLink shall reasonably cooperate with Customer in its performance of the Audit and shall make available to Customer or its auditors documents and records reasonably required to complete the Audit. CenturyLink shall provide Customer with reasonable access to the relevant facility for the purpose of inspection of the equipment and facilities which are used to provide the Services to Customer. For purposes of clarification, access will not be granted to certain areas of certain facilities (such as data centers) to which CenturyLink does not generally allow access to its customers (e.g. areas which house equipment used to support services for multiple customers). Audit access is subject to CenturyLink's reasonable security requirements for its most sensitive security policies/materials. Audit access must be within CenturyLink's normal business hours and must be scheduled at least ten (10) business days in advance, and Customer or its auditor shall be escorted by CenturyLink personnel during the period of access. The Audit and any findings related thereto shall be treated as Confidential Information.

5. SECURITY INCIDENTS AND RESPONSE.

In the event CenturyLink determines that a Security Incident has impacted Customer Data, CenturyLink shall promptly take the following actions:

- Notify Customer of such Security Incident and provide periodic updates as appropriate given the nature of the Security Incident and as information becomes available;
- Take reasonable steps to remediate and mitigate the Security Incident, to the extent such steps are technically feasible and appropriate in the circumstances;
- Conduct a preliminary investigation into the Security Incident to determine, to the extent reasonably feasible, its root cause; and

© CenturyLink. All Rights Reserved.

- Reasonably cooperate with Customer in its efforts to remediate or mitigate the Security Incident and its efforts to comply with applicable law and legal authorities, as necessary.

For purposes hereof, “Security Incident” means any unlawful or unauthorized access, theft, or use of Customer Data while being stored, transmitted or otherwise processed using CenturyLink services.

© CenturyLink. All Rights Reserved.

CENTURYLINK MASTER SERVICE AGREEMENT
NETWORK MANAGEMENT SERVICE EXHIBIT

1. General. CenturyLink QCC will provide Network Management Service ("NMS" or "Service") under the terms of the Agreement and this Service Exhibit.

2. Service.

2.1 Description. NMS provides performance reporting, change management, configuration management, fault monitoring, management and notification of customer premises equipment ("CPE") and network related issues. NMS does not include transport or Local Access, which may be separately purchased from CenturyLink. The following management types are available:

(a) Select Management. Select Management includes: 24x7x365 remote performance monitoring, reporting, and ticketing via NMS online portal for devices supported by CenturyLink. Select Management also includes complete fault monitoring, management, and notification (detection, isolation, diagnosis, escalation and remote repair when possible) change management supported by CenturyLink, (up to 12 changes per year), asset management (device inventory), and configuration management (inventory of customer physical and logical configuration). Customer may submit change management requests via Control Center at https://controlcenter.centurylink.com. Select Management only supports basic routing functions. Please reference the NMS Supported Device List to determine which devices qualify for NMS Select. NMS does not include new CPE initial configuration, lab testing, lab modeling, or on-site work of CPE. The NMS supported device list and a standard change management list are available on request and are subject to change without notice.

(b) Comprehensive Management. Comprehensive Management includes all of the Select Management features as well as total customer agency and change management (up to 24 configuration changes per year) of complex routing functions within routers, switches, and Firewall modules. This includes configuration and management of complex routing, switching, device NIC cards, Firewall module configurations, and basic router internal Firewall functions. "Firewall" means a set of related programs, located at a network gateway server that is designed to allow or deny certain hosts or networks to speak to each other, based on a set security policy. CenturyLink acts as the Customer's single point of contact in managing the resolution of all service, device, and transport faults covered by Comprehensive Management and will work with any third party hardware and/or transport providers the Customer has under contract until all network issues are successfully resolved. With Internet security protocol ("IPSec"), CenturyLink can configure full mesh, partial mesh, or hub-and-spoke topologies with secure tunnels for remote communication between Customer locations. IPSec is only available on approved Cisco and Adtran devices. IPSec opportunities greater than 25 devices or with other manufacturer's devices require CenturyLink approval before submitting an order.

(c) Monitor and Notification. CenturyLink will monitor Customer device 24x7x365 for up/down status and notify Customer of faults. This feature does not include any of the Select Management or Comprehensive Management features.

(d) CenturyLink Responsibilities.

(i) CenturyLink will provide Customer with a non-exclusive service engineer team, which will maintain a Customer profile for the portion of the Customer's network where the CenturyLink-managed devices reside. CenturyLink will work with the Customer to facilitate resolution of service-affecting issues as long as Customer chooses either Select Management or Comprehensive Management.

(e) Customer Responsibilities.

(i) Customer must provide all information and perform all actions reasonably requested by CenturyLink in order to facilitate installation of Service. For Out-of-Band management related to fault isolation/resolution, Customer will provide and maintain a POTS line(s) for each managed device. "Out-of-Band" means a connection between two devices that relies on a non-standard network connection, such as an analog dial modem, which must be a CenturyLink certified 56k external modem. Additionally, Customer will provide a dedicated modem for each managed device. It is not mandatory that Customer have a POTS line but Customer must understand that CenturyLink will not be able to troubleshoot issues if the device under management cannot be reached.

(ii) For Comprehensive Management, Customer must execute the attached Letter of Agency (Attachment 1) to authorize CenturyLink to act as Customer's agent solely for the purpose of accessing Customer's transport services.

(iii) Depending on transport type, Customer's managed devices must comply with the following set of access requirements: (a) for Service delivered via IP connectivity with CenturyLink IQ® Networking Internet Port or other public Internet service, devices must contain an appropriate version of OS capable of establishing IPsec VPNs; (b) for Service delivered with CenturyLink IQ Networking Private Port, CenturyLink will configure a virtual circuit to access Customer device at no additional charge. CenturyLink will add the CenturyLink NMS network operations center to the Customer user group to manage the devices within the customer's network. With CenturyLink IQ Networking Private Port, the Customer device does not need to be IPSec-capable unless customer is requesting an added layer of security; (c) for Private Line, both A and Z locations must be under management and accessible via a valid routable IP address.

(iv) Customer must provide: A routable valid IP address to establish the Service connection. Customer's primary technical interface person must be available during the remote installation process in order to facilitate installation of the Service. All Customer devices managed under NMS must be maintained under a contract from a CenturyLink approved on-site CPE maintenance provider. The response times for which the Customer contract with its CPE maintenance provider will affect CenturyLink's timing for resolution of problems involving Customer-provided devices. The performance of the CPE maintenance provider is Customer's responsibility.

OMR #R085547

© CenturyLink, Inc. All Rights Reserved.

2.2 INTENTIONALLY DELETED.

(a) Export Controls. If equipment, software, or technical data is provided under this Service Exhibit, Customer's use of such items must comply fully with all applicable export and re-export controls under U.S. Export Administration Regulations and/or the relevant export control laws and regulations of any other applicable jurisdiction.

(b) Anti-Corruption. Each party acknowledges and agrees that certain anti-bribery and anti-corruption laws, including the Foreign Corrupt Practices Act, 15 U.S.C. Sections 78dd-1 et seq. and the UK Bribery Act, prohibit any person from making or promising to make any payment of money or anything of value, directly or indirectly, to any government official, political party, or candidate for political office for the purpose of obtaining or retaining business. Each party represents and warrants that in the performance of its obligations hereunder, it has not offered, made, or accepted and will not offer, make, or accept, any bribe or facilitation payment, and will otherwise comply with the requirements of applicable anti-bribery laws.

(c) Business Contact Information. Customer is providing to CenturyLink the names of and contact information ("Business Contact Information") for its employees ("Business Contacts") who have purchasing or other responsibilities relevant to CenturyLink's delivery of Service under this Service Exhibit. The Business Contact Information does not include personal data revealing racial or ethnic origin, political opinions, religious or philosophical beliefs, trade-union memberships, financial status, health or sex life. Customer consents to CenturyLink's and its affiliates or subcontractors' use and transfer to the United States of Business Contact Information for the purpose of: (i) fulfilling its obligations under this Service Exhibit; and (ii) providing information to Customer about CenturyLink's products and services via these Business Contacts. Customer represents that the Business Contact Information is accurate and that each Business Contact has consented to CenturyLink's processing of their Business Contact Information for the purposes set forth in this Service Exhibit. The Business Contact Information provided by Customer has been collected, processed, and transferred in accordance with applicable laws, including, where applicable, any necessary notification to the relevant data protection authority in the territory in which Customer is established ("Authority"). Customer will notify CenturyLink promptly of staffing or other changes that affect CenturyLink's use of Business Contact Information. CenturyLink will have in place technical and organizational measures that ensure a level of security appropriate to the risk represented by the processing and the nature of the Business Contact Information, and that protects such information against accidental or unlawful destruction or accidental loss, alteration, unauthorized disclosure or access. CenturyLink will use the information only for the express purposes set forth in this Service Exhibit. CenturyLink will identify a contact authorized to respond to inquiries concerning processing of Business Contact Information, and will reasonably cooperate in good faith with Customer and the Authority concerning all such inquiries without excessive delays.

(d) INTENTIONALLY DELETED

3. INTENTIONALLY DELETED.

4. Charges. Customer will pay all applicable charges in the Option C Proposal 2 BAFO ("BAFO"). Charges will commence within five days after the date CenturyLink notifies Customer that Service is provisions and ready for use ("Start of Service Date"). Location additions will be at CenturyLink's then-current rate.

5. AUP. All use of the Service must comply with the Acceptable Use Policy ("AUP"), as such policy existed on the Effective Date, and which is posted at .. The State will comply with all laws and regulations that apply to the State's use of the Services.

6. INTENTIONALLY DELETED.

Pricing Attachment

For pricing, please refer Option C Proposal 2 BAFO ("BAFO")

© CenturyLink, Inc. All Rights Reserved.

ATTACHMENT 1

COMPREHENSIVE MANAGEMENT

LIMITED LETTER OF AGENCY
Between
STATE OF NEBRASKA ("Customer")
and
Qwest Communications Company, LLC d/b/a CenturyLink QCC ("CenturyLink")

This limited letter of agency ("LOA") hereby authorizes CenturyLink to act as the Customer's Agent for the limited purpose of contacting Customer's designated Local Exchange Carrier ("LEC"), Interexchange Carrier ("IXC"), Internet Service Provider ("ISP"), or customer premises equipment ("CPE") maintenance provider in conjunction with CenturyLink Network Management Service. Network Management Service activities will consist of working with Customer's LEC, IXC, ISP, and/or CPE maintenance provider for the purpose of: (a) extracting information concerning transmission data elements carried over Customer's network connection; (b) identifying Customer's links or data link connection identifiers ("DLCIs"); (c) opening, tracking, and closing trouble tickets with the LEC, IXC, ISP, or CPE maintenance provider on Customer's transport links or CPE when an alarm or fault has been detected; (d) dispatching CPE repair personnel on behalf of Customer to CPE for which a fault has been detected; and (e) discussing fault information with the LEC, IXC or CPE maintenance provider on behalf of Customer to facilitate resolution of the problem.

CenturyLink does not assume any of Customer's liabilities associated with any of the services the Customer may use.

The term of this LOA will commence on the date of execution below and will continue in full force and effect until terminated with 30 days written notice by one party to the other or until the expiration or termination of the Network Management Service.

A copy of this LOA will, upon presentation to LEC, IXC, ISP, and/or CPE maintenance provider, as applicable, be deemed authorization for CenturyLink to proceed on Customer's behalf.

_____
Authorized Signature

_____
Name Typed or Printed

_____
Title

_____
Date

© CenturyLink, Inc. All Rights Reserved.

NETWORK MANAGEMENT SERVICE ("NMS" or "Service"**)**
SERVICE LEVEL AGREEMENT ("SLA"**)**
(not applicable to services offered under the CenturyLink Wholesale and Enhanced Services Agreements)

This SLA applies to NMS ordered by customers pursuant to an agreement between a specific customer ("Customer") and Qwest Communications Company, LLC d/b/a CenturyLink QCC ("CenturyLink") ("Agreement"). Capitalized terms not defined in this SLA are defined in the Agreement.. This SLA provides Customer's sole and exclusive remedy for service interruptions or service deficiencies of any kind whatsoever for Service.

1. Definitions.

"ICMP" means Internet Control Message Protocol and is the protocol used to "ping" a monitored device to verify if it is alive.

"Network Incident" means device and network performance issues that are recognized by the NMS NOC as being potentially harmful to Customer's network.

"SLO" means service level objective. An SLO differs from an SLA in that it does not provide for remedies.

"SNMP" means Simple Network Management Protocol and is the primary protocol used for monitoring and extracting device health information for use of management and reporting.

"UDP" means User Datagram Protocol and is the underlying protocol used by SNMP to monitor device health.

2. SLA Effective Date. This SLA becomes effective when the deployment process has been completed, the device has been set to "live," and support and management of the device has been successfully transitioned to the NOC. The SLA remedies are available provided Customer meets its obligations as defined in this SLA.

(1) NMS. CenturyLink will respond to all identified incidents according to the table above, after ticket generation. Customer's designated incident contact will be notified by telephone and email for High severity incidents and via e-mail for Severity Medium, Low and MACD incidents. During a High severity incident escalation, CenturyLink will contact the designated Customer contact until all escalation contacts have been exhausted. Incidents will be posted to the Service portal near real time upon identification. Operational activities related to incidents and responses are documented and time-stamped within the CenturyLink trouble ticketing system, which will be used as the sole authoritative information source for purposes of this SLA.

a. Policy change request acknowledgement SLA. CenturyLink will acknowledge receipt of Customer's policy change request within two hours of receipt by CenturyLink. This SLA is only available for policy change requests submitted by one designated contact in accordance with the provided procedures.

b. Customer service request implementation SLA.

(1) CenturyLink will provide the Move, Add, Change, Delete ("MACD") service events to Customer based on the following material baselines. The baselines will be measured on a weighted average across the install base of the in-scope devices of the Statement Of Work.

© CenturyLink, Inc. All Rights Reserved.

2.2 Scheduled and Emergency Portal Maintenance. Scheduled maintenance will mean any maintenance:

a. of which Customer is notified at least five days in advance; or

b. that is performed during the standard monthly maintenance window on the second Tuesday of every month from 11 pm to 6 am. Central Time. Notice of scheduled maintenance will be provided to the designated Customer contact. No statement in the section entitled "SLA" will prevent CenturyLink from conducting emergency maintenance on an "as needed" basis. During such emergency maintenance, the affected Customer's primary point of contact will receive notification within 30 minutes of initialization of the emergency maintenance and within 30 minutes of the completion of any emergency maintenance.

2.3 SLA Exclusions and Stipulations.

a. Customer Contact Information. Multiple SLAs require CenturyLink to provide notification to the designated Customer contact after certain events occur. In the case of such an event, Customer is solely responsible for providing CenturyLink with accurate and current contact information for the designated contact(s). The current contact information on record is available to authorized contacts through the Service portal. CenturyLink will be relieved of its obligations under this SLA if Customer contact information is out of date or inaccurate due to Customer action or omission.

b. Customer Network/Server Change Notifications. Customer is responsible for providing CenturyLink advance notice regarding any network or server changes to the firewall environment. If the event advance notice cannot be provided, Customer is required to provide CenturyLink with notification of changes within seven business days of said network or server changes. Notification is completed by the submission or update of a critical server ticket through the Service portal. If Customer fails to notify CenturyLink as stated above, all SLA remedies directly related to Customers failure to provide such notification are considered null and void.

c. Maximum Penalties/Remedies Payable to Customer. The total SLA credits (called "remedies") provided by NMS for network firewalls – Standard, and Managed UTM Service, described in the sections entitled "SLAs" and "SLA Remedies" above, will not exceed the MRCs for one calendar month.

d. Network Traffic Applicable to SLAs. Certain SLAs focus on the prevention, identification, and escalation of security incidents. These SLAs assume that traffic has successfully reached the firewall and therefore the firewall has the ability to process the traffic against the installed policy and generate a logged event. Traffic that does not pass through a firewall, or that does not generate a logged event, is not covered under these SLAs.

e. SLA Compliance and Reporting. SLA compliance and the associated remedies are based on fully functional network environments, Internet, and circuit connectivity, firewalls, and properly configured servers. If SLA compliance failure is caused solely by CPE hardware or software (including any and all software agents, all SLA remedies are considered null and void. CenturyLink will provide SLA compliance reporting through the Service portal.

f. Testing of Monitoring and Response Capabilities. Customer may test CenturyLink monitoring and response capabilities by staging simulated or actual reconnaissance activity, system or network attacks, and/or system compromises. These activities may be initiated directly by Customer or by a contracted third party with no advance notice to CenturyLink. SLAs will not apply during the period of such staged activities, and remedies will not be payable if the associated SLA(s) are not met.

g. Interruptions or Times of Service Degradation. In addition to other exclusions stated in this SLA, the commitments outlined in the UTM SLA section will not apply in the event Service is unavailable or impaired due to any of the following:

(1) Negligence, Error, or Customer Caused. Interruptions or times of Service degradation directly caused by the negligence, error, or omission of the Customer or others authorized by the Customer to use or modify the Customer's Service; to include changes made with read/write access

(2) No Access, Service Termination. Interruptions or times of Service degradation during any period in which CenturyLink or its agents are not afforded access to the premises where the access lines associated with the Customer's Service are terminated or where the Customer's CPE resides, provided such access is reasonably necessary to prevent a degradation or restore Service;

(3) Customer Elects Not to Release Service. Interruptions or times of Service degradation during any period when the Customer elects not to release the Service(s) for testing and/or repair and continues to use it on an impaired basis;

(4) CPE Failure Not Covered. Interruptions or times of Service degradation due to failure of CPE components not covered by NMS;

(5) Failure of Customer Supplied Wiring. If required for Service, interruptions or times of Service degradation due to failure of inside wiring components supplied by the Customer;

(6) Customer Use in Unauthorized/Unlawful Manner. Interruptions or times of Service degradation resulting from the Customer's use of the Service in an unauthorized or unlawful manner;

(7) Other Vendor Disconnect. Interruptions or times of Service degradation resulting from any other vendor disconnecting their service;

(8) Breach of Terms. Interruptions or times of Service degradation resulting from a CenturyLink disconnect for the Customer's breach of a term set forth in the Agreement pursuant to which CenturyLink is providing the Service to the Customer or CenturyLink is providing a local access service to the Customer;

(9) Incorrect, Incomplete, Inaccurate Information from Customer. Interruptions or times of Service degradation resulting from incorrect, incomplete, or inaccurate information from the Customer, including, without limitation, the Customer's over-subscription of ports or selection of insufficient committed information rate, or over utilization of CPE resources;

(10) Customer Requested Improper, Inaccurate, or Special Network Specifications. Interruptions or times of Service degradation due to improper, inaccurate, or special network specifications requested by the Customer that are not included in CenturyLink's standard specifications of the Service and/or CenturyLinks' contract with Customer and/or CenturyLink's internal operational processes;

(11) Unable to Reach Customer Contact Post Restoration of Service. Interruptions or times of Service degradation occurring after CenturyLink reasonably believes it has restored a particular Service and is unable to contact the person designated by the Customer as being the person to contact in the event of an interruption or degradation of the Service and restoration of a Service;

(12) Unavailable Bandwidth due to Overcapacity. SNMP polling is not available as a result of the Customer running at 100% capacity;

(13) Loss of SNMP Packet. The underlying protocol of SNMP is UDP. UDP is connectionless and therefore unreliable for retransmission. When an SNMP packet is sent from the end device, if there is a network outage, congestion, or the packet is somehow lost it will not be retransmitted by the end device;

(14) Unable to Reach Customer Contact During Power Outage. If CenturyLink loses monitoring connectivity to the managed device,

© CenturyLink, Inc. All Rights Reserved.

and there is no Customer contact to identify a power outage, this down time will not be included in SLA calculations. If CenturyLink dispatches a technician and finds a no power situation, then the outage is considered a false callout scenario with associated charges;
(15) Customer Configurations. If the Customer makes its own configuration changes to its device causing network outages and/or issues.
(16) Force Majeure. Force Majeure Events as defined in the Agreement;
(17) Vendor Handling Time. Handling Time for vendor or CenturyLink time;
(18) Incomplete/Incorrect Service Order. SLA install time does not apply if a Service order is incomplete or if Customer provides incorrect information for a Service order.

3. SLOs. The following establish nonbinding objectives for the provision of certain features of the Service. The SLOs become effective when the deployment process has been completed, the device has been set to "live," and support and management of the device have been successfully transitioned to the NOC.
a. Service Portal. CenturyLink will provide a 99.9% accessibility objective for the Service portal outside of the times detailed in the

© CenturyLink, Inc. All Rights Reserved.

section entitled “Scheduled and Emergency Portal Maintenance”.

b. Internet Emergency. In the event CenturyLink declares an Internet emergency, it is CenturyLink’s objective to notify Customer’s specified points of contact via e-mail within 15 minutes of emergency declaration. This notification will include an incident tracking number. During declared Internet emergencies, CenturyLink will provide a summarized e-mail designed to Customer. Situation briefings following the onset of an Internet emergency will supersede any requirement for CenturyLink to provide Customer-specific escalations for events directly related to the declared Internet emergency. Standard escalation practices will resume upon conclusion of the stated Internet emergency.

4. INTENTIONALLY DELETED.

© CenturyLink, Inc. All Rights Reserved.

CENTURYLINK MASTER SERVICE AGREEMENT
PUBLIC SAFETY VERSION
NEXT GENERATION 9-1-1 SERVICE SCHEDULE

1. Services

Qwest Corporation d/b/a CenturyLink QC ("CenturyLink") will provide, and Customer will purchase, the CenturyLink Next Generation ("NG") 9-1-1 service ("Service" or "NG 9-1-1 Service") provided under this Service Schedule. Service enables the routing of 9-1-1 dialed calls to a Customer–designated Public Safety Answering Point ("PSAP") over an Internet Protocol ("IP") network. Service is provided as described in this Service Schedule and in a Statement of Work ("SOW"), if applicable. The number "9-1-1" is intended as a universal emergency telephone number that provides the public direct access to a PSAP. A PSAP is an agency authorized to receive and respond to emergency calls. One or more PSAPs may be required for any given municipality or metropolitan area. PSAPs are designated by the Customer and specified in Addendums to this Service Schedule. Service includes components necessary for the answering, transferring, and forced disconnect of emergency 9-1-1 calls originated by persons within the servicing area(s). Service does not include Customer's telecommunications equipment. Customer will provide telecommunications equipment with a capacity adequate to handle the number of incoming 9-1-1 calls recommended by CenturyLink to be installed. It is Customer's responsibility to ensure that the telecommunications equipment is compatible with the Service furnished under this Service Schedule. CenturyLink does not answer and forward 9-1-1 calls, but furnishes the use of its facilities to enable the Customer's NG 9-1-1 and/or 9-1-1 personnel to respond to such calls. PSAP information, service locations, and addresses are shown on Addendum 1, incorporated by reference into this Service Schedule. By checking the box below, the applicable SOW is incorporated into this Service Schedule. SOWs that are not specifically incorporated will not be considered part of this Service Schedule.

☒SOW [#_____] is hereby incorporated into this Service Exhibit.
This SOW will be completed upon award.

1.2 Service provided under this Service Schedule does not include IP transport. Customer acknowledges and understands that this Service requires IP transport between certain points in Customer's 9-1-1 network to deliver the ALI to the PSAP and that the IP transport provided by Customer must meet the requirements for this Service. Customer understands that the terms and conditions of any agreement imposed by Customer's provider of its IP transport will impact Customer's access to this Service. Customer further acknowledges and understands that IP transport may create limitations on access to 9-1-1 emergency services that are different from or in addition to access limitations of traditional E9-1-1 transport and such transport may limit its access to the Service provided under this Service Schedule. "ALI" means Automatic Location Identification.

1.3 Service provided under this Service Schedule does not include Data Transport. Customer acknowledges and understands that any new or existing Data Transport used in conjunction with this Service is subject to the terms of a separate agreement. "Data Transport" means traditional E9-1-1 circuits used to deliver the ALI to the PSAP that are provided under the terms of a CenturyLink tariff, price list, price, schedule, administrative guideline, catalog, and other rate and term schedules (hereinafter, whether individually or together, "Tariff"). Data Transport is not offered under this Service Schedule.

1.4 CenturyLink will not provide Service to less than an entire central office service area. Service does not include facilities provided by Independent Providers. CenturyLink will provide Service up to the Standard Network Interface ("SNI") for each of the service locations at Customer's location(s). The SNI is that location where CenturyLink's facilities end and Customer's inside wire or network begins. "Independent Providers" means telephone companies, Incumbent Local Exchange Carriers ("ILECS"), Competitive Local Exchange Carriers ("CLECS"), or other communications service providers, (i.e., wireless carriers and/or interconnected VoIP providers).

1.5 Customer will use the NG 9-1-1 Service only for receiving and responding to requests for emergency assistance. Customer will be responsible for ensuring that each PSAP will also use the NG 9-1-1 Service as prescribed herein. Any other use of the database will result in immediate termination of Service.

1.6 CENTURYLINK ACCEPTS NO RESPONSIBILITY FOR OBTAINING OR FOR THE ACCURACY OF SUBSCRIBER, STATION, OR END-USER RECORD INFORMATION RECEIVED FROM INDEPENDENT PROVIDERS OR PRIVATE TELECOMMUNICATIONS SYSTEMS, SUCH AS PBX OR SHARED TENANT SERVICES.

1.7 Customer will provide an MSAG to CenturyLink for use in the database preparation. The MSAG must follow the NENA recommended United States Postal Service street name and directional addressing standard. Customer will ensure that each participating telephone service provider's records are sent electronically in the NENA format for database updates as specified by CenturyLink. CenturyLink will not deliver Service until each participating telephone service provider's records for Customer's service area match the applicable Master Street Address Guide at rates shown below. Customer is fully responsible for correcting all erroneous records and achieving such rate. "MSAG" means Master Street Address Guide. "NENA" means National Emergency Number Association.

State	Rate
Minnesota	98%
Washington	97%
Oregon	97%
New Mexico	96%
Other (within CenturyLink's 14 state territory)	95%

© CenturyLink. All Rights Reserved.

1.8 Customer must promptly notify CenturyLink in the event the Service is not functioning properly. CenturyLink acknowledges some elements of the Service are monitored for performance as part of the routine maintenance of the network. This shall not be interpreted, construed, or regarded, either expressly or impliedly as a warranty, service commitment or creating any CenturyLink obligation nor does it relieve Customer of its responsibilities under this Service Schedule.

1.9 CenturyLink will perform inspection and/or monitoring of its facilities on a routine basis, to discover errors, defects and malfunctions that might affect the Service. Customer understands and acknowledges that this inspection and monitoring may not detect all errors that may occur. Some Service-related issues may arise that impact and delay or prevent call delivery. Some Service-related issues may occur which the system will not recognize and will therefore not cause an automatic rerouting of calls to an alternate destination. Customer may authorize CenturyLink to manually implement an alternate call route as required.

2. INTENTIONALLY DELETED.

3. INTENTIONALLY DELETED.

3.1 INTENTIONALLY DELETED.
3.2 INTENTIONALLY DELETED.

4. Charges and Payment.

4.1 CenturyLink will notify Customer of the date Service is available for use. In the event Customer informs CenturyLink that it is unable or unwilling to accept Service at such time, the Service will be held available for Customer for a period not to exceed 30 business days from such date ("Grace Period"). If after the Grace Period, Customer still has not accepted Service, CenturyLink may either: (a) commence with regular monthly billing for the Service; or (b) cancel the Service. If Customer cancels Service prior to the date the Service is available for use, or is unable to accept the Service during the Grace Period and CenturyLink cancels the Service at the end of the Grace Period, termination charges may apply.

4.2 Customer will pay the rates for the Service as set forth in Option C Proposal 2 BAFO ("BAFO"). CenturyLink reserves the right to revise rates if a change in the statutes or administrative rules affects the cost of providing Service.

4.3 Provision of Service under this Service Schedule may involve Independent Providers. Charges for Service only include Service provided within CenturyLink Territory up to the meet point of the Independent Provider. Other charges which involve work performed by the Independent Provider will be in addition to CenturyLink's charges and will be negotiated separately between Customer and the Independent Provider. "CenturyLink Territory" means CenturyLink's local service areas in the following states: Arizona, Colorado, Idaho, Iowa, Minnesota, Montana, Nebraska, New Mexico, North Dakota, Oregon, South Dakota, Utah, Washington, and Wyoming.

4.4 Customer may add Service under this Service Schedule at the rates and charges in effect at the time of the addition(s). New Service will be coterminous with existing Service. Requests to add Service must be by written amendment or by submitting a work request to CenturyLink. The amendment or work request will be signed by authorized representatives of both parties and made a part of this Service Schedule.

5. Other Terms.

5.1 Service Notices. Notices for disconnection of Service must be submitted to CenturyLink via Email at: BusinessDisconnects@Centurylink.com. Notices of non-renewal for Services must be sent via e-mail to: CenturyLink, Attn.: CenturyLink NoRenew, e-mail: Norenew@centurylink.com. Notices for billing inquiries/disputes or requests for Service Level credits must be submitted to CenturyLink via Customer's portal at https://www.centurylink.com/business/login/ or via Email at: Care.Inquiry@Centurylink.com. All other routine operational notices will be provided by Customer to its CenturyLink sales representative.

5.2 INTENTIONALLY DELETED.

© CenturyLink. All Rights Reserved.

ADDENDUM 1
CENTRAL OFFICE PSAP INFORMATION

BILLING NUMBER: _____

PSAP NAME	PSAP ADDRESS	CENTRAL OFFICE CLLI CODE SERVING THE PSAP	NPA/NXX

© CenturyLink. All Rights Reserved.

Instructions To Bidders

General

- All cells are locked except those allowing input (shaded green).
- **Do not attempt to edit formula cells**. Any attempt to edit a formula may cause bidder's entire response to be rejected.
- Tabs will contain cells for Non-Recurring Costs (NRC) and Monthly Recurring Charges (MRC).
- Follow the instructions for each Tab.
- Save as an Excel file and give it a unique name, using the following format: "**Company XYZ XXXX Z1 Cost Proposal Option C ESInet and NGCS**".
- Print the workbook (not just the worksheets) to verify content of each tab. Also, verify that all data can be seen in each cell.
- Include the saved Excel file when submitting the RFP response package to the Nebraska State Purchasing Bureau.
- If more rows are needed in each region, you can insert additional rows.
- Each sheet is divided into the 7 regions. Enter pricing information for each region based on bidders implementation plan.

- All PSAPs and regions may not be ready for geospatial routing on day one of operations and Bidder shall provide tabular routing services, also known as Internet Protocol Selective Routing (IPSR), until such time as PSAPs and regions are ready for geospatial routing. Be sure the cost proposal response indicates the pricing difference between tabular and geospatial routing.
- Include pricing for Optional NGCS services on the Optional Svc tab.

NRC Milestones

- Milestone Payments - NRC payments will be made as structured on the NRC Milestones Tab.As each region is completed on each tab, it is calculated into the total milestone. **Bidders should prepare their cost proposal to reflect the timeline submitted with Bidder's Implementation Plan.**

Summary Tab

- As the name implies, this tab contains the totals from the ESInet, **Legacy Network Gateway (LNG)**, **Border Control Function (BCF)**, **Emergency Services Routing Proxy and Policy Routing Function (ESRP & PRF)**, **Emergency Call Routing Function and Location Validation Function (ECRF & LVF)**, **Spatial Interface (SI)**, **Location Database (LDB)** and **Miscellaneous (MISC) tabs.**
- Enter the Bidder name and date in the designated cells. This information automatically populates the other tabs.
- All other cells are locked.

ESInet Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Emergency Services IP Network services (hardware, software, connectivity, training, maintenance, etc.) for each region. Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly per person amounts in cents**. The monthly amounts are automatically multiplied by the population of the region and by 12 months.

LNG Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Legacy Network Gateway services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the region's population.

BCF Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Border Control Function services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

ESRP & PRF Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Emergency Services Routing Proxy and Policy Routing Function services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

ECRF & LVF Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Emergency Call Routing Function and Location Validation Function services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

SI Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information for Spatial Interface services (hardware, software, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

LDB Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Location Database services (hardware, software, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

MISC Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Miscellaneous services that are not part of one of the above functional elements or that may not have been covered in the RFP but are required in order to complete the project. Add rows for each region as needed.

ESInet Milestones	
Milestone 1: **Region 1** regional host connection and testing acceptance	0.00
Milestone 2: **Region 2** regional host connection and testing acceptance	0.00
Milestone 3: **Region 3** regional host connection and testing acceptance	0.00
Milestone 4: **Region 4** regional host connection and testing acceptance	0.00
Milestone 5: **Region 5** regional host connection and testing acceptance	0.00
Milestone 6: **Region 6** regional host connection and testing acceptance	0.00
Milestone 7: **Region 7** regional host connection and testing acceptance	0.00
TOTAL	0.00

NGCS Milestones	
Milestone 1: **Region 1** deployments complete	8,186.04
Milestone 2: **Region 2** deployments complete	8,186.04
Milestone 3: **Region 3** deployments complete	8,186.04
Milestone 4: **Region 4** deployments complete	8,186.04
Milestone 5: **Region 5** deployments complete	8,186.04
Milestone 6: **Region 6** deployments complete	8,186.04
Milestone 7: **Region 7** deployments complete	8,186.04
TOTAL	57302.28

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name	BAFO -Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	9/8/2020														
Next Generation Core Services	**INITIAL CONTRACT PERIOD**														
	YEAR 1		**YEAR 2**		**YEAR 3**		**YEAR 4**		**YEAR 5**		**YEAR 6**	**YEAR 7**	**YEAR 8**	**YEAR 9**	**YEAR 10**
	NRC	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**
ESInet	0.00	199,656.00	0.00	465,864.00	0.00	465,864.00	0.00	465,864.00	0.00	465,864.00	465,864.00	465,864.00	465,864.00	465,864.00	465,864.00
LNG	5,460.12	70,076.70	7,280.16	163,511.64	0.00	163,511.64	0.00	163,511.64	0.00	163,511.64	163,511.64	163,511.64	163,511.64	163,511.64	163,511.64
BCF	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ESRP & PRF	0.00	283,872.39	0.00	662,368.92	0.00	662,368.92	0.00	662,368.92	0.00	662,368.92	662,368.92	662,368.92	662,368.92	662,368.92	662,368.92
ECRF & LVF	0.00	152,073.93	0.00	354,839.16	0.00	354,839.16	0.00	354,839.16	0.00	354,839.16	354,839.16	354,839.16	354,839.16	354,839.16	354,839.16
SI	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LDB	0.00	77,091.99	0.00	179,881.32	0.00	179,881.32	0.00	179,881.32	0.00	179,881.32	179,881.32	179,881.32	179,881.32	179,881.32	179,881.32
MISC	19,098.00	7,560.00	25,464.00	17,640.00	0.00	17,640.00	0.00	17,640.00	0.00	17,640.00	17,640.00	17,640.00	17,640.00	17,640.00	17,640.00
Total	24,558.12	790,331.01	32,744.16	1,844,105.04	0.00	1,844,105.04	0.00	1,844,105.04	0.00	1,844,105.04	1,844,105.04	1,844,105.04	1,844,105.04	1,844,105.04	1,844,105.04

Project Totals	**Year 1**	**Year 2**	**Year 3**	**Year 4**	**Year 5**	**Year 6**	**Year 7**	**Year 8**	**Year 9**	**Year 10**
Yearly Totals (NRC+MRC)	814,889.13	1,876,849.20	1,844,105.04	1,844,105.04	1,844,105.04	1,844,105.04	1,844,105.04	1,844,105.04	1,844,105.04	1,844,105.04
Initial Contract (5 Year NRC+MRC)	8,224,053.45									
+ Optional Year 6 (6 Year NRC+MRC)	10,068,158.50									
+ Optional Years 7 (7 Year NRC+MRC)	11,912,263.54									
+ Optional Years 8 (8 Year NRC+MRC)	13,756,368.58									
+ Optional Years 9 (9 Year NRC+MRC)	15,600,473.62									
+ Optional Years 10 (10 Year NRC+MRC)	17,444,578.66									

State Population	
	2019 Estimates
Region One - ~~SE~~ SC	259,183
Region Two - ~~SC~~ SE	512,126
Region Three - Metro	772,006
Region Four - NC	28,227
Region Five - EC	180,423
Region Six - NE	114,203
Region Seven - Metro West	63,100
Total Population	1,929,268

Bidder Name:	0
Date (MM/DD/YYYY):	1/0/1900

Emergency Services IP Network	**INITIAL CONTRACT PERIOD**														
	YEAR 1		**YEAR 2**		**YEAR 3**		**YEAR 4**		**YEAR 5**		**Year 6**	**Year 7**	**Year 8**	**Year 9**	**Year 10**
	NRC	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**
Region One Milestone															
SOUTH CENTRAL - (4 Circuits /2 per host)	0.0000	0.0214	0.0000	0.0214	0.0000	0.0214	0.0000	0.0214	0.0000	0.0214	0.0214	0.0214	0.0214	0.0214	0.0214
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 1 TOTAL	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001
Region Two Milestone															
SOUTH EAST - (4 Circuits /2 per host)	0.0000	0.0108	0.0000	0.0108	0.0000	0.0108	0.0000	0.0108	0.0000	0.0108	0.0108	0.0108	0.0108	0.0108	0.0108
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 2 TOTAL	0.0000	66,551.9999	0.0000	66,551.9999	0.0000	66,551.9999	0.0000	66,551.9999	0.0000	66,551.9999	66,551.9999	66,551.9999	66,551.9999	66,551.9999	66,551.9999
Region Three Milestone															
METRO - (4 Circuits /2 per host)			0.0000	0.0072	0.0000	0.0072	0.0000	0.0072	0.0000	0.0072	0.0072	0.0072	0.0072	0.0072	0.0072
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 3 TOTAL	0.0000	0.0000	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001
Region Four Milestone															
NORTH CENTRAL - (4 Circuits /2 per host)			0.0000	0.1965	0.0000	0.1965	0.0000	0.1965	0.0000	0.1965	0.1965	0.1965	0.1965	0.1965	0.1965
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 4 TOTAL	0.0000	0.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000
Region Five Milestone															
EAST CENTRAL - (4 Circuits /2 per host)	0.0000	0.0307	0.0000	0.0307	0.0000	0.0307	0.0000	0.0307	0.0000	0.0307	0.0307	0.0307	0.0307	0.0307	0.0307
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 5 TOTAL	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001
Region Six Milestone															
NORTH EAST - (4 Circuits /2 per host)			0.0000	0.0486	0.0000	0.0486	0.0000	0.0486	0.0000	0.0486	0.0486	0.0486	0.0486	0.0486	0.0486
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 6 TOTAL	0.0000	0.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000
Region Seven Milestone															
METRO WEST - (4 Circuits /2 per host)			0.0000	0.0879	0.0000	0.0879	0.0000	0.0879	0.0000	0.0879	0.0879	0.0879	0.0879	0.0879	0.0879
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 7 TOTAL	0.0000	0.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000
ESInet Total	0.0000	199,656.0002	0.0000	465,864.0002	0.0000	465,864.0002	0.0000	465,864.0002	0.0000	465,864.0002	465,864.0002	465,864.0002	465,864.0002	465,864.0002	465,864.0002

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name:	BAFO -Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	9/8/2020														
	INITIAL CONTRACT PERIOD														
Legacy Network Gateway	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL															
CCS Default Routes	1,820.0400														
SIP Ingress to Cores, per CCS		0.0075		0.0075		0.0075		0.0075		0.0075	0.0075	0.0075	0.0075	0.0075	0.0075
NRC/MRC Region 1 Total	1,820.0400	23,358.8160	0.0000	23,358.8160	0.0000	23,358.8160	0.0000	23,358.8160	0.0000	23,358.8160	23,358.8160	23,358.8160	23,358.8160	23,358.8160	23,358.8160
Region Two Milestone															
SOUTH EAST															
CCS Default Routes	1,820.0400														
SIP Ingress to Cores, per CCS		0.0038		0.0038		0.0038		0.0038		0.0038	0.0038	0.0038	0.0038	0.0038	0.0038
NRC/MRC Region 2 Total	1,820.0400	23,359.0911	0.0000	23,359.0911	0.0000	23,359.0911	0.0000	23,359.0911	0.0000	23,359.0911	23,359.0911	23,359.0911	23,359.0911	23,359.0911	23,359.0911
Region Three Milestone															
METRO															
CCS Default Routes			1,820.0400												
SIP Ingress to Cores, per CCS				0.0025		0.0025		0.0025		0.0025	0.0025	0.0025	0.0025	0.0025	0.0025
NRC/MRC Region 3 Total	0.0000	0.0000	1,820.0400	23,358.4311	0.0000	23,358.4311	0.0000	23,358.4311	0.0000	23,358.4311	23,358.4311	23,358.4311	23,358.4311	23,358.4311	23,358.4311
Region Four Milestone															
NORTH CENTRAL															
CCS Default Routes			1,820.0400												
SIP Ingress to Cores, per CCS				0.0690		0.0690		0.0690		0.0690	0.0690	0.0690	0.0690	0.0690	0.0690
NRC/MRC Region 4 Total	0.0000	0.0000	1,820.0400	23,358.8474	0.0000	23,358.8474	0.0000	23,358.8474	0.0000	23,358.8474	23,358.8474	23,358.8474	23,358.8474	23,358.8474	23,358.8474
Region Five Milestone															
EAST CENTRAL															
CCS Default Routes	1,820.0400														
SIP Ingress to Cores, per CCS		0.0108		0.0108		0.0108		0.0108		0.0108	0.0108	0.0108	0.0108	0.0108	0.0108
NRC/MRC Region 5 Total	1,820.0400	23,358.7885	0.0000	23,358.7885	0.0000	23,358.7885	0.0000	23,358.7885	0.0000	23,358.7885	23,358.7885	23,358.7885	23,358.7885	23,358.7885	23,358.7885
Region Six Milestone															
NORTH EAST															
CCS Default Routes			1,820.0400												
SIP Ingress to Cores, per CCS				0.0170		0.0170		0.0170		0.0170	0.0170	0.0170	0.0170	0.0170	0.0170
NRC/MRC Region 6 Total	0.0000	0.0000	1,820.0400	23,358.8075	0.0000	23,358.8075	0.0000	23,358.8075	0.0000	23,358.8075	23,358.8075	23,358.8075	23,358.8075	23,358.8075	23,358.8075
Region Seven Milestone															
METRO WEST															
CCS Default Routes			1,820.0400												
SIP Ingress to Cores, per CCS				0.0308		0.0308		0.0308		0.0308	0.0308	0.0308	0.0308	0.0308	0.0308
NRC/MRC Region 7 Total	0.0000	0.0000	1,820.0400	23,358.8628	0.0000	23,358.8628	0.0000	23,358.8628	0.0000	23,358.8628	23,358.8628	23,358.8628	23,358.8628	23,358.8628	23,358.8628
LNG Total	**5,460.1200**	**70,076.6956**	**7,280.1600**	**163,511.6445**	**0.0000**	**163,511.6445**	**0.0000**	**163,511.6445**	**0.0000**	**163,511.6445**	**163,511.6445**	**163,511.6445**	**163,511.6445**	**163,511.6445**	**163,511.6445**

Bidder Name:	BAFO -Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	9/8/2020														
	INITIAL CONTRACT PERIOD														
Border Control Function	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
BCF Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name:	BAFO -Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	9/8/2020														
Emergency Services Routing Proxy & Policy Routing Function	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL															
A9-1-1 Routing Services		0.0304		0.0304		0.0304		0.0304		0.0304	0.0304	0.0304	0.0304	0.0304	0.0304
Border Control Function (BCF)															
NRC/MRC Region 1 Total	0.0000	94,624.1304	0.0000	94,624.1304	0.0000	94,624.1304	0.0000	94,624.1304	0.0000	94,624.1304	94,624.1304	94,624.1304	94,624.1304	94,624.1304	94,624.1304
Region Two Milestone															
SOUTH EAST															
A9-1-1 Routing Services		0.0154		0.0154		0.0154		0.0154		0.0154	0.0154	0.0154	0.0154	0.0154	0.0154
Border Control Function (BCF)															
NRC/MRC Region 2 Total	0.0000	94,624.1321	0.0000	94,624.1321	0.0000	94,624.1321	0.0000	94,624.1321	0.0000	94,624.1321	94,624.1321	94,624.1321	94,624.1321	94,624.1321	94,624.1321
Region Three Milestone															
METRO															
A9-1-1 Routing Services				0.0102		0.0102		0.0102		0.0102	0.0102	0.0102	0.0102	0.0102	0.0102
Border Control Function (BCF)															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	94,624.1300	0.0000	94,624.1300	0.0000	94,624.1300	0.0000	94,624.1300	94,624.1300	94,624.1300	94,624.1300	94,624.1300	94,624.1300
Region Four Milestone															
NORTH CENTRAL															
A9-1-1 Routing Services				0.2794		0.2794		0.2794		0.2794	0.2794	0.2794	0.2794	0.2794	0.2794
Border Control Function (BCF)															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	94,624.1316	0.0000	94,624.1316	0.0000	94,624.1316	0.0000	94,624.1316	94,624.1316	94,624.1316	94,624.1316	94,624.1316	94,624.1316
Region Five Milestone															
EAST CENTRAL															
A9-1-1 Routing Services		0.0437		0.0437		0.0437		0.0437		0.0437	0.0437	0.0437	0.0437	0.0437	0.0437
Border Control Function (BCF)															
NRC/MRC Region 5 Total	0.0000	94,624.1313	0.0000	94,624.1313	0.0000	94,624.1313	0.0000	94,624.1313	0.0000	94,624.1313	94,624.1313	94,624.1313	94,624.1313	94,624.1313	94,624.1313
Region Six Milestone															
NORTH EAST															
A9-1-1 Routing Services				0.0690		0.0690		0.0690		0.0690	0.0690	0.0690	0.0690	0.0690	0.0690
Border Control Function (BCF)															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	94,624.1313	0.0000	94,624.1313	0.0000	94,624.1313	0.0000	94,624.1313	94,624.1313	94,624.1313	94,624.1313	94,624.1313	94,624.1313
Region Seven Milestone															
METRO WEST															
A9-1-1 Routing Services				0.1250		0.1250		0.1250		0.1250	0.1250	0.1250	0.1250	0.1250	0.1250
Border Control Function (BCF)															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	94,624.1318	0.0000	94,624.1318	0.0000	94,624.1318	0.0000	94,624.1318	94,624.1318	94,624.1318	94,624.1318	94,624.1318	94,624.1318
ESRP & PRF Total	**0.0000**	**283,872.3938**	**0.0000**	**662,368.9185**	**0.0000**	**662,368.9185**	**0.0000**	**662,368.9185**	**0.0000**	**662,368.9185**	**662,368.9185**	**662,368.9185**	**662,368.9185**	**662,368.9185**	**662,368.9185**

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name:	BAFO -Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	9/8/2020														
Emergency Call Routing Function & Location Validation Function	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL															
i3 Add-on		0.0163		0.0163		0.0163		0.0163		0.0163	0.0163	0.0163	0.0163	0.0163	0.0163
NRC/MRC Region 1 Total	0.0000	50,691.3087	0.0000	50,691.3087	0.0000	50,691.3087	0.0000	50,691.3087	0.0000	50,691.3087	50,691.3087	50,691.3087	50,691.3087	50,691.3087	50,691.3087
Region Two Milestone															
SOUTH EAST															
i3 Add-on		0.0082		0.0082		0.0082		0.0082		0.0082	0.0082	0.0082	0.0082	0.0082	0.0082
NRC/MRC Region 2 Total	0.0000	50,691.3110	0.0000	50,691.3110	0.0000	50,691.3110	0.0000	50,691.3110	0.0000	50,691.3110	50,691.3110	50,691.3110	50,691.3110	50,691.3110	50,691.3110
Region Three Milestone															
METRO															
i3 Add-on				0.0055		0.0055		0.0055		0.0055	0.0055	0.0055	0.0055	0.0055	0.0055
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	50,691.3067	0.0000	50,691.3067	0.0000	50,691.3067	0.0000	50,691.3067	50,691.3067	50,691.3067	50,691.3067	50,691.3067	50,691.3067
Region Four Milestone															
NORTH CENTRAL															
i3 Add-on				0.1497		0.1497		0.1497		0.1497	0.1497	0.1497	0.1497	0.1497	0.1497
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	50,691.3087	0.0000	50,691.3087	0.0000	50,691.3087	0.0000	50,691.3087	50,691.3087	50,691.3087	50,691.3087	50,691.3087	50,691.3087
Region Five Milestone															
EAST CENTRAL															
i3 Add-on		0.0234		0.0234		0.0234		0.0234		0.0234	0.0234	0.0234	0.0234	0.0234	0.0234
NRC/MRC Region 5 Total	0.0000	50,691.3076	0.0000	50,691.3076	0.0000	50,691.3076	0.0000	50,691.3076	0.0000	50,691.3076	50,691.3076	50,691.3076	50,691.3076	50,691.3076	50,691.3076
Region Six Milestone															
NORTH EAST															
i3 Add-on				0.0370		0.0370		0.0370		0.0370	0.0370	0.0370	0.0370	0.0370	0.0370
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	50,691.3080	0.0000	50,691.3080	0.0000	50,691.3080	0.0000	50,691.3080	50,691.3080	50,691.3080	50,691.3080	50,691.3080	50,691.3080
Region Seven Milestone															
METRO WEST															
i3 Add-on				0.0669		0.0669		0.0669		0.0669	0.0669	0.0669	0.0669	0.0669	0.0669
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	50,691.3083	0.0000	50,691.3083	0.0000	50,691.3083	0.0000	50,691.3083	50,691.3083	50,691.3083	50,691.3083	50,691.3083	50,691.3083
ECRF & LVF Total	**0.0000**	**152,073.9273**	**0.0000**	**354,839.1589**	**0.0000**	**354,839.1589**	**0.0000**	**354,839.1589**	**0.0000**	**354,839.1589**	**354,839.1589**	**354,839.1589**	**354,839.1589**	**354,839.1589**	**354,839.1589**

Bidder Name:	BAFO -Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	9/8/2020														
Spatial Interface	**INITIAL CONTRACT PERIOD**														
	YEAR 1		**YEAR 2**		**YEAR 3**		**YEAR 4**		**YEAR 5**		**Year 6**	**Year 7**	**Year 8**	**Year 9**	**Year 10**
	NRC	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**
Region One Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
SI Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name:	BAFO -Centurylink (NGCS & ESINET Solution 2)
Date (MM/DD/YYYY):	9/8/2020

Location Database	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL															
A90101 LDB (ALI)		0.0083		0.0083		0.0083		0.0083		0.0083	0.0083	0.0083	0.0083	0.0083	0.0083
NRC/MRC Region 1 Total	0.0000	25,697.3320	0.0000	25,697.3320	0.0000	25,697.3320	0.0000	25,697.3320	0.0000	25,697.3320	25,697.3320	25,697.3320	25,697.3320	25,697.3320	25,697.3320
Region Two Milestone															
SOUTH EAST															
A90101 LDB (ALI)		0.0042		0.0042		0.0042		0.0042		0.0042	0.0042	0.0042	0.0042	0.0042	0.0042
NRC/MRC Region 2 Total	0.0000	25,697.3294	0.0000	25,697.3294	0.0000	25,697.3294	0.0000	25,697.3294	0.0000	25,697.3294	25,697.3294	25,697.3294	25,697.3294	25,697.3294	25,697.3294
Region Three Milestone															
METRO															
A90101 LDB (ALI)				0.0028		0.0028		0.0028		0.0028	0.0028	0.0028	0.0028	0.0028	0.0028
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	25,697.3314	0.0000	25,697.3314	0.0000	25,697.3314	0.0000	25,697.3314	25,697.3314	25,697.3314	25,697.3314	25,697.3314	25,697.3314
Region Four Milestone															
NORTH CENTRAL															
A90101 LDB (ALI)				0.0759		0.0759		0.0759		0.0759	0.0759	0.0759	0.0759	0.0759	0.0759
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	25,697.3315	0.0000	25,697.3315	0.0000	25,697.3315	0.0000	25,697.3315	25,697.3315	25,697.3315	25,697.3315	25,697.3315	25,697.3315
Region Five Milestone															
EAST CENTRAL															
A90101 LDB (ALI)		0.0119		0.0119		0.0119		0.0119		0.0119	0.0119	0.0119	0.0119	0.0119	0.0119
NRC/MRC Region 5 Total	0.0000	25,697.3325	0.0000	25,697.3325	0.0000	25,697.3325	0.0000	25,697.3325	0.0000	25,697.3325	25,697.3325	25,697.3325	25,697.3325	25,697.3325	25,697.3325
Region Six Milestone															
NORTH EAST															
A90101 LDB (ALI)				0.0188		0.0188		0.0188		0.0188	0.0188	0.0188	0.0188	0.0188	0.0188
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	25,697.3319	0.0000	25,697.3319	0.0000	25,697.3319	0.0000	25,697.3319	25,697.3319	25,697.3319	25,697.3319	25,697.3319	25,697.3319
Region Seven Milestone															
METRO WEST															
A90101 LDB (ALI)				0.0339		0.0339		0.0339		0.0339	0.0339	0.0339	0.0339	0.0339	0.0339
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	25,697.3311	0.0000	25,697.3311	0.0000	25,697.3311	0.0000	25,697.3311	25,697.3311	25,697.3311	25,697.3311	25,697.3311	25,697.3311
LDB Total	**0.0000**	**77,091.9939**	**0.0000**	**179,881.3197**	**0.0000**	**179,881.3197**	**0.0000**	**179,881.3197**	**0.0000**	**179,881.3197**	**179,881.3197**	**179,881.3197**	**179,881.3197**	**179,881.3197**	**179,881.3197**

Bidder Name:	BAFO -Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	9/8/2020														
Miscellaneous	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL															
Network Monitoring (NMS)		0.0008		0.0008		0.0008		0.0008		0.0008	0.0008	0.0008	0.0008	0.0008	0.0008
UPS	2,880.0000														
LABOR	3,486.0000														
NRC/MRC Region 1 Total	6,366.0000	2,519.9990	0.0000	2,519.9990	0.0000	2,519.9990	0.0000	2,519.9990	0.0000	2,519.9990	2,519.9990	2,519.9990	2,519.9990	2,519.9990	2,519.9990
Region Two Milestone															
SOUTH EAST															
Network Monitoring (NMS)		0.0004		0.0004		0.0004		0.0004		0.0004	0.0004	0.0004	0.0004	0.0004	0.0004
UPS	2,880.0000														
LABOR	3,486.0000														
NRC/MRC Region 2 Total	6,366.0000	2,519.9979	0.0000	2,519.9979	0.0000	2,519.9979	0.0000	2,519.9979	0.0000	2,519.9979	2,519.9979	2,519.9979	2,519.9979	2,519.9979	2,519.9979
Region Three Milestone															
METRO															
Network Monitoring (NMS)				0.0003		0.0003		0.0003		0.0003	0.0003	0.0003	0.0003	0.0003	0.0003
UPS			2,880.0000												
LABOR			3,486.0000												
NRC/MRC Region 3 Total	0.0000	0.0000	6,366.0000	2,520.0036	0.0000	2,520.0036	0.0000	2,520.0036	0.0000	2,520.0036	2,520.0036	2,520.0036	2,520.0036	2,520.0036	2,520.0036
Region Four Milestone															
NORTH CENTRAL															
Network Monitoring (NMS)				0.0074		0.0074		0.0074		0.0074	0.0074	0.0074	0.0074	0.0074	0.0074
UPS			2,880.0000												
LABOR			3,486.0000												
NRC/MRC Region 4 Total	0.0000	0.0000	6,366.0000	2,519.9999	0.0000	2,519.9999	0.0000	2,519.9999	0.0000	2,519.9999	2,519.9999	2,519.9999	2,519.9999	2,519.9999	2,519.9999
Region Five Milestone															
EAST CENTRAL															
Network Monitoring (NMS)		0.0012		0.0012		0.0012		0.0012		0.0012	0.0012	0.0012	0.0012	0.0012	0.0012
UPS	2,880.0000														
LABOR	3,486.0000														
NRC/MRC Region 5 Total	6,366.0000	2,519.9991	0.0000	2,519.9991	0.0000	2,519.9991	0.0000	2,519.9991	0.0000	2,519.9991	2,519.9991	2,519.9991	2,519.9991	2,519.9991	2,519.9991
Region Six Milestone															
NORTH EAST															
Network Monitoring (NMS)				0.0018		0.0018		0.0018		0.0018	0.0018	0.0018	0.0018	0.0018	0.0018
UPS			2,880.0000												
LABOR			3,486.0000												
NRC/MRC Region 6 Total	0.0000	0.0000	6,366.0000	2,520.0002	0.0000	2,520.0002	0.0000	2,520.0002	0.0000	2,520.0002	2,520.0002	2,520.0002	2,520.0002	2,520.0002	2,520.0002
Region Seven Milestone															
METRO WEST															
Network Monitoring (NMS)				0.0033		0.0033		0.0033		0.0033	0.0033	0.0033	0.0033	0.0033	0.0033
UPS			2,880.0000												
LABOR			3,486.0000												
NRC/MRC Region 7 Total	0.0000	0.0000	6,366.0000	2,520.0002	0.0000	2,520.0002	0.0000	2,520.0002	0.0000	2,520.0002	2,520.0002	2,520.0002	2,520.0002	2,520.0002	2,520.0002
MISC Total	**19,098.0000**	**7,559.9960**	**25,464.0000**	**17,639.9999**	**0.0000**	**17,639.9999**	**0.0000**	**17,639.9999**	**0.0000**	**17,639.9999**	**17,639.9999**	**17,639.9999**	**17,639.9999**	**17,639.9999**	**17,639.9999**

Bidder Name:	BAFO -Centurylink (NGCS & ESINET Solution 2)
Date (MM/DD/YYYY):	9/8/2020

Optional Svc for NGCS	**INITIAL CONTRACT PERIOD**														
	YEAR 1		**YEAR 2**		**YEAR 3**		**YEAR 4**		**YEAR 5**		**Year 6**	**Year 7**	**Year 8**	**Year 9**	**Year 10**
	NRC	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**
Region One Milestone															
SOUTH CENTRAL															
TSP Provisioning installation and/or Restoration priority	578.0000														
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 1 Total	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
SOUTH EAST															
TSP Provisioning installation and/or Restoration priority	578.0000														
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 2 Total	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
METRO															
TSP Provisioning installation and/or Restoration priority			578.0000												
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 3 Total	0.0000	0.0000	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
NORTH CENTRAL															
TSP Provisioning installation and/or Restoration priority			578.0000												
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 4 Total	0.0000	0.0000	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
EAST CENTRAL															
TSP Provisioning installation and/or Restoration priority	578.0000														
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 5 Total	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
NORTH EAST															
TSP Provisioning installation and/or Restoration priority			578.0000												
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 6 Total	0.0000	0.0000	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
METRO WEST															
TSP Provisioning installation and/or Restoration priority			578.0000												
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 7 Total	0.0000	0.0000	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Opt. Svc NGCS Total	**1,734.0000**	**0.0000**	**2,312.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

CenturyLink

Response to Request for Proposal

State of Nebraska

Next Generation 911 Emergency Services
IP Network (ESInet) and Next Generation Core Services (NGCS)

RFP No.: 6264 Z1



Technical Proposal 2

June 3, 2020

CenturyLink

CenturyLink's proposal may contain CenturyLink trademarks, trade secrets, and other proprietary information and may not be disclosed to a third party without the prior written consent of CenturyLink. CenturyLink acknowledges that the proposal may be subject to disclosure in whole or in part under applicable freedom of information, open records, or sunshine laws and regulations (collectively, "FOI"). CenturyLink requests that customer provide CenturyLink with prompt notice of any intended disclosures, including copies of copies of applicable FOI for review, and an appropriate opportunity to seek protection of CenturyLink confidential and proprietary information consistent with all applicable laws and regulations.

LEGAL STATEMENT:

Informational Purposes Only
CenturyLink has endeavored to provide responses as requested by the RFP, but our response is not intended to create a binding contractual commitment between the parties without further discussions between the parties and execution of a mutually acceptable agreement. Specifically, our responses and our offer are dependent upon the final solution and information exchanged during discussions between the parties. Therefore, regardless of any condition contained within the RFP, including but not limited to CenturyLink's signature to its submission, the responses are informational only and are provided for your evaluation.

Contract Structure
As requested by the RFP, CenturyLink is proposing to provide its Services pursuant to the Terms and Conditions contained in *Section II. Terms and Conditions* of the RFP ("RFP Terms and Conditions"), as modified by CenturyLink's exceptions, clarifications, and additions in this response and subject to further discussion and negotiation by the parties to arrive at mutually agreeable terms. CenturyLink has made every effort to provide limited exceptions to the RFP Terms and Conditions, and requests changes consistent with terms the parties have agreed to in the past as much as possible. Many requested language changes are similar to the provisions agreed to in Contract 70987 O4 for network services, signed by the parties in 2016. However, some proposed terms necessarily differ from what the parties have agreed to in past contracts due to the unique and high-risk nature of 911 services. Accordingly, CenturyLink has proposed some additional and different terms that are necessary for CenturyLink to maintain an appropriate risk profile for the provision of 911 services and allows us to offer our 911-related services at competitive rates. In preparing this response, CenturyLink has made every effort to streamline its response and to comply with the terms of the RFP to the maximum extent possible.

As permitted by the introductory paragraphs of *Section II. Terms and Conditions* of the RFP, CenturyLink has included with our proposal the service exhibits, service level agreements (SLAs), and technical documents that apply to the services proposed (collectively, the "CenturyLink Attachments"). CenturyLink's proposal to provide its Services pursuant to the RFP Terms and Conditions specifically contemplates that the RFP Terms and Conditions will be modified and supplemented by the CenturyLink Attachments, and that the RFP Terms and Conditions will be negotiated and modified in accordance with CenturyLink's exceptions and clarifications contained in this response. Our response is dependent upon incorporating the CenturyLink Attachments into the final agreement between the parties. If there is any conflict between the RFP Terms and Conditions, the responses provided, and the CenturyLink Attachments, the CenturyLink Attachments control and contain the complete CenturyLink offer. In the context of an intent to award, CenturyLink anticipates that the parties will discuss and review the exceptions and clarifications provided in this response and the CenturyLink Attachments and that these documents and terms will be incorporated into a final definitive contract in the manner mutually agreed to by the parties.

Affiliated Companies
CenturyLink services are provided through affiliated companies. The CenturyLink Contract and/or the applicable Service Exhibits attached thereto will identify the legal CenturyLink affiliate providing the services.

Critical 9-1-1 Circuits
To the extent services are provided in the United States, the Federal Communications Commission's 9-1-1 reliability rules mandate the identification and tagging of certain circuits or equivalent data paths that transport 9-1-1 calls and information ("9-1-1 Data") to public safety answering points defined as Critical 911 Circuits in 47 C.F.R. Section 9.4(a)(5). CenturyLink policies require tagging of any circuits or equivalent data paths used to transport 9-1-1 Data. We require that customers agree to cooperate with CenturyLink regarding compliance with these rules and policies and to notify CenturyLink of all Services customers purchase under the Agreement utilized as Critical 911 Circuits or for 9-1-1 Data.

Insurance
CenturyLink purchases sufficient insurance limits to protect the company from risks and liabilities associated with providing its commercial services and products. CenturyLink's standard coverage is in accordance with generally accepted industry standards for the type services and/or work proposed. CenturyLink's Memorandum of Insurance is available at www.centurylink.com/moi.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

TABLE OF CONTENTS

COVER LETTER 1
EXECUTIVE SUMMARY 2
A. PROPOSAL SUBMISSION 9
1. CORPORATE OVERVIEW 9
II. TERMS AND CONDITIONS 30
III. CONTRACTOR DUTIES 44
IV. PAYMENT 54
V. PROJECT DESCRIPTION AND SCOPE OF WORK 57
2. TECHNICAL APPROACH 65
FORM A BIDDER PROPOSAL POINT OF CONTACT 69
REQUEST FOR PROPOSAL FOR CONTRACTUAL SERVICES FORM 70
ATTACHMENTS, ADDENDA, APPENDICES, AND BROCHURES 71
RFP 6264 Z1 CenturyLink Proposal 2 Option C File 2 of 4 (Cost Proposal) 71
RFP 6264 Z1 CenturyLink Proposal 2 Option C File 3 of 4 (Attachment C Option C) 71
RFP 6264 Z1 CenturyLink Proposal 2 Option C File 4 of 4 (PROPRIETARY INFORMATION) 71
6264 Z1 Addendum One 3-25-2020 71
6264 Z1 Addendum Two 3-27-2020 71
6264 Z1 Addendum Three 4-16-2020 71
6264 Z1 Addendum Four Questions and Answers 4.22.20 final Q&A Answers - NE RFP 71
6264 Z1 Addendum Five 4-22-20 Revised SOE Revised Schedule - NE RFP NG911 71
6264 Z1 Addendum Six 5-7-2020 Questions and Answers Round Two final 71
6264 Z1 Addendum Seven 5-15-20 Questions and Answers additional question 71
6264 Z1 CC LLC NE Cert of Good Standing 71
1.A.1.i Key Employees ResumesNG911 Resumes_Combined 71
1_a_CC__LLC_Certificate_of_Name_Change__Incorporation 71
2.d_ CenturyLink Sample Program Management Plan for Nebraska 71
2.d ss15_SAMPLE Staging and Acceptance Checklist 71
2.d_Testing_Sample CenturyLink Test Plan 71
2.e Sample Nebraska_Draft Project Schedule_Gantt Chart Format 71
3.B I 9 Compliance Certification_Q1 2020_Letterhead 71
Att A_MPLS (IPVPN and VPLS) VPN Service Schedule 72
Att B_Local Access Service Exhibit with Pricing Attachment 72
Att C_SLA_Local Access 72
Att D_Domestic Network Diversity Service Exhibit 72

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Att E_SLA_Diversity 72
Att F_CenturyLink Select Advantage Service Exhibit 72
Att J_Telecommunications Service Priority (TSP) 72
Att K_Data Security Addendum 72
Att L_QCC Network Management Service (NMS) Exhibit 72
Att M_SLA_NMS 72
Att N_NextGen 911 Service Schedule (Intrado) 72
NGCS_78_Intrado 9-1-1EGDMS User Guide_3.4 72
SEC 3 Security Compliance Matrix 72
SLA 5 Brix_probe_PSAP_Troubleshooting 72
SLA 5 PSAP_Active_Test_V4-Example 72
CenturyLink-Intrado PROPRIETARY INFORMATION Reasons 72
ESI_10_ESInet to ESInet Intercon Specification_v2.1.1_PROPRIETARY 72
Attachment C Option C - PROPRIETARY INFORMATION 72
NGCS_23_OSP NNI v1.6.1_PROPRIETARY 72
NGCS_75_ADR-AdditionalData Interface Specif_v1.3.1docx_PROPRIETARY 72
NGCS_75_ECRF-LoST Interface Specification_v1.4.2_PROPRIETARY 72
NGCS_75_LIS-HELD Interface Specification_v1.4_PROPRIETARY 72
NGCS_78_ESRP-Term ESRP Interface Specification_v1.4.1_PROPRIETARY 72
A.1.e NE Active Contracts Public Saftey & SoNE PROPRIETARY 72

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

COVER LETTER

June 3, 2020

Annette Walton / Nancy Storant, Procurement Contacts
State of Nebraska State Purchasing Bureau
1526 K St. Suite 130
Lincoln, NE 68508

Dear Mss. Walton and Storant,

CenturyLink is pleased to present this response to your Request for Proposal for Contractual Services related to RFP 6264 Z1 to provide a Next Generation 911 Emergency Services IP Network (ESInet) and Next Generation Core Services (NGCS).

CenturyLink has made every effort to respond with accurate and relevant information. Occasionally, it was necessary for CenturyLink to make assumptions to formulate a timely response. Therefore, CenturyLink reserves the right to correct any errors and to modify any responses based on the final solution or information received during further discussions. Notwithstanding anything in this response to the contrary, including CenturyLink's signature on its response, CenturyLink will not be legally bound until execution of a mutually agreed-upon definitive agreement.

Best regards,

Jon Osborne



Central Region Account Director Public Safety
Public Sector
118 South 19th Street Omaha, NE, 68102
Tel: (402) 998-7392 Cell: (402) 216-1009 Fax: (402) 422-3545
jon.osborne1@CenturyLink.com

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

EXECUTIVE SUMMARY

CenturyLink is proud to respond to the Next Gen 911 Emergency Services IP Network (ESInet) and Next Generation Core Services (NGCS) RFP with a history of successfully supporting 9-1-1 services throughout the United States for more than 60 years. CenturyLink is fully committed to supporting the State of Nebraska Public Service Commission (PSC) and all 68 PSAPS in the implementation and support of an Emergency Services IP Network (ESInet) and Next Generation Core Services (NGCS) solution.

CenturyLink understands there are several reasons to engage in the journey of NG9-1-1. NENA states, "anyone should be able to connect to 9-1-1 on any device, from anywhere, at any time" with the goal of saving more lives. NG9-1-1's new technology will deliver faster call set up, more accurate caller location, sophisticated policy-based routing, and waves of new data. The journey of NG9-1-1 is complicated, but with the right partner it can be done successfully. All the right players need to be at the table, the best designed technology must be deployed, and all the work needs to be organized.

The complexity of NG9-1-1 requires effective collaboration. CenturyLink is proud to have been a part of the state's transition process and to have met with Mission Critical Partners in January 2017 to provide input to the "Nebraska Public Service Commission 9-1-1 Service Plan". Since then, CenturyLink has remained focused on assisting the PSC and the PSAPs execute their plan. CenturyLink is ready to deliver the PSC's plan functional areas of 911 System Design, integration of Geographic Information System data, Continuity of Operations & Disaster Recovery, and coordination with FirstNet.

The complexity of NG9-1-1 also requires a single point of management for all elements of the NG9-1-1 solution. CenturyLink's ESInet will be the fabric that connects all elements of the state's NG9-1-1 solution. Nebraska's PSAPs and the PSC will benefit from full visibility and management of the entire solution and the ability to have a single point of contact with the state's trusted partner: CenturyLink.

Why CenturyLink does collaboration better

In order to deliver the best, feature-rich, i3 compliant, and public safety grade NG9-1-1 solution for the State of Nebraska, effective collaboration between all players in the ecosystem is essential.
A CenturyLink-led journey of NG9-1-1 is designed with all the elements required to produce effective collaboration - the right team, effective conversations to explore all the options, and flexible thinking. The goal of CenturyLink's methodology is to develop an implementation plan that will deliver all designed functionality on time and within budget.

CenturyLink's commitment to the State of Nebraska

CenturyLink's resume of data transformation experience is expansive. CenturyLink is recognized as a worldwide leading provider of networking solutions, security solutions, cloud-based strategies, and products through a Unified Communications suite. Because our solution portfolio is comprehensive, our public safety customers have the unique advantage of making choices to create a NG9-1-1 solution that best meets their needs.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.



CenturyLink is proud of its long history of partnering with the State of Nebraska to deliver communications technology that has made a positive impact on government institutions, businesses, and citizens. Specifically, CenturyLink has decades of experience working with Nebraska public safety professionals to deliver public safety solutions that save lives, protect property, and ensure the safety of first responders.

CenturyLink's commitment to the State of Nebraska shines bright in the lives of our dedicated team of 9-1-1 service technicians. For example, Craig Blocher, a Nebraska native with 15 years servicing 9-1-1 PSAPs believes he is, "making a real difference and is contributing to saving lives in Nebraska." Craig's dedication to his customers is demonstrated by his detailed technical training and expertise, his ongoing communication, and his willingness to quickly respond in a time of need. Craig was a part of the team that installed the first Intrado VIPER system in Douglas County in 2005. He is also the first technician to install the first multi-node hosted solution in Buffalo and Dawson County for the South Central Region. According to Craig, he is, "driven by his tremendous sense of pride in his job, the friendships he's made, and supporting Nebraska's 9-1-1 services."

CenturyLink's 9-1-1 experience



CenturyLink provides 9-1-1 solutions to 1572 PSAPs across 35 states and has implemented and managed NG9-1-1 solutions (ESInets and NGCS) in nine states. Our experience with 9-1-1 dates to the

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

first 9-1-1 call made in 1968. As NG9-1-1 has evolved, CenturyLink has worked with our customers to understand all the technology options available and helped them make the technology choices that best fit their situation. CenturyLink recognizes there is no “one size fits all” to NG9-1-1 and has assembled a broad portfolio of technology options available to our customers.


CenturyLink’s NG9-1-1 solution is built on the foundation of our world class reliable, resilient, fault tolerant, secure, and i3 compliant ESInet. Current and future next generation core services (e.g., GIS-based call routing) will be integrated into our ESInet to provide the State of Nebraska with a full range of NG9-1-1 functionality designed to better connect citizens to PSAPs. Armed with more accurate location information, new data sources, and enhanced call routing management, Nebraska PSAPs will be able to improve the situational awareness of first responders.

CenturyLink’s Public Safety Network Operations Center (NOC) stands ready to manage Nebraska’s CenturyLink ESInet and NGCS solution to ensure superior performance and timely notification of any service impacting event. Our 24/7/365 Public Safety NOC is constantly assessing the health of the network and quickly responding with appropriate notifications and actions. Additionally, CenturyLink’s industry leading security solutions and practices will be deployed to scan the ESInet and identify and resolve any vulnerabilities. By adopting CenturyLink’s approach to NG9-1-1 solutions, Public Safety professionals across the state can be confident that their PSAP will be ready to answer calls for help and save lives.

CenturyLink’s NG9-1-1 Strategic Design Approach

A CenturyLink-led NG9-1-1 journey begins with a comprehensive NG9-1-1 Solution Development Workshop (SDW). During the SDW, CenturyLink will lead collaborative discussions on design options, security strategies, program/project plans and roles, and responsibilities. At the conclusion of the SDW, the right plan will be identified to ensure the project delivers all functionality on time and within budget. An SDW is part of our overall NG9-1-1 solution transformation methodology (shown below).

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

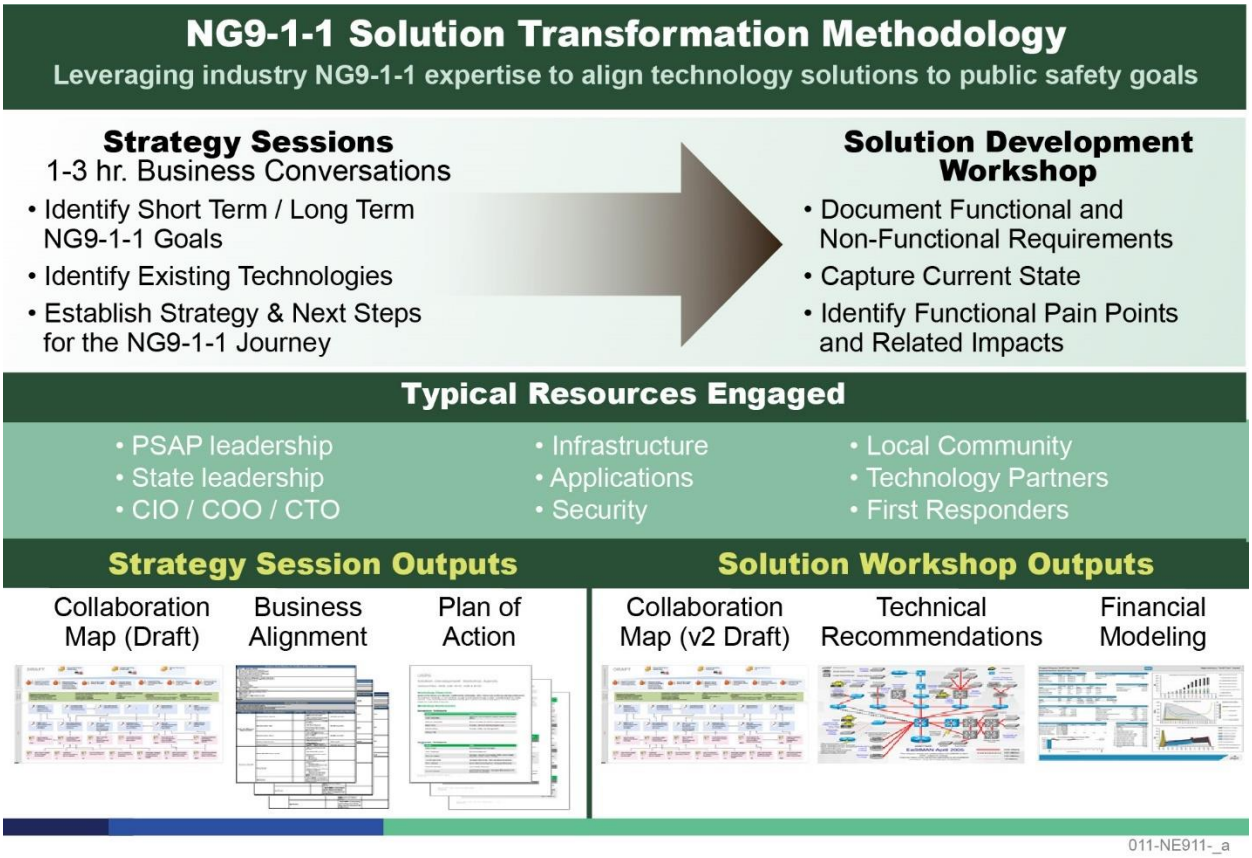

Our NG9-1-1 design principles drive our approach to creating and managing NG9-1-1 solutions that save lives and property protect first responders. Our design principles Influence all we do and include the following:

1. Solutions based on ***i3 standards***.
2. Highly reliable, resilient, and redundant ***Public Safety Grade*** design
3. NG9-1-1 building blocks that ***Future Proof*** your solution
4. ***Flexible design process*** that explores all the available options
5. Collaboration on a Program Development Plan document that details the installation process and timelines

CenturyLink Next Generation Core Services Design Options

In this procurement, CenturyLink is offering two NGCS technology options – 1) CenturyLink NGCS (Synergem Technologies) and 2) CenturyLink NGCS (Intrado). Both NGCS options have been proven in customer implementations in several states. Additionally, both NGCS options are delivered over CenturyLink's industry leading, Public Safety grade ESInet is hardened by CenturyLink cybersecurity technology and managed by CenturyLink's 24x7x365 NOC.

Both NGCS platforms provide the full suite of next generation core services required to complete a NG9-1-1 emergency call. In both options, the functionality delivered is consistent with i3 standards. CenturyLink is confident either option will meet and exceed the requirements defined in the "Nebraska Public Service Commission 9-1-1 Service Plan".

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

CenturyLink commits to a series of collaborative discussions within our NG9-1-1 Solutions Transformation Methodology to determine which option fits best with the state's strategic vision for the future.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

State of Nebraska State Purchasing Bureau
REQUEST FOR PROPOSAL FOR CONTRACTUAL SERVICES

RETURN TO:
Name: State Purchasing Bureau
Address: 1526 K St. Suite 130
City/State/Zip: Lincoln, NE 68508
Phone: 402-471-6500

SOLICITATION NUMBER	RELEASE DATE
RFP 6264 Z1	March 17, 2020
OPENING DATE AND TIME	**PROCUREMENT CONTACT**
June 3, 2020, 2:00 P.M. Central Time	Annette Walton / Nancy Storant

PLEASE READ CAREFULLY!

SCOPE OF SERVICE

The State of Nebraska (State), Department of Administrative Services (DAS), Materiel Division, State Purchasing Bureau (SPB), is issuing this Request for Proposal (RFP) Number 6264 Z1 for the purpose of selecting a qualified bidder to provide a Next Generation 911 Emergency Services IP Network (ESInet) and Next Generation Core Services (NGCS). A more detailed description can be found in Section V. The resulting contract may not be an exclusive contract as the State reserves the right to contract for the same or similar services from other sources now or in the future.

The term of the contract will be five (5) years commencing upon notice to proceed. The Contract includes the option to renew for five (5) additional one (1) year periods upon mutual agreement of the Parties. The State reserves the right to extend the period of this contract beyond the termination date when mutually agreeable to the Parties.

ALL INFORMATION PERTINENT TO THIS REQUEST FOR PROPOSAL CAN BE FOUND ON THE INTERNET AT: **http://das.nebraska.gov/materiel/purchasing.html**.

An optional Pre-Proposal Conference will be held on April 1, 2020 from 10:00 AM – 12:00 PM at 1526 K St. Lincoln, NE 68508.

IMPORTANT NOTICE: Pursuant to Neb. Rev. Stat. § 84-602.04, State contracts in effect as of January 1, 2014, and contracts entered into thereafter, must be posted to a public website. The resulting contract, the solicitation, and the awarded bidder's proposal or response will be posted to a public website managed by DAS, which can be found at http://statecontracts.nebraska.gov.

In addition, and in furtherance of the State's public records Statute (Neb. Rev. Stat. § 84-712 et seq.), all proposals or responses received regarding this solicitation will be posted to the State Purchasing Bureau public website.

These postings will include the entire proposal or response. Bidders must request that proprietary information be excluded from the posting. The bidder must identify the proprietary information, mark the proprietary information according to state law, and submit the proprietary information in a separate container or envelope marked conspicuously using an indelible method with the words "PROPRIETARY INFORMATION" or as a separate electronic file. The bidder must submit a detailed written document showing that the release of the proprietary information would give a business advantage to named business competitor(s) and explain how the named business competitor(s) will gain an actual business advantage by disclosure of information. The mere assertion that information is proprietary or that a speculative business advantage might be gained is not sufficient. (See Attorney General Opinion No. 92068, April 27, 1992) THE BIDDER MAY NOT ASSERT THAT THE ENTIRE PROPOSAL IS PROPRIETARY. COST PROPOSALS WILL NOT BE CONSIDERED PROPRIETARY AND ARE A PUBLIC RECORD IN THE STATE OF NEBRASKA. The State will determine, in its sole discretion, if the disclosure of the information designated by the Bidder as proprietary would 1) give advantage to business competitors and 2) serve no public purpose. The Bidder will be notified of the State's decision. Absent a determination by the State that the information may be withheld pursuant to Neb. Rev. Stat. § 84-712.05, the State will consider all information a public record subject to disclosure.

If the agency determines it is required to release proprietary information, the bidder will be informed. It will be the bidder's responsibility to defend the bidder's asserted interest in non-disclosure.

To facilitate such public postings, with the exception of proprietary information, the State of Nebraska reserves a royalty-free, nonexclusive, and irrevocable right to copy, reproduce, publish, post to a website, or otherwise use any contract, proposal, or response to this solicitation for any purpose, and to authorize others to use the documents. Any individual or entity awarded a contract, or who submits a proposal or response to this solicitation, specifically waives any copyright or other protection the contract, proposal, or response to the solicitation may have; and, acknowledges that they have the ability and authority to enter into such waiver.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

This reservation and waiver are a prerequisite for submitting a proposal or response to this solicitation, and award of a contract. Failure to agree to the reservation and waiver will result in the proposal or response to the solicitation being found non-responsive and rejected.

Any entity awarded a contract or submitting a proposal or response to the solicitation agrees not to sue, file a claim, or make a demand of any kind, and will indemnify and hold harmless the State and its employees, volunteers, agents, and its elected and appointed officials from and against any and all claims, liens, demands, damages, liability, actions, causes of action, losses, judgments, costs, and expenses of every nature, including investigation costs and expenses, settlement costs, and attorney fees and expenses, sustained or asserted against the State, arising out of, resulting from, or attributable to the posting of the contract or the proposals and responses to the solicitation, awards, and other documents.

Response:

CenturyLink understands the requirements regarding labeling and submission of proprietary information and has followed those requirements in its submission of this proposal. If the State evaluates the material CenturyLink has submitted as proprietary information and determines that it does not meet the State requirements for non-disclosure, CenturyLink respectfully requests that, prior to disclosing such information, the State provides CenturyLink with notice and a reasonable opportunity to respond to and remedy such reasons for non-compliance prior to the disclosure so as to prevent and/or limit the disclosure. In such scenario, CenturyLink respectfully reserves the right to amend its response to revise or withdraw the material that was submitted as proprietary in order to protect the proprietary status of such information. CenturyLink's primary concerns are to ensure that certain information related to 911 configuration or security must remain proprietary in order to protect 911-related services from potential security threats or vulnerabilities, and to maintain the proprietary nature of CenturyLink's 911 service offers from being disclosed to competitors.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

A. PROPOSAL SUBMISSION

1. CORPORATE OVERVIEW

The Corporate Overview section of the Technical Proposal should consist of the following subdivisions:

a. BIDDER IDENTIFICATION AND INFORMATION

The bidder should provide the full company or corporate name, address of the company's headquarters, entity organization (corporation, partnership, proprietorship), state in which the bidder is incorporated or otherwise organized to do business, year in which the bidder first organized to do business and whether the name and form of organization has changed since first organized.

Response:

CenturyLink Communications, LLC d/b/a "CenturyLink"
931 14th Street, # 900
Denver, CO. 80202

CenturyLink Communications, LLC is a single member limited liability company and its sole member is CenturyLink, Inc.

CenturyLink's Headquarters is located at 100 CenturyLink Drive, Monroe, LA. 71203

CenturyLink Communications, LLC f/k/a Qwest Communications Company, LLC was "Organized" in Delaware June 10, 1966; the charter number in Delaware is: 0642301.

The attachment named "1_a_CC__LLC_Certificate_of_Name_Change__Incorporation" shows the Name Change Certificate of Amendment that became effective on April 1, 2014.

b. FINANCIAL STATEMENTS

The bidder should provide financial statements applicable to the firm. If publicly held, the bidder should provide a copy of the corporation's most recent audited financial reports and statements, and the name, address, and telephone number of the fiscally responsible representative of the bidder's financial or banking organization.

If the bidder is not a publicly held corporation, either the reports and statements required of a publicly held corporation, or a description of the organization, including size, longevity, client base, areas of specialization and expertise, and any other pertinent information, should be submitted in such a manner that proposal evaluators may reasonably formulate a determination about the stability and financial strength of the organization. Additionally, a non-publicly held firm should provide a banking reference.

The bidder must disclose any and all judgments, pending or expected litigation, or other real or potential financial reversals, which might materially affect the viability or stability of the organization, or state that no such condition is known to exist.

The State may elect to use a third party to conduct credit checks as part of the corporate overview evaluation.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Response:
Complete financial information, including CenturyLink Inc.'s annual Form 10-K and quarterly reports on Form 10-Q are **available for review on our Investor Relations web site at:** https://ir.centurylink.com/financials/sec-filings/default.aspx
Each **of the last three annual Form 10-K report are in excess of 200 pages. If printed copies of the financial statements are desired, CenturyLink will provide them upon request.**

Contact information for CenturyLink's banking **references is as follows:**

Courtney R Broderick
Assistant Vice President
Treasury Management Sales Consultant
U.S. Bank
425 Walnut Street Cincinnati, OH 45202
(414) 765-6118
courtney.broderick@usbank.com

Pablo Pinedo
Executive Director, Corporate & Investment Bank Treasury Services
J.P. Morgan
4 New York Plaza, 13th Floor
New York, NY 10004
(212) 623-8786
pablo.m.pinedo@jpmorgan.com

Due to size of CenturyLink, various suits, proceedings, and claims typical for an enterprise business can be pending against CenturyLink at any one time. While it is not possible to determine the ultimate disposition and resolution of any suits, proceedings or claims, and whether they are consistent with CenturyLink's position, CenturyLink expects the outcome of such proceedings, individually or in aggregate, will not have a materially adverse effect on the financial condition or results of CenturyLink operations or its business segments; nor negatively affect its ability to provide the services proposed.

As a public corporation, CenturyLink is required to fully disclose material data and relevant information that may influence investment decisions to all investors at the same time. CenturyLink does not provide detailed information on litigation except through its securities filings. Please refer to CenturyLink's Annual Report on Form 10-K, available on http://www.centurylink.com/ for a description of certain litigation or claims.

CenturyLink has read and understands that the State may elect to use a third party to conduct credit checks as part of the corporate overview evaluation..

c. CHANGE OF OWNERSHIP
If any change in ownership or control of the company is anticipated during the twelve (12) months following the proposal due date, the bidder should describe the circumstances of such change and indicate when the change will likely occur. Any change of ownership to an awarded bidder(s) will require notification to the State.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Response:
No change of ownership within CenturyLink is anticipated during the 12 months following the proposal due date. As a public company subject to securities laws disclosure and filing requirements, CenturyLink would provide any such notice of change of ownership to the extent permitted by applicable securities laws**.**

d. OFFICE LOCATION

The bidder's office location responsible for performance pursuant to an award of a contract with the State of Nebraska should be identified.

Response:
CenturyLink
118 S 19th St.
Omaha, NE 68105

e. RELATIONSHIPS WITH THE STATE

The bidder should describe any dealings with the State over the previous five (5 years. If the organization, its predecessor, or any Party named in the bidder's proposal response has contracted with the State, the bidder should identify the contract number(s) and/or any other information available to identify such contract(s). If no such contracts exist, so declare.

Response:
CenturyLink understands and complies. CenturyLink, formerly Qwest, has a long history of servicing the State of Nebraska Government agencies, specifically in Public Safety.

In the last five years, CenturyLink has extensively participated in the development and support of the of the Nebraska Public Service Commission "9-1-1 Service System Plan" in preparation for the implementation of NG9-1-1. The CenturyLink local support team has acted in one capacity or another as the consultant, design engineers, support technicians, and project managers with the South Central, North Central, East Central, Northeast, Metro, and Metro West 911 regions. The team has also consulted with individual PSAPS not associated with an assigned region. We helped upgrade multiple regions' call handling and networks in preparation NG9-1-1. Currently, a member of our Nebraska Public safety local support team was appointed to the Public Service Commission 911 Service System Advisory Committee. As a member of this committee, CenturyLink has not only been able to support at the PSAP level, but also support the Public Service Commission 911 initiatives.

We currently have 93 active Public Safety specific contracts with 29 PSAPs. These contracts support network, call handling equipment, and call routing. CenturyLink is the predominate Local Exchange Carrier (LEC) in the state and provides an extensive network of voice and data circuits. CenturyLink owns four of the five 911 selective routers which transmit 911 calls via our network to the respective PSAPS.

CenturyLink has multiple voice and data circuits and 911 trunks that are contracted via the State of Nebraska Tariff; implemented on 9/29/2000 "Qwest Corporation Exchange and Network Services Catalog". Additionally, within the last five years, CenturyLink has accumulated a total of 68 voice and data master contracts/amendments. These are contracted through the State of Nebraska OCIO. Every government entity: state, county, and local municipality are able to purchase off of these existing contracts. There are 93 counties and 531 cities and villages in the State that may have individual voice or data

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

contracts with CenturyLink. We have provided all public safety CPE, maintenance, and network contracts and the 68 master contracts/amendments. The State of Nebraska Tariff; "Qwest Corporation Exchange and Network Services Catalog" can be accessed via the two links below.

https://www.centurylink.com/aboutus/legal/tariff-library.html

http://www.centurylink.com/tariffs/ne_qc_ens_c.pdf

NE%20Active%20Contracts%20Public%2

Please see the PROPRIETARY INFORMATION in file 4 of 4
File named: A.1.e NE Active Contracts Public Saftey & SoNE PROPRIETARY

f. BIDDER'S EMPLOYEE RELATIONS TO STATE

If any Party named in the bidder's proposal response is or was an employee of the State within the past five (5) months, identify the individual(s) by name, State agency with whom employed, job title or position held with the State, and separation date. If no such relationship exists or has existed, so declare.

If any employee of any agency of the State of Nebraska is employed by the bidder or is a subcontractor to the bidder, as of the due date for proposal submission, identify all such persons by name, position held with the bidder, and position held with the State (including job title and agency). Describe the responsibilities of such persons within the proposing organization. If, after review of this information by the State, it is determined that a conflict of interest exists or may exist, the bidder may be disqualified from further consideration in this proposal. If no such relationship exists, so declare.

Response:

No CenturyLink employee was an employee of the State within the last five months. CenturyLink is not aware of any employee relationships with the State that would be considered a conflict of interest .

g. CONTRACT PERFORMANCE

If the bidder or any proposed subcontractor has had a contract terminated for default during the past five (5) years, all such instances must be described as required below. Termination for default is defined as a notice to stop performance delivery due to the bidder's non-performance or poor performance, and the issue was either not litigated due to inaction on the part of the bidder or litigated and such litigation determined the bidder to be in default.

It is mandatory that the bidder submit full details of all termination for default experienced during the past five (5)) years, including the other Party's name, address, and telephone number. The response to this section must present the bidder's position on the matter. The State will evaluate the facts and will score the bidder's proposal accordingly. If no such termination for default has been experienced by the bidder in the past five (5) years, so declare.

If at any time during the past five (5) years, the bidder has had a contract terminated for convenience, non-performance, non-allocation of funds, or any other reason, describe

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

fully all circumstances surrounding such termination, including the name and address of the other contracting Party.

Response:
Please see our response to Item 1.B Financial Statements above. Additionally, this question is extremely broad and would require disclosure of information that is confidential and beyond the scope of this proposal. Despite CenturyLink's reasonable efforts to avoid disputes, the sheer volume of contracts entered into by CenturyLink dictates that CenturyLink is occasionally involved in contract disputes. CenturyLink is not aware of any disputes or relevant defaults at the time of this response that will have a material negative impact on our ability to provide the services proposed**.**

h. SUMMARY OF BIDDER'S CORPORATE EXPERIENCE

The bidder should provide a summary matrix listing the previous projects similar to this solicitation in size, scope, and complexity. The State will use no more than three (3) narrative project descriptions submitted by the bidder during its evaluation of the proposal.

The bidder should address the following:

i. Provide narrative descriptions to highlight the similarities between the bidder's experience and this solicitation. Provide the number of ESInet and NGCS solutions implemented by the bidder that are in production today and lessons learned throughout the project that will be applied to the deployment of the Nebraska ESInet and NGCS solution. These descriptions should include:

a) The time period of the project.
b) The scheduled and actual completion dates.
c) The bidder's responsibilities.
d) For reference purposes, contracting entity name, contact name, contact title, contact email address, and contact telephone number. The Commission may request that references authorize a site visit and the opportunity to review event logs.); and
e) Each project description should identify whether the work was performed as the prime Contractor or as a subcontractor. If a bidder performed as the prime Contractor, the description should provide the originally scheduled completion date and budget, as well as the actual (or currently planned) completion date and actual (or currently planned) budget.

Response:
CenturyLink has read, understands, and complies. Three references are provided below.

Reference # 1

a) The time period of the project;	ESInet installed in 2013 to 2016
b) The scheduled and actual completion dates;	Matched requested timeframe
c) The bidder's responsibilities;	Provide NGCS through the state-wide ESInet
d) For reference purposes, contracting entity name, contact name, contact title, contact email address, and contact telephone number. The Commission may request that	State of North Dakota Jason Horning, EMP Jason.horning@ndaco.org 701-328-7334

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

references authorize a site visit and the opportunity to review event logs.); and	In an effort to respect our customers' confidential and proprietary information and accommodate schedules of all parties involved to yield the most productive discussions possible, we respectfully request that communication with CenturyLink's references be coordinated through Jon Osborne, your Central Region Account Director (402) 998-7392; jon.osborne1@centurylink.com or Bjorn Johnson, your CenturyLink Senior Account Manager, at Bjorn.Johnson@CenturyLink.com or at (605) 977-2820.
e) Each project description should identify whether the work was performed as the prime Contractor or as a subcontractor. If a bidder performed as the prime Contractor, the description should provide the originally scheduled completion date and budget, as well as the actual (or currently planned) completion date and actual (or currently planned) budget.	CenturyLink was Prime Contractor for the North Dakota State-wide implementation of NGCS. CenturyLink was the Prime Contractor for the North Dakota State-wide ESInet project incorporating all PSAPS within the State of North Dakota. Phase one completion finished 2017 within budget and timeline. Phase two is ongoing and will include GIS integration.

Reference # 2

a) The time period of the project;	2019 – February of 2020
b) The scheduled and actual completion dates;	December of 2019
c) The bidder's responsibilities;	Managed Emergency Call Handling including State-wide NG Core Services and Hosted Call Handling System.
d) For reference purposes, contracting entity name, contact name, contact title, contact email address, and contact telephone number. The Commission may request that references authorize a site visit and the opportunity to review event logs.); and	State of South Dakota Maria King – State 911 Coordinator maria.king@state.sd.us (605) 773-3264 In an effort to respect our customers' confidential and proprietary information and accommodate schedules of all parties involved to yield the most productive discussions possible, we respectfully request that communication with CenturyLink's references be coordinated through Jon Osborne, your Central Region Account Director (402) 998-7392; jon.osborne1@centurylink.com or Bjorn

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

	Johnson, your CenturyLink Senior Account Manager, at Bjorn.Johnson@CenturyLink.com or at (605) 977-2820.. .
e) Each project description should identify whether the work was performed as the prime Contractor or as a subcontractor. If a bidder performed as the prime Contractor, the description should provide the originally scheduled completion date and budget, as well as the actual (or currently planned) completion date and actual (or currently planned) budget.	CenturyLink was Prime Contractor in implementing a State-wide ESInet with hosted call handling. The solution is a completely managed system including 911 Ingress, Core Services, Egress and Call Handling Services. All monitoring and maintenance are provided for the term of the agreement. The State of South Dakota had an incredibly aggressive 6-month implementation timeline. CenturyLink was the Prime Contractor on the NG911 project, and the project completed within budget. The projects only delay was due to additional Core Network Improvements that was undetermined at the start of the project. Through a collaboration and design enhancements the completion was delayed by only 2 months and still fell within acceptable parameters set by the state.

Reference # 3

a) The time period of the project;	March 2017 – April 2019
b) The scheduled and actual completion dates;	Matched requested timeframe
c) The bidder's responsibilities;	Managed Emergency Call Handling including State-wide NG Core Services and Hosted Call Handling System.
d) For reference purposes, contracting entity name, contact name, contact title, contact email address, and contact telephone number. The Commission may request that references authorize a site visit and the opportunity to review event logs.); and	Pima County, Arizona Sheila Blevins, Pima County 911 Administrator, sblevins@marana.com, 520-382-2038 In an effort to respect our customers' confidential and proprietary information

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

	and accommodate schedules of all parties involved to yield the most productive discussions possible, we respectfully request that communication with CenturyLink's references be coordinated through Jon Osborne, your Central Region Account Director (402) 998-7392; jon.osborne1@centurylink.com or Bjorn Johnson, your CenturyLink Senior Account Manager, at Bjorn.Johnson@CenturyLink.com or at (605) 977-2820.
e) Each project description should identify whether the work was performed as the prime Contractor or as a subcontractor. If a bidder performed as the prime Contractor, the description should provide the originally scheduled completion date and budget, as well as the actual (or currently planned) completion date and actual (or currently planned) budget.	CenturyLink was Prime Contractor. PIMA County has a population of 1M+ - that include 10 PSAPs. CenturyLink Implemented, NG911 Core services Network and Hosted CenturyLink MECH product (Managed Emergency Call Handing) and TXT 2 9-1-1. Description of services provided: i3 compliant NG911 Core services, hosted VESTA Call handling equipment, integrated Text to 911, mapping, 24x7x365 monitoring and security of entire network and CPE. 24x7x365 maintenance and software support. Full implementation which includes training pre and post deployment, project management and a suite of additional services.

ii. Contractor and subcontractor(s) experience should be listed separately. Narrative descriptions submitted for subcontractors should be specifically identified as subcontractor projects.

Response:
CenturyLink has read, understands, complies. CenturyLink's vendors are listed as subcontractors and are listed as such in the description below**.**

iii. If the work was performed as a subcontractor, the narrative description should identify the same information as requested for the Contractors above. In addition, subcontractors should identify what share of contract costs, project responsibilities, and time period were performed as a subcontractor.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Response:
CenturyLink has read, understands, complies, and offers aforementioned description of subcontractor(s) most recent experience. Including the narrative description that identifies the same information as requested for the Contractors above. Project responsibilities and time period is listed. Contract costs are not included and are considered to be customer specific proprietary information. Therefore, contract cost is not listed.

Intrado acted as the subcontractor and worked directly with CenturyLink in the installation of Minnesota – Statewide ESINET Deployment, South Dakota – Statewide ESINET Deployment including VIPER as a hosted Statewide Deployment, and Arizona South Dakota – Statewide ESINET Deployment including VIPER as a hosted Statewide Deployment. Responsibilities included provisioning and turn up of SS7 trunks from the LSRs (or IP trunks in the case of SD), hardware ordering and installation, data collection at a per PSAP level, provisioning of the IPSR/NGCS, interop testing with the PSAP and CPE on site overall project planning, scheduling additional vendors and parties as needed, setting up SRDB feeds from the ALI provider, and managing the day of cut event.

Minnesota – Statewide ESINET Deployment –Phase 1 – Interop Planning and Infrastructure Deployment - October 2009 to August 2011 RCL/LNG Selection, Contracts secured and Installation Connectivity to RCLs and all MN Legacy Selective Routers Provisioning Platform for Statewide Deployment General Project Planning. Phase 2 – Beta Site Deployments – September 2011 to March 2012. Carver County SO and Kandiyohi CO SO PSAP Deployments completes as part of Beta Phase. Phase 3 – PSAP Deployments – March 2012 to February 2014. Deployed 105 Minnesota PSAPs. All MN PSAPs deployed at end of Phase 3.

South Dakota – Statewide ESINET Deployment – This was a VIPER Hosted Statewide Deployment. Phase 1 – Interop Planning and Infrastructure Deployment - June 2019 to October 2019. General Project Planning IP connectivity to Selective Routers tested and put in place Provisioning Platform for Statewide Deployment. Phase 2 – PSAP Deployments – November 2019 to February 2020. Deployed 30 South Dakota PSAPs. All participating SD PSAPs deployed at end of Phase 2.

Arizona – ESINET Deployment – This was a VIPER and VESTA Hosted Deployment. Phase 1 – Interop Planning and Infrastructure Deployment - May 2016 to February 2017. RCL/LNG Selection, Contracts secured and Installation. Connectivity to RCLs and all AZ Legacy Selective Routers Provisioning Platform for Statewide Deployment General Project Planning. Phase 2 – PSAP Deployments – March 2017 to August 2019. Deployed 44 Arizona PSAPs. All participating AZ PSAPs deployed at end of Phase 2.

i. SUMMARY OF BIDDER'S PROPOSED PERSONNEL/MANAGEMENT APPROACH
The bidder should present a detailed description of its proposed approach to the management of the project.

The bidder should identify the specific professionals who will work on the State's project if their company is awarded the contract resulting from this solicitation. The names and titles of the team proposed for assignment to the State project should be identified in full, with a description of the team leadership, interface and support functions, and reporting relationships. The primary work assigned to each person should also be identified.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Project managers assigned to the project shall be certified Project Management Professionals (PMP) and are highly encouraged to possess the Emergency Number Professional (ENP) certification.

The bidder should provide resumes for all personnel proposed to work on the project. The State will consider the resumes as a key indicator of the bidder's understanding of the skill mixes required to carry out the requirements of the solicitation in addition to assessing the experience of specific individuals.

Resumes should not be longer than three (3) pages. Resumes should include, at a minimum, academic background and degrees, professional certifications, understanding of the process, and at least three (3) references (name, address, and telephone number) who can attest to the competence and skill level of the individual. Any changes in proposed personnel shall only be implemented after written approval from the State.

Response:

CenturyLink describes our two-team approach for program/project management and account management below. In the initial meeting with the State, after the contract is awarded, both teams will be represented to explain our management approach.

CenturyLink's Program Management team will be involved in the planning and installation of services and products until the service implementation is accepted and the project is complete. CenturyLink's account management team is assigned during the bid process and will provide dedicated services to the State throughout the term of the contract. Each team is described below.

CenturyLink Standard Program/Project Management Approach

CenturyLink Program/Project Management (CPrgM & CPM) adheres to Best Practices Methodology as prescribed by the Project Management Institute standards and ITILv3. The CPrgM/CPM charter underscores CenturyLink's commitment to facilitate a seamless transition for our customer's communications services to CenturyLink's network, ensure compliance with the terms of the contract, and maintain customer satisfaction throughout the project life cycle. We believe that by following these proven project management practices, the project milestones can be successfully achieved. The PMO's goal and commitment is to professionally manage and deliver projects on time and with satisfaction. CenturyLink is committed to the successful implementation of our customer's projects through the skills of Project Management by providing:

- Experienced, professional CPMs (many with PMP certifications)
- Recognized Authority to Manage and Direct Team Members and Resources
- Extensive Telecommunications Background
- Overall Project Management Background
- Project Management as a Functional Role within CenturyLink

A CPrgM will engage after the contract negotiations have been finalized. Throughout the program lifecycle, Maggie Cook, PMP, CISSP, CCSK and ITIL certified, will work with the CenturyLink Account team to provide customer support across the organizations of CenturyLink. Ms. Cook will serve as the CenturyLink Single Point of Contact, during the implementation and transition phase, to identify critical project success factors and mutually negotiate modifications and time frames for inclusion in the customized Project Plan. Maggie will:

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

- Provide high-quality services through efficient, resourceful and responsive Program/Project Management
- Confirm compliance with terms of contract
- Maintain customer satisfaction
- Ensure project meets scheduling and technical requirements
- Manage external suppliers, vendors, and third-party contributors to the project
- Facilitate rapid response to changing technologies and environments through change/configuration management

Program and Project Management Representatives

Please note that the final Program/Project Plan, including the development of components such as the communications plan, test plan, cutover plan, and actual timeline (with expected task duration and detailed task assignments) will be developed after contract award and will be tailored to the unique needs, requirements, and scope of the customer's contract. This document will be developed after a thorough review of the contract, SOW, and discussion with the CenturyLink Account Team, the CenturyLink Operations & Network teams, and the customer's representatives. A sample of what the Program Development Plan will look like is in the appendix named "**4.2.C_CenturyLink Sample Program Development Plan for Nebraska**".

Account Team Introduction


Our Account and Service Teams are structured around a clear, focused, and disciplined market strategy designed to drive near and long-term value to our customers who we serve by delivering solutions and value that our competitors cannot easily duplicate.

The company's open management model drives fast decision-making and promotes discipline, enabling CenturyLink to be closer to its customers and to more responsively deliver services to the market and reply to individual customer requests. CenturyLink's global sales and support model matches its network footprint and delivers a consistent and superior customer experience worldwide.

CenturyLink's vision "is to be the recognized leader in connecting business, people and information around the world".

Below is the organizational chart for the CenturyLink Account Team that will be dedicated to the Nebraska account.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

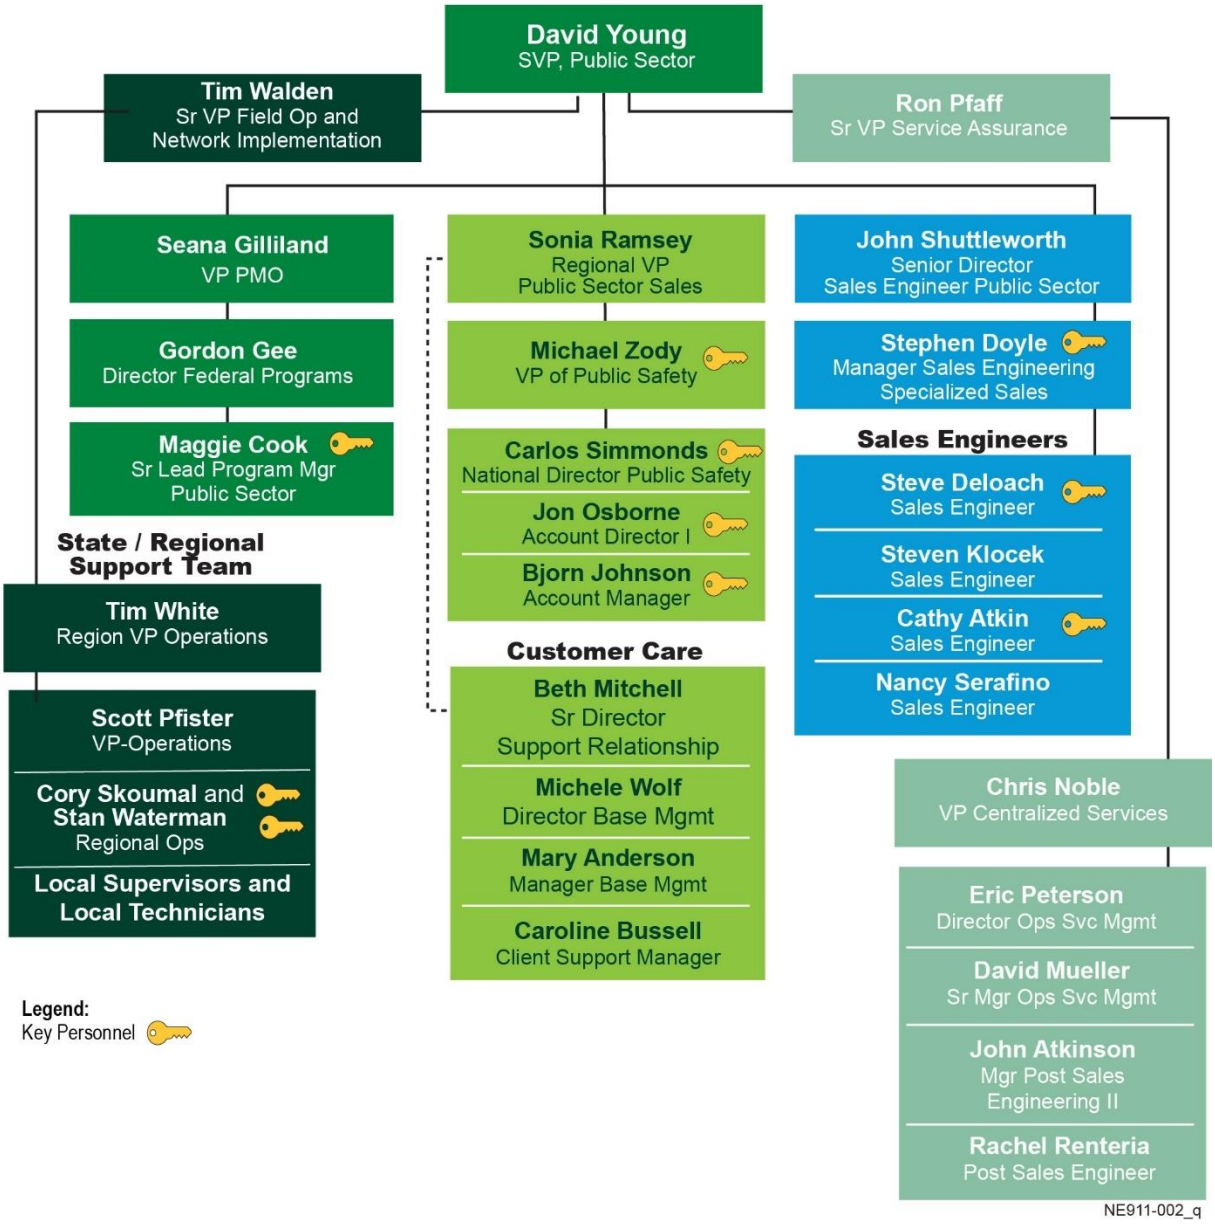

Below is an account team profile. It provides the title, responsibilities, contact information, years of experience, and certifications, if applicable, for each member of the account team that has worked on the 911 NGCS system design and/or will work on the project. Please note that Maggie Cook is PMP, CISSP, CCSK and ITIL certified and Nancy Serafino is ENP certified.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

The CenturyLink Account Team Profiles for Nebraska

Account Team Experience and Expertise

Title	Responsibility	CenturyLink Personnel and Contact Information	Experience
Sr. Account Manager - SLED	Proposes customer solutions based on customer requirements and needs resulting in decisions for CenturyLink. Provides consultative oriented solutions sales leveraging the CenturyLink Corporate portfolio. Collaborates with technical and other support services, and with other CenturyLink sales resources to maximize sales focus. Leads account strategy planning and build key customer relationships.	Bjorn Johnson Bjorn.Johnson@centurylink.com Office: 605 977 2820 Cell: 605 321 6188	25 Years of Industry experience managing large complex enterprise accounts 2+ years' experience in the Public Safety, State & County Government, and Education markets.
Account Director I - SLED	Strategically engages with state and local leadership through establishing C-Level and Director level relationships within multiple market verticals. Specifically, State Government and 911 Public Safety. Supports State 911 Agencies and acts as center point of contact to resolve issues quickly	Jon Osborne Jon.Osborne1@centurylink.com Office: 402 998 7392 Cell: 402 216 1009	17+ years in telecommunications and leadership roles. 6+ years in Public Safety and Government support roles. Member of APCO and NENA. Active in 911 Local Advisory boards and Government Community support roles
National Director 9-1-1 Public Safety	Oversees national public safety sales team. Responsible for the success of the business unit and customer projects. Aligns ecosystem partners to ensure successful delivery of revenue commitments.	Carlos Simmonds Carlos.Simmonds@centurylink.com Office: 602 512 2535 Cell: 602 319 4758	19+ years in telecommunications. 13 years in Public Safety, State, Local Government and education market leadership. Active member of NENA and APCO as well as various local community organizations.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Title	Responsibility	CenturyLink Personnel and Contact Information	Experience
VP of Public Safety	Oversees administrative sales staff that identifies markets and outline strategies. Coordinates a team that helps government, education and public safety sector organizations implement proven IT solutions to address public infrastructure continuity, ensure safety and security, facilitate economic growth, build stronger educational systems and augment technology needs.	Michael Zody michael.zody@centurylink.com Office: 610 785 1486 Cell: 717 443 9535	30+ years in telecommunications and IT leadership roles. 20+ years in Public Sector enterprise roles. Corporate Alliance member of NASCIO and NASTD. Active in Local Government and Community roles
Senior Sales Engineer	Responsible for reviewing technical requirements of solicitation to design and architect world-class networking solutions.	Steve Deloach Steve.Deloach@CenturyLink.com Office: 407 252-6333 Mobile: 407 252-6333	Over 20 Years Public Safety Experience. Over 30 years Combined Service with CenturyLink. Served on NC 911 Wireless Board in 2013.
Senior Sales Engineer	Responsible for reviewing technical requirements of solicitation to design and architect world-class networking solutions.	Steven Klocek Steven.Klocek@CenturyLink.com Office: 763 400 5492 Cell: 952 857 9609	Over 36 years of experience in the Telecommunications Industry. 21+ years' experience in the Public Safety, State & County Government, and Education markets. Strong performance in Next Gen 911,
Senior Sales Engineer	Responsible for reviewing technical requirements of solicitation to design and architect world-class networking solutions.	Cathy Atkin Cathy.Atkin@CenturyLink.com Office: 520 526 1877 Cell: 520 331 3021	45 years with CenturyLink in support of both Global Enterprise Customers and Government and Education Services. MISM - University of Phoenix, Cisco-CCNA/CCDA, Avaya, Juniper,Mitel, Vesta, Viper, VMWare Certified

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Title	Responsibility	CenturyLink Personnel and Contact Information	Experience
Senior Sales Engineer	Responsible for reviewing technical requirements of solicitation to design and architect world-class networking solutions.	Nancy Serafino Nancy.C.Serafino@centurylink.com Office: 419 755 7366 Mobile: 419 610 6645	32+ years' experience with CenturyLink. 25 years serving 911 customers throughout the US. **ENP Professional**. State 911 Technical Advisory Committee 5 years
Manager Sales Engineering Specialized Sales	Manages Sales Engineers who are focused on the technical aspects of the solution. Serves as first point of escalation for any design-related issues.	Stephen Doyle Stephen.Doyle@CenturyLink.com Office: 520 292 5618 Mobile: 520 904 5699	41 years with CenturyLink in support of both Global Enterprise Customers and Government and Education Services. MISM - University of Phoenix, Cisco, Adtran, Avaya, Mitel, Vesta, Viper Certified
Senior Director Sales Engineer Public Sector	Responsible for all aspects of the pre-sales engineering/solution architecture functions for the CTL Public Sector.	John Shuttleworth john.shuttleworth@centurylink.com Office: 571 730 6522 Cell: 703 407 6177	39 years Telecom Engineering and Solution Architecture with CenturyLink. Additional prior experience in wireline and wireless technologies.
Client Support Manager (CSM)	The CSM is your on-going personal contacts for support. Your CSM will be the main support contacts for order review, input and tracking through install, and reviewing your service to ensure that it is up to date. Additional responsibilities include maintaining the account for inventory accuracy, assisting with implementation and review and handling of billing and credits.	Caroline Bussell caroline.bussell@centurylink.com Cell: 317 697 4499	2+ years of Industry experience, Government, Education and Public Safety in both sales and sales support roles. BA- Indiana University Telecommunications & Sociology

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Title	Responsibility	CenturyLink Personnel and Contact Information	Experience
Manager Base Management	Responsible for the all CSMs that support Strategic Accounts within CenturyLink's territory. The manager is a point of escalation and is the point of ultimate responsibility for overall customer satisfaction. Responds to billing inquiries and resolves billing disputes. Proactively monitors service provider-billing accuracy. Works with order processing group to minimize billing errors on the front end.	Mary Anderson Mary.Anderson1@centurylink.com Office: 402 998 7386 Mobile: 402 215 2282	17 years telecom experience, 13 years as Customer Service Manager 5 years at CenturyLink
Director, Base Management	Manages the Account Consultants and Service Managers. Dedicated to working with our Government & Education Services (GES) clients in either a sales or sales support role.	Michele Wolf Michele.Wolf@CenturyLink.com Office: 952 885 3940 Mobile: 651 492 3361	19 years' experience with CenturyLink MBA from Augsburg College and BS – Economics and Business Management Lean Six Sigma Green Belt
Post Sales Engineer & Service Manager	The Service Assurance Manager is the post sales technical support and repair escalation. Your Service Assurance Manager will assist in trouble ticket management, escalation and provide RFO (reason for outage) upon request. Additional responsibilities include coordination of change management and client business review and recommendations. The Service Assurance Manager reports directly to the Regional Support Manager.	Rachel Renteria Rachel.Renteria@centurylink.com Office: 214 989 3577	26 years telecom experience with 7 at CenturyLink. CCNA, with 20 years of Service Management experience and 10 years NOC management.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Title	Responsibility	CenturyLink Personnel and Contact Information	Experience
Manager Post Sales Engineering II	Manager Post Sales Engineering responsible for overall operational performance for regional clients within the Public Sector.	John Atkinson John.Atkinson@CenturyLink.com Office: 602 563 3292 Cell: 480 888 5104	33 years of service at CenturyLink including 13 years in service management and over 15 in a NOC environment
Sr Mgr Operations Service Management	Sr. Manager Operations Service Management responsible for overall operational performance for all clients supported by Operations Service Managers and Post Sales Engineers within the Public Sector.	David Mueller dave.mueller@centurylink.com Office: 720 888 2634 Cell: 303 905 7432	18 years in the telecommunications industry with 16 at CenturyLink and legacy companies. Lean Six Sigma Green Belt, Bachelor's in political science, MBA
Dir Operations Service Management	Director of Operations Service Management responsible for overall operational performance for all clients supported by Operations Service Managers and Post Sales Engineers within CenturyLink.	Eric Peterson eric.peterson@centurylink.com Office: 918 547 7754 Cell: 918 809 1994	22 years with CenturyLink, bachelor's in finance, MBA.
Manager Regional Operations II	Responsible for overall field operations including installation and maintenance of fiber and copper transport networks and installation and maintenance of all 911 equipment and CPE. Oversee all CenturyLink Technician activities	Stan Waterman Stan.Waterman@centurylink.com Office: 531 301 3080 Cell: 308 631 2653	39 Yrs. Telecommunication experience including Installation, maintenance and construction of CenturyLink network and residential and enterprise customers. Manage teams doing this work
Manager Regional Operations II	Responsible for overall field operations including installation and maintenance of fiber and copper transport networks and installation and maintenance of all 911 equipment and CPE. Oversee all CenturyLink Technician activities	Cory Skoumal Cory.Skoumal@CenturyLink.com Office: 402 998 6012 Cell: 402 320 6261	20 Yrs. Telecommunication experience including, managing teams of engineers, installation and maintenance teams for residential and enterprise customers
VP Operations	Located in Houston, TX. Responsible for field provisioning, maintenance, and repair of physical plant in TX, NM, KS, NE, OK	Scott Pfister scott.pfister@centurylink.com Office: 281 618 3972 Cell: 214 755 4239	25 years with CenturyLink, bachelor's in finance.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Title	Responsibility	CenturyLink Personnel and Contact Information	Experience
Sr. Lead Program Manager (PM)	Oversees overall implementation including project planning development, project execution, quality, change control, meeting coordination, and documentation. Main customer point of contact and integrator, ensuring compliance with contract terms and objectives are incorporated consistently throughout the project implementation.	Maggie Cook margaret.cook@centurylink.com Office: 571 730 3096 Cell: 703 867 2095	26+ years in the telecommunication industry, with 15+ years focused on mission critical Department of Defense networks. B.S in Information Systems, Certified Project Management Professional (PMP) since 2005. Certified Information Systems Security Professional (CISSP), Cloud Computing Security Knowledge (CCSK) and Information Technology Infrastructure Library (ITIL) certified
Director Public Sector Program Management	Responsible for all aspects of the Project Management process for the lifecycle of a project's implementation. Directly responsible for PMO managers and, by extension, individual contributors. Point of escalation both internally and customer-facing, to ensure appropriate project support and alignment with project goals.	Gordon Gee gordon.gee@centurylink.com Office: 571 730 6591 Cell: 703 593 0080	30 years in the telecommunications industry and 8 years with CenturyLink. B.Sc. Electrical Engineering and MBA – Carey Business School, Johns Hopkins University
Customer Data Technician	Responsible for all aspects of installation and maintenance of 911 systems. Including Network elements and CPE.	Craig Blocher Craig.Blocher@centurylink.com Office: 308 324 3302 Cell: 308 325 5234	30 yrs. Telecommunication experience 15 yrs. Specific 911 experience Intrado Viper Certified Enterprise Design Services installation and maintenance of fiber and copper networks

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Title	Responsibility	CenturyLink Personnel and Contact Information	Experience
Customer Data Technician	Responsible for all aspects of installation and maintenance of 911 systems. Including Network elements and CPE.	Jim Stacy James.Stacy@centurylink.com Office: 308 530 4011 Cell: 308 530 4011	12 yrs. Telecommunications experience 1 yr. specific 911 experience Intrado Viper Certified Enterprise Design Services installation and maintenance of fiber and copper networks
Customer Data Technician	Responsible for all aspects of installation and maintenance of 911 systems. Including Network elements and CPE.	Don Cramer Donald.Cramer@CenturyLink.com Office: 402 708 3261 Cell: 402 708 3261	25 yrs. Telecommunications experience 14 yrs. Specific 911 experience Intrado Viper training Enterprise Design Services installation and maintenance of fiber and copper networks
Customer Data Technician	Responsible for all aspects of installation and maintenance of 911 systems. Including Network elements and CPE.	Ryan Scott Ryan.Scott@centurylink.com Office: 402 592 6016 Cell: 402 312 4880	22 yrs. Telecommunications experience 13 yrs. specific 911 experience Intrado Viper training Lifeline training Enterprise Design Services installation and maintenance of fiber and copper networks
Customer Data Technician	Responsible for all aspects of installation and maintenance of 911 systems. Including Network elements and CPE.	Tom Hodge Thomas.v.hodge@centurylink.com Office: 402 727 4974 Cell: 402 720 2883	29 yrs. telecommunication experience 16 yrs. specific 911 experience Intrado Viper Certified Lifeline Certified Enterprise Design Services installation and maintenance of fiber and copper networks

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Title	Responsibility	CenturyLink Personnel and Contact Information	Experience
Central Office Technician	Responsible for the installation and maintenance of fiber and copper transport networks in NE.	Christopher Kautz Christopher.Kautz@centurylink.com Office: 402 644 3530 Cell: 402 290 8317	27 yrs. Telecommunications experience installation and maintenance of fiber and copper transport networks
Central Office Technician	Responsible for the installation and maintenance of fiber and copper transport networks in NE.	Grant True Grant.True@centurylink.com Office: 402-433-5182 Cell: 402 433 5182	25 yrs. Telecommunications experience installation and maintenance of fiber and copper transport networks
Central Office Technician	Responsible for the installation and maintenance of fiber and copper transport networks in NE.	Brenda Kobobel-Troy Brenda.Kobobel-Troy@centurylink.com Office: 402 336 1144 Cell: 402 340 4616	30 yrs. Telecommunications experience installation and maintenance of fiber and copper transport networks

CenturyLink reserves the right to make changes to its organization. CenturyLink understands the importance of consistency in personnel and will attempt to limit changes. CenturyLink agrees that the State may request personnel changes and CenturyLink will work with the State to address any concerns, but we must ultimately retain responsibility for how our employees are assigned to projects.

CenturyLink has detailed the project plan and timeline in the Program Management Plan (PMP). CenturyLink presents the resumes for the people who will work on the State's project and focus on providing an excellent customer experience in the attachment named "I.A.1.i Key Employee Resumes".

j. SUBCONTRACTORS

If the bidder intends to subcontract any part of its performance hereunder, the bidder should provide:

i. name, address, and telephone number of the subcontractor(s);

Response:
Intrado Life & Safety, Inc.
1601 Dry Creek Drive
Longmont, CO 80504
720-494-5800

ii. specific tasks for each subcontractor(s);

Response: Intrado's responsibilities included provisioning and turn up of SS7 trunks from the LSRs (or IP trunks in the case of SD), hardware ordering and install, data collection at a per PSAP level, provisioning of the IPSR/NGCS, interop testing with the PSAP and CPE on site with CenturyLink, assisting in overall project planning, scheduling additional vendors and parties as needed, and managing the day of cut event. Ongoing

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

tasks include supporting CenturyLink's Project Management/Program Management and providing GIS and Location Database management.

iii. percentage of performance hours intended for each subcontract; and

Response: Intrado will have approximately 40% of the contract hours

iv. total percentage of subcontractor(s) performance hours.

Response: Intrado will have approximately 40% of the contract hours

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

II. TERMS AND CONDITIONS

Bidders should complete Sections II through VI as part of their proposal. Bidders should read the Terms and Conditions and should initial either accept, reject, or reject and provide alternative language for each clause. The bidder should also provide an explanation of why the bidder rejected the clause or rejected the clause and provided alternate language. By signing the solicitation, bidder is agreeing to be legally bound by all the accepted terms and conditions, and any proposed alternative terms and conditions submitted with the proposal. The State reserves the right to negotiate rejected or proposed alternative language. If the State and bidder fail to agree on the final Terms and Conditions, the State reserves the right to reject the proposal. The State of Nebraska is soliciting proposals in response to this solicitation. The State of Nebraska reserves the right to reject proposals that attempt to substitute the bidder's commercial contracts and/or documents for this solicitation.

Bidders should submit with their proposal any license, user agreement, service level agreement, or similar documents that the bidder wants incorporated in the Contract. The State will not consider incorporation of any document not submitted with the bidder's proposal as the document will not have been included in the evaluation process. These documents shall be subject to negotiation and will be incorporated as addendums if agreed to by the Parties.

If a conflict or ambiguity arises after the Addendum to Contract Award have been negotiated and agreed to, the Addendum to Contract Award shall be interpreted as follows:1. If only one Party has a particular clause then that clause shall control;

2. If both Parties have a similar clause, but the clauses do not conflict, the clauses shall be read together;
3. If both Parties have a similar clause, but the clauses conflict, the State's clause shall control.

A. GENERAL

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	CenturyLink requests a revision to the order or precedence consistent with what the parties have agreed to in prior contracts and as shown below. This change ensures clarity about any modifications to the RFP specifications provided in CenturyLink's response and ensures the final definitive contract between the parties reflecting the specific solution selected by the State takes first priority: 1) Amendment to the executed Contract with the most recent dated amendment having the highest priority, 2) executed Contract and any attached Addenda or Service Attachments, 3) the bidder's submitted Proposal, 4) Amendments to solicitation and any Questions and Answers, 5) the original solicitation document and any Addenda

The contract resulting from this solicitation shall incorporate the following documents:

1. Request for Proposal and Addenda;
2. Amendments to the solicitation;
3. Questions and Answers;

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

4. Bidder's proposal (Solicitation and properly submitted documents);
5. The executed Contract and Addendum One to Contract, if applicable; and,
6. Amendments/Addendums to the Contract.

These documents constitute the entirety of the contract.

Unless otherwise specifically stated in a future contract amendment, in case of any conflict between the incorporated documents, the documents shall govern in the following order of preference with number one (1) receiving preference over all other documents and with each lower numbered document having preference over any higher numbered document: 1) Amendment to the executed Contract with the most recent dated amendment having the highest priority, 2) executed Contract and any attached Addenda, 3) Amendments to solicitation and any Questions and Answers, 4) the original solicitation document and any Addenda, and 5) the bidder's submitted Proposal.

Any ambiguity or conflict in the contract discovered after its execution, not otherwise addressed herein, shall be resolved in accordance with the rules of contract interpretation as established in the State of Nebraska.

B. NOTIFICATION

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			Regarding Item D, Governing Law, CenturyLink understands that the State of Nebraska must comply with applicable law, statutes, and regulations. However, rather than include a blanket statement that the contract may be overridden for a broad list of reasons, CenturyLink proposes that the parties should closely review the contract during the finalization process and ensure that that terms in the contract comply with applicable laws. The parties will benefit from the certainty of having definitive contract terms that can only be changed via a mutually agreed upon amendment to the contract.

Contractor and State shall identify the contract manager who shall serve as the point of contact for the executed contract.

Communications regarding the executed contract shall be in writing and shall be deemed to have been given if delivered personally or mailed, by U.S. Mail, postage prepaid, return receipt requested, to the parties at their respective addresses set forth below, or at such other addresses as may be specified in writing by either of the parties. All notices, requests, or communications shall be deemed effective upon personal delivery or five (5) calendar days following deposit in the mail.

Either party may change its address for notification purposes by giving notice of the change, and setting forth the new address and an effective date.

C. BUYER'S REPRESENTATIVE

The State reserves the right to appoint a Buyer's Representative to manage (or assist the Buyer in managing) the contract on behalf of the State. The Buyer's Representative will be appointed in writing, and the appointment document will specify the extent of the Buyer's Representative authority and responsibilities. If a Buyer's Representative is appointed, the Contractor will be

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

provided a copy of the appointment document, and is required to cooperate accordingly with the Buyer's Representative. The Buyer's Representative has no authority to bind the State to a contract, amendment, addendum, or other change or addition to the contract.

D. GOVERNING LAW (Statutory)

Notwithstanding any other provision of this contract, or any amendment or addendum(s) entered into contemporaneously or at a later time, the parties understand and agree that, (1) the State of Nebraska is a sovereign state and its authority to contract is therefore subject to limitation by the State's Constitution, statutes, common law, and regulation; (2) this contract will be interpreted and enforced under the laws of the State of Nebraska; (3) any action to enforce the provisions of this agreement must be brought in the State of Nebraska per state law. (4) the person signing this contract on behalf of the State of Nebraska does not have the authority to waive the State's sovereign immunity, statutes, common law, or regulations; (5) the indemnity, limitation of liability, remedy, and other similar provisions of the final contract, if any, are entered into subject to the State's Constitution, statutes, common law, regulations, and sovereign immunity; and, (6) all terms and conditions of the final contract, including but not limited to the clauses concerning third party use, licenses, warranties, limitations of liability, governing law and venue, usage verification, indemnity, liability, remedy or other similar provisions of the final contract are entered into specifically subject to the State's Constitution, statutes, common law, regulations, and sovereign immunity.

The Parties must comply with all applicable local, state and federal laws, ordinances, rules, orders, and regulations.

E. BEGINNING OF WORK

The bidder shall not commence any billable work until a valid contract has been fully executed by the State and the awarded bidder. The awarded bidder will be notified in writing when work may begin.

F. AMENDMENT

This Contract may be amended in writing, within scope, upon the agreement of both parties.

G. CHANGE ORDERS OR SUBSTITUTIONS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

The State and the Contractor, upon the written agreement, may make changes to the contract within the general scope of the solicitation. Changes may involve specifications, the quantity of work, or such other items as the State may find necessary or desirable. Corrections of any deliverable, service, or work required pursuant to the contract shall not be deemed a change. The Contractor may not claim forfeiture of the contract by reasons of such changes.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

The Contractor shall prepare a written description of the work required due to the change and an itemized cost sheet for the change. Changes in work and the amount of compensation to be paid to the Contractor shall be determined in accordance with applicable unit prices if any, a pro-rated value, or through negotiations. The State shall not incur a price increase for changes that should have been included in the Contractor's proposal, were foreseeable, or result from difficulties with or failure of the Contractor's proposal or performance.

No change shall be implemented by the Contractor until approved by the State, and the Contract is amended to reflect the change and associated costs, if any. If there is a dispute regarding the cost, but both parties agree that immediate implementation is necessary, the change may be implemented, and cost negotiations may continue with both Parties retaining all remedies under the contract and law.

In the event any product is discontinued or replaced upon mutual consent during the contract period or prior to delivery, the State reserves the right to amend the contract or purchase order to include the alternate product at the same price.

*****Contractor will not substitute any item that has been awarded without prior written approval of SPB*****

H. VENDOR PERFORMANCE REPORT(S)

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

The State may document any instance(s) of products or services delivered or performed which exceed or fail to meet the terms of the purchase order, contract, and/or solicitation specifications. The State Purchasing Bureau may contact the Vendor regarding any such report. Vendor performance report(s) will become a part of the permanent record of the Vendor.

I. NOTICE OF POTENTIAL CONTRACTOR BREACH

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	CenturyLink will provide notice as soon as possible under the circumstances but does not agree that failure to provide immediate notice is grounds for denial of a request for waiver of a breach. The circumstances of what constitutes immediate notice are inherently subjective and difficult to quantify for an infinite number of potential scenarios.

If Contractor breaches the contract or anticipates breaching the contract, the Contractor shall immediately give written notice to the State. The notice shall explain the breach or potential breach, a proposed cure, and may include a request for a waiver of the breach if so desired. The State may, in its discretion, temporarily or permanently waive the breach. By granting a waiver, the State does not forfeit any rights or remedies to which the State is entitled by law or equity, or

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

pursuant to the provisions of the contract. ~~Failure to give immediate notice, however, may be grounds for denial of any request for a waiver of a breach.~~

J. BREACH; DAMAGES LIMITATIONS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	CenturyLink proposes the changes shown below. Given the higher risk and cost associated with providing 911 services, CenturyLink cannot agree to a cost of cover provision. The State may seek services from a different provider if it chooses, but CenturyLink will not cover those costs. Additionally, CenturyLink requires limitations on its liability in order to provide the services at competitive rates and has provided additional language to address that concern below.

1. Breach. Either Party may terminate the contract, in whole or in part, if the other Party materially breaches its duty to perform its obligations under the contract in a timely and proper manner. Termination requires written notice of default and a thirty (30) calendar day (or longer at the non-breaching Party's discretion considering the gravity and nature of the default) cure period. Said notice shall be delivered by Certified Mail, Return Receipt Requested, or in person with proof of delivery. Allowing time to cure a failure or breach of contract does not waive the right to immediately terminate the contract for the same or different contract breach which may occur at a different time. ~~In case of default of the Contractor, the State may contract the service from other sources and hold the Contractor responsible for any excess cost occasioned thereby. OR In case of breach by the Contractor, the State may, without unreasonable delay, make a good faith effort to make a reasonable purchase or contract to purchase goods in substitution of those due from the contractor. The State may recover from the Contractor as damages the difference between the costs of covering the breach. Notwithstanding any clause to the contrary, the State may also recover the contract price together with any incidental or consequential damages defined in UCC Section 2-715, but less expenses saved in consequence of Contractor's breach.~~

   The State's failure to make payment shall not be a breach, and the Contractor shall retain all available statutory remedies and protections.

2. Damages Limitations. CenturyLink will not be liable for any damages for lost profits, lost revenues, loss of goodwill, loss of anticipated savings, loss of data or cost of purchasing replacement services, or any indirect, incidental, special, consequential, exemplary or punitive damages arising out of the performance or failure to perform under this Agreement or any Service Attachment. UNLESS OTHERWISE SET FORTH IN A SERVICE ATTACHMENT, CUSTOMER'S EXCLUSIVE REMEDIES FOR CLAIMs WILL BE LIMITED TO THE TOTAL MRCs OR USAGE CHARGES PAID BY CUSTOMER TO CENTURYLINK FOR THE AFFECTED SERVICE IN THE ONE MONTH IMMEDIATELY PRECEDING THE OCCURRENCE OF THE EVENT GIVING RISE TO THE CLAIM. CENTURYLINK'S LIABILITY FOR ANY LOSS OR DAMAGE ARISING FROM ERRORS, INTERRUPTIONS, DEFECTS, FAILURES, OR MALFUNCTIONS OF ANY SERVICE OR ANY PART THEREOF CAUSED BY THE NEGLIGENCE OF CENTURYLINK WILL NOT EXCEED THE GREATER OF $50.00 OR AN AMOUNT EQUIVALENT TO THE PRO RATA CHARGES FOR THE SERVICE AFFECTED DURING THE TIME THE SERVICE WAS FULLY OR PARTIALLY INOPERATIVE. FURTHER CENTURYLINK, ITS AFFILIATES, AGENTS AND CONTRACTORS PROVIDING SERVICES ASSOCIATED WITH ACCESS TO 911

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

EMERGENCY SERVICE WILL NOT HAVE ANY LIABILITY WHATSOEVER FOR ANY PERSONAL INJURY TO OR DEATH OF ANY PERSON, FOR ANY LOSS, DAMAGE OR DESTRUCTION OF ANY PROPERTY RELATING TO THE USE, LACK OF ACCESS TO OR PROVISION OF, 911 EMERGENCY SERVICE. IN ADDITION, CENTURYLINK WILL NOT BE LIABLE FOR ANY DAMAGE THAT RESULTS FROM INFORMATION PROVIDED TO CUSTOMER BY ANY OTHER DATA PROVIDER(S).

3. Service Levels.

(a) Any "Service Level" commitments applicable to Services are contained in the Service Attachments applicable to each Service. If CenturyLink does not meet a Service Level, CenturyLink will issue to Customer a credit as stated in the applicable Service Attachment on Customer's request. CenturyLink's maintenance log and trouble ticketing systems are used to calculate Service Level events. Scheduled maintenance and force majeure events are considered excused outages.

(b) Unless otherwise set forth in a Service Attachment, to request a credit, Customer must contact Customer Service (contact information is located at http://www.level3.com) or deliver a written request with sufficient detail to identify the affected Service. The request for credit must be made within 60 days after the end of the month in which the event occurred. Total monthly credits will not exceed the charges for the affected Service for that month. Customer's sole remedies for any non-performance, outages, failures to deliver or defects in Service are contained in the Service Levels applicable to the affected Service.

K. NON-WAIVER OF BREACH

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

The acceptance of late performance with or without objection or reservation by a Party shall not waive any rights of the Party nor constitute a waiver of the requirement of timely performance of any obligations remaining to be performed.

L. SEVERABILITY

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

If any term or condition of the contract is declared by a court of competent jurisdiction to be illegal or in conflict with any law, the validity of the remaining terms and conditions shall not be affected, and the rights and obligations of the parties shall be construed and enforced as if the contract did not contain the provision held to be invalid or illegal.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

M. INDEMNIFICATION

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	Regarding #1, CenturyLink cannot offer indemnification related to 911 services. SLAs and associated penalties will be defined in the contract and those will provide the sole and exclusive remedies for any claims related to service performance. Regarding #2, CenturyLink proposes changes that it reasonably believes will better clarify the scope of its IP obligations.

1. RESERVED. ~~The Contractor agrees to defend, indemnify, and hold harmless the State and its employees, volunteers, agents, and its elected and appointed officials ("the indemnified parties") from and against any and all third party claims, liens, demands, damages, liability, actions, causes of action, losses, judgments, costs, and expenses of every nature, including investigation costs and expenses, settlement costs, and attorney fees and expenses ("the claims"), sustained or asserted against the State for personal injury, death, or property loss or damage, arising out of, resulting from, or attributable to the willful misconduct, negligence, error, or omission of the Contractor, its employees, subcontractors, consultants, representatives, and agents, resulting from this contract, except to the extent such Contractor liability is attenuated by any action of the State which directly and proximately contributed to the claims.~~

2. INTELLECTUAL PROPERTY (Optional)

The Contractor agrees it will, at its sole cost and expense, defend, ~~indemnify, and hold harmless~~ the ~~indemnified parties~~ State from and against any and all third party claims filed against the State and alleging that a Service, as provided by Contractor, prospectively infringes, ~~to the extent such claims arise out of, result from, or are attributable to, the actual or alleged infringement or misappropriation of~~ any patent, copyright, trade secret, trademark, or other intellectual property right ("IP Right") ~~confidential information~~ of any third party by the Contractor or its employees, subcontractors, consultants, representatives, and agents; provided, however, the foregoing will not apply to any claim based on: (i) the combination of Service with other products, services or functionality, (ii) Contractor's design or modification of a Service in accordance with the State's specific written instructions, specifications or requirements; (iii) use or operation by or on behalf of the State of a Service other than in accordance with the Contract or other written documentation provided by Contractor; (iv) content, data, or other information provided by or on behalf of the State ("State Content"). Contractor's obligations under this section are contingent upon the State (i) ~~gave~~ giving the Contractor prompt notice in writing of the claim, (ii) providing Contractor with sole control and authority over the defense and/or settlement of such claim, and (iii) cooperating with Contractor (at Contractor's expense) in the defense and/or settlement of such claim upon Contractor's written request. The Contractor may not settle any infringement claim that will affect the State's use of the ~~Licensed Software~~ affected intellectual property without the State's prior written consent, which ~~consent may be withheld for any reason~~ may not be unreasonably withheld.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

If a judgment or settlement is obtained or reasonably anticipated against the State's use of any intellectual property for which the Contractor has ~~indemnified the State~~ a defense or payment obligation, the Contractor ~~shall~~ may, at the Contractor's sole cost and expense, promptly modify the item or items which were determined to be infringing, ~~acquire a license or licenses on~~ obtain for the State the right to continue using the Service consistent with the Contract~~'s behalf to provide the necessary rights to the State to eliminate the infringement~~, or provide the State with a non-infringing substitute that provides the State ~~the same~~ with equivalent functionality. ~~At the State's election, the actual or anticipated judgment may be treated as a breach of warranty by the Contractor, and the State may receive the remedies provided under this RFP.~~

Notwithstanding the foregoing, any third-party service, system, CPE, equipment or software provided under this Agreement (each, a "Third Party Item") is provided without any obligation of Contractor to defend or indemnify the State against any claim of infringement of any IP Right arising in connection with any such Third Party Item, except that Contractor shall pass through to the State any contractual obligations of a third party provider of any such Third Party Item to defend or indemnify the State against such claims. The foregoing states Contractor's only obligations (and the State's sole and exclusive remedy) for any claims, actions, liabilities, damages or losses arising in connection with alleged or actual infringement, violation or misappropriation of an IP Right by the Services.

3. PERSONNEL

The Contractor shall, at its expense, indemnify and hold harmless the ~~indemnified parties~~ State from and against any claim with respect to withholding taxes, worker's compensation, employee benefits, or any other similar claim, demand, liability, damage, or loss ~~of any nature~~ relating to any of the personnel, including subcontractor's and their employees, provided by the Contractor to perform the services under this Agreement.

4. SELF-INSURANCE

The State of Nebraska is self-insured for any loss and purchases excess insurance coverage pursuant to Neb. Rev. Stat. § 81-8,239.01 (Reissue 2008). If there is a presumed loss under the provisions of this agreement, Contractor may file a claim with the Office of Risk Management pursuant to Neb. Rev. Stat. §§ 81-8,829 – 81-8,306 for review by the State Claims Board. The State retains all rights and immunities under the State Miscellaneous (§ 81-8,294), Tort (§ 81-8,209), and Contract Claim Acts (§ 81-8,302), as outlined in Neb. Rev. Stat. § 81-8,209 et seq. and under any other provisions of law and accepts liability under this agreement to the extent provided by law.

5. The Parties acknowledge that Attorney General for the State of Nebraska is required by statute to represent the legal interests of the State, and that any provision of this indemnity clause is subject to the statutory authority of the Attorney General.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

N. ATTORNEY'S FEES

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

In the event of any litigation, appeal, or other legal action to enforce any provision of the contract, the Parties agree to pay all expenses of such action, as permitted by law and if ordered by the court, including attorney's fees and costs, if the other Party prevails.

O. PERFORMANCE BOND

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			Please see the bond letter provided by our bonding company as "**Appendix III.O_Performance Bond**"

The Contractor maybe required to supply a bond executed by a corporation authorized to contract surety in the State of Nebraska, payable to the State of Nebraska, which shall be valid for the life of the contract to include any renewal and/or extension periods. The amount of the bond must be $500,000. The bond will guarantee that the Contractor will faithfully perform all requirements, terms and conditions of the contract. Failure to comply shall be grounds for forfeiture of bond as liquidated damages. Amount of forfeiture will be determined by the agency based on loss to the State. The bond will be returned when the contract has been satisfactorily completed as solely determined by the State, after termination or expiration of the contract.

P. ASSIGNMENT, SALE, OR MERGER; AFFILIATES

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	CenturyLink proposes adding affiliates language to his section (or elsewhere in the contract as the parties may mutually agree upon during contract finalization) to clarify that CenturyLink is permitted to affiliates, subcontractors, and third parties, since those relationships would be part of the solution proposed in our response. However, regardless of CenturyLink's use of a third party, CenturyLink remains responsible to the State for the services under the contract.

Assignment, Sale, Or Merger. Either Party may assign the contract upon mutual written agreement of the other Party. Such agreement shall not be unreasonably withheld.

The Contractor retains the right to enter into a sale, merger, acquisition, internal reorganization, or similar transaction involving Contractor's business. Contractor agrees to cooperate with the State in executing amendments to the contract to allow for the transaction. If a third party or entity is involved in the transaction, the Contractor will remain responsible for performance of the

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

contract until such time as the person or entity involved in the transaction agrees in writing to be contractually bound by this contract and perform all obligations of the contract.

Affiliates. CenturyLink may use a CenturyLink affiliate, subcontractor or a third party to provide Service to Customer, but CenturyLink will remain responsible to Customer for Service delivery and performance.

Q. CONTRACTING WITH OTHER NEBRASKA POLITICAL SUB-DIVISIONS OF THE STATE OR ANOTHER STATE

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

The Contractor may, but shall not be required to, allow agencies, as defined in Neb. Rev. Stat. §81-145, to use this contract. The terms and conditions, including price, of the contract may not be amended. The State shall not be contractually obligated or liable for any contract entered into pursuant to this clause. A listing of Nebraska political subdivisions may be found at the website of the Nebraska Auditor of Public Accounts.

The Contractor may, but shall not be required to, allow other states, agencies or divisions of other states, or political subdivisions of other states to use this contract. The terms and conditions, including price, of this contract shall apply to any such contract, but may be amended upon mutual consent of the Parties. The State of Nebraska shall not be contractually or otherwise obligated or liable under any contract entered into pursuant to this clause. The State shall be notified if a contract is executed based upon this contract.

R. FORCE MAJEURE

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

Neither Party shall be liable for any costs or damages, or for default resulting from its inability to perform any of its obligations under the contract due to a natural or manmade event outside the control and not the fault of the affected Party ("Force Majeure Event"). The Party so affected shall immediately make a written request for relief to the other Party, and shall have the burden of proof to justify the request. The other Party may grant the relief requested; relief may not be unreasonably withheld. Labor disputes with the impacted Party's own employees will not be considered a Force Majeure Event.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

S. CONFIDENTIALITY

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	CenturyLink proposes replacing the first paragraph with the new paragraph shown below. This language provides a more robust definition of confidentiality obligations and carves out common exceptions to confidentiality.

~~All materials and information provided by the Parties or acquired by a Party on behalf of the other Party shall be regarded as confidential information. All materials and information provided or acquired shall be handled in accordance with federal and state law, and ethical standards. Should said confidentiality be breached by a Party, the Party shall notify the other Party immediately of said breach and take immediate corrective action.~~

All Confidential Information provided by the Parties or acquired by a Party on behalf of the other Party shall be regarded as confidential information. Except to the extent required by an open records act or similar law, neither party will: (a) disclose any of the terms of the Contract; or (b) disclose or use (except as expressly permitted by, or required to achieve the purposes of, the Contract) the Confidential Information received from the other party. A party may disclose Confidential Information if required to do so by a governmental agency, by operation of law, or if necessary in any proceeding to establish rights or obligations under the Contract. All Confidential Information provided or acquired shall be handled in accordance with federal and state law, and each party will limit disclosure and access to Confidential Information to those of its employees, contractors, attorneys or other representatives who reasonably require such access to accomplish the Contract's purposes and who are subject to confidentiality obligations at least as restrictive as those contained herein. Should said confidentiality be breached by a Party, the Party shall notify the other Party immediately of said breach and take immediate corrective action. "Confidential Information" means any commercial or operational information disclosed by one party to the other in connection with the Contract and does not include any information that: (a) is in the public domain without a breach of confidentiality; (b) is obtained from a third party without violation of any obligation of confidentiality; or (c) is independently developed by a party without reference to the Confidential Information of the other party.

It is incumbent upon the Parties to inform their officers and employees of the penalties for improper disclosure imposed by the Privacy Act of 1974, 5 U.S.C. 552a. Specifically, 5 U.S.C. 552a (i)(1), which is made applicable by 5 U.S.C. 552a (m)(1), provides that any officer or employee, who by virtue of his/her employment or official position has possession of or access to agency records which contain individually identifiable information, the disclosure of which is prohibited by the Privacy Act or regulations established thereunder, and who knowing that disclosure of the specific material is prohibited, willfully discloses the material in any manner to any person or agency not entitled to receive it, shall be guilty of a misdemeanor and fined not more than $5,000.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

T. EARLY TERMINATION

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	CenturyLink suggests changes consistent with what the parties have agreed to in prior contracts and that reflect the unique nature of a contract for NG911 Services

The contract may be terminated as follows:

1. The State and the Contractor, by mutual written agreement, may terminate the contract at any time.

2. The State, in its sole discretion, may terminate the contract upon ~~thirty (30)~~ sixty (60) calendar day's written notice to the Contractor. Such termination shall not relieve the Contractor of warranty or other service obligations incurred under the terms of the contract. In the event of termination for cause or default, the Contractor shall be entitled to payment, determined on a pro rata basis, for products or services satisfactorily performed or provided. In the event of termination for convenience, the State shall remain liable for all costs incurred by CenturyLink up to the date of termination, including but not limited to 100% of the costs incurred for special construction and third-party expenses. These charges will be determined upon termination according to CenturyLink records

3. The Contractor in its sole discretion may terminate the contract for any reason upon sixty (60) days' prior written notice to the State. In addition, the Contractor may terminate the contract for Cause. If the Contractor terminates for Cause, non-payment excluded, prior to the conclusion of its Term, then the Contractor will be entitled to payment, determined on a pro rata basis, for products or services satisfactorily performed or provided. Any changes to the scope of this Agreement or any Amendments thereof shall not be made without the Contractor's prior written approval. Any agreed to up-scopes shall include cancellation charges equal to Special Construction Charges.

4. The State may terminate the contract immediately for the following reasons:

- **a.** if directed to do so by statute;
- **b.** Contractor has made an assignment for the benefit of creditors, has admitted in writing its inability to pay debts as they mature, or has ceased operating in the normal course of business;
- **c.** a trustee or receiver of the Contractor or of any substantial part of the Contractor's assets has been appointed by a court;
- **d.** fraud, misappropriation, embezzlement, malfeasance, misfeasance, or illegal conduct pertaining to performance under the contract by its Contractor, its employees, officers, directors, or shareholders;
- **e.** an involuntary proceeding has been commenced by any Party against the Contractor under any one of the chapters of Title 11 of the United States Code and (i) the proceeding has been pending for at least sixty (60) calendar days; or (ii) the Contractor has consented, either expressly or by operation of law, to the entry of an order for relief; or (iii) the Contractor has been decreed or adjudged a debtor;

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

f. a voluntary petition has been filed by the Contractor under any of the chapters of Title 11 of the United States Code;

g. Contractor intentionally discloses Confidential Information ~~confidential information~~;

h. ~~Contractor has or announces it will discontinue support of the deliverable; and,~~

i. In the event funding is no longer available.

U. CLOSEOUT

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

Upon contract closeout for any reason the Contractor shall within 30 calendar days, unless stated otherwise herein:

1. Transfer all completed or partially completed deliverables to the State;
2. Transfer ownership and title to all completed or partially completed deliverables to the State;
3. Return to the State all information and data, unless the Contractor is permitted to keep the information or data by contract or rule of law. Contractor may retain one copy of any information or data as required to comply with applicable work product documentation standards or as are automatically retained in the course of Contractor's routine back up procedures;
4. Cooperate with any successor Contactor, person or entity in the assumption of any or all of the obligations of this contract;
5. Cooperate with any successor Contactor, person or entity with the transfer of information or data related to this contract;
6. Return or vacate any state owned real or personal property; and,
7. Return all data in a mutually acceptable format and manner.

Nothing in this Section should be construed to require the Contractor to surrender intellectual property, real or personal property, or information or data owned by the Contractor for which the State has no legal claim.

Additional Terms and Conditions: CenturyLink proposes the following additional provisions to be added to the contract as important provisions that provide protections to both the customer and CenturyLink:

V. Critical 9-1-1 Circuits. The Federal Communications Commission's 9-1-1 reliability rules mandate the identification and tagging of certain circuits or equivalent data paths that transport 9-1-1 calls and information ("9-1-1 Data") to public safety answering points. These circuits or equivalent data paths are defined as Critical 911 Circuits in 47 C.F.R. Section 12.4(a)(5). CenturyLink policies require tagging of any circuits or equivalent data paths used to transport 9-1-1 Data. Customer will cooperate with CenturyLink regarding compliance with these rules and policies and will notify CenturyLink of all Services Customer purchases under this Agreement utilized as Critical 911 Circuits or for 9-1-1 Data.

CenturyLink explanation: Circuits that are used for 911 services need to be tagged as such so that they receive appropriate priority and treatment for service restoration in the event of an

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

outage. CenturyLink needs our customers to commit to work with us on designating the circuits that they use to transport 911 Data.

W. Acceptable Use Policy and Data Protection. The State must comply with the CenturyLink Acceptable Use Policy ("AUP"), which is available at http://www.centurylink.com/legal, for Services purchased under this Agreement and acknowledge the CenturyLink Privacy Policy, which is available at http://www.centurylink.com/aboutus/legal/privacy-policy.html. CenturyLink may reasonably modify these policies to ensure compliance with applicable laws and regulations and to protect CenturyLink's network and customers.

CenturyLink explanation: Applicability of the CenturyLink AUP provides protection for all customers and the CenturyLink network.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

III. CONTRACTOR DUTIES

A. INDEPENDENT CONTRACTOR / OBLIGATIONS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	CenturyLink proposes changes to clarify that it is permitted to use affiliates, subcontractors, and third parties, since those relationships would be part of the solution proposed in our response. In addition, CenturyLink proposes to strike the last two sentences because our vendor contracts are already in place and it is impractical to add customer-specific provisions into each contract. This should not impact the State, because regardless of CenturyLink's use of subcontractors, we remain responsible to the State for the delivery and performance of the services. CenturyLink agrees that the State may request personnel changes and CenturyLink will work with you to address any concerns, but we must ultimately retain responsibility for how our employees are assigned to projects.

It is agreed that the Contractor is an independent contractor and that nothing contained herein is intended or should be construed as creating or establishing a relationship of employment, agency, or a partnership.

The Contractor is solely responsible for fulfilling the contract, subject to its permission to use affiliates, subcontractors and third parties as set forth in the Contract. The Contractor or the Contractor's representative shall be the sole point of contact regarding all contractual matters.

The Contractor shall secure, at its own expense, all personnel required to perform the services under the contract. The personnel the Contractor uses to fulfill the contract shall have no contractual or other legal relationship with the State; they shall not be considered employees of the State and shall not be entitled to any compensation, rights or benefits from the State, including but not limited to, tenure rights, medical and hospital care, sick and vacation leave, severance pay, or retirement benefits.

By-name personnel commitments made in the Contractor's proposal shall not be changed without the ~~prior written approval~~ consent of the State, which shall not be unreasonably withheld. Replacement of these personnel, if approved by the State, shall be with personnel of equal or greater ability and qualifications.

All personnel assigned by the Contractor to the contract shall be employees of the Contractor or a subcontractor, and shall be fully qualified to perform the work required herein. Personnel employed by the Contractor or a subcontractor to fulfill the terms of the contract shall remain under the sole direction and control of the Contractor or the subcontractor respectively.

With respect to its employees, the Contractor agrees to be solely responsible for the following:

1. Any and all pay, benefits, and employment taxes and/or other payroll withholding;
2. Any and all vehicles used by the Contractor's employees, including all insurance required by state law;
3. Damages incurred by Contractor's employees within the scope of their duties under the contract;
4. Maintaining Workers' Compensation and health insurance that complies with state and federal law and submitting any reports on such insurance to the extent required by governing law;

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

5. Determining the hours to be worked and the duties to be performed by the Contractor's employees; and,
6. All claims on behalf of any person arising out of employment or alleged employment (including without limit claims of discrimination alleged against the Contractor, its officers, agents, or subcontractors or subcontractor's employees).

If the Contractor intends to utilize any subcontractor, the subcontractor's level of effort, tasks, and time allocation should be clearly defined in the bidder's proposal. The Contractor shall agree that it will not utilize any subcontractors not specifically included in its proposal in the performance of the contract without the prior written authorization of the State.

The State reserves the right to require the Contractor to reassign or remove from the project any Contractor or subcontractor employee for lawful reasons.

If the State receives a complaint about the behavior or conduct of Contractor's employees or any subcontractor employee, the State shall notify the Contractor and reserves the right to ask them to be reassigned or removed from the project.

~~Contractor shall insure that the terms and conditions contained in any contract with a subcontractor does not conflict with the terms and conditions of this contract.~~

~~The Contractor shall include a similar provision, for the protection of the State, in the contract with any subcontractor engaged to perform work on this contract.~~

B. EMPLOYEE WORK ELIGIBILITY STATUS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			**Please see CenturyLink's Attestation form provided as the Attachment "3.B I 9 Compliance Certification_Q1 2020_Letterhead"**

The Contractor is required and hereby agrees to use a federal immigration verification system to determine the work eligibility status of employees physically performing services within the State of Nebraska. A federal immigration verification system means the electronic verification of the work authorization program authorized by the Illegal Immigration Reform and Immigrant Responsibility Act of 1996, 8 U.S.C. 1324a, known as the E-Verify Program, or an equivalent federal program designated by the United States Department of Homeland Security or other federal agency authorized to verify the work eligibility status of an employee.

If the Contractor is an individual or sole proprietorship, the following applies:

1. The Contractor must complete the United States Citizenship Attestation Form, available on the Department of Administrative Services website at http://das.nebraska.gov/materiel/purchasing.html.
2. The completed United States Attestation Form should be submitted with the solicitation response.
3. If the Contractor indicates on such attestation form that he or she is a qualified alien, the Contractor agrees to provide the US Citizenship and Immigration Services documentation required to verify the Contractor's lawful presence in the United States using the Systematic Alien Verification for Entitlements (SAVE) Program.
4. The Contractor understands and agrees that lawful presence in the United States is required and the Contractor may be disqualified, or the contract terminated if such lawful presence cannot be verified as required by Neb. Rev. Stat. §4-108.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

C. COMPLIANCE WITH CIVIL RIGHTS LAWS AND EQUAL OPPORTUNITY EMPLOYMENT / NONDISCRIMINATION (Statutory)

The Contractor shall comply with all applicable local, state, and federal statutes and regulations regarding civil rights laws and equal opportunity employment. The Nebraska Fair Employment Practice Act prohibits Contractors of the State of Nebraska, and their subcontractors, from discriminating against any employee or applicant for employment, with respect to hire, tenure, terms, conditions, compensation, or privileges of employment because of race, color, religion, sex, disability, marital status, or national origin (Neb. Rev. Stat. §48-1101 to 48-1125). The Contractor guarantees compliance with the Nebraska Fair Employment Practice Act, and breach of this provision shall be regarded as a material breach of contract. The Contractor shall insert a similar provision in all subcontracts for goods and services to be covered by any contract resulting from this solicitation.

D. COOPERATION WITH OTHER CONTRACTORS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

Contractor may be required to work with or in close proximity to other contractors or individuals that may be working on same or different projects. The Contractor shall agree to cooperate with such other contractors or individuals, and shall not commit or permit any act which may interfere with the performance of work by any other contractor or individual. Contractor is not required to compromise Contractor's intellectual property or proprietary information unless expressly required to do so by this contract.

E. PERMITS, REGULATIONS, LAWS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

The contract price shall include the cost of all royalties, licenses, permits, and approvals, whether arising from patents, trademarks, copyrights or otherwise, that are in any way involved in the contract. The Contractor shall obtain and pay for all royalties, licenses, and permits, and approvals necessary for the execution of the contract. The Contractor must guarantee that it has the full legal right to the materials, supplies, equipment, software, and other items used to execute this contract.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

F. ~~OWNERSHIP OF INFORMATION AND DATA /~~ DELIVERABLES

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	CenturyLink proposes edits to clarify the definition and scope of deliverable ownership.

The State shall have the ~~unlimited~~ right to publish, duplicate, use, and disclose all information and data developed or obtained by the Contractor on behalf of the State ("collectively, Deliverables") pursuant to this contract, if Deliverables are specifically contemplated in the Contract and paid for by the State.

The State shall own and hold exclusive title to any Deliverable developed as a result of this contract and paid for by the State. Contractor shall have no ownership interest or title, and shall not patent, license, or copyright, duplicate, transfer, sell, or exchange, the ~~design, specifications, concept, or~~ ~~d~~Deliverables.

G. INSURANCE REQUIREMENTS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

The Contractor shall throughout the term of the contract maintain insurance as specified herein and provide the State a current Certificate of Insurance/Acord Form (COI) verifying the coverage. The Contractor shall not commence work on the contract until the insurance is in place. If Contractor subcontracts any portion of the Contract the Contractor must, throughout the term of the contract, either:

1. Provide equivalent insurance for each subcontractor and provide a COI verifying the coverage for the subcontractor;
2. Require each subcontractor to have equivalent insurance and provide written notice to the State that the Contractor has verified that each subcontractor has the required coverage; or,
3. Provide the State with copies of each subcontractor's Certificate of Insurance evidencing the required coverage.

The Contractor shall not allow any subcontractor to commence work until the subcontractor has equivalent insurance. The failure of the State to require a COI, or the failure of the Contractor to provide a COI or require subcontractor insurance shall not limit, relieve, or decrease the liability of the Contractor hereunder.

In the event that any policy written on a claims-made basis terminates or is canceled during the term of the contract or within one (1) year of termination or expiration of the contract, the contractor shall obtain an extended discovery or reporting period, or a new insurance policy, providing coverage required by this contract for the term of the contract and one (1) year following termination or expiration of the contract.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

If by the terms of any insurance a mandatory deductible is required, or if the Contractor elects to increase the mandatory deductible amount, the Contractor shall be responsible for payment of the amount of the deductible in the event of a paid claim.

Notwithstanding any other clause in this Contract, the State may recover up to the liability limits of the insurance policies required herein.

1. WORKERS' COMPENSATION INSURANCE

The Contractor shall take out and maintain during the life of this contract the statutory Workers' Compensation and Employer's Liability Insurance for all of the contactors' employees to be engaged in work on the project under this contract and, in case any such work is sublet, the Contractor shall require the subcontractor similarly to provide Worker's Compensation and Employer's Liability Insurance for all of the subcontractor's employees to be engaged in such work. This policy shall be written to meet the statutory requirements for the state in which the work is to be performed, including Occupational Disease. The policy shall include a waiver of subrogation in favor of the State. The COI shall contain the mandatory COI subrogation waiver language found hereinafter. The amounts of such insurance shall not be less than the limits stated hereinafter. For employees working in the State of Nebraska, the policy must be written by an entity authorized by the State of Nebraska Department of Insurance to write Workers' Compensation and Employer's Liability Insurance for Nebraska employees.

2. COMMERCIAL GENERAL LIABILITY INSURANCE AND COMMERCIAL AUTOMOBILE LIABILITY INSURANCE

The Contractor shall take out and maintain during the life of this contract such Commercial General Liability Insurance and Commercial Automobile Liability Insurance as shall protect Contractor and any subcontractor performing work covered by this contract from claims for damages for bodily injury, including death, as well as from claims for property damage, which may arise from operations under this contract, whether such operation be by the Contractor or by any subcontractor or by anyone directly or indirectly employed by either of them, and the amounts of such insurance shall not be less than limits stated hereinafter.

The Commercial General Liability Insurance shall be written on an occurrence basis, and provide Premises/Operations, Products/Completed Operations, Independent Contractors, Personal Injury, and Contractual Liability coverage. The policy shall include the State, and others as required by the contract documents, Additional Insured(s). This policy shall be primary, and any insurance or self-insurance carried by the State shall be considered secondary and non-contributory. The COI shall contain the mandatory COI liability waiver language found hereinafter. The Commercial Automobile Liability Insurance shall be written to cover all Owned, Non-owned, and Hired vehicles.

REQUIRED INSURANCE COVERAGE	
COMMERCIAL GENERAL LIABILITY	
General Aggregate	$2,000,000
Products/Completed Operations Aggregate	$2,000,000
Personal/Advertising Injury	$1,000,000 per occurrence
Bodily Injury/Property Damage	$1,000,000 per occurrence
Medical Payments	$10,000 any one person
Damage to Rented Premises (Fire)	$300,000 each occurrence
Contractual	Included

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

REQUIRED INSURANCE COVERAGE	
XCU Liability (Explosion, Collapse, and Underground Damage)	Included
Independent Contractors	Included
Abuse & Molestation	Included
If higher limits are required, the Umbrella/Excess Liability limits are allowed to satisfy the higher limit.	
WORKER'S COMPENSATION	
Employers Liability Limits	$500K/$500K/$500K
Statutory Limits- All States	Statutory - State of Nebraska
Voluntary Compensation	Statutory
COMMERCIAL AUTOMOBILE LIABILITY	
Bodily Injury/Property Damage	$1,000,000 combined single limit
Include All Owned, Hired & Non-Owned Automobile liability	Included
Motor Carrier Act Endorsement	Where Applicable
UMBRELLA/EXCESS LIABILITY	
Over Primary Insurance	$2,000,000 per occurrence
PROFESSIONAL LIABILITY	
All Other Professional Liability (Errors & Omissions)	$1,000,000 Per Claim / Aggregate
COMMERCIAL CRIME	
Crime/Employee Dishonesty Including 3rd Party Fidelity	$1,000,000
CYBER LIABILITY	
Breach of Privacy, Security Breach, Denial of Service, Remediation, Fines and Penalties	$10,000,000
MANDATORY COI SUBROGATION WAIVER LANGUAGE	
"Workers' Compensation policy shall include a waiver of subrogation in favor of the State of Nebraska."	
MANDATORY COI LIABILITY WAIVER LANGUAGE	
"Commercial General Liability & Commercial Automobile Liability policies shall name the State of Nebraska as an Additional Insured and the policies shall be primary and any insurance or self-insurance carried by the State shall be considered secondary and non-contributory as additionally insured."	

3. EVIDENCE OF COVERAGE

The Contractor shall furnish the Contract Manager, with a certificate of insurance coverage complying with the above requirements prior to beginning work at:

Public Service Commission
Attn: State 911 Director
PO Box 94927
Lincoln, NE 68509

These certificates or the cover sheet shall reference the RFP number, and the certificates shall include the name of the company, policy numbers, effective dates, dates of expiration, and amounts and types of coverage afforded. If the State is damaged by the failure of the Contractor to maintain such insurance, then the Contractor shall be responsible for all reasonable costs properly attributable thereto.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Reasonable notice of cancellation of any required insurance policy must be submitted to the contract manager as listed above when issued and a new coverage binder shall be submitted immediately to ensure no break in coverage.

4. DEVIATIONS

The insurance requirements are subject to limited negotiation. Negotiation typically includes, but is not necessarily limited to, the correct type of coverage, necessity for Workers' Compensation, and the type of automobile coverage carried by the Contractor.

H. ANTITRUST

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

The Contractor hereby assigns to the State any and all claims for overcharges as to goods and/or services provided in connection with this contract resulting from antitrust violations which arise under antitrust laws of the United States and the antitrust laws of the State.

I. CONFLICT OF INTEREST

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			CenturyLink is not aware of any conflicts of interest or relationships that would be considered a conflict of interest.

By submitting a proposal, bidder certifies that no relationship exists between the bidder and any person or entity which either is, or gives the appearance of, a conflict of interest related to this Request for Proposal or project.

Bidder further certifies that bidder will not employ any individual known by bidder to have a conflict of interest nor shall bidder take any action or acquire any interest, either directly or indirectly, which will conflict in any manner or degree with the performance of its contractual obligations hereunder or which creates an actual or appearance of conflict of interest.

If there is an actual or perceived conflict of interest, bidder shall provide with its proposal a full disclosure of the facts describing such actual or perceived conflict of interest and a proposed mitigation plan for consideration. The State will then consider such disclosure and proposed mitigation plan and either approve or reject as part of the overall bid evaluation.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

J. STATE PROPERTY

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

The Contractor shall be responsible for the proper care and custody of any State-owned property which is furnished for the Contractor's use during the performance of the contract. The Contractor shall reimburse the State for any loss or damage of such property; normal wear and tear is expected.

K. SITE RULES AND REGULATIONS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	CenturyLink can agree as modified below. CenturyLink agrees to comply with all reasonable site rules and regulations, and requests that these be provided in advance, if possible, as it will better enable CenturyLink to be prepared in advance to comply.

The Contractor shall use its ~~best~~ reasonable efforts to ensure that its employees, agents, and subcontractors comply with reasonable site rules and regulations while on State or any government premises. Site rules will be provided to Contractor in advance whenever possible. If the Contractor must perform on-site work outside of the daily operational hours set forth by the State, it must make arrangements with the State or any government to ensure access to the facility and the equipment has been arranged. No additional payment will be made by the State on the basis of lack of access, unless the State fails to provide access as agreed to in writing between the State and the Contractor.

L. ADVERTISING

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

The Contractor agrees not to refer to the contract award in advertising in such a manner as to state or imply that the company or its goods or services are endorsed or preferred by the State. Any publicity releases pertaining to the project shall not be issued without prior written approval from the State.

M. NEBRASKA TECHNOLOGY ACCESS STANDARDS (Statutory)

Contractor shall review the Nebraska Technology Access Standards, found at http://nitc.nebraska.gov/standards/2-201.html and ensure that products and/or services provided

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

under the contract are in compliance or will comply with the applicable standards to the greatest degree possible. In the event such standards change during the Contractor's performance, the State may create an amendment to the contract to request the contract comply with the changed standard at a cost mutually acceptable to the parties.

N. DISASTER RECOVERY/BACK UP PLAN

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

The Contractor shall have a disaster recovery and back-up plan, of which a copy should be provided upon request to the State, which includes, but is not limited to equipment, personnel, facilities, and transportation, in order to continue delivery of goods and services as specified under the specifications in the contract in the event of a disaster.

O. DRUG POLICY

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

Contractor certifies it maintains a drug free workplace environment to ensure worker safety and workplace integrity. Contractor agrees to provide a copy of its drug free workplace policy at any time upon request by the State.

P. WARRANTY; DISCLAIMER OF WARRANTIES

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	Due to the high-risk nature of providing 911 services, CenturyLink requires a narrowed scope of warranties and clarify that all warranties are expressly stated in the agreement, per the language proposed here.

~~Despite any clause to the contrary, t~~The Contractor represents and warrants that its services hereunder shall be performed by competent personnel and shall be of professional quality ~~consistent with generally accepted industry standards for the performance of such services~~ and shall comply in all respects with the requirements of this Agreement. For any breach of this warranty, the Contractor shall, for a period of ninety (90) calendar days from performance of the service, perform the services again, at no cost to the State~~, or if Contractor is unable to perform the services as warranted, Contractor shall reimburse the State all fees paid to Contractor for the unsatisfactory services. The rights and remedies of the parties under this warranty are in addition to any other rights and remedies of the parties provided by law or equity, including, without~~

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

~~limitation actual damages, and, as applicable and awarded under the law, to a prevailing party, reasonable attorneys' fees and costs.~~

Disclaimer of Warranties. CENTURYLINK MAKES NO WARRANTIES OR REPRESENTATIONS, EXPRESS OR IMPLIED, EITHER IN FACT OR BY OPERATION OF LAW, STATUTORY OR OTHERWISE, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR USE OR NON-INFRINGEMENT, EXCEPT THOSE EXPRESSLY SET FORTH IN THIS AGREEMENT OR ANY APPLICABLE SERVICE ATTACHMENT. CUSTOMER ASSUMES TOTAL RESPONSIBILITY FOR USE OF THE SERVICE. IF CENTURYLINK INTEGRATES ANY RECORDS PROVIDED TO CENTURYLINK BY ANY OTHER DATA PROVIDER, FOR INCLUSION IN THE CUSTOMER'S 9-1-1 DATA, CENTURYLINK MAKES NO REPRESENTATION OR WARRANTY AND ASSUMES NO LIABILITY REGARDING THE ACCURACY OF THE DATA PROVIDED BY ANY OTHER DATA PROVIDER. IN ADDITION TO ANY OTHER DISCLAIMERS OF WARRANTY STATED IN THE AGREEMENT, CENTURYLINK MAKES NO WARRANTY, GUARANTEE, OR REPRESENTATION, EXPRESS OR IMPLIED, THAT ALL SECURITY THREATS AND VULNERABILITIES WILL BE DETECTED OR THAT THE PERFORMANCE OF THE SERVICES WILL RENDER CUSTOMER'S SYSTEMS INVULNERABLE TO SECURITY BREACHES, OR THAT THE SERVICES WILL BE PROVIDED ERROR-FREE.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

IV. PAYMENT

A. PROHIBITION AGAINST ADVANCE PAYMENT (Statutory)

Neb. Rev. Stat. §§81-2403 states, "[n]o goods or services shall be deemed to be received by an agency until all such goods or services are completely delivered and finally accepted by the agency."

B. TAXES (Statutory)

The State is not required to pay taxes and assumes no such liability as a result of this solicitation. The Contractor may request a copy of the Nebraska Department of Revenue, Nebraska Resale or Exempt Sale Certificate for Sales Tax Exemption, Form 13 for their records. Any property tax payable on the Contractor's equipment which may be installed in a state-owned facility is the responsibility of the Contractor.

C. INVOICES

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

Invoices for payments must be submitted by the Contractor to the agency requesting the services with sufficient detail to support payment. Public Service Commission State 911 Director 1200 N St. Lincoln, NE 68509. The terms and conditions included in the Contractor's invoice shall be deemed to be solely for the convenience of the parties. No terms or conditions of any such invoice shall be binding upon the State, and no action by the State, including without limitation the payment of any such invoice in whole or in part, shall be construed as binding or estopping the State with respect to any such term or condition, unless the invoice term or condition has been previously agreed to by the State as an amendment to the contract.

D. INSPECTION AND APPROVAL

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
SKB			

Final inspection and approval of all work required under the contract shall be performed by the designated State officials.

The State and/or its authorized representatives shall have the right to enter any premises where the Contractor or subcontractor duties under the contract are being performed, and to inspect, monitor or otherwise evaluate the work being performed. All inspections and evaluations shall be at reasonable times and in a manner that will not unreasonably delay work.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

E. PAYMENT (Statutory)

Payment will be made by the responsible agency in compliance with the State of Nebraska Prompt Payment Act (See Neb. Rev. Stat. §81-2403). The State may require the Contractor to accept payment by electronic means such as ACH deposit. In no event shall the State be responsible or liable to pay for any goods and services provided by the Contractor prior to the Effective Date of the contract, and the Contractor hereby waives any claim or cause of action for any such services.

F. LATE PAYMENT (Statutory)

The Contractor may charge the responsible agency interest for late payment in compliance with the State of Nebraska Prompt Payment Act (See Neb. Rev. Stat. §81-2401 through 81-2408).

G. SUBJECT TO FUNDING / FUNDING OUT CLAUSE FOR LOSS OF APPROPRIATIONS (Statutory)

The State's obligation to pay amounts due on the Contract for a fiscal year following the current fiscal year is contingent upon legislative appropriation of funds. Should said funds not be appropriated, the State may terminate the contract with respect to those payments for the fiscal year(s) for which such funds are not appropriated. The State will give the Contractor written notice thirty (30) calendar days prior to the effective date of termination. All obligations of the State to make payments after the termination date will cease. The Contractor shall be entitled to receive just and equitable compensation for any authorized work which has been satisfactorily completed as of the termination date. In no event shall the Contractor be paid for a loss of anticipated profit.

H. RIGHT TO AUDIT (First Paragraph is Statutory)

The State shall have the right to audit the Contractor's performance of this contract upon a thirty (30) calendar days' written notice. Contractor shall utilize generally accepted accounting principles, and shall maintain the accounting records, and other billing and service records and information relevant to the contract (Information) to enable the State to audit the contract. (Neb. Rev. Stat. §84-304 et seq.) The State may audit and the Contractor shall maintain, the Information during the term of the contract and for a period of five (5) years after the completion of this contract or until all issues or litigation initiated prior to the expiration of this records retention obligation are resolved, whichever is later. The Contractor shall make the Information available to the State at Contractor's place of business or a location acceptable to both Parties during normal business hours. If this is not practical or the Contractor so elects, the Contractor may provide electronic or paper copies of the Information. The State reserves the right to examine, make copies of, and take notes on any Information relevant to this contract, regardless of the form or the Information, how it is stored, or who possesses the Information. Under no circumstance will the Contractor be required to create or maintain documents not kept in the ordinary course of contractor's business operations, nor will contractor be required to disclose any information, including but not limited to product cost data, which is confidential or proprietary to contractor.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:
		SKB	CenturyLink requests a few edits to clarify that the parties will be responsible for their own costs of an audit and to clarify that the State has an obligation to review invoices in a timely manner and promptly raise any concerns about invoices.

The Parties shall pay their own costs of the audit ~~unless the audit finds a previously undisclosed overpayment by the State. If a previously undisclosed overpayment exceeds one-half of one percent (.5%) of the total contract billings, or if fraud, material misrepresentations, or non-performance is discovered on the part of the Contractor, the Contractor shall reimburse the State for the total costs of the audit.~~ Overpayments ~~and audit costs~~ owed to the State shall be paid within ninety (90) days of written notice of the claim, provided the Contractor shall have a right to vet and contest such findings. The Contractor agrees to correct any material weaknesses or condition found as a result of the audit. Disputes must be submitted to Contractor in writing within 90 days from the date of the invoice or the right to dispute an invoice is waived.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

V. PROJECT DESCRIPTION AND SCOPE OF WORK

A. Background and Project Scope


The Nebraska Public Service Commission, State 911 Department (The Commission) is the statewide authority responsible for implementing and coordinating 911 service in the state. The Commission is seeking proposals for a statewide ESInet and NGCS to help advance Next Generation 911 (NG911) across the state.

Today, the local PSAPs manage and maintain independent relationships with 911 service provider and network providers. With this procurement, the Commission will establish and support a statewide ESInet and NGCS to provide 911 service to the regions throughout the state.

The state has 68 PSAPs that take approximately 1.13 million calls a year and serve a statewide population of 1.929 million people. The largest population centers are Douglas County (566,880) and Lancaster County (317,272). Many of the PSAPs throughout the state have joined together to form regions. Each region utilizes call-handling equipment (CHE) that operates in a host/remote configuration. The Commission is looking for the statewide ESInet to include physically redundant connections into each of the regional host systems. The current regional configuration is depicted in the diagram (Figure 1) below; however, it is anticipated that over the next 12 to 18 months, additional PSAPs will join one of the different regions or a new region may be formed. Updated regional information can be found on the Public Service Commission's website at www.psc.nebraska.gov.

FIGURE 1

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

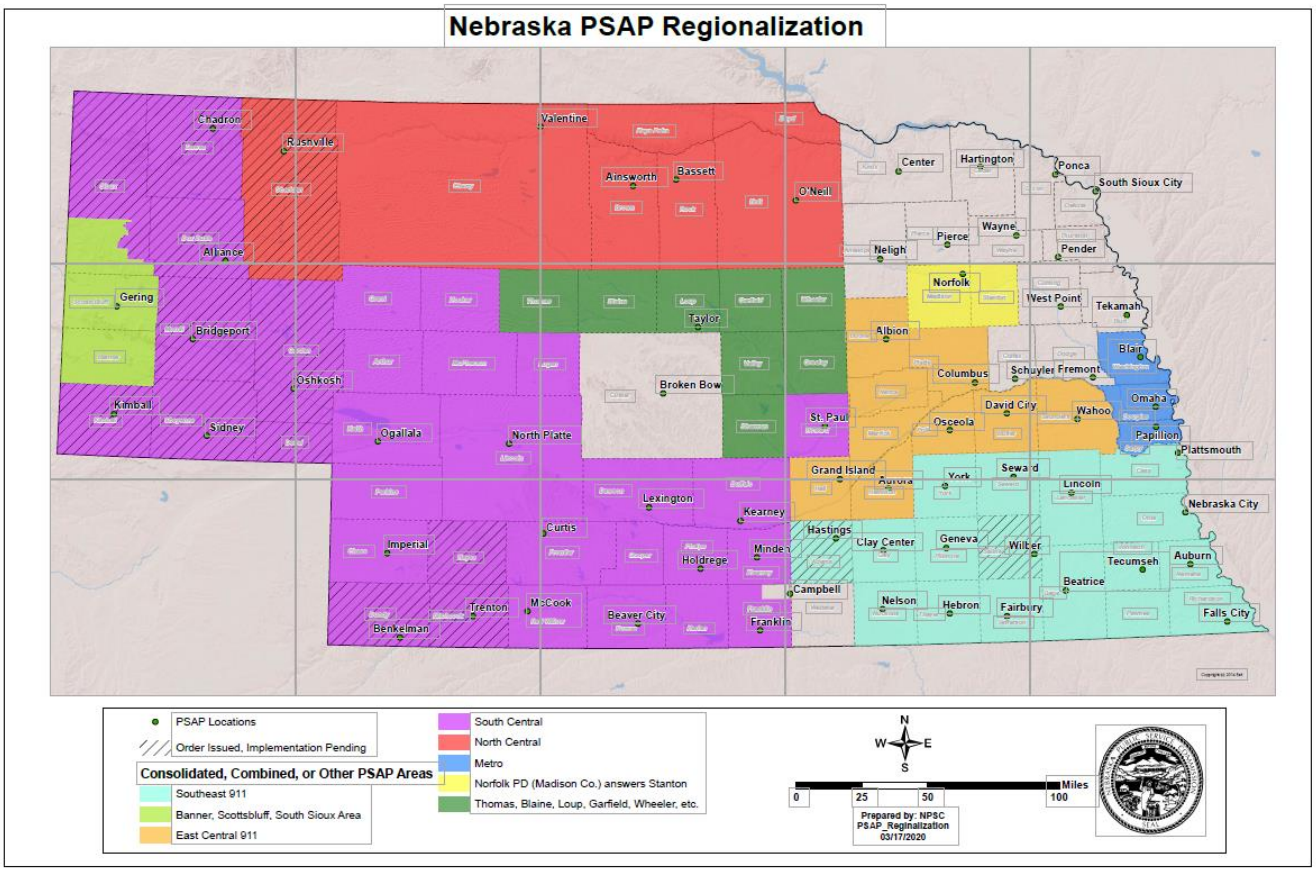

Estimated Regions (subject to change): South Central/Panhandle=Region 1, Southeast 911=Region 2, East Central 911 (including Custer County)=Region 3, Metro=Region 4, North Central=Region 5, Norfolk PD=North East=Region 6, Metro West (anticipated Dodge, Colfax, Cuming, and Burt Counties)=Region 7

Response: CenturyLink has read and understands. The information presented in this RFP reflects our approach and solution to the above Scope of Work.

B. Composition of the Request for Proposal

This RFP is composed of two elements: Emergency Services Internet Protocol [IP] Network (ESInet) and Next Generation Core Services (NGCS). Bidders may respond to a single element (Option A- ESInet or Option B - NGCS) or both elements (Option C – ESInet and NGCS. The State will evaluate all conforming proposals. A highest scoring bidder will be identified for each of the options (A, B, and C) The State reserved the right to award any and all options at its sole discretion.

The statewide NG911 initiative will focus on two primary areas, the ESInet and NGCS.

1. Option A: Deployment of an ESInet

With the deployment of a statewide ESInet, the Commission is seeking a solution that connects each regional host to the statewide ESInet. Key project elements for ESInet deployment include, but are not limited to:

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

a. Deployment of a public safety-grade network that is monitored and managed to ensure security, reliability and high availability;
b. Implementation of a network that is affordable and provides a consistent level of service to all PSAPs throughout the state;
c. Development of a phased implementation approach that minimizes service impact to PSAP operations; and,
d. Cooperation and coordination with the NGCS provider throughout and after implementation.

2. **Option B: Deployment of Next Generation Core Services (NGCS)**
The Commission is seeking an NG911 call-delivery system that provides highly available call routing and delivery to the regional end points throughout the state. Key project elements for NGCS deployment include but are not limited to:

a. Deployment of monitored and managed core services that are redundant, resilient, sustainable, and provide an upgrade path to new technologies as NG911 services evolve;
b. Transition to the use of Geographic Information System (GIS) data for geospatial call routing;
c. Planned transition timelines that limit the overlap between the legacy selective router network and NGCS; and,
d. The ability to support various types of requests for assistance including calls, text messages, video messages, additional data, etc.

3. **Option C: Deployment of an ESInet and NGCS**
Includes all requirements of both Option A and Option B.

Please note that proposals may be submitted for all of the desired services or a portion of the services based on Bidder capabilities. For example, a network provider may bid only the ESInet portion of the proposal and not the NGCS.

The Commission's intent is to release an RFP soon after the release of the ESInet/NGCS RFP that addresses the connectivity from the host locations to the regional PSAP locations.

Response: CenturyLink has read, understands, and complies. CenturyLink's proposal incorporates Option C, deployment of both an ESInet and NGCS.

C. Bidder Requirements:

1. Bidders should include with their response:

a. Configuration Solution – A diagram showing the major components (hardware, software, and network layout) for the proposed system, accompanied by tables containing short descriptions of the diagrammed components in terms of their value or benefit to the Commission and the Public Safety Answering Points (PSAPs).

Response: The configuration solution diagram and the major components for the proposed solution are provided in the response to NGCS-1 in Attachment C, Option C.

b. Attachments – Cost Proposal, with a detailed description of its firm fixed pricing.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Response: The Cost Proposal is provided in a separate file per the instructions in Q&A response # 48 in Addendum Two. Please see the Cost Proposal in the file named "**RFP 6264 Z1 CenturyLink Proposal 2 Option C File 2 of 3**".

c. Appendices – The Bidder may include appendices and reference them from within the proposal response. This is particularly appropriate for lengthy responses on a single subject. Understanding the intent of the Bidder shall be possible without the reading of the appendices.

Response: CenturyLink has read, understands, and complies.

d. Brochures – Hardware, software, or service brochures may be submitted with response where appropriate.

Response: CenturyLink has read, understands, and complies.

D. General Requirements – Technical

1. General requirements – Commission Requirements

a. Industry Standards
The Commission seeks a standards-based solution that complies with nationally accepted standards and requirements applicable to ESInet architecture, security, and interface functionality. All aspects of the Bidder's proposed system design, deployment, operation, and security shall be in full compliance with the standards, requirements, and recommendations located in the Table 1: Adopted Standards. Standards Development Organizations (SDOs) include:

i. Association of Public Safety Communications Officials (APCO)
ii. The Monitoring Association (TMA)
iii. National Emergency Number Association (NENA)
iv. Alliance for Telecommunications Industry Solutions (ATIS)
v. Department of Justice (DOJ)
vi. Internet Engineering Task Force (IETF)
vii. North American Electric Reliability Corporation (NERC)
viii. National Institute of Standards and Technology (NIST)
ix. Telecommunications Industry Association (TIA)

Table 1: Adopted Standards

SDO	Standard ID	Standard Title	Standard Description	Latest Revision/ Release Date or The Most Current
ATIS	ATIS-0500017	Considerations for an Emergency Services Next Generation Network (ES-NGN)	Identifies standards and standards activities that are relevant to the evolution of emergency services networks in the context of next-generation telecommunications networks.	Version 1 June 2009

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

SDO	Standard ID	Standard Title	Standard Description	Latest Revision/ Release Date or The Most Current
DOJ	CJISD-ITS-DOC-08140-5.6	Criminal Justice Information Services (CJIS) Security Policy	Provides information security requirements, guidelines, and agreements reflecting the will of law enforcement and criminal justice agencies for protecting the sources, transmission, storage, and generation of criminal justice information.	Version 5.6 June 5, 2017
IETF	RFC 3261	SIP: Session Initiation Protocol	Describes the SIP, an application-layer control (signaling) protocol for creating, modifying, and terminating sessions (including Internet telephone calls, multimedia distribution, and multimedia conferences) with one or more participants.	Version 1 July 7, 2002
IETF	RFC 3986	Uniform Resource Identifier (URI): Generic Syntax	Defines the generic URI syntax and a process for resolving URI references, along with guidelines and security considerations for the use of URIs on the Internet.	Version 1 January 2005
NENA/ APCO	REQ-001.1.2-2018	Next Generation 911 PSAP Requirements	Provides requirements for functions and interfaces between an i3 PSAP and NGCS, and among functional elements associated with an i3 PSAP.	Version 1.2 April 5, 2018
NENA/ APCO	INF-005	Emergency Incident Data Document (EIDD) Information Document	Provides a recommended list of data components, their relationships to each other, the data elements contained within each data component, and the registries that control the available values for appropriate data elements. Initiates the process to create a National Information Exchange Model (NIEM).	February 21, 2014 Scheduled to be replaced by a standards document
NENA	STA-015.10-2018	Standard Data Formats for 911 Data Exchange & GIS Mapping	Establishes standard formats for Automatic Location Identification (ALI) data exchange between service providers and Database Management System (DBMS) providers, a GIS data model, a data dictionary, and formats for data exchange between the ALI database and PSAP controller equipment.	Version 10 August 12, 2018
NENA	STA-008.2-2014	Registry System Standard	Describes how registries (lists of values used in NG911 functional element standards) are created and maintained.	Version 2 October 6, 2014

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

SDO	Standard ID	Standard Title	Standard Description	Latest Revision/ Release Date or The Most Current
NENA	STA-010.2-2016	Detailed Functional and Interface Specifications for the NENA i3 Solution	Builds upon prior NENA publications including i3 requirements and architecture documents and provides additional detail on functional standards.	Version 2 September 10, 2016
NENA	INF-016.2-2018	Emergency Services IP Network Design for NG911 (ESIND)	Provides information that will assist in developing the requirements for and/or designing an i3-compliant ESInet.	Version 1 April 5, 2018
NENA	75-001	Security for Next Generation 911 (NG-SEC)	Establishes the minimal guidelines and requirements for levels of security applicable to NG911 entities.	Version 1 February 6, 2010
NENA	INF-015.1-2016	NG911 Security Information Document	Provides mechanisms and best practices for cybersecurity for i3 systems	Version 1 December 8, 2016
NERC	CIP 002-CIP 009	Critical Infrastructure Protection	Addresses the security of cyber assets essential to the reliable operation of the nation's critical infrastructure.	Version 1 December 16, 2009
NIST	FIPS 140-33	Security Requirements for Cryptographic Modules	Specifies security requirements that will be satisfied by a cryptographic module utilized with a security system protecting sensitive but unclassified information.	Version 2 March 22, 2019
NIST	Cybersecurity Framework	Framework for Improving Critical Infrastructure Cybersecurity	Provides standards, guidelines, and best practices that promote the protection of critical infrastructure.	Version 1.1 April 16, 2018
TIA	TIA-942-A	Telecommunications Infrastructure Standard for Data Centers	Specifies the minimum requirements for telecommunications infrastructure of data centers and computer rooms, including single-tenant enterprise data centers and multi-tenant Internet-hosting data centers.	Revision A March 2014

As industry standards evolve, the Bidder's solution shall be upgraded to maintain compliance with the current version of established industry standards. The Bidder's solution shall support new ESInet, NGCS and security industry standards within 18 months of ratification of applicable industry standards at no additional cost to the State. Compliance requirements apply also to the supporting standards referenced within each standard. As solution updates are made to maintain compliance, the solution shall not abandon services or feature functionality in place at the time of the solution upgrade. The Bidder shall uncover any performance or feature changes prior to the upgrade and report them to the Commission for approval.

b. Public Safety-Grade Definition
The national standards listed in this document provide standards and requirements an IP network and core functions shall meet or exceed to be considered an ESInet. The term "public safety-grade" has been utilized to refer to

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

this level of standards compliance; however, a universal definition of this term has not been proposed by a Standards Development Organization (SDO) or accepted by the public safety community. For the purpose of the requirements associated with this ESInet and NGCS design and deployment, the following metric is used to define public safety-grade:

i. Reliability:
"Reliability" is the ability of a system or component to perform the required functions under stated conditions for a specified period of time. The traditional measure of system or component reliability is Mean Time Between Failure (MTBF). The required MTBF must result in system reliability of 0.99999 as recommended in NENA-INF-016.2-2018, Section 2.10.1.

ii. Availability:
"Availability" is the degree to which a system or component is operational and accessible when required for use. System availability is dependent upon the Mean Time to Repair (MTTR) calculation, which measures the time it takes to recover from component failure, a failed system upgrade, operator error, or other scheduled and unscheduled system interruption. Downtime must not exceed five (5) minutes per year, or 99.999 percent availability, as recommended in NENA-INF-016.2-2018, Section 2.10.1.

iii. Security:
Secure communications must be retained through the following measures, as recommended in NENA-INF-015.1-2016, Section 3.2:

- **a.** Rivest–Shamir–Adleman (RSA)-based public-key cryptography using X.509 certificates to authenticate elements, agencies, and agents. Mutual authentication must exist between both ends of a communication.
- **b.** An eXtensible Access Control Markup Language (XACML)-based Data Rights Management (DRM) system to control authorization.
- **c.** Advanced Encryption Standards (AES) based encryption to provide confidentiality.
- **d.** Secure Hash Algorithm (SHA)-based digest-based digital hashing to provide integrity protection.
- **e.** Dsig-based digital signatures to provide non-repudiation.

iv. Network Traffic Restrictions:
The established metrics in this definition can be achieved through system and component redundancy, diversity, resiliency, and other similar engineering methodologies. When the term "public safety-grade" is applied in this document, the Bidder shall describe how bidder's network and core service system and components for critical functions either meets or exceeds the standards-based, public safety-grade definition.

When this term is used in this document to describe the required level of service for the ESInet, and NGCS, functionality, the Bidder shall confirm that its service and components meet or exceed both the national standards listed in Table1 and the public safety-grade definition.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

Response: CenturyLink has read, understands and complies. CenturyLink's responses in Attachment C Option C show that we comply with and meet or exceed the standards listed above. Additional information about CenturyLink's NGCS and ESInet solution is provided in the Service Exhibits, SLAs, and Technical information provided in the Attachments, Addenda, Appendices, and Brochures attached to this response.

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

2. TECHNICAL APPROACH

The technical approach section of the Technical Proposal should consist of the following subsections:

a. Understanding of the project requirements;

Response: CenturyLink currently offers E9-1-1 services in 35 states where CenturyLink operates as a Local Exchange Carrier. Our E9-1-1 services include network management, local trunking, selective routing (using appropriate ESN data), and ALI database services. Additionally, CenturyLink offers a full range of PSAP applications in on-premise configurations.

CenturyLink currently offers NG9-1-1 services in Washington, Utah, North Dakota, Minnesota, and North Carolina over our IP-based, redundant, resilient, fault tolerant, and secure Public Safety grade ESInet. Powered by West Safety Services next generation core services, CenturyLink has been offering NG9-1-1 solutions for over 8 years.

CenturyLink has been designing and deploying public safety products and services based on the needs of the industry and our forward-looking view of 9-1-1. CenturyLink provides core 911 services to over 35 states in the US and has played a key role in defining, building, and maintaining the complex emergency communications infrastructure.

We listen to public safety officials, monitor new technology development, and participate in industry standards bodies to understand these needs and develop products that revolutionize the public safety industry.

CenturyLink has a proven track record of successfully integrating emerging technologies into the evolving emergency services network, and our proactive deployment of next generation technologies is helping to improve 9-1-1 system efficiency and increase interoperability throughout the emergency response community.

CenturyLink 911 systems and services support a high percentage of all 9-1-1 calls placed each day, totaling over 300 million calls to 9-1-1 each year. CenturyLink customers include all major U.S. wireline, wireless, Voice over IP (VoIP), Satellite, and Telecommunication Relay Services carriers, large international operators, and a growing number of public safety agencies and municipalities in the U.S. Built on a belief in work worth doing, our companies touch millions of lives every day and we take that responsibility very seriously.

CenturyLink is extensively involved in all aspects of 9-1-1, giving us a unique perspective on its required evolutionary path to support new technologies and expand citizen expectations. These insights have enabled CenturyLink to anticipate trends and help public safety agencies and telecommunications service providers proactively prepare for change.

CenturyLink's emergency communications excellence is built upon a strong foundation of the following::

- An unmatched knowledge of emergency communications and public safety operations
- A proven experience in the design, deployment and operation of highly accurate, high-volume communication networks, equipment, software and applications
- A solid reputation as a trusted and neutral custodian of sensitive data
- A passion for saving lives
- A thorough understanding of the needs of the State of Nebraska for NG911 Services

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

i3 Products

CenturyLink's NG9-1-1 product suite is a complete, end-to-end manage hosted NG 9-1-1 solution that provides an i3 ESInet that is fully interoperable with legacy networks. The suite includes a broad range of premise-based and fully managed public safety solutions that align with the most commonly used industry standards. New products include interconnections with call handling solutions and managed and secure emergency IP network (ESInet) services.

Additional products in the i3 suite are:

- IP voice and data delivery to public safety answering points (PSAPs)
- Enterprise Geographic Information Services (GIS) data management services
- Comprehensive Geographic Information Services (GIS)
- Location Information Services (LIS)
- Advanced call routing services including ESRP, ECRF, BCF, LNG, and LPG
- Network and Application Security services
- Voice and data gateway services for interoperability with legacy and other next generation networks
- Advanced message switching services
- Call handling premise systems for the i3 capable PSAP
- Text-to-9-1-1

CenturyLink has been designing and implementing telephony networks since 1930. This includes 911 ALI database and selective routing and transport since the inception of 9-1-1. CenturyLink's NG9-1-1 solution is built on the basic principle of "no single point of failure." Our solution uses a fully redundant, multi-carrier, multi-location network linking all 9-1-1/E9-1-1 network elements and PSAPs. Within each redundant node, there are redundant network elements. Each of these facilities and nodes are equipped with physically redundant data communications and power equipment so that any component can be maintained without overall service impact. Failover within the system occurs automatically with no manual intervention. CenturyLink's network carriers enter each facility (minimum of two) via diverse facility transport paths and diverse points of interconnection. Where available, each carrier will have their 9-1-1 calls delivered over diverse facility routes.

The MPLS network is designed in a 100% capacity and 100% redundancy configuration so that if one MPLS carrier's network goes down, the redundant bandwidth can manage 100% of the PSAP's capacity. The result of this is a network that is truly public safety grade in terms of capacity, reliability, and redundancy.

CenturyLink's proven track record of successfully integrating emerging technologies into the evolving emergency services network and its proactive deployment of next generation technologies is helping to improve 9-1-1 system efficiency and increase interoperability throughout the emergency response community. Our network design is based on CenturyLink's extensive experience in deploying NG9-1-1 for hundreds of PSAPs and many statewide deployments covering the following areas.

b. Proposed development approach;

Response: CenturyLink follows a well-defined, repeatable, and disciplined system and software design, development, and implementation methodology. These are well planned

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

and managed processes. The ESInet system design is a highly available and highly reliable distributed and redundant architecture with no single points of failure. Key components are redundant within a given geographic site and are also geographically redundant. The loss of any single element will not prohibit call processing functions. The architecture is also extremely scalable to meet current and future needs. The solution includes internal audits and background test capabilities to continuously ensure solution integrity and to detect abnormal conditions.

The overall implementation is highly secure and uses industry standard security best practices. The ESInet system is protected from external sources and practices internal security management best practices process and procedures.

The ESInet system design is a multi-tenant architecture with configuration to implement customer desired routing behavior and interface protocols. The resulting architecture is highly cost effective for individual customers and results in an ability to focus specialized resources, where smaller, completely localized solutions may struggle to deploy dedicated specialized resources.

Implementation has achieved a standard, highly repeatable, process as demonstrated by the numerous NG911 / PSAP deployments. Deployment is followed by an effective and constantly improving monitoring and management capability with a 24x7x365 support structure..

c. Attachment C - Technical Requirements Option A, B, and/or C;

Response: CenturyLink has provided Attachment C Option C for this proposal version 2 in the electronic on-line filing as the file named "**RFP 6264 Z1 CenturyLink Proposal 2 Option C File 3 of 4"**

d. Proposed high-level project plan

Response:
A high-level Program Management Plan(PMP) has been provided as an appendix to this document. The Program Development Plan will be refined with input from all stakeholders after contract award during the planning phase of the project. The PMP outlines all areas of the project from planning through implementation and deployment and will serve as the guiding document throughout the lifecycle of the program. Please see the file named "**2.d_CenturyLink Sample Program Management Plan for Nebraska**"

During the planning phase of the project, the CenturyLink Program Manager will work with stakeholders to refine the PMP and ensure that it is inclusive of all aspects of both the project and overall program lifecycle. A final draft version of the PMP will be provided to all stakeholders for any revisions and signoff, then the final product will be distributed. As customer needs evolve, this document can, and should, be revised to reflect any changes to the project/program.

e. Schedule for the lifecycle of this project; and

Response:
A draft schedule has been provided as an appendix to this proposal. The schedule has been developed based on the timelines provided within the Request for Proposal and approaches the Implementation and Transition phases on a regional basis. A regional approach will allow

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

the state to transition services in a manner that both reduces risk, and allows for ample testing and acceptance prior to moving focus to the subsequent regions. The schedule that has been provided is to be considered a draft, with the finalized schedule to be provided after the planning phase has been completed. The CenturyLink Program Manager will update the schedule as the project progresses and provide it to the state as revisions occur, along with the regular status reporting. The schedule, although considered final after the planning phase, should be considered a "living" document as it will be adjusted throughout the lifecycle of the project. Please see the attachment named **"2.e Sample Nebraska_Draft Project Schedule_Gantt Chart Format**"

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

FORM A
BIDDER PROPOSAL POINT OF CONTACT

Request for Proposal Number 6264 Z1

Form A should be completed and submitted with each response to this solicitation. This is intended to provide the State with information on the bidder's name and address, and the specific person(s) who are responsible for preparation of the bidder's response.

Preparation of Response Contact Information	
Bidder Name:	CenturyLink Communications, LLC
Bidder Address:	118 South 19th Omaha Ne 68102
Contact Person & Title:	Jon Osborne
E-mail Address:	Jon.Osborne1@centurylink.com
Telephone Number (Office):	402 998 7392
Telephone Number (Cellular):	402 216 1009
Fax Number:	402 422 3545

Each bidder should also designate a specific contact person who will be responsible for responding to the State if any clarifications of the bidder's response should become necessary. This will also be the person who the State contacts to set up a presentation/demonstration, if required.

Communication with the State Contact Information	
Bidder Name:	CenturyLink Communications, LLC
Bidder Address:	125 S Dakota Ave. Sioux Falls, SD. 57104
Contact Person & Title:	Bjorn Johnson, Sr. Account Manager - SLED
E-mail Address:	Bjorn.Johnson@centurylink.com
Telephone Number (Office):	605 977 2820
Telephone Number (Cellular):	605 321 6188
Fax Number:	605 339 5652

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

REQUEST FOR PROPOSAL FOR CONTRACTUAL SERVICES FORM

By signing this Request for Proposal for Contractual Services form, the bidder guarantees compliance with the procedures stated in this Solicitation, and agrees to the terms and conditions unless otherwise indicated in writing and certifies that bidder maintains a drug free workplace.

Per Nebraska's Transparency in Government Procurement Act, Neb. Rev Stat § 73-603 DAS is required to collect statistical information regarding the number of contracts awarded to Nebraska Contractors. This information is for statistical purposes only and will not be considered for contract award purposes.

__X__ NEBRASKA CONTRACTOR AFFIDAVIT: Bidder hereby attests that bidder is a Nebraska Contractor. "Nebraska Contractor" shall mean any bidder who has maintained a bona fide place of business and at least one employee within this state for at least the six (6) months immediately preceding the posting date of this Solicitation.

_____ I hereby certify that I am a Resident disabled veteran or business located in a designated enterprise zone in accordance with Neb. Rev. Stat. § 73-107 and wish to have preference, if applicable, considered in the award of this contract.

_____ I hereby certify that I am a blind person licensed by the Commission for the Blind & Visually Impaired in accordance with Neb. Rev. Stat. §71-8611 and wish to have preference considered in the award of this contract.

FORM MUST BE SIGNED USING AN INDELIBLE METHOD OR BY DOCUSIGN

FIRM:	CenturyLink Communications, LLC
COMPLETE ADDRESS:	931 14th Street, # 900 Denver, CO. 80202
TELEPHONE NUMBER:	720 779 8247
FAX NUMBER:	303 383 8275
DATE:	June 3, 2020
SIGNATURE:	Susan Baker
TYPED NAME & TITLE OF SIGNER:	Susan Baker, Manager Offer Management

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

ATTACHMENTS, ADDENDA, APPENDICES, AND BROCHURES

State Attachments and Required Uploaded Files

RFP 6264 Z1 CenturyLink Proposal 2 Option C File 2 of 4 (Cost Proposal)

RFP 6264 Z1 CenturyLink Proposal 2 Option C File 3 of 4 (Attachment C Option C)

RFP 6264 Z1 CenturyLink Proposal 2 Option C File 4 of 4 (PROPRIETARY INFORMATION)

State Issued Addenda

6264 Z1 Addendum One 3-25-2020

6264 Z1 Addendum Two 3-27-2020

6264 Z1 Addendum Three 4-16-2020

6264 Z1 Addendum Four Questions and Answers 4.22.20 final Q&A Answers - NE RFP

6264 Z1 Addendum Five 4-22-20 Revised SOE Revised Schedule - NE RFP NG911

6264 Z1 Addendum Six 5-7-2020 Questions and Answers Round Two final

6264 Z1 Addendum Seven 5-15-20 Questions and Answers additional question

CenturyLink Attachments and Supporting Documentation

6264 Z1 CC LLC NE Cert of Good Standing

1.A.1.i Key Employees ResumesNG911 Resumes_Combined

1_a_CC__LLC_Certificate_of_Name_Change__Incorporation

2.d_ CenturyLink Sample Program Management Plan for Nebraska

2.d ss15_SAMPLE Staging and Acceptance Checklist

2.d_Testing_Sample CenturyLink Test Plan

2.e Sample Nebraska_Draft Project Schedule_Gantt Chart Format

3.B I 9 Compliance Certification_Q1 2020_Letterhead

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

CenturyLink's Service Exhibits and SLA Attachments, as referenced in the Legal Statement included with this response:

Att A_MPLS (IPVPN and VPLS) VPN Service Schedule

Att B_Local Access Service Exhibit with Pricing Attachment

Att C_SLA_Local Access

Att D_Domestic Network Diversity Service Exhibit

Att E_SLA_Diversity

Att F_CenturyLink Select Advantage Service Exhibit

Att J_Telecommunications Service Priority (TSP)

Att K_Data Security Addendum

Att L_QCC Network Management Service (NMS) Exhibit

Att M_SLA_NMS

Att N_NextGen 911 Service Schedule (Intrado)

Attachments and Brochures supporting attachment C Option C

NGCS_78_Intrado 9-1-1EGDMS User Guide_3.4

SEC 3 Security Compliance Matrix

SLA 5 Brix_probe_PSAP_Troubleshooting

SLA 5 PSAP_Active_Test_V4-Example

Attachments and Brochures filed as PROPRIETARY INFORMATION and provided in a separate file:

CenturyLink-Intrado PROPRIETARY INFORMATION Reasons

ESI_10_ESInet to ESInet Intercon Specification_v2.1.1_PROPRIETARY

Attachment C Option C - PROPRIETARY INFORMATION

NGCS_23_OSP NNI v1.6.1_PROPRIETARY

NGCS_75_ADR-AdditionalData Interface Specif_v1.3.1docx_PROPRIETARY

NGCS_75_ECRF-LoST Interface Specification_v1.4.2_PROPRIETARY

NGCS_75_LIS-HELD Interface Specification_v1.4_PROPRIETARY

NGCS_78_ESRP-Term ESRP Interface Specification_v1.4.1_PROPRIETARY

A.1.e NE Active Contracts Public Saftey & SoNE PROPRIETARY

© 2020 CenturyLink. All Rights Reserved. The service marks used in this proposal are registered service marks or service marks of CenturyLink, Inc., its subsidiaries, or third parties in the United States and/or other countries.

ADDENDUM ONE

Date: March 25, 2020

To: All Bidders

From: Annette Walton / Nancy Storant, Buyers
Nebraska State Purchasing Bureau

RE: Addendum for RFP Number 6264 Z1 to be opened June 3, 2020 at 2:00:00 p.m. Central

The Change in Procurement Procedure allowing for electronic submission of bids through ShareFile has the following change:

The previous link did not request email information in order to send a confirmation email listing the items uploaded by a vendor for this RFP.

Please use the following Link to upload proposal documents:
https://nebraska.sharefile.com/r-r7e7e4b7a0264303a

This addendum will become part of the ITB/proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM TWO

Date: March 27, 2020

To: All Bidders

From: Annette Walton / Nancy Storant, Buyers
Nebraska State Purchasing Bureau

RE: Addendum for RFP Number 6264 Z1 to be opened June 3, 2020 at 2:00:00 p.m. Central

Due to concerns around COVID-19, the State of Nebraska is allowing attendance of the Optional Pre-Proposal Scheduled for April 1, 2020 from 10am-12pm to only be via Skype. Please submit an Intent to Attend Form B for meeting information.

This addendum will become part of the ITB/proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM THREE – REVISED SCHEDULE OF EVENTS

Date: April 16, 2020

To: All Bidders

From: Annette Walton / Nancy Storant, Buyers
Nebraska State Purchasing Bureau

RE: Addendum for RFP Number 6264 Z1 to be opened June 3, 2020 at 2:00:00 P.M. Central

Revised Schedule of Events

ACTIVITY		DATE/TIME
6.	State responds to written questions through Solicitation "Addendum" and/or "Amendment" to be posted to the Internet at: http://das.nebraska.gov/materiel/purchasing.html	April 22, 2020 ~~April 16, 2020~~
7.	Proposal Opening Location for mailed/hand delivered submissions: State Purchasing Bureau 1526 K Street, Suite 130 Lincoln, NE 68508 Electronic submissions: https://nebraska.sharefile.com/r-r11ba33e3ee24b63b	June 3, 2020 2:00: 00 PM Central Time
8.	Review for conformance to solicitation requirements	June 8, 2020
9.	Evaluation period	June 8, 2020 through June 29, 2020
10.	"Oral Interviews/Presentations and/or Demonstrations" (if required)	TBD –July 13-17
11.	Post "Notification of Intent to Award" to Internet at: http://das.nebraska.gov/materiel/purchasing.html	TBD
12.	Contract finalization period	TBD
13.	Contract award	TBD
14.	Contractor start date	TBD

This addendum will become part of the ITB/proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM FOUR, QUESTIONS and ANSWERS

Date: April 22, 2020

To: All Bidders

From: Annette Walton/Nancy Storant, Buyers
AS Materiel State Purchasing Bureau

RE: Addendum for Request for Proposal Number 6264 Z1 to be opened June 3, 2020 at 2:00 P.M. Central Time

Questions and Answers

Following are the questions submitted and answers provided for the above-mentioned Request for Proposal. The questions and answers are to be considered as part of the Request for Proposal. It is the Bidder's responsibility to check the State Purchasing Bureau website for all addenda or amendments.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
1.	6264 Z1 Attachment C Technical Requirements Option A, B and C (Word doc)	SLA 1 through 9	General Operations - Service Level Agreements System Capacities and Performance	16	Option A, B, and C have the same SLA requirements; could the Commission please clarify how the SLA's apply to each option individually?	The SLA requirements apply as written. Even if a bidder is only responding to the NGCS, there is still a network component to that. The SLAs related to devices and capacity apply equally to network and NGCS devices.
2.	6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS (Word doc)	GEN SCEN 3	Scenario 3	25	Can the Commission clarify whether this scenario is referring to an SI or LDB change?	The reference is to a spatial interface (SI) change, but it could be either an SI or location database (LDB) in a transitional environment. The errors were discovered in the Contractor's validation process prior to updating either the SI or the LDB, with the understanding that the state will upload data to the Contractor and never have direct access to either the SI or the LDB.
3.	6264 Z1 ESInet and Core Services RFP Revision One and Cost Proposal (Word doc)	V.A	Background and Project Scope	28	Regions 1-6 are defined differently in Section V.A and in the Cost Proposal Summary; for example, Region 1 is defined as the South Central / Panhandle in RFP Section V.A and defined as SE in the Cost Proposal Summary. Could the Commission please clarify?	Section V.A. of the RFP is Correct. Please use the revised posted documents: 6264 Z1 Cost Proposal Option A ESInet Revision One, 6264 Z1 Cost Proposal Option B NGCS Revision One, and 6264 Z1 Cost Proposal Option C ESInet and NGCS Revision One.
4.	6264 Z1 ATTACHMENT A	PSAP Host Locations	-	-	Based on the description of each RFP element in section V.B of the main RFP document, the initial RFP solution will connect each regional host to the statewide ESInet. What does the Commission intend for the Standalone PSAPs and Regions 6 and 7 that do not have a host location defined in Attachment A? Can the Commission identify hosted location(s) for Regions 6	The creation and composition of PSAP regions is under local control. However, it is the State's expectation that the remaining standalone PSAPs will join either an existing region or one of two new regions, at the PSAPs discretion. The State anticipates that regions 6 & 7 will be comprised of PSAPs in the northeast corner of the state. The two regions are expected to form by mid-2021 and anticipated host locations have been added to Attachment A Revision One.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					and 7 to maintain consistency with pricing for Regions 1-5? Can the Commission indicate which Region the Standalone PSAPs intend to join?	For purposes of responding to this RFP, please assume the following: The State is of the understanding that the PSAPs in Custer and those included in 'Region 26' (Thomas, Blaine, Loup, Garfield, Wheeler, Valley, Greely and Sherman counties) will become a part of the East Central Region. ***Region 6 (Northeast)** Knox, Cedar, Dixon, Dakota, Thurston, Stanton, Madison (Host), Wayne, Pierce, and Antelope **Region 7 (Metro West)** Dodge (Host), Colfax (Host), Cuming and Burt *The Northeast region is finalizing host locations. Norfolk (Madison County) will be one host, while the second host may be one of the following three locations: South Sioux City (Dakota County), Wayne, or Hartington (Cedar County). The State anticipates that the second host will be known prior to the opening of the RFP and an Addendum will be posted once the locations are finalized.
5.	6264 Z1 ATTACHMENT A	PSAP Host Locations	-	-	Is there a timeframe that should be assumed for the deployment of the host locations for Regions 6 and 7 for purposes of developing the project implementation plan?	The State anticipates completion of regions 6 and 7 by the end of 2021. It is expected that all regions are transitioned to the statewide NG911 system by 2023.
6.	6264 Z1 ATTACHMENT A	PSAP Host Locations	-	-	If the requirement is for bidders to provide network to standalone PSAPs, what is the requirement for last-mile diversity and redundancy for standalone PSAPs?	All PSAPs on the NG911 system will be a part of a region. There will not be standalone PSAPs.
7.	6264 Z1 ATTACHME	PSAP Equipm	-	-	Can the Commission provide the call-handling position count at each PSAP?	See Attachment D Nebraska PSAP Trunk, Position, and Call Volume Information.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	NT A	ent				
8.	6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS (Word doc)	ESI 1	Emergency Services IP Network Diversity	30	Can the Commission please clarify whether diverse entrances already exist at any of the identified host locations due to the likelihood that bidders will not be able to perform site walks of the locations prior to bid submission? For sites that have diverse entrances, can the Commission provide information on which carriers are providing IP connectivity through those entrances?	It is the state's understanding that the majority of the host locations do not have diverse entrances into their facilities. The host locations that have diverse entrances are those serving the South East Region, with Windstream serving as the primary carrier in both host locations and the Metro Region, with CenturyLink serving as the primary carrier into both host locations. The North Central, South Central, East Central, Metro West, and North East do not have diverse entrances. The State asks that Bidders differentiate between primary and secondary connections both in the response and pricing matrix.
9.	6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS (Word doc)	NGCS 9	Next Generation Core Services Elements (NGCS) Legacy Network Gateway (LNG) Location Information	37	Are NGCS 8 and NGCS 9 duplicates?	Yes, NGCS 8 and NGCS 9 are duplicates NGCS 9 has been deleted in its entirety. Please see; Attachment C Option B Revision One, and Attachment C Option C Revision One.
10.	6264 Z1 Attachment C Technical	NGCS 67	Next Generation Core	59	What expectations does the Commission have for the interface between audio logging recording and i3 Event logging?	At this time, there is no requirement of audio logging occurring within NGCS. Audio logging is done at the host or PSAP level. i3 event logging must interface

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	Requirements Option C - ESInet and NGCS (Word doc)		Services Elements (NGCS) Event Logging and Management Information System (MIS)			with ECaTS.
11.	6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS (Word doc)	NGCS 62	Next Generation Core Services Elements (NGCS) Spatial Interface (SI) Use of the Commission's GIS Data Model	56	1. Describe how the Bidder's solution will use the Commission's GIS data model (Attachment D) without modification to the schema. Can the Commission confirm that this is actually referencing Attachment B?	Yes .NGCS 62 has been corrected. Please use: Attachment C Option B - NGCS Revision One and Attachment C Option C – ESInet and NGCS Revision One.
12.	6264 Z1 ESInet and Core Services RFP Revision One	-	Scope of Service	1	"The bidder must identify the proprietary information, mark the proprietary information according to state law, and submit the proprietary information in a separate container or envelope marked conspicuously using an indelible method with the words "PROPRIETARY INFORMATION" or if submitting the proposal or response electronically, as a separate electronic file that is named "PROPRIETARY INFORMATION". " As the proprietary information in bidder's responses may be in a number of	

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					different areas of the response and if bidders provide the bid as requested above, this would oblige the State evaluation team to reference back and forth between two documents as they go through the review of the completed responses. We would like to suggest for the benefit of the evaluation team that bidders provide two full set of response documents; One copy of the full submission for the evaluation team (not to be published publicly) and one redacted version of the completed response (for public publication).	Please submit all proprietary information as required in the RFP.
13.	Addendum 1	-	-	-	Can the State provide what the file size limitation are for bid submission via ShareFile, if any?	None known at this time.
14.			Attachment A	2,3	Will PSAP CPE be upgraded to be i3 capable or will this be an initial RFAI deployment?	The PSC will work with the regions to encourage i3 compatibility, but Bidders shall assume connectivity to CHE with the software versions noted in Attachment A Revision One.
15.			Attachment C	Page 65, SVAL-1	Can the State please confirm that SVAL-1 is an optional requirement?	SVAL-1 is not an optional requirement. Attachment C Option B NGCS - Revision One Attachment C Option C ESInet and NGCS - Revision One.
16.			6264 Z1 ESInet and Core Services RFP Revision	Page 29	Is the intent of the “Option A” network to be a standalone WAN for all host locations to communicate and share data; or is the “Option A” network exclusive to provide connectivity from the NGCS’s to the host locations?	It could potentially allow for traffic between PSAPs associated with different hosts; however, 911 requests for assistance shall have priority. The regional ESInets will handle traffic between PSAPs in the respective regions. Any non-911 traffic must be public-

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			One			safety-related (CAD, MIS, etc.). The State recognizes that there would need to be traffic engineering discussions before additional traffic could be added to the network.
17.			Attachment A	2-3	Can the State provide physical addresses for all the Stand Alone PSAPs so that vendors can determine diversity availability to each?	See response to Question 4.
18.			Attachment A	all	Can the State confirm there are no secondary PSAPs that will be connected to the ESInet/NGCS?	At this time, no secondary PSAPs will be connected to the ESInet/NGCS. If they connect in the future, they will connect via a regional host.
19.			Attachment C, Option C	10	NOC/SOC 10 - Does this requirement only apply to ESInet as NGCS is not indicated in this requirement?	It is a general requirement and applies to both ESInet and NGCS. Please use Attachment C – Option A ESInet Revision One; Attachment C Option B NGCS Revision One; and Attachment C Option C ESInet and NGCS Revision One.
20.			Attachment C, Option C	18	SLA 9 – Will the State please reference the Standards Document the 54ms network traffic convergence requirement is derived from?	ITU-T G.8031 and G.8032 implement sub-50ms failover in ethernet networks. Additionally, MPLS networks support Fast Re-Route (FRR) which also is sub-50ms.
21.			Attachment C, Option C	32	ESI 9 - Can the State provide additional documentation on the microwave network and other local/state-owned networks that are being proposed? Are these public safety grade	This requirement was to raise awareness of other networks in the state. Bidders should research all possible providers to provide service to the State. The PSC is unable to provide additional

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					networks?	information specific to the networks.
22.			Attachment C, Option C	33	ESI 11 - Can the state clarify the difference between ESI 10 and ESI 11?	ESI 10 specifies that the Contractor will support ESInet-to-ESInet interconnections. ESI 11 specifies that the Contractor will implement ESInet-to-ESInet and NGCS interconnections as the need arises.
23.			Attachment C, Option C	47	NGCS 38 - SCTP is listed as optional. NGCS 27 includes this and does not state as optional. Can the State clarify?	NGCS 27 refers to the border control function (BCF) and requires that the BCF be able to accept stream control transmission protocol (SCTP) traffic from outside. NGCS 38 refers to the emergency services routing proxy (ESRP), where SCTP traffic is desirable but not required.
24.			Attachment C, Option C	56	NGCS 62 - Reference to Attachment D. Currently no attachment D on the State's website, can the State provide?	See response to Question 11.
25.			Attachment C, Option C	59	NGCS 69 - State references MIS which is usually associated with CPE. Is the State asking for the NGCS provider to manage MIS or continue using the current ECaTs solution with their loggers for CPE?	The requirement is for the event logging in the NGCS to feed into the PSAPs' event logging (ECaTS) to provide a complete record of the call event.
26.			Attachment C, Option C	63	NGCS 77 - Can the State clarify the Ringdown Functionality. Ringdown is currently part of CPE, how does the State propose this be integrated with ESInet?	The requirement is that the NGCS support Ringdown functionality in the event that one or more CHE systems do not support it.
27.			Attachment A	2,3	Will you please add a "Total Position Count" column to the PSAP Table in	See response to Question 7.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					Attachment A?	
28.			6264 Z1 ESInet and Core Services RFP Revision One	all	What changes were made with the release of Revision One?	1. The Opening Date and time was corrected to: June 3, 2020 2:pm CT 2. Added to the Proprietary Paragraph on Page i. “if submitting the proposal or response electronically, as a separate electronic file that is named “PROPRIETARY INFORMATION”. 3. Schedule of Events Activity 2 added “Form B” 4. Schedule of Events, Activity 8 added “.00 (seconds)” to the time that bids are due.
29.			Attachment C, Option A, B, and C	all	Are there any Mandatory Requirements in Options A, B, or C?	Optional service is called out at NGCS 81. It is understood that Bidders may not have 100% compliance. The evaluation process is designed to select the best solution from those submitted.
30.			Attachment C, Option C	15	NOC/SOC 23 – State indicates they maybe find it beneficial to have a third party NOC/SOC service. Can the State provide additional details such as location, software used, and other technical capabilities on the 3rd party to allow vendors to price connecting to a 3rd party NOC/SOC?	This is a requirement to support such a connection in the future should the State determine it is in the State’s best interest. Bidders should describe their capabilities for establishing a data-sharing connection.
31.			Attachment C, Option C	25	GEN SCEN 3 – Can the state expand on the scenario described? What kind of changes has the bidder uploaded? Are these software updates? The assumption is that the	See response to Question 2. The reference is to a spatial interface (SI) change,

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					State is responsible for both MSAG and GIS data so they would be responsible for making updates to these. Not sure what kind of bidder updates would result in 15,000 errors being generated.	
32.			6264 Z1 ESInet and Core Services RFP Revision One, Section V.B.2.b	29	Can the State provide status of GIS data for the PSAP's throughout Nebraska? Will the State be going to i3 with geospatial day 1 or will it be a slower transition?	The statewide street centerline data is available for download from nebraskamap.gov (search 911) The State is currently working with each PSAP to create the statewide PSAP layer. This is a work in progress and the data is currently out to the PSAPs for input and updates. The State is looking to implement NG911 services as quickly as possible, so it is not required that geospatial routing be available with the initial deployments.
33.			Attachment A	2,3	Can you please provide the number of concurrent calls that each PSAP can currently support? As a follow on, is it the State's desire to maintain this capacity or is there a need to increase the number of concurrent calls for each PSAP? If so, please provide the desired number of concurrent calls by PSAP.	The number of concurrent calls that each PSAP can support is unknown. Please see Attachment D. At this time, it is the expectation of the State that the capacity for concurrent calls remains the same. As greater functionality becomes available (video, images, etc.), it is expected that network capacity can be adjusted to accommodate the additional traffic. Please refer to Req. GEN-4 and SLA-1.
34.			Attachment C	63	Make-Busy Functionality: Is the requirement to continue to use a	The functionality can be provided either way. Some PSAPs may desire the option of a

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					physical device for make-busy operation or can this capability be provided through a portal that would add more functionality and options for make-busy scenarios?	physical switch.
35.			Attachment A	3	Is it the intent of the State to connect each of the individual PSAPs (not currently part of a regional system) to the NGCS via ESInet or will those PSAPs remain on legacy routing until such time that they become part of an existing or new regional system?	See response to Question 4.
36.			6264 Z1 Cost Proposal Option A ESInet Final, 6264 Z1 Cost Proposal Option B-NGCS FINAL3.10.20, 6264 Z1 Cost Proposal Option C ESInet and NGCS final		The cost proposal worksheets require the breakout of fees to seven (7) regions. Section V. A of the Request for Proposal for Contractual Services (6264 Z1 ESInet and Core Services RFP final SONYAS.docx) and "Attachment A PSAP Host endpoints equipment and selective router locations" indicate the makeup of the seven (7) regions. Between those two data sources, twelve (12) of the "stand-alone" counties / PSAP locations from Attachment A are not accounted for in one of the seven (7) regions. How should fees for these twelve (12) unaccounted locations be included in the cost proposal? 1. Antelope County	See response to Question 4.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					2. Cedar County 3. City of South Sioux City 4. City of Wayne/Wayne County 5. Dawes County 6. Dixon County 7. Knox County 8. Mid Rivers 911 Center 9. Pierce County 10. Region 26 Council 11. Scottsbluff County 12. Thurston County	
37.			6264 Z1 Cost Proposal Option A ESInet Final, 6264 Z1 Cost Proposal Option B-NGCS FINAL3.10.20, 6264 Z1 Cost Proposal Option C		When will the remaining "stand-alone" entities join a specific region? Are there any circumstances that would allow a stand-alone to NOT be in a region, and if so, will each stand-alone be their own 'region'?	See response to Question 4.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			ESInet and NGCS final			
38.			6264 Z1 ESInet and Core Services RFP final SONYAS *Scope of Services I.J. Submission of Proposals*	i	How should bidders delineate proprietary information? Can bidders submit redacted copies to be used for FOIA requests? The RFP states that The Technical Proposal, Cost Proposal, and Proprietary information should be uploaded as separate files. We are concerned that by separating proprietary details from the Technical Proposal the full response context will not be understood and will therefore make proposal evaluation more difficult.	See response to Question 12.
39.			6264 Z1 ESInet and Core Services RFP final SONYAS *I.P. Request for Proposal / Proposal Requirements*	5	Should item #4 "Completed Sections II through IV" read "through VI" instead?	No. Please use the most recent version of the RFP: "6264 Z1 ESInet and Core Services RFP Revision One".
40.			6264 Z1 ESInet and Core	9-27	Are bidders required to indelibly initial the "Accept" or "Reject" boxes in ink, or can bidders type the company	Either is acceptable.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			Services RFP final SONYAS *II. Terms and Conditions* *III. Contractor Duties* *IV. Payment*		officer's initials?	
41.			6264 Z1 ESInet and Core Services RFP final SONYAS *V.B. Composition of the Request for Proposal*	29	The Commission's intent is to release an RFP soon after the release of the ESInet/NGCS RFP that addresses the connectivity from the host locations to the regional PSAP locations. Please provide the status of the intended RFP, and what the expected relationship with these services providers will be?	The status of releasing an RFP to address Host/Remote connectivity is still in discussion and a decision has not been finalized on the need for releasing such an RFP. Each region has a regional IP network today, and the expectation is that a possible Host/Remote RFP will not change the interaction between the Bidders and these regional IP providers. It is anticipated that the various service providers of the state and regional ESInets will advise one another of outages within their respective networks.
42.			6264 Z1 ESInet and Core Services RFP final SONYAS	29	Are there any plans to upgrade call handling equipment to NENA i3-ready call handling?	The PSC will work with the regions to encourage i3 compatibility, but Bidders shall assume connectivity to CHE with the software versions noted in Attachment A Revision One.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			V.B. Composition of the Request for Proposal			
43.			6264 Z1 Attachment C Technical Requirements Option C *GEN SCEN 4, Scenario 4*	25	Since the connectivity from the regional host controller to the PSAP's will be part of another RFP, what are the responsibilities of the service provider for this connectivity regarding monitoring, reporting, and maintenance actions?	The Regional IP network and monitoring of such networks is the responsibility of the Regional network service provider. It is anticipated that the various service providers of the State and regional ESInets will advise one another of outages within their respective networks.
44.			6264 Z1 Attachment C Technical Requirements Option C *ESI 9, Emergency Services IP Network (ESInet); Special Construction*	32	Can the State provide diagrams or schema for the existing network assets so bidder's understand what can be leveraged?	See response to Question 21.
45.			6264 Z1 Attachment C Technical	60	Please provide a copy or link to the existing data-sharing agreement (DSA).	Please see new 6264 Z1 Attachment E Nebraska ECaTs Data Sharing Agreement

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			Requirements Option C *NGCS 70, Next Generation Core Services Elements (NGCS)* *Event Logging and Management Information System (MIS); Access to Event Logging Data*			
46.			6264 Z1 Attachment C Technical Requirements Option C NGCS 71, Next Generation Core Services Elements	61	What needs to be provided for third-party certification proof?	Certification documents are not required. Please see NGCS 71.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			(NGCS) Event Logging and Management Information System (MIS); NENA Standards Compliance			
47.			RFP document, title page, top section:	Page i	The opening date and time says: "June 3, 3030, 2:00 P.M. Central Time". **Question**: Should the year be changed to 2020 instead of 3030? Or is there a reason its titled 3030?	See response to Question 28.
48.			RFP document, Section I. Procurement Procedure, part J. Submission of Proposals subsection 2 and Section VI Proposal	Pages 4 and 35	At section 1.J.2 of the RFP, the bid says: "The Technical, Cost Proposals, and Proprietary information should be uploaded as separate files." Additionally, section VI., Proposal Instructions, Part A Proposal Submission, number 2 Technical Approach says: " The technical approach section of the Technical Proposal should consist of the following subsections, which includes subpart f titled "Cost	

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			Instructions, Section 2.f		Proposal". **Question**: Should the cost proposal be included as subpart f in the Technical Approach/Technical Proposal electronic file document, or should it be submitted as a totally separate file?	Please submit the cost proposal as a separate excel file. VI.A.2.f. is hereby deleted.
49.			RFP document, Section I. Procurement Procedure, part P. Request for Proposal/Proposal Requirements, Subpart 4 and Section VI A. Proposal Instructions, Section 1 Corporate Overview & 2 Technical Approach	Pages 5 and 35	At Section 1.P.4, the proposal requirements say The proposals will first be examined to determine if all requirements listed below have been addressed and whether further evaluation is warranted. It goes on to include # 4 "Complete Sections II through IV." **Questions**: 1. In section VI Proposal Instructions, the location to include sections II through IV is not mentioned. Should those sections be included in Section VI, Part 1 for Corporate Overview, or in section VI part 2 for Technical Approach? 2. If in section VI.A.1, Corporate Overview, should the sections be in the order presented in the RFP, or do you want the	The State lists all required items in section I.P. The order of documents is not prescribed in the RFP document.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					Sections ii through IV after VI.A.1.j? 3. .If in Section VI.A.2 Technical Approach, where in the letter sequence a. to f. should sections II through IV be inserted?	
50.			ESInet & Core Services RFP Revision One	4	The RFP requests one hard copy labeled "original," but does not specify the number of hard copies. If bidders intend to submit hard copies, how many copies should be provided?	If a bidder chooses to submit a paper document, only one (1) copy marked “original” is needed.
51.			ESInet & Core Services RFP Revision One	20	If the primary contractor lists their subcontractors as additional insured on their insurance policy, does this satisfy the requirements in section G for subcontractors?	Yes, if the Contractor provides equivalent insurance for each subcontractor and verifies the coverage meets the requirements of the RFP.
52.			ESInet & Core Services RFP Revision One	15	Within Section VI. Proposal Instructions, Item 2. Technical Approach provides a list of the subsections that should be included in the Technical Proposal. Item c. states "Attachment C - Technical Requirements Option A, B, and/or C." If a bidder intends to submit a response for Technical Requirements Options A, B, and C, how does the state prefer all three options be submitted?	

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					Does the state want bidders to complete/return separate responses for Option A, B, and C? Or, does the state want only a response submitted for Option C and a separate cost proposal for each option? Please provide clarification. If the state does prefer bidders submit each option separately, should they be provided as separate binders?	Please submit a complete, separate response if responding to more than one option. Yes. Or if submitted electronically, as separate files using the naming convention stated in the RFP.
53.			Attachment C Option A / Attachment C Option B /Attachment C Option C	1	The instructions for Attachment C, Options A, B, and C include instructions indicating "the narrative should provide The Public Service Commission (PSC) with sufficient information to differentiate the bidder's business solution from other bidders' solutions. Bidder shall not refer to other sections as a response. Even if the response is an exact duplicate of a previous response, the details shall be provided in the same paragraph as the requirement." However, ESInet & Core Services Revision One, page 29 indicates "The Bidder may include appendices and reference them from within the proposal response. This is particularly appropriate for lengthy responses on a single subject." The bidder believes this information is contradicting. Please provide clarification as to whether it is	Each Option being bid must include a response to each requirement. Bidders cannot reference a response submitted in another Option. While individual requirement responses may refer to additional documentation in appendices, attachments, etc., an answer may not be scored if it simply refers the reader to the response to an attachment or another requirement.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					acceptable for bidders to refer to appendixes within their response that are included later within the proposal?	
54.			Attachment C Option B Attachment C Option C	34 37	Req Identifier NGCS 8 and NGCS 9 are identical. Does the state want bidders to answer both requirements or will one be removed?	See response to Question 9.
55.			Attachment C Option B Attachment C Option B	35 38	Req Identifier NGCS 11 states "The bidder's BCF solution shall support transcoding of Baudot tones to real-time text (RTT), as described in IETF RFC 4103. Describe how the solution meets or exceeds the above requirements." Generally, this function is normally conducted by the legacy network gateway (LNG). Can the state please provide clarification on this requirement?	Describe how this functionality is implemented in the proposed solution, including the functional element or elements involved.
56.			Attachment C Option B Attachment C Option C	47 50	Regarding Req Identifier NGCS 45 “An origination network may use an ECRF, or a similar function within its own network, to determine an appropriate route—equivalent to what would be determined by the authoritative ECRF—to the correct ESInet for the emergency call. Describe the functionality of such an ECRF equivalent and document where this functional element resides within the proposed solution." If an origination network is using their own ECRF not provided by the bidder, how is the	This is in reference to originating service providers (OSPs) needing some means of making an initial routing decision. Whether this is implemented by the NGCS provider as an external (to the ESInet) ECRF or by the respective OSP depends on the bidder’s interop agreement with the OSP. Describe how the ECRF solution operates in a hierarchical environment.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					bidder expected to describe the functionality of said ECRF? Additionally, if it is in the origination network, how can the NGCS bidder document where this functional element resides? This same requirement is included in	For the remainder of the question, there is missing information. The State is unable to provide a response.
57.			Attachment C Option B Attachment C Option C	47 51	Part of Req Identifier NGCS 49 is a duplicate of NGCS 48. Both contain, at least in part, “Logging of all connections, connection attempts, data updates, ECRF query results, and LoST transactions.” Please provide clarification.	Req Identifier NGCS 48 deals specifically with rate-limiting queries and logging when those limits are exceeded. Req Identifier NGCS 49 is a more general list of requirements based on NENA-STA-010.2.
58.			Attachment C Option B Attachment C Option C	47 51	Part of Req Identifier NGCS 49 includes “Location error correction." It is the bidders belief that the ECRF should consume data and optionally detect errors, allowing the GIS staff to act on detected errors and resolve them in the source GIS data. An ECRF can’t, and should not, attempt to correct errors as this can introduce a number of problems. Can this requirement please be removed?	This requirement remains and should read, “location error identification.” Please use Attachment C Option B NGCS Revision One; and Attachment C Option B ESInet and NGCS Revision One.
59.			Attachment C Option B Attachment C Option C	41 51	Part of Req Identifier NGCS 49 includes “Compliance with NENA 02-010 and NENA 02-014." NENA 02-010 is a legacy schema for GIS and is incompatible with the NG9-1-1 GIS Data Model that is specified in	Bidder must be compliant with all current NENA standards, other industry standards and best practices.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					Attachment B. NENA 02-014 refers to GIS data collection and maintenance standards, of which the ECRF does not do. Can both of these requirements be removed, or updated, to reflect new NENA standards (such as the NG9-1-1 GIS Data Model)?	
60.			Attachment C Option B Attachment C Option C	51 51	Req Identifier NGCS 59 references legacy standards NENA 02-010 and NENA 02-014. Neither of these should apply to the SI. Can these be changed to the CLDXF standard and NG9-1-1 GIS Data Model?	Please see response to Question 59.
61.			Attachment C Option B Attachment C Option C	52 56	Req Identifier NGCS 63 states "Describe how the solution interfaces with other LDB solutions which may participate in or interface with bidder's solution." Please elaborate on how, and more importantly why, one LDB will need to interface with another? There is currently no NENA standard in place for this.	There will be a transition period between legacy routing and geospatial routing. Explain how the proposed solution would deal with multiple ALI/MSAG databases and the locations where ALI steering may be in place.
62.			Attachment C Option B Attachment C Option C	57 57	Req Identifier NGCS 64 states the LDB shall "Shall automatically detect, import and validate customer records (SOI records)." In order to load a legacy SOI record into an LDB, it must be converted to CLDXF. The NENA standards specify using an MSAG Conversion Service (MCS) functional element for this. Is an MCS part of the	The RFP seeks a complete solution. Please submit a response that best meets all current NENA and industry standards.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					requirements of this RFP?	
63.			Attachment C Option B Attachment C Option C	53 56	Req Identifier NGCS 62 refers to the Commission's GIS data model (Attachment D). Can the state please clarify if the GIS Data Model is Attachment B or D?	See response to Question 11.
64.			Cost Proposal Option C ESInet & NGCS Final	1	Each of the three pricing workbooks (including Cost Proposal Option A ESInet Final, Cost Proposal Option B NGCS Final, and Option C ESInet & NGCS Final) define seven regions. However, the diagram in ESInet & Core Services RFP Revision One, Section V. Project Description and Scope of Work (pg. 28) and Attachment A - PSAP Host EndPoints, Equipment, and Selective Router Locations do not definitively define or illustrate the regions to allow for pricing. Can the state please provide clarification as to how the regions should be defined including where the hosts are to be located for the Metro West and Northeast regions?	Please see response to Question 4.
65.			Attachment A - PSAP Host EndPoints, Equipment, and Selective Router	Page not numbered	Eighteen PSAPs are listed as "Stand Alone" in Attachment A. If anticipated regional hosts are not defined for the Metro West and Northeast regions, will ESInet providers be required to bid/provide layer 2 circuits to each of these PSAPs that are not part of a region? How will the state handle the	See response to Question 4.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			Locations		circuit costs for these sites if/when they join a region?	
66.	Optional Pre-Proposal Conference - Link to Listen to Conference			Media, Slide 5	Slide 5 of the pre-proposal conference presentation lists the proposal due date as June 2, 2020. All RFP documents and the procurement website lists June 3, 2020. Please confirm June 3, 2020 is the proposal due date.	See response to Question 28.
67.	Optional Pre-Proposal Conference - Link to Listen to Conference			Media, Slide 14	During the discussion of slide 14 of the pre-proposal conference presentation, MCP representative Milton Schober stated the RFP lists some older standards and bidders should state their compliance or non-compliance based upon the most current standards. Since the RFP will likely become part of resulting contract we ask that the State update the RFP to list the published standards that are required for compliance. We assume Mr. Schober was referring to Section V, D. General Requirements - Technical.	Please see response to Question 59.
68.			6264 Z1 Attachment C Technical Requirements Option B NGCS 62	53	Does the State plan to leverage the GeoComm Data Hub in place today for most of the regions?If so, how does the State envision GeoComm's Data Hub will interconnect to the required Spatial Interface (SI)?	The State intends to use the statewide aggregated data and will work directly with the PSAPs (or their designated GIS representative) to maintain this layer.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			Next Generation Core Services (NGCS) Spatial Interface (SI) Use of the Commission 's GIS Data Model			
69.	6264 Z1 ESInet and Core Services RFP Revision One Schedule of Events			2	Will vendors have the opportunity to ask follow-up questions to those answers released on or about April 16? If so, what is the deadline?	Bidders will be given an opportunity to ask question during a second round of Q&A. Please see posted Revised Schedule of Events.
70.	6264 Z1 ESInet and Core Services RFP Revision One Section I,			Page 6 and Page 11	Are the reference Vendor Performance Reports part of the RFP response evaluation process? If so, what is the derivation of the reports?	Vendor Performance Reports may be used for evaluation.. Bidders who have had a contract with the State of Nebraska may be evaluated on any performance reports submitted to State Purchasing Bureau.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	R. Evaluation of Proposals; and Section II, H. Vendor Performance Reports					
71.	V. PROJECT DESCRIPTION AND SCOPE OF WORK			Page 28	In order to assure proper sizing for traffic engineering, network bandwidth and data throughputs, we will need data on busy hour call attempts and average call durations. Can the State please provide this information?	The State is unable to provide this information at this time. The State is in the process of receiving 2019 call volume numbers from PSAPs statewide and will post the data with the 2nd round of Q&A.
72.	V. PROJECT DESCRIPTION AND SCOPE OF WORK			Page 28	During the pre-bid meeting there was mention of a new Metro West region with Colfax and Dodge Counties as participants. Can the State please provide a list of all the members that will be participating in this new region?	See response to Question 4.
73.	V. PROJECT DESCRIPTION AND SCOPE OF WORK			Page 28	During the pre-bid meeting there was mention of a new North East region with Wayne County, City of South Sioux City and City of Norfolk as participants. Can the State please provide a list of all the members that will be participating in this new	See response to Question 4.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					region?	
74.	Attachment C Technical Requirements – Option C			Requirement Identifier ESI 9 Page 32	Can the State please provide details and/or a diagram of the meet points of this microwave network?	See response to Question 21.
75.	Attachment C Technical Requirements – Option C			Requirement Identifier ESI 10 Page 33	Are there any plans or knowledge to support the connection to prospective neighboring ESInet's?	The State intends to implement this requirement in the future.
76.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 8 Page 37	Requirement Identifier NGCS 8 and NGCS 9 appear to be the same requirement. Are these duplicate requirements?	See response to Question 9.
77.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 32	Is there, or will there be, a Statewide geospatial project to position the PSAPs for true i3 geospatial routing? If yes, can you share those details relating to schedules, milestones,	See response to Question 32.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
				Page 45	etc.?	
78.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 1 Page 34	The RFP mentions transitional and end states for the NGCS network. What are the State's expectations regarding what defines the transitional state(s) and the end state?	The transitional period is the time between the start of routing on tabular data and the migration of the last region on tabular routing to full geospatial routing. Full geospatial routing is the end state.
79.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 1 Page 34	Does the State expect the NGCS network to receive calls directly from TDM trunks (i.e., is the contractor expected to provide the necessary gateways in this case)?	The State requires a complete solution. If gateways are necessary, the contractor must provide all equipment.
80.	Attachment A – PSAP Host EndPoints, Equipment and Selective Router Locations			Attachment A	Can the State provide detailed information on the downstream connection (i.e., PSAPs and regions) as to what terminating equipment is available at the regions, which PSAPs require direct connections and which directly connected PSAPs are IP-capable?	Only regions will be connecting to the statewide ESInet. The known call handling equipment type and model for each region is the level of detail that the State has listed on Attachment A – Revision One
81.	Attachment C Technical			Requirement	NGCS-14 requires the LNG to generate reports that can be loaded	This can be done through a central reporting function.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	Requirements – Option C			Identifier NGCS 14 Page 39	into a spreadsheet. Is it necessary for the LNG to do this directly or can this be done through a central reporting function?	
82.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 32 Page 45	Can the State provide more information on how many PSAPS – and for how long – tabular routing will be required? What is the limitation driving the need for tabular routing?	The State intends to transition to geospatial routing as soon as possible. The limiting factor at the moment is the current status of the statewide PSAP layer.
83.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 70 Page 60	The RFP calls for both ECaTS and NENA i3 event reporting. Can the State provide any detail on how these are expected to interwork?	The RFP requires bidders to comply with NENA i3 event reporting. The requirements call for the proposed solution to interface with ECaTS. The contractor will be required to communicate with ECaTS to achieve this functionality.
84.	Attachment C, Option A Attachment C, Option B			12	Req Identifier NOC/SOC 15 describes that a NMIS – Management System should interface with the Incident Management System, and that the	Historical data includes but is not limited to, network and system performance data, bandwidth utilization, latency, jitter, packet loss, MOS scores, CPU and memory utilization, and outage-related data.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	Attachment C, Option C				Contractor shall maintain historical information for the term of the contract and provide copies of the data to the Commission at the end of the contract. Can the Commission clarify the scope of the historical information? Are we correct in interpreting this to mean the historical incident management information and related logging errors and not all logs?	
85.	Attachment C, Option B Attachment C, Option C			53 56	Req Identifier 62 refers to "regions." How many different regional GIS datasets can we expect to receive? Does the state envision these regional GIS datasets to be aggregated into a single statewide dataset for use in the ECRF/LVF?	The State currently anticipates 7 regions as part of the statewide ESInet. The State envisions these datasets will be aggregated into a statewide dataset. The State will provide the aggregated dataset to the Contractor.
86.	6264 Z1 Cost			summary	For clarification, will the five year total cost (cell	Yes.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	Proposal Option A, B, C Excel Workbooks			tab	B20 in the option C pricing workbook) be the figures that are used for cost comparison between vendors?	
					Or, does the renewal pricing also play a part in the cost scoring?	No.
				N/A	Will a faster implementation schedule save the State money on legacy costs? If so, are those cost savings going to be considered as part of the evaluation process when scoring the proposals? If it will be considered in scoring the proposals, will that be considered in the points awarded under Part 2 – Technical Approach or under Part 3 – Cost Proposal Points?	Cost evaluation is not weighted to include implementation timeline. The implementation timeline is evaluated on the technical response. N/A. Please see response above.
				N/A	Additionally, it is our interpretation that if these legacy cost	

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					savings are not factored in, the vendor with the slowest implementation schedule is likely to have the lowest cost proposal allowing them to score the maximum points in pricing. Is this interpretation correct?	
87.	Attachment A			page 1	Will the State provide location information for the 2 host sites for the Northeast Region? Locations of the host sites will both determine diversity and connection types that can be used to connect the ESInet to this region	See response to Question 4.
88.	Attachment C, Option C, SEC-3			pages 4-5	This requirement states: "The matrix shall identify whether the bidder's proposed solution Complies (C), Complies Partially (CP), Complies with Future Capability (CFC) or Does Not Comply (DNC), or Not Applicable (N/A) (as indicated in the NENA checklist) with the identified requirement(s) for each category included in the checklist." Each category contains varying numbers of requirements. Please explain how the	Please see Attachment C – Option A ESInet Revision One, Attachment C – Option B NGCS Revision One, and Attachment C – Option C ESInet and NGCS Revision One.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					State would like the bidders to determine the response. For example, suppose **Section 3. Authentication/Password Policy** has 54 requirements: 30 are Complies, 8 are Complies Partially , 0 are Complies with Future Capability, 1 is Does Not Comply, and 15 are N/A. For this example, can the State explain how bidders should determine which category to check for Section 3 in the checklist?	
89.	Attachment C, Option C, SEC-3			pages 4-5	This requirement states: "Bidder shall provide details to support the responses for each category in the response box below." What kind of details is the State requesting? Does the State want an explanation for each requirement in a section? Does the State want a breakdown of how many of each type of response is in each section? Please explain.	See response to Question 88.
90.	6264 Z1 Technical Requirements Option B NGCS 49 -	NGCS 49	Next Generation Core Services Elements (NGCS) Emergency Call Routing Function	51	When logging of all connections, connection attempts, data updates, ECRF query results, and LoST transactions: What format of log file is required as well as any duration for retention, or settings to support such, requirements that may exist for the	The file format is not specified. The tools provided for viewing logs should be capable of reading the native format of each device, be it text, XML, JSON, or something else, and displaying the output in human-readable format. Records must be maintained for the length of the contract including all renewals and extensions. Please also see Section II.U. Contract Closeout.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			(ECRF) Supported Functions		State?	
91.	6264 Z1 ATTACHMENT A	PSAP Equipment			Would the Commission provide the following 9-1-1 call volumes for each PSAP; Avg. Busy Hour, Peak Call Volume and and Annual Call Volume?	See response to Question 71.
92.	6264 Z1 ESInet and Core Services RFP Revision One and Cost Proposal (Word doc)	I.C	Schedule of Events	2	Please confirm that the bid due date is 6/3/20 per the RFP. 6/2/20 was shown during the pre-bid meeting.	See response to Question 66.
93.	6264 Z1 Attachment C Technical Requirements Option C -ESInet and NGCS (Word doc)	Gen SCEN	GEN SCEN 4	25	Vendors were request to provide connectivity to Host Sites for each of the regions. The scenario specifies connectivity to a PSAP. Would the State want to modify the Scenario using host site rather than a PSAP?	Yes, replace “PSAP” in Scenario 4 with “Host A”. Please use Attachment C Option A – ESInet, Attachment C Option B – NGCS, and/or Attachment C Option C – ESInet and NGCS.
94.	6264 Z1 Attachment C Technical Requiremen	NGCS 39	Next Generation Core Services Elements	47	Our understanding is that the i3 standard will soon be updated from i3 v2 to i3 v3, and furthermore that there are significant differences	Please see response to Question 59.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	ts Option C -ESInet and NGCS (Word doc)		(NGCS) NENA Compliance Chart		between the two standards. Since no PSAP CPE supports v2 at this time, our expectation is that the State would prefer vendors be able to support i3 v3 once ratified, and therefore vendors could also address compliance to i3 v3 as an option?	
95.	Attachment C, Option C			Page 10	NOC/SOC 10: Does this requirement only apply to ESInet as NGCS is not indicated in this requirement?	See response to Question 19.
96.	Attachment C, Option C			Page 47	NGCS 38: Is SCTP a protocol which is optional or required?	See response to Question 23.
97.	Attachment C, Option C			Page 56	NGCS 62-1: Please provide or direct as to where Attachment D is located	See response to Question 11.
98.	Attachment C, Option C			Page 63	NGCS 77-2: Please provide the requirements and definition of an NGCS “ringdown” feature. This is typically a feature in Call Handling and in order to understand the request, please provide desired functionality.	See response to Question 26.
99.	6264 Z1 Cost Proposal Option C - ESInet and NGCS				Is it understood that complete pricing may not be provided until all locations are identified?	See Response to Question 4.
100.	Attachment C, Option C				There is no reference to the number of POI’s required. Can the State	Please provide a response that best meets the requirements of the RFP.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					provide guidance on this requirement?	
101.	Attachment C, Option C				Please provide a position count and/or concurrent call counts that need to be supported per Aggregated Call Handling location.	See Attachment D
102.	PROCUREMENT PROCEDURE, J. SUBMISSION OF PROPOSALS			4	The State is accepting either electronically submitted responses or paper responses for this RFP. For bidders submitting electronic responses: 1. Bidders submitting electronically can upload the response here: a. https://nebraska.sharefile.com/r-r11ba33e3ee24b63b **Questions:** In sections J. it discusses submitting each section of the RFP as well as lists the separate solutions Option A (ESInet), Option B (NGCS), and Option C (ESInet, & NGCS). 1. Will the state accept two solutions of the same service? How should a vendor submit these options? 2. Should there be two separate	Yes. Submit a complete, separate, response, cost proposal, and Technical response for each. Yes.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					RFP submissions and two separate pricing options? 3. How do you want the separate RFP's named? 4. If a Vendor submits two options will the scoring be a weighted average or seen as a completely separate submission?	 Please see Section I.J.3. "Submission of Proposals" of RFP 6264 Z1 ESInet and Core Services RFP Revision One. Each proposal will be scored independently.
103.	**I. SUMMARY OF BIDDER'S PROPOSED PERSONNEL/MANAGEMENT APPROACH**			35	The bidder should identify the specific professionals who will work on the State's project if their company is awarded the contract resulting from this solicitation….. ……..Resumes should not be longer than three (3) pages. Resumes should include, at a minimum, academic background and degrees, professional certifications, understanding of the process, and at least three (3) references (name, address, and telephone number) b. SUBCONTRACTORS If the bidder intends to subcontract any part of its performance hereunder, the bidder should provide: i. name, address, and telephone number of the	

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					subcontractor(s); i. specific tasks for each subcontractor(s); ii. percentage of performance hours intended for each subcontract; and iii. total percentage of subcontractor(s) performance hours. **Questions:** **1.** In section I. as apart of the resume section it states that you are requesting 3 personal references for each resume submitted. (name, address, and telephone number), this would be considered personal confidential information to these individuals. Knowing that the RFP is considered public information these individuals may not want their personal information publicized and attached to the RFP. Would the state accept the name of the reference omitting address, telephone number and upon award the vendor would provide additional information about the references so they may be contacted if the state feels it is	Question1:) The address and telephone numbers do not need to be submitted with the proposal, but must be submitted by the selected vendor upon award.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					necessary? **2.** In the section outlined above "SUBCONTRACTORS If the bidder intends to subcontract any part of its performance hereunder, the bidder should provide:" name, address, and telephone number of the subcontractor(s). This too would be considered personal confidential information to these individuals. Knowing that the RFP is considered public information these individuals may not want their personal information publicized and attached to the RFP. Would the state accept the name of the reference omitting address, telephone number and upon award the vendor would provide additional information about the references so they may be contacted if the state feels it is necessary? **3.** Would the state accept the general corporate address and phone number of the subcontractors company to fulfill the requirement of this RFP in the outlined section.	Question 2:) The address and telephone numbers of subcontractors do not need to be submitted with the proposal, but must be submitted by the selected vendor upon award. Question 3: Yes, if the State would be able to contact the actual subcontractor(s) to be used to fulfill this contract using the given address and phone number.

This addendum will become part of the proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM FIVE – REVISED SCHEDULE OF EVENTS

Date: April 22, 2020

To: All Bidders

From: Annette Walton / Nancy Storant, Buyers
Nebraska State Purchasing Bureau

RE: Addendum for RFP Number 6264 Z1 to be opened June 3, 2020 at 2:00:00 P.M. Central

Revised Schedule of Events

ACTIVITY		DATE/TIME
7.	Last day to submit second round written questions.	April 30, 2020
8.	State responds to second round written questions through Solicitation "Addendum" and/or "Amendment" to be posted to the Internet at: http://das.nebraska.gov/materiel/purchasing.html	May 7, 2020
9.	Proposal Opening Location for mailed/hand delivered submissions: State Purchasing Bureau 1526 K Street, Suite 130 Lincoln, NE 68508 Electronic submissions: https://nebraska.sharefile.com/r-r11ba33e3ee24b63b	June 3, 2020 2:00: 00 PM Central Time
10.	Review for conformance to solicitation requirements	June 8, 2020
11.	Evaluation period	June 8, 2020 through June 29, 2020
12.	"Oral Interviews/Presentations and/or Demonstrations" (if required)	TBD –July 13-17
13.	Post "Notification of Intent to Award" to Internet at: http://das.nebraska.gov/materiel/purchasing.html	TBD
14.	Contract finalization period	TBD
15.	Contract award	TBD
16.	Contractor start date	TBD

This addendum will become part of the ITB/proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM SIX FOR QUESTIONS AND ANSWERS, ROUND TWO

Date: May 7, 2020

To: All Bidders

From: Annette Walton/Nancy Storant, Buyers
AS Materiel State Purchasing Bureau (SPB)

RE: Addendum for RFP 6264 Z1 to be opened June 3, 2020, 2:00 P.M. Central Time

Following are the changes made to the above mentioned RFP. The changes are to be considered as part of the RFP. It is the Bidder's responsibility to check the SPB website for all Addenda or Amendments.

Question Number	RFP Section Reference	RFP Page Number	Question	State Response
1.	6264 Z1 Attachment C Technical Requirements Option B: Requirement #NGCS 62, and Addendum Four – Questions & Answers; Question #68	6264 Z1 Attachment C Technical Requirements Option B NGCS, page 53; Addendum Four – Questions & Answers, page 25	Will the selected vendor be required to provide a solution and/or workflow for receiving GIS updates from the regions and aggregating the data into a statewide dataset? Or rather, will the State receive GIS data updates from the regions and deliver an aggregated statewide dataset to the selected vendor for ingestion into the ECRF and LVF via the SI? If this is the State's preferred method, how often does the State anticipate providing a statewide aggregated data set to the selected vendor? Further, if the State plans to deliver the statewide aggregated dataset for ingestion into the ECRF and LVF via the SI, will the State be	The Contractor will work directly with the State. The State will provide an aggregated statewide dataset for each of the required layers. Yes. The State anticipates providing data updates monthly. The State updates will be validated against topological errors and missing attribution. The Contractor will be required to provide their own

			performing any quality control and error checks prior to transmission to the selected vendor? If so, please elaborate on the planned checks.	validation prior to populating or updating the NGCS.
2.	6264 Z1 EsiNet and Core Services RFP final SONYAS Section II, H. Vendor Performance Reports	Page 11	The following requirement is in the terms and conditions: The State may document any instance(s) of products or services delivered or performed which exceed or fail to meet the terms of the purchase order, contract, and/or solicitation specifications. The State Purchasing Bureau may contact the Vendor regarding any such report. Vendor performance report(s) will become a part of the permanent record of the Vendor. What permanent record is the State referring to? Are these records available to the public?	Procedures for Vendor Performance Reports can be found in the Vendor manual at: http://das.nebraska.gov/materiel/purchase_bureau/vendor/vendor-info.html All performance reports received are kept on file. Yes.
3.	6264 Z1 Cost Proposal Option B-NGCS revision one.xlsx, 6264 Z1 Cost Proposal Option C ESInet and NGCS revision one.xlsx NRC Milestones tab	NRC Milestones tab	The total on the NRC Milestones tab of both the Option B (C11) and Option C (Cell C9 for ESInet and cell C19 for NGCS) workbooks is omitting the total NRC from Region 7. All totals are ignoring the region 7 value on NRC Milestones tab only. Is this an intentional omission or is this a formula error given that the instructions specify	Formula error. Please use 6264 Z1 Cost Proposal Option B Revision Two, 6264 Z1 Cost Proposal Option C Revision Two.

			NRC payments will be made as structured on the NRC milestones tab?	
4.	Document: 6264 Z1 Attachment A - PSAP HOST Endpoints equipment and selective router locations	Page. 1	Can the State verify the address for the Douglas County Call handling Host Site. Attachment A shows the address to be 151335 West Maple, Omaha. Douglas County Treasury is at 15335 W Maple. Can the State confirm that Douglas County Sheriff is on same property but faces west and has a 3601 N 156th St. address?	The address of the PSAP is 15335 West Maple, Omaha, NE. Please see Attachment A Revision Two – PSAP Host endpoints equipment and select router locations. The demarc for the back office/technology equipment is located at 3603 N 156 St, Omaha, NE.
5.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS.docx Section: ESI-9 and NGCS-1 Subsection: Network Design Documentation	Page. 32 and Page. 34	The RFP mentions transitional and end states for the NGCS network. What are the state's expectations regarding what defines the transitional state(s) and the end-state?	The transitional and end states apply to the NGCS only, not the ESInet. The transition state is the time when the NGCS is routing based on tabular data or a combination of tabular and geospatial data. The end state is the time at which all entities are routing based on geospatial data.
6.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS.docx Section: NGCS-4	Page. 36	Does the state expect the NGCS network to receive calls directly from TDM trunks (i.e. is the contractor expected to provide the necessary gateways in this case)?	Yes, the Contractor is required to provide a complete solution, including any necessary gateway functionality.

	Subsection: Next Generation Core Services Elements (NGCS), Legacy Network Gateway (LNG), LNG Description			
7.	General	General	Can the state provide detailed information on the downstream connection (i.e. PSAPs and regions) as to what terminating equipment is available at the regions, which PSAPs require direct connections and which directly connected PSAPs are IP-capable?	The call handling equipment for the regional host sites is included in Attachment A Revision Two – PSAP Host endpoints equipment and select router locations. There will not be any standalone PSAPs directly connected to the ESInet. All PSAPs will be part of a region. All connections to the ESInet will be from the host locations.
8.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS.docx Section: NGCS-14 Subsection: Next Generation Core Services Elements (NGCS), Legacy Network Gateway (LNG), Extraction of Log Files	Page. 39	Requires the LNG to generate reports that can be loaded into a spreadsheet. Is it necessary for the LNG to do this directly or can this be done through a central reporting function?	This can be done through a central reporting function.

9.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS.docx Section: NGCS-32 Subsection: Next Generation Core Services Elements (NGCS), Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF), Transition to Geospatial Routing	Page. 45	Can the state provide more information on how many PSAPS – and for how long – tabular routing will be required? What is the limitation driving the need for tabular routing?	The number of PSAPs is not known, each PSAP is controlled at the local level. It is the State's intent to transition to geospatial routing as soon as all PSAPs in a region are ready for geospatial routing. The limitation driving the need for tabular routing is that regional and statewide data still requires preparation.
10.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS.docx Section: NGCS-67 to NGCS-71 Subsection: Multiple	Pages. 59-61	The RFP calls for both ECaTS and NENA i3 event reporting. Can the state provide any detail on how these are expected to interwork?	The requirements call for the proposed solution to interface with ECaTS. The Contractor will be required to work with ECaTS to achieve this.
11.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and	Page. 62	What is the current situation with PSAPs in the State of Nebraska and Text-to-9-1-1? Do all PSAPs support integrated text handling	There are approximately 42 PSAPs that have text-to-911 capabilities. No, not all PSAPs support integrated text, some rely

	NGCS.docx Section: NGCS-76 Subsection: Next Generation Core Services Elements (NGCS), Message Session Relay Protocol Text (MSRP) Integration		capabilities, or do some still rely on an Over-the-Top solution? Will the new NGCS network be required to support the OTT approach? Will the existing OTT solution (if any) be left in place?	on an OTT solution. The State intends to integrate text-to-911 into NGCS and have text available to all PSAPs. NGCS will not be required to support OTT. No OTT solutions will not remain.
12.			Are ISPs allowed to bid this RFP with/through partners?	Yes.
13.	Attachment C, Option, Option B Revision One Attachment C, Option C Revision One	59 62	NGCS 76 - How is (SMS)-to-911 service delivered to PSAPs today? What integration to existing service is expected to be provided by the ESInet provider? Is the intent for the NGCS and/or ESInet provider to become the primary SMS-to-911 provider for PSAPs in Nebraska?	See question 11. Integration to existing service is not required. Yes.
14.	Cost Proposal Option A ESInet Revision One Cost Proposal Option B NGCS Revision One Cost Proposal Option C ESInet Revision One	1 1 1	Within the revised Cost Proposal spreadsheets, regions were adjusted to match the Nebraska PSAP Regionalization map (Figure 1) within the 6264 Z1 EsiNet and Core Services RFP Revision One. Regions 1 and 2 were switched to reflect the desired project schedule. However, in doing so, the associated	Yes. Please use 6264 Z1 Cost Proposal Option A Revision Two; 6264 Z1 Cost Proposal Option B Revision Two; and/or 6264 Z1 Cost Proposal Option C revision Two.

			populations were not adjusted. Will the state modify the Cost Proposal spreadsheets to reflect the correct populations? Or, should Bidder's work from the existing Cost Proposals (Options A, B, and C)?	
15.	6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS, NGCS 77	63	Please provide a full definition of the NGCS requirement to provide ringdown circuits. Traditional Ringdown functionality typically involves legacy technological solutions not provided within a typical IP network. Please describe the functionality requested so that the ESInet vendor can describe the IP and NGCS infrastructures capability to support requirement.	The requirement is that the NGCS support Ringdown functionality in the event that one or more CHE systems do not support it.
16.	6264 Z1 Attachment CTechnical Requirements Option C - ESInet and NGCS, NGCS 67	59	Please clarify the i3 Logging request of the ESInet provider. It is generally understood that delivery of the State/PSAP facing report is the responsibility of the MIS vendor. The process of establishing these reports typically occurs in two stages. a. Aggregation of i3 element record logs and delivery of that data (interface) to the MIS reporting vendor (EcATS) b. Establishment of reports of specified i3 elements on ECaTS	

			platform. It is the understanding of the ESInet vendor that the solution will include the resources/time/effort for item a.. For Item b. it is understood that the resources, time effort and pricing would be a separate agreement between the state/PSAP and ECaTS and the ESINET vendor should not account for additional cost of ECaTS to support those reports. Please confirm	The requirement is only for the delivery of the data to ECaTS. The ESInet/NGCS contractor must coordinate this with ECaTS. For item 'b,' the State works directly with ECaTS for the reports and formatting of the reports, so yes, the ESInet vendor should not account for additional cost to support these reports.
17.	Attachment A, Attachment D	All	Please identify which potential Host Region the following PSAP's will be affiliated with: • Scottsbluff County Custer County	Scottsbluff County will become a part of the South Central region. The State anticipates that Custer County will become a part of the East Central region.
18.	Attachment A	1	Please confirm the address for the Douglas County PSAP Host location.	See response to Question 4.
19.	Attachment C, Option C	6	SEC 5 – Please provide use case of a device/carrier outside of the IP network not provided credentials.	The State wants to ensure that a network that connects to the ESInet or NGCS has a valid reason for interconnection. If that is the case, credentials are issued. The State requires that if no valid reason for interconnection exists, credentials are not issued.
20.	Attachment C,	63	NGCS 77 – Will the	The State is not looking

	Option C		PSAPs be providing ringdown phones if their CPE does not support this functionality?	for any party to provide equipment. We are looking for support of the functionality via the NGCS.

This Addendum will become part of the RFP and should be acknowledged with the RFP.

ADDENDUM SEVEN FOR QUESTIONS AND ANSWERS, ADDITIONAL QUESTIONS

Date: May 14, 2020

To: All Bidders

From: Annette Walton/Nancy Storant, Buyers
AS Materiel State Purchasing Bureau (SPB)

RE: Addendum for RFP 6264 Z1 to be opened June 3, 2020, 2:00 P.M. Central Time

Following are the changes made to the above mentioned RFP. The changes are to be considered as part of the RFP. It is the Bidder's responsibility to check the SPB website for all Addenda or Amendments.

Question Number	RFP Section Reference	RFP Page Number	Question	State Response
1.	6264 Z1 Cost Proposals Option A ESInet Revision Two; 6264 Z1 Cost Proposal Option B NGCS Revision Two; 6264 Z1 Cost Proposal Option C ESInet and NGCS Revision Two		The revision two version of the cost workbooks corrected the 2019 estimates of population for the first two regions. However, in doing so, the calculation of the MRC for Regions One and Region Two is now pulling the incorrect population figure (i.e. the Region One MRC is multiplying the price per pop. by Region Two's population and vice versa). This is making the MRC for Region One larger than the MRC for Region Two when using the same per pop price because the formulas in "NRC/MRC Region 1 Total" and "NRC/MRC Region 2 Total" on all input tabs have an incorrect cell reference. Will the State be issuing revision three?	Yes. Please use 6264 Z1 Cost Proposal Option A ESInet Revision Three; 6264 Z1 Cost Proposal Option B NGCS Revision Three; 6264 Z1 Cost Proposal Option C ESInet and NGCS Revision Three.

This Addendum will become part of the RFP and should be acknowledged with the RFP.

STATE OF NEBRASKA

United States of America, } ss.
State of Nebraska }

Secretary of State
State Capitol
Lincoln, Nebraska

I, Robert B. Evnen, Secretary of State of the State of Nebraska, do hereby certify that

CENTURYLINK COMMUNICATIONS, LLC

a Delaware limited liability company is authorized to transact business in Nebraska;

all fees, taxes, and penalties due under the Nebraska Uniform Limited Liability Company Act or other law to the Secretary of State have been paid;

the Company's most recent biennial report required by section 21-125 has been filed by the Secretary of State;

the Secretary of State has not revoked the Company's Certificate of Authority and has not filed a notice of cancellation.

This certificate is not to be construed as an endorsement, recommendation, or notice of approval of the entity's financial condition or business activities and practices.

In Testimony Whereof,

I have hereunto set my hand and affixed the Great Seal of the State of Nebraska on this date of

May 20, 2020

Secretary of State

Verification ID a5b4884 has been assigned to this document. Go to ne.gov/go/validate to validate authenticity for up to 12 months.

BJORN JOHNSON
SENIOR ACCOUNT MANAGER

Experience Summary

Bjorn Johnson oversees all aspects of the regional 9-1-1 accounts, including South Dakota, North Dakota, Nebraska, and Illinois. He actively participates in implementation tasks including planning development, execution, quality control, customer facing meetings, and account-related documentation. He serves as the overall account director and point of contact for the Public Service Commission and all Public Service Answering Points (PSAPs). Mr. Johnson is a proven Account Manager with 20 years of demonstrated of experience and success in management, marketing, and strategic business development. Mr. Johnson is a progressive, decisive, innovative professional who is highly valued for expertise interpreting corporate vision and strategy, translating objectives into actionable plans, and providing decisive leadership to multi-functional team members. Mr. Johnson has a strong work ethic and track record of success with a history of developing long-lasting relationships based on a foundation of trust, integrity, and reliability. Mr. Johnson has gained deep expertise in public safety networks, 9-1-1 call handling, sales engineering, 9-1-1 technologies, strategic planning, managing complex projects, team building, state budget optimization, and risk management.

Role and Understanding of the Process

Mr. Johnson serves as the first point of escalation for any account-related issues. His professional interest ranges from Business Development through Public Safety NG-911 Telecommunications Solution implementation. Mr. Johnson has provided leadership that has raised customer retention levels through effective client management and by delivering effective solutions. Mr. Johnson engages state and local leadership through establishing CenturyLink C-Level and Director level relationships within multiple market verticals. He facilitates business development through client acquisition, effective marketing strategies, and by driving sales through consistent follow-up activities. Mr. Johnson cultivates and nurtures relationships with clients to educate them on services or product specifications, including design, features, advantages, and benefits. He works effectively with customers and delivers outstanding customer service through consistent, on-time and on-budget project delivery. Over his career at CenturyLink, Mr. Johnson has focused on deployment of 9-1-1 initiatives and strict adherence to and conformance with customer needs. Mr. Johnson is a skilled communicator as he broadly communicates his initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Computer Science, University of Nebraska, Omaha, Nebraska, Attended 1987-1990

Computer Science, Community College of the Air Force, San Antonio, Texas, 1984-1988

Relevant Employment/Project History

CenturyLink . Sioux Falls, South Dakota 2013-Present
Senior Account Manager

As Senior Account Manager, Mr. Johnson responsible for 9-1-1 in North Dakota and South Dakota, Nebraska, and Illinois. Involved in moving an enhanced 9-1-1 to NG-911 in his respective states. His responsibilities include working with customers to design solutions that resolve customer pain points, works with CTL product team to develop products that meet customer specific requirements, works with CTL orders team to ensure customer orders are installed on-time/timely, attended National 9-1-1 community conference and meetings to stay abreast of 9-1-1 innovations. In 2019, Mr. Johnson moved South Dakota to a hosted state-wide NG-911 solution.

Mitel/DataNet **Sioux Falls, South Dakota** **2011-2013**
Sales Manager

As Sales Manager at Mitel/DataNet, Mr. Johnson manages the Local Group consisting of 6 Sales Professionals that included sales of Server and Desktop Virtualization, Storage, and Telecommunications. He is Responsible for a 21-million-dollar annual quota.

CenturyLink . **Sioux Falls, South Dakota** **2007-2011**
Premier Account Manager

As Premier Account Manager, Mr. Johnson managed Government, Education, and Medical Accounts for the entire State of South Dakota. He promoted telecommunication and business solutions to CenturyLink clientele and hosted Customer meetings to provide customer service and promote CenturyLink Products and Services. He also hosted and attended CenturyLink tradeshows and provide presentations. Mr. Johnson provided routine account management to CenturyLink Customers. He was responsible for a Monthly Total Billed Revenue Quota of $720,000.00 and a Total Billed Revenue of $6.8 Million dollars annually.

Communication Service for the Deaf. **Sioux Falls, South Dakota** **2002-2007**
Assistant Chief Technology Officer

As Assistant Chief Technology Officer, Mr. Johnson designed, implemented and managed CSD's VRS (video relay systems). This system provided relay services to the Deaf community through H.323 and SIP video across the public internet. He designed and implemented a nationwide converged IP network that supports voice, data and video and worked with Qwest engineers to develop a nation-wide ATM network supporting video and data. Utilizing OC3 to DS1 level circuits. Mr. Johnson implemented Qwest SHNS OC12 network supporting voice, video and data. He was responsible 15 employees and accountable for a 5 million dollar a year budget, coordinated and managed several projects from concept to completion. These projects were completed on time and within budget constraints and developed relationships with many communication and equipment providers to develop unconventional solutions to communication barriers for the deaf and hard of hearing community.

Qwest Communications **Sioux Falls, South Dakota** **1998-2002**
Data Applications Sales Engineer

As Data Applications Sales Engineer, Mr. Johnson was the Principal network architect in the design and installation of Governor Janklow's statewide school video network. He designed extensive Voice, LAN and WAN networks for Governmental and commercial Agencies. Including the use of Private line, ISDN, Frame Relay, ATM and MPLS networks and coordinated the installation of communication services and equipment to support clients' networks.

Certifications / Training

None

Professional Memberships / Associations

None

JON OSBORNE
CENTRAL REGION ACCOUNT DIRECTOR
PUBLIC SAFETY

Experience Summary

Jon Osborne oversees all aspects of the Nebraska's 9-1-1 accounts, including overall solutioning. He actively participates in implementation tasks including planning development, execution, quality control, customer facing meetings, and account-related documentation. He serves as the overall account director and point of contact for the Public Service Commission and all Public Service Answering Points (PSAPs). Furthermore, Mr. Osborne is a voting board member on the Nebraska 9-1-1 Service System Advisory Committee. Mr. Osborne is a proven Account Director with 17 years of demonstrated of experience and success in management, marketing, and strategic business development. He is a dedicated, energetic, and versatile professional with expansive technical skill set and an advanced degree in educating clients on company services or products, acquiring new accounts, expanding the client base, and ultimately generating higher levels of revenue. Mr. Osborne is a progressive, decisive, innovative professional who is highly valued for expertise interpreting corporate vision and strategy, translating objectives into actionable plans, and providing decisive leadership to multi-functional team members. He leverages eco-centric thinking and relationship building to steer clients towards a mutually beneficial outcome. Articulate and persuasive with exceptional communication and training skills, Mr. Osborne has a strong work ethic and track record of success with a history of developing long-lasting relationships based on a foundation of trust, integrity, and reliability. He has gained deep expertise in public safety networks, 9-1-1 call handling, sales engineering, 9-1-1 technologies, strategic planning, managing complex projects, team building, state budget optimization, and risk management.

Role and Understanding of the Process

Mr. Osborne acts as overlay support to provide state 9-1-1Account Managers who are focused on delivering customer 9-1-1 solutions. He serves as the first point of escalation for any account-related issues. His professional interest ranges from Business Development through Public Safety NG-911 Telecommunications Solution implementation. Mr. Osborne has provided leadership that has raised customer retention levels through effective client management and by delivering effective solutions.

Mr. Osborne engages state and local leadership through establishing CenturyLink C-Level and Director level relationships within multiple market verticals, including a voting board member on the Nebraska 9-1-1 Service System Advisory Committee. He facilitates business development through client acquisition, effective marketing strategies, and by driving sales through consistent follow-up activities. Mr. Osborne cultivates and nurtures relationships with clients to educate them on services or product specifications, including design, features, advantages, and benefits. He works effectively with diverse individuals and delivers outstanding customer service through consistent, on-time and on-budget project delivery. Over his career at CenturyLink, Mr. Osborne has focused on deployment of 9-1-1 initiatives and strict adherence to and conformance with customer needs. Mr. Osborne is a skilled communicator as he broadly communicates his initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Master Business Administration, Bellevue University, Bellevue, Nebraska, 2018

Master of Science, Management Information Systems, Bellevue University, Bellevue, Nebraska, 2016

Bachelor of Science, Management, Bellevue University, Bellevue, Nebraska, 2008

Relevant Employment/ Project History

CenturyLink **Omaha, Nebraska** **2017-Present**
Senior Global Relationship Manager / Central Region Director Public Safety

As Senior Global Relationship Manager for Central Region Director Public Safety at CenturyLink, Mr. Osborne is responsible for strategically engaging with state and local leadership through establishing C-Level and Director level relationships within multiple market verticals. Specifically, he solves customer business challenges through technology solutions by understanding customer's business model, funding mechanisms, engaging in creative research and investigation, and aligning challenges to potential technology solutions. Mr. Osborne collaborates with public safety support team to deliver optimal services and experience, effective planning, maintaining engagement during the sales process, and using effective communications. He provides services that targets line of public sector leadership to identify challenges, collaborating with vendors/partners to identify optimal solution for clients, attending and participating in conferences and national work groups APCO/NENA to stay current on technology trends, building adaptive relationships, maintaining a strong ability to consult the customer, and tailoring conversations to their needs. Highlights of Mr. Osborne's key significant accomplishments include the following:

- NENA/APCO National Member
- NENA/NG911 S&BP
- MPLS Network Specifics

Executive Technologies, Inc. **Sioux City, Iowa** **2015-2017**
Director of Sales & Client Services

As Director of Sales & Client Services, Mr. Osborne contributed individually through establishing C-Level and Director level relationships within multiple market verticals. Specifically, Enterprise and Government agencies. He directed corporate sales training, led development, conducted performance reviews, monitored account executives & sales managers progress toward reaching development goals. Mr. Osborne consistently promoted the company's culture of a team-based work environment to elevate sales across business lines and encourage employee and customer retention. He established and adjusted selling prices by monitoring costs, competition, and supply and demand.

Mr. Osborne's significant accomplishments include providing critical input on several key projects. Highlights of his key significant accomplishments include the following:

- Directed the hardware and software sales of teams to meet and/or exceed targeted unit placement and revenue
- Maintained 30% margin in gross profit/net operating income
- Generating $4M in annual revenue

Encartele, Inc. **Omaha, Nebraska** **2013-2015**
Director of Business Development/Director of Sales & Marketing

As Director of Business Development, Mr. Osborne was responsible for providing the company direction of sales and marketing focused on SaaS, CPE, and cloud-based storage. that was specifically focused in Law Enforcement and Public Safety. He determined annual unit and gross-profit plans by implementing marketing strategies and analyzing trends. Mr. Osborne established C-Level and Director level relationships within multiple nationwide law enforcement agencies.

Mr. Osborne's significant accomplishments include several key initiatives which were critical to customer's operations. As the Lead Sales Engineer, Highlights of Mr. Osborne's key significant accomplishments include the following:

- Restructured sales and RFP process resulting in $4.8M in total contract revenue in 18-month time frame
- Increasing sales revenue by 9.5% in 2013; 14.5% in 2014; 15.2% in 2015
- Increased overall revenue by 23.8% during tenure
- Successfully launched new brand via social media outlets and obtained 20,000+ followers

White Lotus Group **Omaha, Nebraska** **2012-2013**
Sales Manager & Marketing

As Sales Manager, Mr. Osborne was responsible for developing and maintaining strong relationships with tier 1 corporate accounts C-Level contacts. His responsibilities include launching and managing market specific CRM, developed marketing and hunting process, built and maintained CRM data base. Mr. Osborne facilitated sales and marketing presentations for prospective clients, evaluated trends within specific markets, and established priorities for focus on revenue generating activities. He directed brand management, Public Relations, media relations, corporate positioning, product launches, advertising, and sales collateral. He also produced media sales kits that demonstrated key marketing analytics and demographics. Highlights of Mr. Osborne's key significant accomplishments include the following:

- Restructured Sales packets resulting in 4.7% quarterly sales
- Implemented Client Relationship Management (CRM) Sales Pro improving sales Funnel
- Restructured RFP and Contract response format cutting down on reply and acceptance timelines

CenturyLink **Omaha, Nebraska** **2002-2012**
Sales & Sales Support Manager

As Sales and Sales Support Manager at CenturyLink, Mr. Osborne functioned as the Manager of Mass Markets Telecommunications Sales and Support Office, Manager of Client Services and National Markets Center for Off-line and Sales Support. His responsibilities included interviewing, developing, training, motivating sales center of 250+ Senior Sales Consultants and 175+ Sales Support Specialists. Highlights of Mr. Osborne's key significant accomplishments include the following:

- Collaborated with cross functional channels to ensure maximum efficiency, productivity, and order accuracy for 45,000+ accounts.
- Successfully coached all teams to maintain 100+% of productivity metrics.

Certifications / Training

- NENA/NG911 S&BP
- Miller Heiman Strategic Selling
- RFP Development
- Contract Interpretation
- MPLS Network Specifics
- Buyer-Seller Relationships
- Train the Trainer
- Fair Hiring Practices
- Prevention of Harassment Policies
- Sales Processes
- Best Practices in Management
- Gaining Sales Commitment
- Qwest 360 Executive Professional Development Program

Professional Memberships / Associations

- Tangier Shriner – Omaha Nebraska
- Waterloo Masonic Lodge – Omaha Nebraska
- Sigma Phi Epsilon National Alumni Board - Omaha Nebraska
- Sigma Phi Epsilon National Alumni Association – Omaha Nebraska

CARLOS SIMMONDS
NATIONAL DIRECTOR, PUBLIC SAFETY

Experience Summary

Carlos Simmonds is a proven Director with 19 years of demonstrated experience in management, marketing, and strategic business development. He is a strategic, results-driven professional who is focused on team leadership, performance analysis, and business management, ensuring profit and sales maximization. Mr. Simmonds is a proven leader at reversing non-performing operations by installing new processes, leading ecosystems, and translating vision into action. Over his career, he has gained deep expertise in sales engineering, strategic planning, overseeing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

Mr. Simmonds manages and oversees the national CenturyLink Public Safety team and all sales disciplines including revenue projections and conversion of market opportunities to new revenue for the organization. He works with CenturyLink leadership to develop the strategic direction and implement new initiatives. Mr. Simmonds has executed key tasks that led to the inception of an internal group who established and identified the key players in the development of the Public Safety Group at CenturyLink, which provides 9-1-1 service nationally. He engages state and local leadership to strengthen relationships, resolves any type of escalated issue, and develops CenturyLink go-to market strategy, which includes strategic partnering.

Mr. Simmonds is an advocate for CenturyLink's customers and serves as a conduit to facilitate communications between internal and external ecosystem partners for ensuring positive customer experiences, on-time project completions with his programs, and market penetration. Over his career at CenturyLink, Mr. Simmonds has focused on deployments of various 9-1-1 and company strategic initiatives.

Education

Bachelor of Science, Business Administration, University of Phoenix, Phoenix, Arizona, 2011

Relevant Employment/ Project History

CenturyLink **Phoenix, Arizona** **2019-Present**
National Director, Public Safety

As Director in Public Safety at CenturyLink, Mr. Simmonds manages and oversees the national CenturyLink Public Safety team and all sales discipline including revenue projections and conversion of market opportunities to new revenue for the organization. His responsibilities include implementing the company's vision and strategies by maintaining focus on CenturyLink's core values, developing and establishing relationships with industry partners, and conducting weekly staff and ecosystem meetings that focus on project deliverables and overcoming obstacles to ensure both customer and channel success. Highlights of Mr. Simmonds's key significant accomplishments include the following:

- Sponsored and provided the vision and strategic direction for the product development of NG 911 solution for CenturyLink that was first implemented for the State of Arizona
- Executed key tasks that led to the inception of an internal group who established and identified the key players in the development of the new Public Safety Group at CenturyLink, which provides 9-1-1 service nationally

CenturyLink **Phoenix, Arizona** **2015-Present**
Senior Relationship Manager

As Senior Relationship Manager for 9-1-1 Public Safety at CenturyLink, Mr. Simmonds was accountable for developing successful business relationships by actively seeking new business influencers within assigned territory in the Public Safety sector (9-1-1). His responsibilities included targeting line of business leadership to identify

business challenges and cultivate a foundation of trust/partnership, providing guidance and leadership to extended sales support team to ensure CenturyLink's success in the market and overseeing all day to day sales operations. He collaborated and built relationships with vendors and partners. He led CenturyLink's efforts with contract language, design components, integration into the legacy 9-1-1 system, and negotiating discounts with the manufacturers to increase CenturyLink's margin in the NG-911 space. Highlights of Mr. Simmonds's key significant accomplishments include the following:

- Negotiated and received award for NG-911 managed service contract (TCV over $80 million)
- Earned the company COE award 2016-2018. Monthly Recurring Revenue (MRR) attainment 2015- 361%, 2016- 134%, 2017- 593%, 2018- 372%

Integra **Boise, Idaho** **2013-2015**
Government /Education Solutions Manager

As Solutions Manager at Integra, Mr. Simmonds was accountable for developing and growing the Idaho and Eastern Washington markets in the government and education sector through the successful coaching and leadership of direct reports. He developed profitable and long-term relationships with heads of state agencies, school districts, and local municipal governments, and oversaw all day to day sales operations. Highlights of Mr. Simmonds's key significant accomplishments include the following:

- Successful negotiated of statewide purchasing contracts generating over $10 million in new contract revenue
- Earned the company Elev8 award as the #1 Solutions Manager for 4th quarter 2013 and 1st quarter 2014 with blended results of 238% of quota

Frontier Communications **Boise, Idaho** **2012-2013**
Strategic Territory Manager

As Strategic Territory Manager at Frontier Communications, Mr. Simmonds was accountable for meeting and exceeding assigned monthly sales objectives and revenue quotas in the commercial, government, and education sectors. He developed profitable relationships with the various levels of management across the company from the C-Level to IT management. His recognitions include top West Enterprise Sales Executive 1st, 2nd and 3rd quarter 2012 and he earned the company red carpet start award for achieving a 36% quarter over quarter territory growth.

CenturyLink **Boise, Idaho** **2008-2012**
Strategic Account Manager

As Strategic Account Manager at CenturyLink, Mr. Simmonds was accountable for meeting and exceeding assigned monthly sales objectives and revenue quotas in the Enterprise business market groups through the successful management of customer base. He developed profitable relationships with the various levels of management across the company from the C-Level to IT management. Mr., Simmonds was responsible for building and maintaining a sales funnel by hunting for new prospects on a daily basis through telemarketing, knocking on doors, cold calling, working resources such as Chamber of Commerce, Hart Hanks, Hoover's list, vendor contacts and customer referrals. He was accountable for providing outstanding customer service daily as well as development of customer presentations according to their business requirements, trends and emerging technologies. He partnered with new and existing customers through a consultative sales approach in order to better understand their business strategies and needs. He was responsible for the monthly acquisition of 12 new logos. Mr. Simmonds was recognized as Destination Beyond winner 2010 & 2011. 110% club quarterly branch excellence awards (2010-2011) and received Branch recognition for high achievement in sales YTD 149%, retention 195% and blended 192% (2010-2011). Mr. Simmonds also received numerous monthly top MRC branch sales leader awards (2009-2011).

Certifications / Training

The Real ABC's of selling advanced leadership certification

Miller Heiman Conceptual & Strategic Selling certification.

Salesforce certification.

Summit 2 strategic selling certification.

Culture Selling training and certification.

Cisco CSE certification.
Avaya product certifications including AURA, Contact Centers, and Unified Communications.
ShoreTel UC and IP platform certifications.
Mitel product training and partner certifications.

Professional Memberships / Associations

NENA, member since 2013

STEVE DELOACH
SENIOR SALES ENGINEER

Experience Summary

Steve Deloach is a proven Senior Sales Engineer with over 33 years of demonstrated Telecommunications experience in both Telecommunications and Public Safety. Mr. Deloach is a dedicated, energetic, and versatile professional with expansive technical skill set supported by an advanced degree in multiple telecommunication platforms. He has gained deep expertise in sales engineering, strategic planning, managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

As Senior Sales Engineer, Mr. Deloach is responsible for design and architecture of world-class Public Safety networking solutions. He is an accomplished Sales Engineer with a unique combination of strong communication and presentations skills along with technical acumen. Mr. Deloach possesses over 35 years of Sales Engineering Management experience in the telecommunications industry and over 20 of those years directly supporting regional and National Public Safety Sales and Engineering teams for a Fortune 500 telecommunications company. He has built a repertoire that is based upon solid experience with CRM, Marketing Automation tools and applications with over 25 years of B2B Sales and Engineering experience. Mr. Deloach has spent the last 18 months working directly with Public Safety Agencies in the State of Nebraska assisting them in solving Public Safety 9-1-1 Equipment and Network Challenges utilizing the vast portfolio of solutions offered by CenturyLink. He has intimate knowledge of the design and implementation of a Next Generation 9-1-1 (NG 911) Solution on a Statewide basis and has met with several customers in the State to discuss the requirements of designing and implementing NG-911. Mr. Deloach completely understands the Network Design/Call Delivery (ESINet), Call Routing/Processing (NGCS) and all the backend touchpoints required for the successful implementation of a Statewide ESInet. He attends Public Safety Conferences and stays abreast of NENA Standards for NG-911to ensure the solutions CenturyLink offer and deploy meet and exceed NENA and Customers expectations and standards. Mr. Deloach is passionate about Public Safety and Emergency Communications and have worked in the Public Safety technology field for over 20 years engineering solutions utilizing and integrating wireless or wireline networks to enhance the delivery of Public Safety Services by our First Responders.

Mr. Deloach is an articulate communicator who works effectively with customers and delivers outstanding customer service through consistent, on-time and on-budget project delivery. Over his career at CenturyLink, he focuses on initiatives and strict adherence to and conformance with customer needs. Mr. Deloach is a skilled communicator who broadly communicates his initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Master Business Administration, University of Phoenix, Cary, NC

Bachelor of Arts, Computer Science, University of North Carolina at Charlotte, Charlotte, NC

Relevant Employment/ Project History

CenturyLink **Rocky Mount, NC** **2014-Present**
Senior Sales Engineer

As Sales Engineering Manager at CenturyLink, Mr. Deloach is responsible for designing and engineering Public Safety Solutions for Government customers in NC, TN, VA, PA, NJ, NE, IA. His responsibilities include project coordination, gross margin analysis, pricing, customer presentations, technical support and design of complex 9-1-1 Network (NG-911) and CPE solutions. Mr. Deloach works closely with Product and Marketing organizations and Vendors to ensure that CenturyLink solutions exceeded customers and company's expectations.

Mr. Deloach's significant accomplishments include providing critical input on several key projects that supported 9-1-1 Network (NG-911) and CPE solutions. Highlights of Mr. Deloach's key significant accomplishments include the following:

- Design of Backup Network for Public Safety Critical Solutions
- Designed and Implemented Largest Call Handling Equipment Solutions in PA
- Implemented 1st Clustered Call Handling Solution within CenturyLink

SPRINT **Cary, NC** **2008-2014**
Manager – Solutions Engineer

As Manager and Solutions Engineer at SPRINT, Mr. Deloach was responsible for leading a team of Solutions Engineers with technical expertise supporting Wireline and Wireless solutions for all market segments in Eastern NC and Southern Virginia. His primary objective was to coordinate and manage activities and efforts to ensure that all assigned area and regional sales revenue objectives were met. His job responsibilities included managing a team of 7 Solutions Engineers that provided pre-sales design and technical support to the Sales Organization and Customers for MPLS, Dedicated IP, SIP trunking, IaaS, SaaS, UCaaS, Managed Network Services, Customer Premise Equipment (CPE) and wireless devices, solutions and applications. Highlights of Mr. Deloach's key significant accomplishments include the following:

- Nominated- Public Sector SE Manager of the Year
- Led a Group of Engineers that assisted in the generating of over $100M in annual revenues

SPRINT NEXTEL **Cary, NC** **2005-2008**
Manager – Solutions Engineer, Public Sector

As Manager and Solutions Engineer at SPRINT, Mr. Deloach was responsible for leading a team of Solutions Engineers with technical expertise covering SPRINT NEXTEL Wireless products and services for customers in the Public Sector Market Segments in NC/SC/TN/AL/MS/AR/LA/GA. Mr. Deloach's primary objective was to coordinate and manage activities and efforts to ensure that all assigned area and regional sales revenue objectives were met. He managed a team of 8 Solutions Engineers that provided pre-sales design and technical support to the Sales Organization and Customers for wireless devices, solutions and applications. Highlights of Mr. Deloach's key significant accomplishments include the following:

- Led a Group of Engineers that assisted in the generating of over $75M in annual revenues

SPRINT **Tarboro, NC** **2008-2014**
Manager – Technical Solutions Sales

As Manager at SPRINT, Mr. Deloach was responsible for Public Safety National Sales and Engineering Support for CPE and Network products and services. He oversaw the engineering, design and pricing of CPE and Network Public Safety solutions to customers in the Business Sales In- Franchise markets. He managed a team of Sales Engineers who were responsible for end to end Public Safety solutions including pre-sales support for CPE, long distance, PCS and network/database opportunities. He managed a group of 22 Network/Database/CPE Engineers covering 13 States. Highlights of Mr. Deloach's key significant accomplishments include the following:

- Generated over $50M in 9-1-1 Non-Regulated and Regulated sales revenue
- Outstanding SE Manager of the Year Award

SPRINT **Tarboro, NC** **2008-2014**
General Manager – Sales and Service

As General Manager of Sales and Service at SPRINT, Mr. Deloach was responsible for the sales and engineering of Non-Regulated Public Safety products and services in the Mid-Atlantic Region. He managed three E911 Engineers and six E911 Account Executives, one Sales Assistant, and one E911 Area Manager. He managed a team that was dedicated to engineering and selling Public Safety integrated 9-1-1 solutions. Mr. Deloach participated in technical sales presentations to prospective clients for both 9-1-1 CPE and Network technologies and solutions. He also provided consultation for strategic approaches to RFP's and RFI's. Highlights of Mr. Deloach's key significant accomplishments include the following:

- Generated over $11M in CPE sales for Sprint National Public Safety

Certifications / Training

Solution Selling Workshops
Leadership Development Seminars
NG-911Conferences
Advanced 9-1-1 CPE Design and Implementation Training
Learning to Lead Seminars
Kenan Flagler Executive Leadership Training

Professional Memberships / Associations

NC911 Board Member
Credit Union Board Member
Team Excellence Award
IP Telephony Strategy Migration Team Member
SpinCo Integration Team Member
Presidents /Masters Club
Who's Who Among College Students
Member of Kappa Alpha Psi Fraternity
Nominated- Public Sector SE Manager of the Year

STEVEN KLOCEK
SENIOR SALES ENGINEER

Experience Summary

Steven Klocek is a proven Senior Sales Engineering Manager with 36 years of demonstrated Telecommunications experience. Mr. Klocek is dedicated primarily to the support of large business and government customers. He demonstrated strong performance in delivering Next Generation 9-1-1 systems, Sales, Design Engineering, Project Management and Customer Service through leadership, teamwork and personal attention to quality. He managed large complex projects, SME CenturyLink Next Generation 9-1-1 Network, bid proposals, Staff, offices and operations, all with a focus on helping customers achieve their business objectives.

Role and Understanding of the Process

Mr. Klocek is responsible for design and architecture of world-class networking solutions. Mr. Klocek provided technical consulting Sales Engineering teams who are focused on the technical aspects of the solution. Mr. Klocek has provided technical leadership on a range of projects that raised customer retention levels while reducing maintenance costs. He has been a sound resource for providing direction on technical aspects of solutions on various E911 projects. He has provided critical design and development support on Next Generation E911 solutions and provides customer service support for the Public Service Answering Points (PSAP's) in Minnesota, South Dakota & North Dakota. Mr. Klocek is an articulate communicator who works effectively with diverse individuals and delivers outstanding customer service through consistent, on-time and on-budget project delivery. Over his career at CenturyLink, Mr. Klocek has demonstrated a keen focus on deployment of E911 initiatives and strict adherence to and conformance with customer needs. Mr. Klocek is a skilled communicator as he broadly communicates his initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Associate in Computer Maintenance, Mankato Area Vocational Technical Institute (MAVTI) Mankato, MN 1983

- Basic and Digital Electronics. Specialized Study Computer Maintenance & Programming.
- Use of Electronic Test Equipment.

US WEST Communications Inc. Learning Systems, Minneapolis, MN

- Quality Process Management 4/97
- Success Principles for Project Management 7/96
- Kepner/Tregoe Project Management, 12/94
- Microsoft Project 4.0 for Windows, 10/94

Relevant Employment/ Project History

CenturyLink **Minneapolis, Minnesota** **2011-Present**

Senior Sales Engineering-Solution Architecture Team – 9-1-1 Public Safety

As Senior Sales Engineering Manager for 9-1-1 Public Safety at CenturyLink, Mr. Klocek provides Professional System Engineering and direction to CenturyLink Sales department on products and services for Government & Education clients. His primary focus is on E911 CPE and Network. Mr. Klocek's responsibilities include providing customer service for the Public Service Answering Points (PSAP's) in Minnesota, South Dakota & North Dakota as well as designing and pricing CenturyLink products for specific for customer applications, communication plans, project status meetings and written recommendations along with customer presentations. Mr. Klocek has gained a deep knowledge based upon his experienced in Next Generation E911 Network, 9-1-1 Hosting Platforms, LAN, WAN, VOIP, Positron, Plant/Cassidian, E911, Nortel, Avaya, NEC, Adtran, DS0, DS1, DS3, SHARP & SHNS, CPE and Video networks. Highlights of Mr. Klocek 's key significant accomplishments include the following:

- Developed National Programs for CenturyLink E911 Services which dictated the method by which CenturyLink standardizes the installation of Next Generation E911 CPE equipment, Pricing and Installation

standards from pre-sale to post sale, and incorporated all documents into a listed CenturyLink Technical Publication

- Functioned as a Qwest Next Generation Emergency 9-1-1 Subject Matter Expert for Minnesota State-Wide NextGen 9-1-1 Platform RFP and the ND State-Wide NextGen 9-1-1 Platform for ND, which both were awarded to Qwest

BAILIWICK DATA SYSTEMS **Eden Prairie, Minnesota** **2002-2006**
Manager, Engineered Design and Development

As Manager at Bailiwick Data Systems, Mr. Klocek provided Program Development, System Engineering and direction to support Sales and Operations of Bailiwick products and services for clients. He responsibilities included designing and pricing of Bailiwick products specific for customer applications, communication plans, project status meetings and written documentation along with customer presentations. Highlights of Mr. Klocek 's key significant accomplishments include the following:

- Developed a deployment design using Computer Aided Design Software (CAD) to realize an overlay of a Big Box store, which standardized the overlay of the store and placed the proper amount of voice/data locations in the proper departments; the overlay worked very well for receiving bids as well as release for the installers to deploy and resulted in significant savings by streamlining the process

QWEST Global National Sales **Minneapolis, Minnesota** **1998-2002**
System Engineer III

As System Engineer at QWEST, Mr. Klocek provided System Engineering support and direction to Qwest's Sales department on Qwest products and services for global clients. His job functions included supporting design and pricing of Qwest products specific for customer applications, communication plans, project status meetings and written recommendations along with customer presentations. Through performing his duties, Mr. Klocek built a deep repertoire of experience in LAN, WAN, VOIP, Positron, Plant, E911, Nortel, Avaya, NEC, DS0, DS1, DS3, SHARP & SHNS, CPE and Video networks. Highlights of Mr. Klocek's key significant accomplishments include the following:

- Special Project to protect our network and PSAP's in a preparation for Y2K time clock changes.
- Managed a 3-year project to deploy the new Campus at ADC Telecommunications, included underground plant, physical layer fiber and copper facilities and wireless communications.

US West Professional & Technical Services **Minneapolis, Minnesota** **1994-1998**
Project Manager

As Project Manager at QWEST, Mr. Klocek provide Project Management, leadership and direction to Sales of U S West products and services for Sales and Carrier clients. His responsibilities included coordinating internal U S West departments, external clients and subcontractor organizations. Highlights of Mr. Klocek's key significant accomplishments include the following:

- Managed significant installations that included major hospitals and colleges in several states

U S West Official Company Services **Minneapolis, Minnesota** **1983-1994**
Assistant Area Manager

As Assistance Area Manager at US West, Mr. Klocek managed 15 field technicians, 4 Supply Room Attendants and 3 Data Specialist, employed in multiple states. Supervisor of installation and maintenance crews for complex US West company services. He also coordinated service for Internal U S West Customers for Minnesota & North Dakota's base for Customer Premise Equipment & Data Network Services. His job functions included the coordination of internal U S West departments, external clients and subcontractor organizations. He also provided support for developing design and pricing of Qwest products specific for customer applications, communication plans, project status meetings and written recommendations along with customer presentations. Highlights of Mr. Klocek 's key significant accomplishments include the following:

- Designed and developed the project base line for building U S West Mega Centers in MN and CO. Mega Centers were monitoring centers for repair tickets, workload planning, new construction routes and climate monitoring to plan for store damage throughout the United States

Certifications / Training

Motorola E911 product training, 8/2018
Intrado E911 product training, 5/2018
Cassidian Sales Engineering 9-1-1 Certification on E911 product, 8/2014
SAVIS Cloud training, 2014
Cassidian Sales Engineering 9-1-1 Certification on E911 product, 2/2012
Adtran Sales Engineering Certification on E911 product, 7/2010
Plant/CML Sales Engineering Certification on E911 product, 9/2010
Nortel VoIP/BCM Training Certification, 2/07
Anoka- Ramsey Community College. Anoka, MN. Cisco Certified Design Associate (CCDA), 12/01
BICSI, Tampa FL. Designing Telecommunications Systems, 12/99

Professional Memberships / Associations

Minnesota Ducks Unlimited – Zone Chairman, 2005 to present.
Carver County Ducks Unlimited - Chairman, 1992 to 2005.
Project Management Institute - Member 1997 to 2004
Carver County Ducks Unlimited - Committee Member, 1988 to 1992

MS. CATHY ATKIN
SENIOR SALES ENGINEER – PUBLIC SAFETY 9-1-1

Experience Summary

Ms. Cathy Atkin is a proven Senior Sales Engineer with 45 years of demonstrated Telecommunications experience in both Global Enterprise Customers and Government and Education Services support. Ms. Atkin is a dedicated, energetic, and versatile professional with expansive technical skill set, advanced degree and certifications in multiple 9-1-1 telecommunication platforms including 9-1-1 Call Handling Equipment designs, Data Center and Cloud designs, Enterprise Network WAN/LAN management. She has gained deep expertise in sales engineering, 9-1-1 technologies, strategic planning, managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

As Senior Sales Engineer at CenturyLink, Ms. Atkin manages Sales Engineers who are focused on the technical aspects of the solution. She serves as first point of escalation for any design-related issues. She holds several certifications, which include VMWare, Cisco CCNA/CCDA, and Cyber-Security Solutions. Ms. Atkin has provided input into NENA standards, engineering designs, and solutions to Public Safety over 45 years. She has provided expertise on the evolution of Public Safety solutions throughout her career and technical leadership on a range of projects that raised customer retention levels while reducing overall costs. She has performed installations, configurations, and special services "grooming" 9-1-1 Public Safety Network and Call Handling solutions. Ms. Atkin designed and implemented Next Generation solutions several States including Arizona, Minnesota, Colorado, Washington, South Dakota and Utah. She has designed, installed, and maintained internal databases, systems and Public Safety systems. Ms. Atkin holds several product certifications that include Cisco, Avaya, Mitel, Vesta, and Viper. She is an articulate communicator who works effectively with diverse individuals and delivers outstanding customer service through consistent, on-time, and on-budget project delivery. Over her career at CenturyLink, Ms. Atkin focuses on deployment of NG-911 initiatives and strict adherence to and conformance with customer requirements. Ms. Atkin is a skilled communicator as she broadly communicates his initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Degree, Computer Engineering, University of Phoenix, Tucson Arizona, January 1994

Relevant Employment/ Project History

CenturyLink **Salt Lake City, Utah and Tucson, Arizona** **1990-Present**
Senior Sales Engineering – 9-1-1 Public Safety, Government and Federal Services

As a Senior Sales Engineer for 9-1-1 Public Safety at CenturyLink, Ms. Atkin is responsible for developing and delivering NG-911 Core, ESInet and I3 solutions for our NG-911 Managed solutions. Her responsibilities include identifying customer business requirements and developing solutions that addressed customer needs with a focus on engineering designs and solution selling. Ms. Atkin analyzes NG-911 and Public Safety Call Center Operations to determine best practice applications and designs. She delivers solution presentations that encourage customer collaboration. She spearheads network security resource requisitioning, installation, configuration, and monitoring. Ms. Atkin develops and documents new system configurations, processes, security, maintenance, backup, and reporting procedures for effective record keeping. Ms. Atkin delivers technical training to associates and customers to promote proper system configuration and designs. She promotes a productive collaboration environment through interfacing with vendors, such as CAD, Radio and Logging providers, 9-1-1 stakeholders, and project teams to drive solution development and testing. She prepares reports to track service issues, customer support business cases, and communicate project costs and status to both the customer (PSAP/State) and Public Safety teams.

Ms. Atkin's significant accomplishments include the successful deployment of several key 9-1-1 systems which were critical to customer's operations. As the Lead Sales Engineer, Ms. Atkin led the development and

implementation multi-million-dollar 9-1-1 delivery systems. Highlights of Ms. Atkin's key significant accomplishments include the following:

- Collaborated with Product Management and 9-1-1 vendors to create new NG-911 Managed Services offering for both the State of Arizona and 9-1-1 Public Safety in Arizona that can be deployed throughout the CenturyLink US wide territories
- Deployed Statewide MPLS deployment for State of NM 9-1-1 system which includes managed IQ Data Bundle, Network Based Security, and Co-location
- Assisted with the State of Arizona (AZnet) Managed Services deployment which accomplished over 770 sites Cisco, Juniper, MPLS and statewide migration
- Created focus teams with individual contributors to improve internal processes and build new public safety product offerings, including new 9-1-1 Public Safety managed services and onboarding new vendor partners
- Capitalized on the many diverse skills of direct reports to deliver customer solutions resulting in over 100% revenue goals attainment and customer satisfaction
- Established clear and concise individual and team goals, significantly increasing the quality of engineering designs, customer design, and public safety team morale
- Directed Tucson Police Department's Plant CML, Vesta, and Nortel Meridian ACD project as Technical Project Leader; resolved challenging Nortel design flaws to meet customer's system acceptance requirements.
- Played integral role in planning, design, and implementation of Enterprise Mapping and Enterprise Magic for nine Pima County E9-1-1 call centers; equipped multiple call centers with full suite of systems, including telecommunication platforms, servers, workstations, CTI applications, databases, GIS mapping applications, and voice and data networks

Certifications / Training

Cisco CCNA/CCDA

VMWare, Juniper- JNCIP-SEC

CenturyLink Sales Academy

Security DDOS and others

Professional Memberships / Associations

Arizona Women in Engineering Support Group, 2000

Project Management Institute, Member, 1994

NANCY C. SERAFINO
SENIOR SALES ENGINEER

Experience Summary

Nancy C. Serafino possesses 25 years of experience at CenturyLink serving 9-1-1 customers. She is a proven Sales Engineer with 32 years of demonstrated 9-1-1 systems development management experience, in both the commercial and State and Local Government environments. She has demonstrated client engagement leadership and change management results, effecting multi-million dollars in annual cost reductions and in hard benefits. Her expertise ranges from overseeing the implementation of E911 solutions to providing customer service and client facing. Ms. Serafino proven experience in strategic management and keen sense for completing implementations of E911 technology, systems integration, and business processes has gained her recognition with her customers and within CenturyLink.

Responsibility and Understanding of the Process

Ms. Serafino is responsible for the design and architecture of world-class networking solutions. Ms. Serafino is certified as a certified Emergency Number Professional (ENP) and has served on the Ohio State 9-1-1 Technical Advisory Committee for over 5 years. As Senior Sales Engineer, she effectively interfaces with various customers to provide 9-1-1 systems throughout the USA, including at the State level. As a proven leader, Ms. Serafino builds consensus, effects change, and delivers with consistent results on delivering E911 implementation projects. She served on the original ESINet Steering Committee for the States of Ohio and Pennsylvania as appointment by the Governors of these States. Real experience, such as this, has deepened Ms. Serafino's understanding of the importance of Nebraska's mission to implement their State-wide 9-1-1 system with next generation network capabilities that are necessary to save lives.

Ms. Serafino possesses over 25 years of Sales Engineering Management experience in the telecommunications industry and over 20 of those years directly supporting regional and national Public Safety Sales and Engineering teams for a Fortune 500 telecommunications company. Over her entire 34-year career at CenturyLink, Ms. Serafino has gained a deep knowledge of implementing 9-1-1 initiatives with strict adherence to and conformance with commercial and State and Local Government requirements. Ms. Serafino is an articulate communicator who works effectively with customers and delivers outstanding customer service through consistent, on-time, and on-budget project delivery. As a senior staff member, Ms. Serafino effectively achieves objectives by broadly communicating initiatives, receiving affirmation, and implementing plans across the entire program to achieve customer and end-user goals. As a senior staff member working at CenturyLink, she continues to augment her sound foundation in implementing and deploying 9-1-1 systems and develop her passion as a Senior Sales Engineer at CenturyLink.

Education

Bachelor of Science, Youngstown State University, 1988

Relevant Employment/ Project History

CenturyLink **Mansfield, Ohio** **1988-Present**
Senior Sales Engineer

As Senior Sales Engineer at CenturyLink, Ms. Serafino is responsible for overseeing development of 9-1-1 solutions. Her responsibilities and duties include managing implementation teams to ensure requirements are met; supporting the CenturyLink's Sales Organization and customers in configuring 9-1-1 solutions based on customer requests and State RFPs; and supporting implementations, configuring solutions, and selling legacy 9-1-1 systems until the transition to NG-911 systems. She also conducts training for Customer Service Managers (CSMs) and implementation team members; scheduling and tracking implementation teams progress while monitoring and reporting progress, roadblocks, and risks to stakeholders. She provides leadership through functioning as a liaison between clients and internal and external project team members to ensure cohesion and enhances team collaboration.

Ms. Serafino's significant accomplishments include providing critical oversight and team management that led to the delivery of several E911 solutions. Ms. Serafino's deep understanding the State of Nebraska's objective was gained from her experience in managing a year-long transition for the State of Indiana to their selected NG911 state-wide solution as a Project Manager who coordinated tasks, set agenda and schedules to implement network, and billing for E911 systems.

Sales Engineer

As Sales Engineer, Ms. Serafino performed various duties as a Regional Subject Matter Expert. Her responsibilities included generating and retaining E911 revenue by supporting CenturyLink's E911 Sales organization. Ms. Serafino technical contributions on E911 projects included developing and delivering solutions and quotes for CPE and Network buildouts. She also drafted, prepared, and delivered effective customer focused solutions presentations and demonstrations that were critical for communication project statuses.

Customer Service Operations E911 Area Manager

As E911 Area Manager, Ms. Serafino functioned as the primary interface for E911 PSAP Customers, Country and State agencies, and external stakeholders for Ohio, Pennsylvania, and New Jersey. Her responsibilities included managing major network configurations, overseeing delivery of 911 solutions, and functioning as the primary interface for internal CenturyLink departments during project execution. Ms. Serafino's significant accomplishments include providing oversight and management of development activities over several project implementation lifecycles. Ms. Serafino received an award by the State of Ohio for providing effective custom service to the State for coordinating PSAP vendor activities.

Certifications / Training

Emergency Number Professional (ENP)

Professional Memberships / Associations

Ohio Technical Advisory Committee, member

National Emergency Number Association (NENA), member

Ohio Telephone Association (OTA), member

STEPHEN E. DOYLE
MANAGER SALES ENGINEERING – SPECIALIZED SALE

Experience Summary

Stephen E. Doyle is a proven Sales Engineering Manager with 41 years of demonstrated Telecommunications experience in both Global Enterprise Customers and Government and Education Services support. Mr. Doyle is a dedicated, energetic, and versatile professional with expansive technical skill set, advanced degree and certifications in multiple 9-1-1 telecommunication platforms and WAN/LAN management. He has gained deep expertise in sales engineering, 9-1-1 technologies, strategic planning, managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

Mr. Doyle manages Sales Engineers who are focused on the technical aspects of the solution. He serves as first point of escalation for any design-related issues. He holds several product certifications. Mr. Doyle has provided technical leadership on range of projects that raised customer retention levels while reducing maintenance costs. He has performed installations, configurations, and special services "grooming" of Digital Loop Carrier (DLC) systems. He has also installed and maintained telephony high-voltage protection equipment in power generating plants and similar tech-heavy environments.

His deep understanding of the process and the State of Nebraska's 9-1-1 mission is demonstrated in the experience he has gained over his career. Mr. Doyle architected the Arizona Next Generation 9-1-1 (NG-911) managed services solution which included NG-911 cores services and managed emergency call handling equipment, employing Vesta and Viper. The Arizona NG-911 solution was designed to meet the financial constraints and provide next generation capabilities using an Operating Expense (OPEX) model to deploy NG core services within budget. He collaborated with the State of Arizona 9-1-1 emergency office and State-hired consultants to develop mission critical requirements and specifications CenturyLink implemented and deployed the NG9-1-1 solution that exceeded customer expectations. He led his solution architect team in designing and developing a new NG9-1-1 cores services ESINet solution for California Office of Emergency Services (CALOES), resulting in CenturyLink being selected as one of four Regional Network Service Provider (RNSPs) for the Southern California region.

Mr. Doyle is skilled and an articulate communicator who works effectively with customers and delivers outstanding customer service through consistent, on-time and on-budget project delivery. Over his career at CenturyLink, Mr. Doyle's keen focus on deployment of 9-1-1 initiatives and strict adherence to and conformance with customer needs.

Education

Master of Science, Information Management, University of Phoenix, Tucson AZ, 2006

Bachelor of Science, Business Information Systems, University of Phoenix, Tucson, AZ, 2004

Relevant Employment/ Project History

CenturyLink **Tucson, Arizona** **2017-Present**
Sales Engineering-9-1-1Public Safety, GES/Manager

As Sales Engineering Manager for 9-1-1 Public Safety at CenturyLink, Mr. Doyle is responsible for managing the CenturyLink's centralized National 9-1-1 Public Safety Sales Engineering team. His responsibilities include focusing on leveraging individual expertise to distribute workloads, establish best practices, collaborate with product management to drive 9-1-1 product offerings, and improve the customer experience. Worked with internal and external partners) all business processes and procedures.

Mr. Doyle's significant accomplishments include providing critical input on several key projects that supported Arizona's Emergency Communications Services development lifecycles. Highlights of Mr. Doyle's key significant accomplishments include the following:

- Deployed Arizona's NG-911 solution through a collaboration with the State of Ariziona 9-1-1 office and State-hired consultants to develop mission critical requirements and specs that exceeded customer expectations.
- Designed, developed, and deployed solutions that met the customer financial constraints to provide NG capabilities using Operating Expense (OPEX) model and within budget.
- Created focus teams with individual contributors to improve internal processes and build new public safety product offerings, including new 9-1-1 Public Safety managed services and onboarding new vendor partners
- Capitalized on the many diverse skills of direct reports to deliver customer solutions resulting in over 100% revenue goals attainment
- Established clear and concise individual and team goals, significantly increasing the quality of engineering designs, customer wins, and team morale

CenturyLink **Tucson, Arizona** **2010-2017**
Sales Engineering-9-1-1Public Safety, GES/Lead Sales Engineer

As Lead Sales Engineer for 9-1-1Public Safety at CenturyLink, Mr. Doyle was responsible for developing and delivering E911Managed Service and GES solutions. His responsibilities include identifying customer business requirements and developing solutions that addressed customer needs with a focus on solution selling. Mr. Doyle analyzed E911and GES call center operations to determine requirements. He also collaborated interactively through solution presentations. He spearheaded network security resource requisitioning, installation, configuration, and monitoring. Mr. Doyle developed and documented new system configurations, maintenance, backup, and reporting procedures for effective record keeping. He delivered technical training to associates and customers to promote proper system usage. He promoted a productive environment through interfacing with vendors and project teams to drive solution development and testing, while preparing reports to track service issues, support business cases, and communicate project costs and status to senior management.

Mr. Doyle's significant accomplishments include the successful deployment of several key 9-1-1systems which were critical to customer's operations. As the Lead Sales Engineer, Mr. Doyle led the development and implementation multi-million-dollar 9-1-1delivery systems. Highlights of Mr. Doyle's key significant accomplishments include the following:

- Collaborated with Product Management and 9-1-1vendors to create new NG-911Managed Services offering for Arizona that can be deployed throughout the CenturyLink territories
- Deployed Statewide MPLS deployment for State of NM 9-1-1system which includes managed IQ Data Bundle, Network Based Security, and Co-location
- Assisted with the Tucson Unified School District deployment which accomplished a 110 sites Avaya CS1000 migration

CenturyLink **Tucson, Arizona** **2002-2010**
Tier II Technical Support Specialist

As Tier II Technical Support Specialist for Arizona Emergency Communication Services, Mr. Doyle participated in all phases of various project life cycles from design through delivery and ongoing maintenance. He designed, installed, and maintained complex telecommunication and data network platforms, which included PBX, VM (Voice Mail), computer telephony integrated systems (CTI), databases, advanced Geographical Information Systems (GIS) applications, TCP / IP networks, Cisco routers and firewalls, frame relay circuits, T1 (DS1), ISDN, and various DSO-type circuits and carrier platforms. His responsibilities include providing input regarding support functions that was included all business processes and procedures.

Mr. Doyle's significant accomplishments include providing critical input on several key projects that supported Arizona's Emergency Communications Services development lifecycles. Highlights of Mr. Doyle's key significant accomplishments include the following:

- Directed Tucson Police Department's Plant CML, Vesta, and Nortel Meridian ACD project as Technical Project Leader; resolved challenging Nortel design flaws to meet customer's system acceptance requirements.

- Played integral role in planning, design, and implementation of Enterprise Mapping and Enterprise Magic for nine Pima County E9-1-1call centers; equipped multiple call centers with full suite of systems, including telecommunication platforms, servers, workstations, CTI applications, databases, GIS mapping applications, and voice and data networks.
- Designed and implemented enhanced functionality that eased management of 9-1-1emergency calls by increasing efficiency and accuracy of transfers.

Certifications / Training

Vesta
Viper

Professional Memberships / Associations

National Emergency Number Association (NENA), member 2005
Association Public-Safety Communications Official (APCO), member 2005

JOHN ROBERT SHUTTLEWORTH
SENIOR DIRECTOR – SALES ENGINEERING & SOLUTIONS ARCHITECTURE

Experience Summary

Mr. John Shuttleworth is a proven Sales Engineering Director with 38 years of demonstrated Telecommunications experience in both Federal and State Government and Education Services support. Mr. Shuttleworth is a dedicated, energetic, and versatile professional with expansive technical skill set including Management and networking in both the wireline and wireless industries. He has gained deep expertise in Pre-Sales Engineering, strategic planning, managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

As Senior Director – Sales Engineering and Solutions Architecture at CenturyLink, Mr. Shuttleworth manages Sales Engineers and Solutions Architects who are focused on the technical aspects of the solution. He reports directly to the Senior Vice President of CenturyLink's Public Sector Government focused vertical. Mr. Shuttleworth has provided technical leadership over multiple teams that support the Department of Defense, Civilian Agencies, Special Programs and Government related systems integrators. He has covered a range of projects in both the wireline and wireless technologies. He has built technical teams in support of complex technical solutions and works to align skillsets and resources effectively. Mr. Shuttleworth is an articulate communicator who works effectively with diverse individuals and delivers outstanding customer service through consistent communications and team management. Over his career at CenturyLink, Mr. Shuttleworth has focused on Network Development, the design of complex networks with strict adherence to and conformance with customer needs. Mr. Shuttleworth is a skilled communicator as he broadly communicates his initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Bachelor of Science, Business Management, Indiana University of Pennsylvania, Indiana, PA - 1980

Relevant Employment/ Project History

CenturyLink **Herndon, Virginia** **2017-Present**
Senior Director/Director – Sales Engineering & Solutions Architecture

As Senior Director for Sales Engineering and Solutions Architecture at CenturyLink, Mr. Shuttleworth is responsible for managing the CenturyLink's Pre-Sales Engineering and Solutions Architecture teams. His responsibilities include managing 130 pre-sales engineers and solutions architects supporting Public Sector customers. Mr. Shuttleworth's team is responsible for ensuring compliant solutions for tactical product requirements as well as complex technical solutions.

Mr. Shuttleworth's significant accomplishments include leading technical teams and driving solutions in support of CenturyLink's major Public Sector contracts including, but not limited to:

- The General Services Administration's Enterprise Infrastructure Services (EIS) Contract.
- Multiple contracts in support of the Department of Defense.
- Multiple contracts in support of the Intelligence Community.

Mr. Shuttleworth's team consists of 11 Sales Engineering Managers reporting directly to him who focus on the individual Public Sector verticals in Public Safety, State and Local, Dept of Defense, Civilian and the IC.

- Combined the former CenturyLink and Level 3 Communications Pre-Sales Federal Government Technical teams as a result of the acquisition of Level 3 by CenturyLink to create the current team of 130 Sales Engineering professionals.
- Optimized diverse skills of the team to ensure delivery of complex technical solutions.

- Works with Product Management, Service Delivery and Program Management to ensure appropriate handoffs to internal Corporate ecosystem.
- Work with Government agencies and Government focused customers to transform networks and technical requirements.
- Ensure technical compliance with customer requirements.
- Continues to develop team talent and ensure alignment of appropriate technical resources.

Level 3 Communications (now CenturyLink) **Herndon and McLean, Virginia** **2009-2017**
Director/Manager - *Sales Engineering*

As Director for the former Level 3 Communications, Mr. Shuttleworth led a team of Pre-Sales Engineers and Solutions Architects. He also collaborated interactively through solution presentations. He spearheaded network security resource requisitioning, installation, configuration, and monitoring. Mr. Shuttleworth developed and documented new system configurations, maintenance, backup, and reporting procedures for effective record keeping. He delivered technical training to associates and customers to promote proper system usage. He promoted a productive environment through interfacing with vendors and project teams to drive solution development and testing, while preparing reports to track service issues, support business cases, and communicate project costs and status to senior management.

Level 3 Communications **Herndon and McLean, Virginia** **2002-2009**
Sales Engineer

As a Sales Engineer, Mr. Shuttleworth closely aligned and collaborated with his Sales counterpart to develop technical solutions serving customer needs and requirements. His key technical accomplishments during this time were leading and supporting a mission critical technical solution for a DoD dark fiber network and a mission critical network that required significant backup and redundancy.

Level 3 Communications **McLean, Virginia** **1998-2002**
Network Developer

As a Network Developer, Mr. Shuttleworth was responsible for planning new networks in specified markets including fiber optic cable route planning and technical facility selection within the markets. This included close coordination with the Sales, Construction, and Operations teams to ensure maximum market penetration and opportunity benefits. Mr. Shuttleworth worked with the Finance team to ensure appropriate cost management throughout Planning and Construction.

Certifications / Training

None

Professional Memberships / Associations

None

CAROLINE BUSSELL
CLIENT SUPPORT MANAGER

Experience Summary

Caroline Bussell is a proven Client Support Manager (CSM) with 3 years of demonstrated Telecommunications back office support expertise in both Global Enterprise Customers and Government and Education Services support. Ms. Bussell is a dedicated, energetic, and versatile professional with expansive technical skill set and degree. She has gained deep expertise in personnel management, customer service, strategic planning, managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

Ms. Bussell is responsible for supporting Sales Account Managers within Iowa and Nebraska territories. She performs retention management of customer contracts, executes move order changes, serves as customer advocate for billing issues, and handles lifecycle management needs. Ms. Bussell supports the Nebraska Account Manager through resolving billing and invoicing disputes and performing move order changes. Her responsibilities include responding to billing inquiries, resolving billing disputes, pulling internal reporting, aiding with supporting customers, and assisting her team with order processing group to minimize billing errors.

Ms. Bussell is an articulate communicator who works effectively with customers and delivers outstanding customer service. Over her career at CenturyLink, Ms. Bussell's is focused on strict adherence to and conformance with customer needs. Ms. Bussell is a skilled communicator as she broadly communicates her initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Bachelor of Art, Liberal Studies with minor in Telecommunications and Sociology, Indiana University, Bloomington, IN, 2017

Relevant Employment/ Project History

CenturyLink **Chicago, Illinois** **2019-Present**
Client Support Manager

As Client Support Manager at CenturyLink, Ms. Bussell proactively serves as customer advocate and handles lifecycle management needs for over 200 accounts. Her responsibilities include serving as a liaison to my customers and between all internal business groups, working to identify and resolve any/all issues, devising and implementing customer retention and revenue growth plans, and coordinating monthly and quarterly business reviews and customer contact evaluations.

CenturyLink **Charlotte, North Carolina** **2018-2019**
Account Manager

As Account Manager at CenturyLink, Ms. Bussell built and managed customer relationships by identifying and qualifying their business needs and provided them with network solutions that meet their criteria utilizing CenturyLink's ecosystem effectively. She gained deep understanding of internal systems and effectively utilized go-forward products and platforms to perform daily tasks of a sales professional. The understanding she gained assisted her with augmenting the customer experience with CenturyLink services.

CenturyLink **Indianapolis, Indiana** **2017-2011**
Logistics Account Executive

As Logistics Account Executive, Ms. Bussell was responsible for coordinating all shipping needs necessary for each client by finding a reliable carrier and eliminated fall out by maintaining strong communication with the drivers. She successfully networked and developed strong relationships with both customers and

carriers and effectively negotiated profitable rates with both the shipper and the carrier through independent research and kept up to date with changing lane rates. She functioned as the single point of contact for customers and carriers to efficiently solve daily problems.

Certifications / Training

Sales Academy College Connect
Social Selling Index Achievement

Professional Memberships / Associations

None

MARY ANDERSON
MANAGER BASE MANAGEMENT

Experience Summary

Mary Anderson is a proven Manager with 15 years of demonstrated Telecommunications back office support expertise in both Global Enterprise Customers and Government and Education Services support. Ms. Anderson is a dedicated, energetic, and versatile professional with expansive technical skill set and degree. She has gained deep expertise in personnel management, customer service, strategic planning, managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

Ms. Anderson is responsible for the all Client Support Managers (CSMs) that support Strategic Accounts within CenturyLink's territory. She is a point of escalation and is ultimately responsible for overall customer satisfaction. Ms. Anderson responds to billing inquiries and resolves billing disputes. Her responsibilities include in assisting her CSMs and proactively monitors service provider-billing accuracy through resolving escalations, managing day-to-day administrative tasks, pulling internal reporting, providing assistance with supporting customers and assisting her team with order processing group to minimize billing errors on the front end. Ms. Anderson managed her team through their involvement in the implementation of the South Dakota NG-911 project. Ms. Anderson is an articulate communicator who works effectively with customers and delivers outstanding customer service through consistent, on-time, and on-budget project delivery. Over her career at CenturyLink, Ms. Anderson's keen focus on deployment of customer-driven initiatives and strict adherence to and conformance with customer needs. Ms. Anderson is a skilled communicator as she broadly communicates her initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Bachelor of Science, Computer Information Management, College of Saint Mary's, Omaha, NE, 2002

Relevant Employment/ Project History

CenturyLink **Omaha, Nebraska** **2017-Present**
Manager Base Management

As Manager in Base Management at CenturyLink. Ms. Anderson drives consistency throughout day-to-day operations: standards, tools, best practices, process knowledge and communication. She provides escalation assistance and situation management to drive for internal and external issue resolution coordinating across sales, service delivery, billing and service management. She ensures CSM team partners closely with Account Director/Sales Engineering (AD/SE) teams in order to grow revenue and provide superior customer experience. Ms. Anderson also ensures coordination and cross alignment with Client Support Management across the sales organization while implementing best practice and solutions to channel's business and customer needs. As a manager, Ms. Anderson promotes positive on-boarding experience for new hires (such as tools, training, and resources) and drives optimal ramp time to full productivity. She manages resource allocation to ensure assigned account bases allow appropriate sales and client support and oversees Key Performance Indicators such as revenue, revenue retention, sales, quoting, client survey feedback.

Ms. Anderson's significant accomplishments include providing critical input on several key projects. Highlights of Ms. Anderson's key significant accomplishments include the following:

- Contributed on CenturyLink internal projects to streamline the customer experience in upfront ordering
- Assisted several large implementations for high profile customers
- Participated in a select group of managers for CenturyLink's company-wide Leadership Experience Program for Front Line Leaders

CenturyLink **Omaha, Nebraska** **2014-2017**
Account Consultant

As Account Consultant at CenturyLink, Ms. Anderson functioned as Account Consultant Subject Matter Expert for SD WAN, IQ Networking, IQ SIP products. She participated in several ongoing Time Interval Reduction projects as well as new product deployment trials. Ms. Anderson was responsible for High Cost Work-In-Progress (WIP) to drive orders to completion. Her responsibilities included maintaining dedicated, high profile customer base and assisting with complex solution delivery and escalations. Her daily duties included present a positive image of CenturyLink during client meetings and communications, assisting management in resolving escalated customer issues. Ms. Anderson functioned as acting Interim Manager during CenturyLink re-organization after Level 3 merger and maintained good rapport with team members. Highlights of Ms. Anderson's key significant accomplishments include the following:

- Received the CenturyLink COE Award for customer account support and assistance to internal Sales Team to improve CenturyLink's customer experience

Evolving Solutions, Inc. **Omaha, Nebraska** **2007-2014**
Senior Account Manager

As Senior Account Manager for Evolving Solutions, Inc., Ms. Anderson was responsible for delivery of projects on time for customers on a national scale. She managed vendors, carrier provisioners, subagent support, and client support resources. She participated in all phases of various project life cycles from design through delivery and ongoing maintenance to deliver complex carrier solutions to new sites for clients with aggressive timelines. Her daily duties included developing and maintaining project documentation and conducting meetings with the clients to fully assess client needs and expectation setting. Ms. Anderson delivered status reports and client communications and coordinated with project team members. She developed training manuals for Operations Department. Highlights of Ms. Anderson's key significant accomplishments include the following:

- Contributed to company's growth through improving the quoting process and client retention.

Certifications / Training

Deep understanding of carrier network offerings, including Ethernet, SIP, MPLS, and many others
Proficient with CORE, SFA, Host Applications
Proficient in MS Office including Excel and Outlook

Professional Memberships / Associations

None

MICHELE L. WOLF
DIRECTOR – BASE MANAGEMENT

Experience Summary

Michele L. Wolf is a proven Director with demonstrated Telecommunications experience in both Global Enterprise Customers and Government and Education Services support and 21 years at CenturyLink. Her deep expertise in managing large, complex telecommunications programs empowers Ms. Wolf to execute her role as an effective program manager. She employs her problem-solving skills and the ability to quickly gather information to manage project implementation plans across the lifecycle of her programs. Ms. Wolf's education and professional development accomplishments include holding a Master of Business Administration. Ms. Wolf is a dedicated, energetic, and versatile professional with expansive technical skill set, advanced degree and certifications in managing telecommunications and WAN/LAN initiatives. She has gained deep expertise in strategic planning, managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

Ms. Wolf is responsible for the all Client Support Managers (CSMs) nation-wide for all national 9-1-1 accounts. She serves as a point of escalation for any all implementation and billing issues. Her responsibilities include in assisting her managers and proactively monitors service provider-billing accuracy through resolving escalations, managing day-to-day administrative tasks, pulling internal reporting, providing assistance with supporting customers and assisting her team with order processing group to minimize billing errors on the front end. Ms. Wolf managed her team through their involvement in the implementation of the South Dakota, Arizona, and California NG-911 systems and fully understands the State of Nebraska's 9-1-1 mission and the process to implement it. Through experience, Ms. Wolf has developed a deep understanding the process of installing and implementing PSAPs.

Ms. Wolf is highly accomplished, solutions-driven professional with enterprise support expertise and demonstrated track record of commitment to customer leading teams, driving improvement and is focused on getting the best out of employees. She holds an MBA and Six Sigma Green Belt certification. Ms. Wolf is an expert in analysis and documentation of existing business processes, requirements, and technical specifications. Ms. Wolf is an articulate communicator who works effectively with customers and delivers outstanding customer service through consistent, on-time, and on-budget project delivery. Over her career at CenturyLink, Ms. Wolf focuses on deployment of 9-1-1 initiatives and strict adherence to and conformance with customer needs. She is a skilled communicator as she broadly communicates her initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Master of Business Administration, Augsburg College, Minneapolis, MN, 2012

Bachelor of Arts, Economics and Management, Augsburg College, Minneapolis, MN, 2009

Relevant Employment/ Project History

CenturyLink **Minneapolis, Minnesota** **2017-Present**
Director-Base Management

As Director in Base Management at CenturyLink, Ms. Wolf is the leader of an organization of 100 Account Consultants, Project Managers, Program Managers, and 7 Post Sales Managers nationwide, who support the growth and retention of our existing customer base and also the acquisition of new clients. Her responsibilities include managing and ensuring her team address all post-sale service issues relating to ordering, provisioning, billing, analysis, performance, and reliability of CenturyLink products and services. She conducts RFP analysis, develops proposals, and delivers RFP presentations to customers. Ms. Wolf assists the CenturyLink Sales Organization in driving sales goals by assisting with pricing, developing a technically sound solution, and drafting contracts.

Ms. Wolf's significant accomplishments include providing critical input on several key project. Highlights of Ms. Wolf's key significant accomplishments include the following:

- Received Circle of Excellence Winner for outstanding performance – top 10% performer in the CenturyLink; received award 2017 & 2018
- Exceeded Sales Target Every month in 2018

CenturyLink **Minneapolis, Minnesota** **2013-2017**
Post Sales Engineering Manager II

As Post Sales Manager at CenturyLink, Ms. Wolf managed a team of 21 Account Consultants and 1 service manager across 8 states for the Midwest region, who supported the growth and retention of our existing customer base and the acquisition of new clients. She ensured her team addressed all post-sale service issues relating to ordering, provisioning, billing, analysis, performance, and reliability of CenturyLink products and services. She hired and trained 13 Account Consultants in 8 different states in 3 months. Ms. Wolf performed RFP analysis, developed proposals, and delivered RFP presentations to customers. She assisted CenturyLink's Sales Organization in driving sales goals by assisting with pricing, creating a technically sound solution, and drafting contracts. Highlights of Ms. Wolf's key significant accomplishments include the following:

- Hired a new team of 13 employees and had them fully ramped up in 3 months
- Contributed to sales region revenue increase of 4.2% over the first 3 quarters of last year through implementing new processes and more aggressive timelines for installs to recognize revenue sooner

CenturyLink **Minneapolis, Minnesota** **2011-2013**
Account Consultant

As Account Consultant, Ms. Wolf supported achievement of sales objectives by partnering with sales team and executing on sales opportunities by developing and maintaining customer relationships. She advocated on behalf of the customer to ensure specific quality improvement strategies and goals were met in service delivery. Ms. Wolf analyzed revenue and expense trends and performed revenue and expense forecasts and prepared annual plans and field budgets. She prepared spreadsheets, graphs, and charts to illustrate financial trends and presented to leadership. Highlights of Ms. Wolf's key significant accomplishments include the following:

- Conducted account records cleanup and conciliation to identify and correct billing errors, resulting in a direct and immediate revenue increase of 3%
- Contributed to sales team revenue increase of $200,000 through implementing product upgrading and pricing strategies for customers

CenturyLink **Minneapolis, Minnesota** **2010-2011**
Service Delivery Coordinator

As Service Delivery Coordinator, Ms. Wolf provided excellent customer service to over 300 large business customers, by serving as a single point of contact. She resolved complex customer billing and service issues. Sold a variety of telecommunications products including data lines, T1 lines, networking, and phone systems. Ms. Wolf acted as a peer coach and trained newly hired representatives. She served as in-charge for managers and handled customer escalations and supervision of representatives. Highlights of Ms. Wolf's key significant accomplishments include the following:

- Maintained outstanding order accuracy for 14 consecutive months as evidenced by 100% quality audits for 14 consecutive months
- Scored 100% on all customer service goals during call observations
- Successfully managed a team of 12 employees for a four-month period, balancing peer relationships in a union environment while fulfilling managerial duties

Certifications / Training

Six Sigma Green Belt Certification, 2018

Professional Memberships / Associations

None

RACHEL G. RENTERIA
SENIOR POST SALES ENGINEER

Experience Summary

Rachel G. Renteria is a proven Senior Post Sales Engineer with 25 years of demonstrated Telecommunications experience in both Global Enterprise Customers and Government and Education Services support. Her deep expertise in managing technically divers customer networks, that range from VoIP, DATA, Cloud, Security, MPLS, and Hosting empowers Ms. Renteria to execute her role as an effective Post Sales Engineer. She employs her problem-solving skills and very customer oriented with strong understanding of sense of urgency at any customer level. Ms. Renteria holds several certifications, including Cisco Certified Network Associate (CCNA) and the Six Sigma Basic Certificate. Ms. Renteria is a dedicated, energetic, and versatile professional. she has gained deep expertise in managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

Ms. Renteria is a Senior Post Sales Engineer at CenturyLink who is responsible for fortune 500 customer networks, providing 24x7 SLA management on multiple types of service including VoIP, MPLS, SIP, IP DATA, Hosting, SD-WAN, Frame relay. She possesses deep expertise in troubleshooting customer networks and providing solutions to outages, providing solution's to all types of network technologies from DATA, VoIP, MPLS, VPN, SIP trunk, supporting C-level customers to resolve critical outages. Ms. Renteria responsibilities include working with account managers and their leadership teams, and closely with Sales Engineers to design and implement customer solutions. She oversees network operations projects including budgeting, planning, implementation, maintenance, administration, staffing and provides day to day leadership of call center employees, both on-shore and off-shore. Ms. Renteria has been supporting 9-1-1 system for 15 months for the of states of Nebraska, Missouri, and Iowa. For Nebraska, she escalates repairs, monitor network technician responses, supports PSAPs to full capacity. She reviews work that was performed in a post-sales capacity to ensure network stability. She coordinates technical visits with the customers and ensures PSAPs overflow call capacity is set up correctly for call handling in cases of surge.

Ms. Renteria is a results-oriented business professional with proven abilities in team building, managing projects, and improving efficiency of operations. She possesses a keen ability to identify areas of organizational strength and weakness and implement company policies, standards, operational processes and systems that optimize productivity and bottom line. She motivates staff to perform at optimal effectiveness. Over her career at CenturyLink, Ms. Renteria focuses on strict adherence to and conformance with customer needs. Ms. Renteria is a skilled communicator as she broadly communicates her initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

2 years IT course work at International Business College

Relevant Employment/ Project History

CenturyLink **Dallas, Texas** **2014-Present**
Senior Post Sales Engineer/Senior Client Service Manager/Senior Service Manager

As Senior Post Sales Engineer at CenturyLink, Ms. Renteria is responsible for fortune 500 customer networks, providing 24x7 SLA management on multiple types of service including VoIP, MPLS, SIP, IP DATA, Hosting, SD-WAN, Frame relay and manage technical teams across the globe. Her duties include managing customer networks and ticket escalation and providing all ticket updates to customers. She supports the Sales Organization in customer negotiations to drive new sales and design customer networks and collaborates with account managers and sales engineers to grow and improve customer networks. Ms. Renteria identifies new opportunities within the customer's network. She provides superior customer care by proactively communicating with C-level customers on outages and working with CNOC engineers to proactively monitor customer networks and resolve customer network issues. Ms. Renteria received recognition as CenturyLink's top 12 sales rep for 2018.

Bank of America **Frisco, Texas** **2010-2013**

Associate Vice President

At Bank of American in her various roles, Ms. Renteria oversaw day to day operations of MCCA Managed Contact Center Applications over the Mortgage call center telephony systems. Her responsibilities included providing 24/7 infrastructure management and monitoring, incident management. She provided superior service delivery by consistently meeting all SLA's. Ms. Renteria managed, led, and supported a team of 2 Managers and 32 technicians including overseas staff. She oversaw and supported 42 Aspect ACD call centers, Aspect Primitive Dialer, VOIP, and UIP and managed and support the Vendor management team of 6 electronic Workflow Management (eWFM). Ms. Renteria managed the NICE call recording team and was responsible for ensuring all customer calls are recorded. She provided training to all new associates and ensure current employees remain up to date on all training material. Training of RTI rollout. She also managed NICE Call Recording Projects to complete implementation and turn over to operation team and line of business (LOB). Ms. Renteria worked closely with CenturyLink's PMO and cross functional teams to deliver projects in a timely manner and within project scope and budgets exceeding 5 million in budget. She defined project scope goals and deliverables, which support business goals. She also maintained vendor relationships, negotiating, and contracting, monitored vendors performance. Ms. Renteria worked closely with CenturyLink's IVR team on all projects and outages to ensure steadfast resolution. She was responsible for all system stability across all Mortgage call centers, to not impact our customer and ultimately their customer by providing daily system monitoring and ensure employees understand the importance of maintaining system stability. She was responsible for all Vendor Management and third-party vendors, to ensure Priority tickets are handled quickly and within the SLA. Her experience with all Life cycle project management and implementation and Delivery, which includes planning, tracking, and execute the operational disaster recovery plan, overseeing 24x7 support of all incident tickets and project delivery, and supporting all change management process and implementation. Her responsibilities also included supporting all RCA-Postmortem Management by all teams and liaising between C-level and Line of Business Team.

Verizon Business **Richardson, Texas** **2003-2009**

Senior Technical Service Manager, Network Operations Manager, CRM Project Manager

At Verizon Business in her various roles, Ms. Renteria oversaw multiple customer Networks, across a global sales region with emphasis on the US and Latin America. Her responsibilities included functioning as a 24x 7 emergencies on call Manager for the duration of time at Verizon, meeting all customers Service Level Agreements (SLAs), managing ticket escalation and providing all ticket updates to customers within a timely manner. She worked with the Sales team to increase sales and continue to grow customer base revenue. Ms. Renteria proactively communicated with C-level customers on outages and worked with CNOC engineers to proactively monitor customer networks. She managed Field technicians on outage repairs for field and Colocations and led Technical teams to quick resolve on technical outages. She worked closely with Sales teams to grow accounts and maintain client focus.

Verizon Business **Richardson, Texas** **1998-2002**

Network Operations Manager

Ms. Renteria ensured complete customer satisfaction by creating a help desk program which successfully met customer needs for 24-hour customer service and resulted in a $2 million cost savings to the company by drastically reducing extended customer outages and subsequent requests for credit reimbursement. She annualized data to improve customer networks and ultimately improve profits within a competitive market and beat out competitors and ensured customer Network outages remain minimal and provide constant feedback to customer during the outage. Ms. Renteria managed the acquisition team during all new acquisitions until fully implemented into the Verizon Business Model. She led staff by focusing on empowering and motivating employees to be successful and exceed quarterly goals. Directly increased sales by developing a team incentive program to motivate the post sales team in delivering timely results during outages. She performed as an account manager, managing global accounts such as Continental Airlines, BOA, JCPenney, PepsiCo. She maintained and managed all contractual equipment agreements for customers under account team as well as processed all Managed Service Provided agreements for customers on their CPE and Network. Ms. Renteria was responsible for vendor management of multimillion-dollar account negotiations, including playing an instrumental role in creating a partnership with Cisco and Nortel which resulted in the ability to provide direct customer service and increased customer satisfaction. She recruited, hired and promoted staff including discipline of employees as well as conducted yearly reviews and continuous training

sessions for cross functional teams. She also implemented Policies and Procedure for both Sales and Network Operations.

Verizon Business **Richardson, Texas** **1996-2008**

CRM Project Manager

Ms. Renteria was responsible for customer quarterly review of network performance and quarterly customer growth reports. She managed customer accounts by meeting with customers on a monthly or quarterly basis to strategically go over their network and review all changes that could be implemented. She developed new business growth plans and ideas for driving quarterly sales for all existing customers globally and implemented new billing software to provide better customer service by allowing the billing department to work more closely with order fulfillment, credits, installs and expedites. Ms. Renteria maintained all customer Equipment Lease agreements and contracts on CPE. She managed all account hot cuts and installations along with expedite and provided customer network diversity by reviewing customer's network monthly. She communicated effectively with all levels of staff and upper management including C-Level

Certifications / Training

Six Sigma Basic Certificate

Cisco Certified Network Associate (CCNA)-Certificate

Professional Memberships / Associations

None

JOHN ATKINSON
MANAGER POST SALES ENGINEERING II

Experience Summary

John Atkinson is a proven Manager of Post Sales Engineers with 34 years of demonstrated Telecommunications experience in both Global Enterprise Customers and Government and Education Services support. He possesses a proven track record of supporting mission critical applications, and unique, customized solutions for a base of strategic, 9-1-1 and Public Sector accounts. He employs his problem-solving skills and is very customer oriented with strong understanding of sense of urgency at any customer level. Mr. Atkinson is a dedicated, energetic, and versatile professional. He has gained deep expertise in managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

Mr. Atkinson is a Manager of Post Sales Engineering (PSE) at CenturyLink who is responsible for Manager Post Sales Engineering responsible for overall operational performance for regional clients within the Public Sector. Mr. Atkinson responsibilities include managing his team of Post Sales Engineers who work with account managers and their leadership teams, and closely with Sales Engineers to design and implement customer solutions. He is responsible for 9-1-1 and Public Sector customers in 36 states. He manages his team to assist them in executing their responsibilities, which include event management, change management, design and RFP support. He assists his PSEs and proactively monitors repair performance through supporting escalations, managing day-to-day administrative tasks, pulling internal reporting, and aiding with supporting customers. Mr. Atkinson managed his team who supports NG-911 systems for State and Local Governments in central midwestern States from South Dakota to Texas and all eastern States. He fully understands the criticality of State of Nebraska's 9-1-1 mission and the process to support it.

Mr. Atkinson is a results-oriented business professional with proven abilities in team building, managing projects, improving efficiency of operations and financial analysis. He possesses a keen ability to identify areas of organizational strength and weakness and implement company policies, standards, operational processes and systems that optimize productivity and bottom line. He motivates staff to perform at optimal effectiveness, while controlling costs through efficient use of human and operational resources. Over his career at CenturyLink, Mr. Atkinson focuses on strict adherence to and conformance with customer needs. Mr. Atkinson is a skilled communicator as he broadly communicates his initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Hill Associates, Burlington VT, Advanced Telecommunications Studies, 1997

Dakota County Technical, Minneapolis MN, Telecommunications study, CSS Labs, 1995

University of Phoenix, Seattle WA, Electronics, 1993

Minneapolis Community College – Small Business Administration, 1990-1992

University of MN, Duluth MN, General Studies, 1983-87

Relevant Employment/ Project History

CenturyLink **Phoenix, Arizona** **2018-Present**

Post Sales Engineering Manager II

As Manager of Post Sales Engineering at CenturyLink, Mr. Atkinson is responsible for leading a team of 10 Post Sales Engineers with responsibility for 9-1-1 and Public Sector customers in 36 states. Team responsibilities include event management, change management, design and RFP support. In his current role, Mr. Atkinson's significant

accomplishment that includes South Dakota NG-911 implementation on an accelerated timeline to achieve customer objectives.

CenturyLink **Phoenix, Arizona** **2007-2018**

Lead Post Sales Engineer

At CenturyLink, Mr. Atkinson was responsible for post-sales relationship management for several Arizona and New Mexico-based premier customers. He led 24x7 escalations and event management, prepared network metrics, and facilitated service meetings with customers. He regularly interfaced with leadership teams, both with customers and internally.

Qwest Communications **Tempe Arizona** **2006-2007**

Supervisor Network Operations

As a Supervisor in Network Operations at CenturyLink, Mr. Atkinson supervised the work of two Customer Data Technician crews. His overall responsibility for designed services installation and repair and span recovery efforts for the southeast Phoenix metro.

Qwest/US West Communications **Minneapolis, Minnesota** **1996-2006**

Customer Service Specialist

As a Customer Service Specialist at CenturyLink, Mr. Atkinson functioned as a NOC technician who supported customers with Frame Relay & ATM services. He diagnosed and repaired coordination including testing with customers and other internal departments, field technicians and other carriers such as Verizon and Sprint. For most of the ten years in this role, Mr. Atkinson was dedicated to the State of Oregon government and their Frame network that covered over 7000 locations. He was single point of contact for all repair issues and test/turn-up activity for all locations. He achieved TIER III on the technical career ladder.

Certifications / Training

None

Professional Memberships / Associations

None

DAVID C. MUELLER
SENIOR MANAGER

Experience Summary

David C. Mueller is a proven Senior Manager with 19 years of demonstrated Telecommunications experience in both Global Enterprise Customers and Government and Education Services support. His deep expertise in managing large, complex telecommunications programs empowers Mr. Mueller to execute her role as an effective program manager. He employs her problem-solving skills and the ability to quickly gather information to manage project implementation plans across the lifecycle of her programs. Mr. Mueller's education and professional development accomplishments include holding a Master of Business Administration. Mr. Mueller is a dedicated, energetic, and versatile professional. He has gained deep expertise in managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

Mr. Mueller is a Senior Manager in Operations Service Management at CenturyLink who is responsible for overall operational performance for all clients supported by Operations Service Managers (OSMs) and Post Sales Engineers (PSEs) within the Public Sector, which includes Federal, State, and Local Agencies. His responsibilities include assisting his managers and proactively monitoring repair performance through supporting escalations, managing day-to-day administrative tasks, pulling internal reporting, providing assistance with supporting customers. Mr. Mueller manages his team in supporting the South Dakota, Arizona, and California NG-911 systems and fully understands the State of Nebraska's 9-1-1 mission and the process to support it. He earned a Master of Business Administration in Management and a Six Sigma Green Belt certification as well as an advanced degree. Mr. Mueller is a results-oriented business professional with proven abilities in team building, managing projects, improving efficiency of operations and financial analysis. He possesses a keen ability to identify areas of organizational strength and weakness and implement company policies, standards, operational processes and systems that optimize productivity and bottom line. He motivates staff to perform at optimal effectiveness, while controlling costs through efficient use of human and operational resources. Over his career at CenturyLink, Mr. Mueller focuses on strict adherence to and conformance with customer needs. Mr. Mueller is a skilled communicator as he broadly communicates his initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Master of Business Administration, Management, University of Colorado, Denver, CO, 2001

Bachelor of Arts, Political Science, Colorado State University, Fort Collins, CO, 1993

Relevant Employment/ Project History

CenturyLink **Broomfield, Colorado** **2008-Present**
Senior Manager-Service Management, Federal and SLED

As Senior Manager at CenturyLink, Mr. Mueller develops partnership between Account Teams, PMO and Service Assurance organizations in support of our clients. He manages a team of Service Managers that support agencies and clients in the Federal and SLED channels. His duties require his leadership and management aptitude to lead his team on tasks that require operational support through KPI assessment, performance analysis, SIP identification and reviews. He supports the client with engaging various CenturyLink Repairs Centers during exceptional service outages. Mr. Mueller develops relationships with key client personnel to ensures proper individuals are notified with outage updates.

Mr. Mueller assumed his role at the end of 2019, with key significant accomplishments that include the following:

- Reorganized the Federal Service Managers to more effectively support the customer base by aligning with high level agencies and sales directors, building better familiarity and responsiveness.

- Reorganizing SLED Service Managers by experience and skill sets to provide the correct individuals with newer, more detailed 9-1-1 training

Senior Manager – Enterprise Repair for Data. IP Infrastructure

As Senior Manager at CenturyLink, Mr. Mueller recruited, developed, evaluated and motivated a high performing, 24x7 team including six managers and 100+ technicians. He developed, documented, communicated, and implemented strategic and tactical operational improvement initiatives at both the team and larger organizational level. Mr. Mueller produced metric reporting, headcount modeling, scheduling and team performance read outs. He was the primary liaison with partner carriers, providing performance feedback at monthly meetings, as well as engaging escalation contacts during executive escalations. Mr. Mueller represented the Enterprise Repair organization at customer get well meetings and merged legacy company Offnet teams into a single Offnet team. Highlights of Mr. Mueller's key significant accomplishments include the following:

- Improved MTTR for one legacy company team by 42% during 2018
- Improved three the month rolling average Top Box CSAT score from 40% to 60% during 2018

Project Manager – Business Operations, Managed and IP Service Assurance

As Project Manager, Mr. Mueller prepared executive level reporting that communicates team performance. He produced budget forecasting, metric reporting, headcount modeling and business cases and tracked strategic and tactical operational improvement initiatives.

Senior Analyst – Internal Audit

As Senior Analyst, Mr. Mueller assisted in the planning of financial, operational and IT audits. He identified opportunities for improving business processes, enhancing revenue, reducing costs or improving internal controls - ensure integrity and reliability of the controls. He communicated with business process owners to document processes, risks and controls of audit areas. Mr. Mueller developed, executed and documented detailed audit testing procedures that measured compliance to established internal control policies, procedures, laws, and regulations and drafted audit reports and communicated audit findings to business process owners.

University of Denver, Division of Athletics and Recreation **Denver, Colorado** **2004-2008**

Director of Joy Burns Arena

As Director, Mr. Mueller hired, managed, developed and evaluated several teams that included 3 exempt employees, 20 full-time employees, 75+ part-time employees, and 100+ volunteers. He developed programming and space utilization through observation, daily activities, data analysis, weekly staff meetings and quarterly department head retreats – developed and documented policies and procedures. He oversaw staff and program scheduling in main venues, including supporting training, meeting, and locker rooms. His job responsibilities included directing overall logistical operations of recreational programming – hiring coaches, scheduling practices/games/officials, assigning support staff, procurement of equipment and supplies. Mr. Mueller developed and implemented risk management policies and procedures. He coordinated facility and equipment maintenance to ensure quality and safe programs and managed a facility and equipment depreciation account. Highlights of Mr. Mueller's key significant accomplishments include the following:

- Improved "Learn to Skate" program retention during peak season from 62% in FY05 to 76% in FY06
- Increased net revenue by 14% from FY05 ($372K) to FY07 ($423K)

Time Warner Telecom, Network Operations Center **Greenwood, Colorado** **1998-2004**

Project Manager – Inventory Assurance

As Project Manager, Mr. Mueller partnered with outside consultants and vendors to develop and implement new customized communication network inventory system that integrated with company's legacy systems. He led development of the workflow systems within new network inventory system. Mr. Mueller consulted with operational SME's to provide accurate and complete information to the project team and reported project progress or roadblocks to senior management as appropriate. He developed process flow charts and M & P documents that highlighted user roles and tasks and coordinated change control and release management. He participated a tool development project that audited actual network against inventory databases. Mr. Mueller developed and

implemented processes and supporting documentation to address required manual clean-up of data bases resulting from network audits. Mr. Mueller's key significant accomplishment was managing a single phase of one project (approx. 16% of network) captured $1.1M in stranded equipment to be re-deployed.

Certifications/Training

Six Sigma Green Belt - Acuity Institute, December 2008

Professional Memberships/Associations

None

ERIC B PETERSON
DIRECTOR – OPERATIONS SERVICE MANAGEMENT

Experience Summary

Eric B. Peterson is a proven Director with 22 years of demonstrated Telecommunications experience in both Global Enterprise Customers and Government and Education Services support. His deep expertise in overseeing and managing large, complex telecommunications programs empowers Mr. Peterson to execute his role as Director. He employs his problem-solving skills and the ability to quickly gather information to guide and manage project implementation plans across the lifecycle of his programs. Mr. Peterson's education and professional development accomplishments include holding a Master of Business Administration. Mr. Peterson is a dedicated, energetic, and versatile professional. He has strong Operations Science based analytical measurement experience and has gained deep expertise in managing teams, team building, talent development, cost optimization, and risk management.

Role and Understanding of the Process

Mr. Peterson is a Director in Operations Service Management at CenturyLink who leads a 170-person Operations Service Management organization company-wide. He is responsible for leading Operations Service Managers (OSMs) and Post Sales Engineers (PSEs) within the Public Sector, which includes Federal, State, and Local Agencies. Mr. Peterson is responsible for all aspects of Operations Service Management processes and post-install support. He is directly responsible for the Operations Service Management (OSM) organization and, by extension, individual contributors. Mr. Peterson is a point of escalation both internally and customer-facing, to ensure appropriate operations support. For the Nebraska NG-911, Rachel Renteria is part of Mr. Peterson's organization. With CenturyLink, Mr. Peterson is currently managing the NG-911 system operations for the State of California. This includes the deployment of Next Generation Core Services (NGCS), ESINet, and the aggregation network to all Originating Service Providers (OSP). Mr. Peterson specializes in the following product solutions: E911/NG-911, UCaaS, Contact Center, VoIP, Managed Security Services, Dark Fiber, Private Dedicate Rings/Networks (PDR/PDN), Wavelength Services, TDM T1/T3 Services, Ethernet Private Lines, Ethernet Virtual Private Line Service, Multi-Protocol Label Switching Service and Internet.

He earned a Master of Business Administration and a Bachelor of Science in Finance. Mr. Peterson is a results-oriented business professional with proven abilities in team building, managing projects, improving efficiency of operations and financial analysis. He possesses a deep understanding of Operations Service Management, Assurance, Sales, and Product Lifecycles. He applies his skills in Critical thinking and execution of big ideas to enable transformation for promoting innovative thinking across his organization. He motivates staff to perform at optimal effectiveness, while controlling costs through efficient use of human and operational resources. Over his career at CenturyLink, Mr. Peterson focuses on strict adherence to and conformance with customer needs. Mr. Peterson is a skilled communicator as he broadly communicates his initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Master of Business Administration, University of Tulsa, Tulsa, OK, 2002

Bachelor of Science, Finance, Oklahoma State University, Stillwater, OK, 2000

Relevant Employment/ Project History

CenturyLink **Tulsa, Oklahoma** **2019-Present**
Director – Operations Service Management

As Director in Operations Service Management (OSM) at CenturyLink, Mr. Peterson leads a 170-person Operations Service Management organization companywide. Our mission and goal are to provide Industry Leading Customer Experience to those we serve by being the service assurance experts and resource center for internal and external customers as well as to alleviate pressure placed on the Repair Center. We do this through relationships and our

core competencies, which include providing Operations Reviews, Service Improvement Plans, critical outage support, post-incident RFO discussion support, ticket and GCR contact management, and project management for process exceptions. Our relationship with Repair, the Sales Organization, and directly with Customers is key to our success and is something that differentiates us from our competitors.

Mr. Peterson's significant accomplishments include providing critical input on several key projects that supported several State Emergency Communications Services development lifecycles. Highlights of Mr. Peterson's key significant accomplishments include the following:

- Leading Digital Transformation efforts within repair through the use of Power BI and other analytics tools to give our OSMs better insights into customer performance and areas to improve upon
- Developed Mobile applications to allow our OSM's have up to the minute information regarding customer network ticketing to improve customer experience
- Successfully merged 5 different OSM organizations into 1 company-wide organization

CenturyLink **Tulsa, Oklahoma** **2015-2019**
Senior Manager – Operations Service Management

As Senior Manager at CenturyLink, Mr. Peterson managed and led most groups within the Operations Service Management organization including most of GAM, Federal, GEAR and parts of Wholesale at times. He effectively led and developed team members across multiple companies from various backgrounds and led multiple teams including two teams with 25 directs for over 9 months. Mr. Peterson accomplished process improvement project that led to building a SharePoint site for team collaboration and improving the digital account management process. He capitalized on opportunities to innovate that led his team to better ways of accomplishing their job through technology and data analytics. Mr. Peterson effectively partnered and developed strong relationships with Assurance, Sales, and Customer leader as well as individual contributors and worked to develop and recognize talent within the organization. Highlights of Mr. Peterson's key significant accomplishments include the following:

- Pioneered the use of Power BI, Power Apps, Flow, and SharePoint to transform the entire OSM Organization as well as share with other organizations
- Developed and rolled out our new Metric and Marketing platforms which includes Power BI and OSM University

CenturyLink **Tulsa, Oklahoma** **2003-2015**
Service Manager Lead

As Service Manager, Mr. Peterson responsible for over $140 million in complex annual revenue. His responsibilities included addressing overall customer satisfaction, billing maintenance, service maintenance, revenue retention, Operations Science based operations reviews and analysis, and both tactical and strategic process development. He effectively led when managing a diverse group of people and departments in a matrix management environment to achieve goals and objectives important to the company and the customer. Mr. Peterson developed and maintained operations science-based operations reviews that include complex data analysis, root cause identification, and service improvement plans. To promote interdepartmental synergies, he initiated and implemented multiple cross-department process improvements many of which involved new revenue opportunities and assisted in cross-functional development teams for creation and release of new products to existing customers. His actions resulted in sales growth revenue base in a market with steady price declination. Mr. Peterson's key significant accomplishments included recovering over $1.2 million in cost savings by reviewing complex financial operating data, developing technical plans to migrate services, and implementing the plan.

CenturyLink **Tulsa, Oklahoma** **2000-2003**
Project Manager IV

As Project Manager, Mr. Peterson managed the ordering and provisioning of telecommunication circuits and projects for a large and wide-ranging customer base including large cable companies and government sub-contracts. His responsibilities included delivering multimillion-dollar services to telecom customers, providing custom presentations for customers to assist the sales process, and managing a group of people and processes for delivering results. Mr. Peterson's significant accomplishment in this position included developing new processes that netted over $20 million.

Certifications / Training

None

Professional Memberships / Associations

None

EARL STAN WATERMAN
REGIONAL OPERATIONS MANAGER

Experience Summary

Earl Stan Waterman is a proven Regional Operations Manager with over 35 years of demonstrated experience in Telecommunications at CenturyLink. Mr. Waterman is a self-motivated, organized professional with demonstrated success in management, interpersonal and communication skills, and the ability to manage numerous tasks simultaneously. He is a dedicated, energetic, and versatile professional with expansive technical skill set that is built upon a technical degree and certifications in best industry management practices and information security policy development. The deep expertise in managing large, complex telecommunications programs Mr. Waterman has gained over his career has resulted in his strong problem-solving skills and the ability to quickly gathers information and implement plans of action. He functions as Secretary on the Nebraska One-Call Board Member and is pursuing an Associate Degree.

Role and Understanding of the Process

Mr. Waterman manages a team of six supervisors, one administrative assistant, and a base of 94 central offices, fields, and design/9-1-1 union technicians that install and maintain broadband, POTS, Gigabit Passive Optical Network (GPON), Ethernet, and 9-1-1. He serves as a point of contact, ensuring compliance with contract terms and objectives are incorporated consistently throughout the project implementation. Mr. Waterman is full responsibility for multi-million-dollar budgets and executing complex projects on time and on budget. He fully understands the critical role Operations play in maximizing the uptime of the Nebraska 9-1-1 system and possesses expertise in risk analysis and management and incident response oversight. Mr. Waterman understands the importance of excellent customer service and has successfully managed his team. He addressed customer concerns promptly and pass on customer "Thank You Feedback" directly to his technicians. Over his career at CenturyLink, Mr. Waterman has keenly focus on deployment of E911 initiatives and strict adherence to and conformance with customer needs. He is a skilled communicator who effectively communicates initiatives and implements plans across the entire program to achieve customer goals.

Education

Associate Degree, Western Nebraska Community College, Scottsbluff, Nebraska, Candidate

Relevant Employment/ Project History

CenturyLink **Scottsbluff, Nebraska** **1988 – Present**
Regional Operations Manager

As a Regional Operations Manager at CenturyLink, Mr. Waterman is responsible for executing and completing telecommunications projects that include voice and data service delivery, network expansions, site activations, outside plant, and fiber builds according to strict deadlines and within budget. His responsibilities include managing a team of six supervisors, an administrative assistant, and a base of 94 central office, field, and design/9-1-1 union technicians that install and maintain broadband, POTS, GPON, Ethernet, and 9-1-1. He manages a $3M expense budget by prioritizing jobs and workload with his supervisors on the best agreed-upon approach to spend the funding on projects, resulting project completion below or at budget each year. He monitors damage claims to ensure money is recouped from the damaging party and manages line extension contractor that preforms construction maintenance activities, including the status of cable repair projects, installation of buried drops, and hold them accountable for on-time performance and quality. He produces maintenance packages by exchange with cost analysis for pedestal replacement/rehab projects and submit cable replacement projects with characterization analysis to support the replacement. Mr. Waterman works with the CenturyLink Public Policy Team to submit Nebraska Universal Service Fund projects. He promotes a corporate employee engagement survey and develop action plans to address the issues and concerns. He administers quarterly point awards to acknowledge fellow employees for work well done.

Area Plant Supervisor

As Area Plant Supervisor at CenturyLink, Mr. Waterman was responsible for directing technicians to maintain OSP/Network facilities in a productive and effective manner. He supervised the conversion of Nortel DMS 100 and DMS 10 products to the Nortel C2P switching technology and performed in-charge duties during the manager's absence and for extended periods when vacancies occurred at the manager level. Mr. Waterman managed $1.5 million employee budgets, coming in below or meeting budget each year. He partnered with internal departments to ensure customer trouble or service order Key Service Measurements were achieved and partnered with engineering on projects to ensure a wider scope of work was reviewed to ensure bad facilities and growth opportunities were identified. Mr. Waterman participated in three Union contract negotiations in 2004, 2007, and 2010 and is an active participant in a Nebraska PSC hearing in January 2011.

Network Supervisor

As Network Supervisor at CenturyLink, Mr. Waterman was responsible for the network facilities in 17 exchanges (35,000 households), including performing monthly central office quality inspections. As part of his duties. Mr. Waterman managed the eight technicians that were responsible for the routine maintenance and repair of special services and the analog and digital switching equipment. He honed his teamwork and communication skills by providing feedback to the team and manager.

Outside Plant Supervisor

As Network Supervisor at CenturyLink, Mr. Waterman was responsible for eight outside plant technicians that served seven exchanges in the Southern and Eastern part of the Sprint territory in Nebraska and supervised 28 departmental personnel, hired new employees, and scheduled work shifts. As part of his duties. Mr. Waterman provided exceptional service to our customers and frontline associates. He maintained budget and promoted teamwork by loaning out employees to supervisors to help with results as well as preformed monthly quality inspections on outside plant technicians and shared the results with each individual.

CenturyLink **Glasco, Kansas** **1981-1988**
Installation and Repair Technician

As Installation and Repair Technician, Mr. Waterman was responsible for the installation of phone lines and the maintenance of customer service in four exchanges. He maintained aerial cable and buried cable independently and executed in-charge duties when the local supervisor was on vacation or away for extended meetings.

Certifications / Training

North Central Kansas Technical College, Beloit, KS Plumbing, Heating, and Air Conditioning Certificate

Professional Memberships / Associations

Nebraska One-Call Board Member, Secretary, 2007 – Present

Volunteer for the Festival of Hope, 2017 - Present

CORY M. SKOUMAL
REGIONAL OPERATIONS MANAGER

Experience Summary

Cory M. Skoumal is a proven Regional Operations Manager with over 20 years of demonstrated experience in Telecommunications at CenturyLink. Mr. Skoumal is a self-motivated, organized professional with demonstrated success in management, interpersonal and communication skills, and the ability to manage numerous tasks simultaneously. He is a dedicated, energetic, and versatile professional with expansive technical skill set that is built upon best industry management practices. Mr. Skoumal possesses strong problem-solving skills and the ability to quickly gathers information and implement plans of action. He holds a degree in Business Administration and Management Marketing.

Role and Understanding of the Process

Mr. Skoumal is responsible for the continuous operation of the network transmission equipment, and infrastructure as well as construction, maintenance, installation and repair of outside plant. and manages a team that executes the tasks. He serves as a point of contact for escalation to ensure compliance with contract terms and objectives are incorporated consistently throughout the project implementation. Mr. Skoumal is full responsibility for multi-million-dollar budgets and executing complex projects on-time and on-budget. He fully understands the critical role Operations play in maximizing the uptime of the Nebraska 9-1-1 system and possesses expertise in risk analysis and management and incident response oversight as well as the importance of excellent customer service. Over his career at CenturyLink, Mr. Skoumal has keenly focused on deployment of 9-1-1 initiatives and strict adherence to and conformance with customer needs. Mr. Skoumal is a skilled communicator who effectively communicates initiatives and implements plans across the entire program to achieve customer goals.

Education

Bachelor of Science, Business Administration & Management Marketing, University of Nebraska, Omaha, NE, 1999

Relevant Employment/Project History

CenturyLink **Omaha, NE** **2011 – Present**
Regional Operations Manager

As a Regional Operations Manager at CenturyLink, Mr. Skoumal is responsible the continuous operation of the network transmission equipment, and infrastructure as well as construction, maintenance, installation and repair of outside plant. He developed and managed an annual $30 million expense budget for the area for all employee and non-employee expenses. His duties include providing product marketing information to facilitate meeting the market's sales unit and net gain forecast while delivering exemplary customer service; maintaining high visibility in the community by being active in local organizations and service groups; ensuring compliance with all company and industry standards and safety procedures; and staying abreast of changing technology to determine the best long term solutions for the company. Mr. Skoumal contributes to the annual capital budget plan development by collaborating with local Engineering organization to ensure the market's needs are met.

CenturyLink **Omaha, NE** **2010-2011**
Manager – Design/Field Engineering

As Manager in Design/Field Engineering at CenturyLink, Mr. Skoumal was responsible for Design and Field Engineering functions specific to the local loop for wire centers in Nebraska and Western Iowa. He led, coach, and develop Outside Plant Engineers to meet and exceed performance targets while continuously improving processes. He performed regular audits on employee job requirements to ensure compliance to company policy. Mr. Skoumal managed operations budgets through authorization of work orders, monitor, and track results. He observed and coached performance of team members against defined metrics and scorecard initiating improvement plans as

needed and partnered with internal and external organizations to ensure that work is completed in an accurate and efficient manner to better serve Qwest customers. He established a team environment to facilitate and improve communications, cooperation, and employee attitude to better serve the team and Qwest customers.

CenturyLink **Omaha, NE** **2005-2010**
Network Operations Manager

As Network Operations Manager at CenturyLink, Mr. Skoumal oversaw the 175 employee Installation and Maintenance, Cable Maintenance, and Construction daily operation for Omaha and Western Iowa. His responsibilities included establishing and ensuring adherence to budgets, work plans, and performance requirements. He was accountable for operational results, methods & procedures, and staffing of the functional area and ensured proper scheduling of daily Construction workload to achieve critical completion dates. His other duties included developing the supervisor team and their subordinates through constant feedback and coaching, building successful relationships with Communications Workers of America (CWA) union officials to help foster positive interactions, and improving relationships with key internal departments to share ideas and facilitate communications. Mr. Skoumal strengthened his department's financial position by controlling expenses through overtime and material management and strived to increase efficiency in employee's daily work through developing employees as well as identifying process improvements to improve workflow.

CenturyLink **Omaha, NE** **2003-2005**
Network Operations Supervisor

As Network Supervisor at CenturyLink, Mr. Skoumal was responsible for the installation and maintenance of Designed Services circuits and equipment including DS0, DS1, E911, Pair gain systems, and Multiplexers. He developed employee performance through training and individual coaching to ensure efficiency and effectiveness while performing daily work functions. He regularly interacted with customers to ensure satisfaction in the products and services received and exercised financial responsibility by managing tool and equipment inventories as well as overtime. Mr. Skoumal was appointed to interview a committee that was charged with assisting in selecting new employees and worked with various departments within Qwest to ensure that all critical service order dates were met. He coordinated initial deployment and turn up of Broadband DSLAM's in the Omaha area and directed the chronic and noise mitigation crew for the states of Nebraska and Iowa.

CenturyLink **Des Moines, IA** **2001-2003**
Senior Design Engineer

As Senior Design Engineer at CenturyLink, Mr. Skoumal used resources to provide telephone and internet cable facilities to new developments (such as a Sub-Division or Campus). He issued engineering work packages for copper and fiber systems including workprints in OSP-FM or Cimage databases. He was responsible for providing specifications for cable placing and splicing, as well as equipment selection and safety guidelines and working to create the most economically feasible solutions while meeting budgetary guidelines. He provided extensive technical expertise in resolving customer held orders in a timely matter and interact with customers to coordinate cable facility placement that meets the customer due date.

CenturyLink **Omaha, NE** **2000-2001**
Customer Experience Manager

As Customer Experience Manager at CenturyLink, Mr. Skoumal managed end-to-end customer experience for 150 to 200 customers simultaneously. His responsibilities included interacting with and directed managers at all levels to prioritize and meet customer issues, initiating alternative solutions and atonement, managing data and information flow on numerous business computer systems, following-up with customer to ensure satisfaction, analyze and document results, and identifying and implemented process improvements to increase departmental productivity.

Certifications / Training/Achievements

Completed Leadership Omaha program through the Omaha Chamber of Commerce.
Nominated for the Ten Outstanding Young Omahans award through the Omaha Jaycees.
Appointed to the Board of Directors for the following organizations:

- Omaha Children's Museum
- Douglas County Sheriff Foundation
- Millard Athletic Association

Assigned to various key corporate teams for process and business improvements:

- Modem Management Team
- Corporate Force to Load Implementation Team
- Nebraska Leadership Team
- Chronic Repair Reduction Team
- Net Promoter Customer Satisfaction Implementation Team

Professional Memberships/Associations

None

MARGARET A. COOK
SENIOR FEDERAL PROGRAM MANAGER

Experience Summary

Margaret A. Cook is a proven Federal Program Manager with over 10 years of demonstrated Program Management experience in Telecommunications. She is a dedicated, energetic, and versatile professional with an expansive technical skill set that is built upon a technical degree and certifications in industry-standard management practices and information security policy development. Her deep expertise in managing large, complex telecommunications programs empowers Ms. Cook to execute her role as an effective program manager. She employs her problem-solving skills and the ability to quickly gather information to manage project implementation plans across the lifecycle of her programs. Ms. Cook's education and professional development accomplishments include holding a Bachelor of Science in Information Systems, maintaining an active Project Management Professional (PMP™) certification since 2005, and acquiring the Certified Information Systems Security Professional (CISSP) certification.

Role and Understanding of the Process

Ms. Cook oversees all aspects of the program lifecycle and overall implementation phases, namely, project planning development, project execution, quality, change control, meeting coordination, and documentation. She serves as the main customer point of contact and integrator, ensuring that compliance with contract terms and objectives are consistently met throughout a project implementation. Ms. Cook has built a 26-year career in the telecommunication industry, with over 15 years focused on mission critical Department of Defense networks. She managed the implementation and operations of the NY, PA, & MD National Guard networks during the September 11, 2001 crisis in September 2001. Real experience, such as this, has deepened Ms. Cook's understanding of the importance of Nebraska's 9-1-1 system moving to the next generation network capabilities that are necessary to save lives. To accomplish Nebraska's mission, Ms. Cook understands that managing all transition risk is paramount to ensuring a seamless service transition while maintaining uninterrupted service throughout the transition. Furthermore, Ms. Cook is committed, as she is on all her programs, to overseeing a timely Nebraska 9-1-1 system implementation, which fulfills customer expectations by meeting the project plan and deploying the system on-time and within budget.

Ms. Cook is fully responsibility for multi-million-dollar budgets, developing multi-year corporate strategies, and executing complex projects on time and on budget. Her expertise in risk analysis and management, information security policy development, compliance governance, IT auditing, and incident response oversight equips her with the requisite knowledge, skills, and experience to properly manage the Nebraska 9-1-1 system implementation. Additionally, she has successfully managed projects that featured penetration testing, configuration of change control, and disaster recovery planning. Over her career at CenturyLink, Ms. Cook has keenly focused on initiatives that are comparable to the Nebraska's 9-1-1 initiative, which demands strict adherence to and conformance with customer needs. She is a skilled communicator who effectively communicates initiatives and implements plans across the entire program to achieve customer goals.

Education

Bachelor of Science, Computer Information Systems, Florida Institute of Technology, Melbourne, FL, 2016

Relevant Employment/ Project History

CenturyLink **Herndon, Virginia** **2015 – Present**
Senior Federal Program Manager

As a Senior Program Manager who is dedicated to support the Harris Corporation portfolio of projects within CenturyLink Communications Government Markets Group, Ms. Cook is responsible for executing and completing telecommunications projects that include voice and data service delivery, network expansions, site activations, outside plant, and fiber builds according to strict deadlines and within budget. Her responsibilities include acquiring

resources and coordinating the efforts of team members and third-party vendors, contractors, or consultants in order to complete projects according to project plan and schedule. Ms. Cook is directly responsible for managing quality control and project objectives that is based on critical path throughout the lifecycle of the entire program. Ms. Cook directs and manages all implementation phases from beginning to end across the entire lifecycle of projects. In the role of the lifecycle program management, Ms. Cook defines project scope, goals, and deliverables that support business objectives in collaboration with senior management and key stakeholders. She develops full-scale project plans and associated communications documents as well as liaise with project stakeholders on an ongoing basis. Ms. Cook estimates the resources and participants that are required to achieve project goals. She develops and submits budget proposals with recommendations and modify budget where necessary. She sets, manages, and continually communicates project expectations with team members and other stakeholders. Ms. Cook identifies and resolves issues that arise and manages program and project dependencies as well as critical path drivers using the schedule project timelines and milestones. Ms. Cook daily duties involve developing and delivering progress reports to customers and stakeholders, participating in proposal support activities, developing requirements documentation, and delivering presentations. Ms. Cook maintains an important role in supporting the sales channel as she builds, develops, and grows any business relationships vital to the success of the program.

Ms. Cook's significant accomplishments include providing effectively program management on a portfolio of key projects that supported Harris Corporation's business objectives. Highlights of Ms. Cook's key significant accomplishments include the following:

- Continuous improvement for the Harris Corporation portfolio of services, valued at $4.5 million MRC, resulting in the award of new business on a continual basis.
- Assisted with development and implementation of the Proof of Concept for CenturyLink's Managed Trusted Internet Protocol (MTIPs) gateway

AMTRAK / National Passenger Railroad Corp. **Washington, DC** **2012-2015**
Senior Security Engineer/Senior System Architect

As Information System Security Manager at AMTRAK, Ms. Cook was responsible for architecting network solutions for nationwide video surveillance, as well as, executing PSIM integration and Network Security. She developed and implemented the Continuous Monitoring Program to maintain the authority to operate (ATO) to ensure proper vulnerability discovery and mitigation, boundary scope, and overall network security of the program, while maintaining FISMA compliance as defined by FIPs 199, 200 and OMB-circular A-130. She managed all Federal Regulatory Compliance reporting for Secure Network, including Plans of Actions and Milestones (POA&M) reporting. She advised Security and Network Engineers on configuring, implementing, and managing network components, such as servers, data storage systems, security software systems, applications software, camera data review systems, new MPLS sites, CCTV, and applications. Ms. Cook supervised A&A documentation, including monthly, quarterly and annual reporting and performed monthly vulnerability scanning for discovery and mitigation strategy development and execution.

Ms. Cook's significant accomplishments include the successful security management of AMTRAK IT systems which were critical to customer's operations. Highlights of Ms. Cook's key significant accomplishments include the following:

- Delivered implementation and migration of 300 cameras and other video surveillance equipment 2 weeks ahead of schedule through close collaboration with vendor and completion of network configuration.
- Increased productivity of staff utilizing standardized process for accessing camera systems, control systems, alarms, and sensors regardless of brand, across enterprise, by leading largest Physical Security Information Management (PSIM) implementation within transportation sector integrating thousands of cameras across the United States from different manufacturers into one common operating platform.
- Facilitated federal agency information sharing for organization by executing initial and on-going A&A activities, achieving ATO for Amtrak FISMA certification project.

CenturyLink **Fairfax, Virginia** **2007-2012**
Program Manager – Federal Programs

Ms. Cook led daily operations for Amtrak Police Department Secure Network (ROMAN), including supporting equipment such as MPLS, Colocated Hosting/Data Centers, Managed Firewall/Intrusion Detection Prevention

Services, vulnerability management, Managed Network Services, CCTV, Internet Hosting and mobile VPN. Highlights of Ms. Cook's key significant accomplishments include the following:

- Captained Physical Infrastructure Security Program for Amtrak conducting vulnerability assessments, risk analysis, and counter-terrorism risk management strategies protecting critical infrastructure assets, as well as, managing $10M budget constructing 65 node network with Total Cost of Ownership savings of 35% against existing business network; complete with fully redundant bi-coastal data centers.
- Maintained 87% win rate serving as Technical Writer/Program Management SME for government RFPs.

MCI WORLDCOM / VERIZON Business **McLean, Virginia** **1999-2007**
Engineer / Engineering Program Manager

Ms. Cook served as the dedicated Program Manager to the Department of State Telecommunications Program Office (DTS-PO) for Spectrum program. She managed day-to-day activities, collaborated with sales team on proposal development and submission via SPECTRUM contract vehicle, and delivered scope, time estimation, implementation plan, and cost for various phases of project lifecycle. She developed and managed customer relationships at all levels of agency providing expertise and leadership regarding telecommunications technology implementation and project execution. Ms. Cook created and established an operational framework for projects that included detailed project plans, project organization and administration. Her duties included monitoring and adjusting project performance against key metrics such as budget, service delivery, and network performance. Ms. Cook identified, assessed, and resolved network infrastructure implementation issues. She also reviewed customer deliverables for content and quality. Ms. Cook drove the Department of Defense FTS2001 transition as Dedicated Program Manager and lead engineer furnishing full lifecycle program management, pairing with GSA and DoD migrating 25k+ voice and data circuits in over 800 global locations. Highlights of Ms. Cook's key significant accomplishments include the following:

- Implemented first International Naval Exercise Private IP (PIP) network for Navy Communications Management Office (NCMO) facilitating United States Navy exercises with international partners such as Australia, Germany, Japan, the United Kingdom and Canada.
- Established telecommunications trailers and other posts in theater during wartime for US DoD allowing service members to maintain contact with stateside relatives.

Certifications / Training

Project Management Professional (PMP™), active since 2005
Certified Information System Security Professional (CISSP) certification, since 2010
Certified Cloud Computing Security Knowledge (CCSK), since 2012
ITILv3 certification, since 2016

Professional Memberships / Associations

Project Management Institute (PMI)
International Information System Security Certification Consortium $(ISC)^2$
Society of Women Engineers
American Society for Industrial Security (ASIS)
Cloud Security Alliance

GORDON L. GEE
DIRECTOR, FEDERAL PMO

Experience Summary

Gordon L. Gee is a proven Director within CenturyLink's Program Management Office with 30 years of demonstrated Telecommunications experience. Mr. Gee is a dedicated, energetic, and versatile professional with expansive technical skill set built from holding technical and advanced degrees that are used to focus on telecommunications and security solutions. He has gained deep expertise in sales engineering, strategic planning, managing complex projects and teams, team building, cost optimization, and risk management.

Role and Understanding of the Process

Mr. Gee is responsible for all aspects of Program/Project Management processes and lifecycle management. He is directly responsible for PMO managers and, by extension, individual contributors. Mr. Gee is a point of escalation both internally and customer-facing, to ensure appropriate project support and project deliverables. For the Nebraska NG-911 implementation, Margaret Cook reports directly to Mr. Gee. He has managed installations, testing, and internal teams and contractors on various project implementations. He is responsible for the quality of the systems, implementation of processes and endeavors to deliver high-quality products that meet and exceed customer requirements and expectations. With CenturyLink, Mr. Gee is currently managing the NG-911 system implementation for the State of California. This includes the deployment of Next Generation Core Services (NGCS), ESINet and the aggregation network to all Originating Service Providers (OSP). Mr. Gee specializes in the following product solutions: E911/NG-911, UCaaS, Contact Center, VoIP, Managed Security Services, Dark Fiber, Private Dedicate Rings/Networks (PDR/PDN), Wavelength Services, TDM T1/T3 Services, Ethernet Private Lines, Ethernet Virtual Private Line Service, Multi-Protocol Label Switching Service and Internet.

Mr. Gee leverages his expertise and experience to promote the application of program and project management standards to ensure deliverables consistently meet contractual requirements and satisfy high-quality standards for the customer and CenturyLink. His objective is to deliver outstanding customer service through consistent, on-time and on-budget project delivery. Over his career at CenturyLink, Mr. Gee's keen focus on deployment of telecommunications solutions with strict adherence to and conformance with customer needs. Mr. Gee is a skilled communicator as he broadly communicates his initiatives, receives affirmation, and implements plans across the entire program to achieve customer goals.

Education

Master of Business Administration, Finance, Johns Hopkins University – Carey School of Business, Baltimore, MD, 2009

Bachelor of Science, Electrical Engineering, University of Alberta, Edmonton, Alberta, Canada 1998

Relevant Employment/ Project History

CenturyLink **Herndon, Virginia** **2018-Present**
Director, Federal PMO

Mr. Gee manages the project and program management teams that deploy telecommunications and professional service solutions to Federal, State and Local government agencies, Research and Education and Large System Integrators. Mr. Gee is responsible for managing and documenting complex projects, planning and managing staff resources, managing risks and communicating and coordinating with all internal and external stakeholders. He is responsible for executing projects or project components from inception to implementation. For ongoing programs, he develops the operational support model. He establishes the appropriate project team structure, reporting, and metrics to measure performance against plan while ensuring processes are in place to support the products. Mr. Gee develops, interprets and implements financial business concepts for business planning and control. He drives

product development or operational processes to meet program and project objectives. Highlights of Mr. Gee's key significant accomplishments include the following:

- Developed the PMO team to oversee and manage all NG-911 solutions
- Implemented a dedicate PMO team for the Commonwealth of Pennsylvania that manages and supports the customer's DWDM, Routing and Switching networks; , including a comprehensive suite of Manage Security Services (MSS). This implementation resulted in significant cost savings for the Commonwealth

Level 3 Communication **McLean, Virginia** **2012-2017**
Manager, Federal PMO

As Manager in the Federal PMO at Level 3, Mr. Gee specialized in outside plant (OSP) fiber design, implementation and testing. He managed contractors and field resources throughout the project to ensure quality and on time delivery. Mr. Gee interpreted project requirements and communicated project scope to clients and eco-teams ensure milestones were met. He managed dependencies across projects and leads project meetings involving customers, partners and cross-functional teams. His other key responsibilities included reporting regular status updates to senior executives and key project stakeholders; performing technical analysis to determine present and future business performance; driving metrics to all layers of the organization (end-to-end and sub-pieces, organization and by individual). He identified areas of process and drove system improvement based on data. Highlights of Mr. Gee's key significant accomplishments include the following:

- Managed and oversaw the deployment resilient Fiber Optic rings for the US Government
- Developed and productized a new FedRAMP UCaaS product offering for Government customers and oversaw the first implementation for a Federal Agency

ASM Research **Fairfax, Virginia** **2012-2012**
Technical Consultant

As a Technical Consultant, Mr. Gee was a member of proposal team who assisted in the development and writing of the T4 proposal for US Department of Veterans Affairs. He defined Program Management Office management structure, resources and execution strategy as well as examined the technical feasibility of a VoIP solution and specified implementation resources.

OCEUS Networks (F/K/A Ericsson Federal) **Reston, Virginia** **2010-2011**
Technical Consultant

As a Technical Consultant, Mr. Gee engineered and proposed telecommunication solutions that include the various technologies, including Tactical 3G/4G Wireless (network in a box), Ericsson 3G (WCDMA/HSPA) QuicLINK and Oceus Networks 4G (LTE) Xiphos, Commercial 3G/4G Wireless: Ericsson RAN (RBS) and Evolved Packet Core, Optical: Ericsson/Marconi MHL-3000 DWDM/CWDM and Ericsson WDM PON, Data/TDM: Ericsson OMS 800, OMS 1200, OMS/SPO 1400, OMS 1600, OMS 2400, Distributed Antenna System: Powerwave FBU and Nexus FT, and Microwave Radio: Ericsson Mini-Link short-haul and Marconi long-haul microwave radios.

Mr. Gee engineered WDM networks using Ericsson's LDT, INTERplan, INTERconfig, and Autorack optical software planning tools. He served as solutions lead for the DISA account team and proposed a migration strategy to move from ATM to IP. He designed microwave links using Pathloss 5 software. Mr. Gee attended customer meetings to gather requirements and assess business opportunities. He created network design and solutions for RFI/RFPs, developed Mobile Virtual Network Operator (MVNO) value proposition and marketing collateral; and created a winning proposal for a distributed antenna system (DAS) solution for the United Nations.

NEC America **Fairfax, Virginia** **2012-2012**
Director of Product Management / Systems Engineering

As a Director of Product Management, Mr. Gee managed the telecommunication product line that consisted of fiber optic transport (CWDM and DWDM), hybrid TDM/Ethernet switches, MPLS-TP data transport, and Passive Optical Network (PON) access technologies for the US and Canadian markets. He designed and engineered optical and data networks for clients based on their requirements and applications. He assembled a systems engineering organization from scratch for which he defined all its processes and job functions. Mr. Gee expanded the product portfolio by establishing third-party OEM and reseller agreements. He conducted market research and competitive analysis; developed marketing collateral, white papers, and training program for sales/marketing teams and clients.

Mr. Gee wrote and presented business cases to executive management to justify new product development. He managed product certification such as NEBS, MEF and UL and presented product and network solutions to clients. He responded to customer's RFI/RFP/RFQs and managed the installation of new DWDM and transport networks in labs and First Field Applications. Mr. Gee managed department budgets and ensured compliance to corporate regulations. He developed a systems integration model featuring NEC professional services and non-NEC products to generate new revenue streams. Highlights of Mr. Gee's key significant accomplishments include the following:

- As Program Manager, he successfully managed the certification and product acceptance of NEC's DWDM equipment in AT&T's lab for North American backbone deployment.
- He won a systems integration contract with The Port Authority of New York and New Jersey to upgrade their DCE communication network at all PATH stations.

Certifications / Training

None

Professional Memberships / Associations

P. Eng. Professional Engineers Ontario

Delaware

The First State

I, JEFFREY W. BULLOCK, SECRETARY OF STATE OF THE STATE OF DELAWARE, DO HEREBY CERTIFY THE ATTACHED IS A TRUE AND CORRECT COPY OF THE CERTIFICATE OF AMENDMENT OF "QWEST COMMUNICATIONS COMPANY, LLC", CHANGING ITS NAME FROM "QWEST COMMUNICATIONS COMPANY, LLC" TO "CENTURYLINK COMMUNICATIONS, LLC", FILED IN THIS OFFICE ON THE TWENTY-FIFTH DAY OF MARCH, A.D. 2014, AT 1:44 O'CLOCK P.M.

AND I DO HEREBY FURTHER CERTIFY THAT THE EFFECTIVE DATE OF THE AFORESAID CERTIFICATE OF AMENDMENT IS THE FIRST DAY OF APRIL, A.D. 2014, AT 12:01 O'CLOCK A.M.



Jeffrey W. Bullock, Secretary of State

0642301 8100

AUTHENTICATION: 1237671

140376224

DATE: 03-25-14

You may verify this certificate online at corp.delaware.gov/authver.shtml

State of Delaware
Secretary of State
Division of Corporations
Delivered 01:44 PM 03/25/2014
FILED 01:44 PM 03/25/2014
SRV 140376224 - 0642301 FILE

CERTIFICATE OF AMENDMENT

to the

CERTIFICATE OF FORMATION

of

QWEST COMMUNICATIONS COMPANY, LLC

This Certificate of Amendment to the Certificate of Formation of Qwest Communications Company, LLC, a Delaware limited liability company, dated as of March 13, 2014, is being duly executed and filed by Stacey W. Goff, as an authorized person, acting pursuant to Section 18-202 of the Delaware Limited Liability Company Act, to amend the Certificate of Formation to change the name of the limited liability company to "CenturyLink Communications, LLC."

FIRST. Prior to the amendment adopted hereby, the name of the limited liability company is Qwest Communications Company, LLC.

SECOND. The Certificate of Formation of the limited liability company, executed and filed with the Delaware Secretary of State effective January 2, 2009, is hereby amended by restating the first article thereof in its entirety as follows:

> "The name of the limited liability company formed hereby is CenturyLink Communications, LLC."

This Certificate of Amendment shall be effective on April 1, 2014 at 12:01 a.m. Eastern Daylight Time

IN WITNESS WHEREOF, the undersigned has executed this Certificate of Amendment to the Certificate of Formation on March 13, 2014.

Stacey W. Goff
Authorized Person

CenturyLink

State of Nebraska

Next Generation 911 Emergency Services
IP Network (ESInet) and Next Generation Core Services (NGCS)

RFP No.: 6264 Z1



Sample Program Management Plan (PMP)

June 3, 2020

CenturyLink

CenturyLink's proposal may contain CenturyLink trademarks, trade secrets, and other proprietary information and may not be disclosed to a third party without the prior written consent of CenturyLink. CenturyLink acknowledges that the proposal may be subject to disclosure in whole or in part under applicable freedom of information, open records, or sunshine laws and regulations (collectively, "FOI"). CenturyLink requests that customer provide CenturyLink with prompt notice of any intended disclosures, including copies of copies of applicable FOI for review, and an appropriate opportunity to seek protection of CenturyLink confidential and proprietary information consistent with all applicable laws and regulations.

Table of Contents

1. Document Control 1
2. Revision History 1
3. Introduction 2
4. Project Management Approach 2
5. Key Personnel 2
   5.1 Account Team 2
   5.2 Sales Engineer (SE) – 3
   5.3 Program Management – Maggie Cook, PMP, CISSP, CCSK and ITIL certified 3
   5.4 Customer Care Manager (CCM) - 4
   5.5 Operations Service Manager (OSM) – 4
6. Project Schedule 6
7. Site Surveys 7
8. Network Requirements and Final Design Solution 9
   8.1 Design Point of Interface (POI) and Aggregation 9
   8.2 Design and Build-Out Next Generation Core Services (NGCS) 9
   8.3 Design and order NG-911 (Egress) Services 9
   8.4 Database Integration Design 10
   8.5 Dashboard Development 10
9. Originating Service Providers (OSPs) Aggregation Connectivity 11
10. Interface and implementation 12
11. Infrastructure Build 13
   11.1 Finalize PSAP Site List with the State of Nebraska 13
   11.2 Determine On-net/Off-net sites 14
   11.3 Complete Network Design 14
   11.4 Order Materials 14
   11.5 Review and Approve with State of Nebraska for PSAP Delivery 14
12. Implement NG-911 Egress Circuits/Trunks at PSAPs 16
   12.1 Receive, Create and Verify IP Assignments 16
   12.2 Order, Install, and Test NG-911 Trunks for PSAP 16
   12.3 Activate NG-911 Trunk 16
   12.4 Design & Implementation (This section may change and will require discussions with OSP's and the State of Nebraska upon award of this contract.) 17
13. NG-911 NGCS 19
   13.1 NG-911 Next Generation Core Services Connectivity 19

14. NG-911 Functional Element provisioning 20
14.1 Border Control Function (BCF) 20
14.2 Emergency Call Routing Function/Location Validation Function 20
14.3 Policy Routing Function (PRF) Provisioning 20
15. System Acceptance Testing 21
16. Preliminary Staging Plan 22
17. Monthly Billing and SLA 25
18. PSAP Training 27
18.1 Needs and Skills Analysis 27
18.2 Training Schedule and Milestones CenturyLink issues 27
19. PSAP Cutover Plan 29
20. Selective Router Decommissioning Plan 33
21. Project Management Approach 33
21.1 Review and Validate all Technical Requirements with STATE 33
22. Execution 33
22.1 Communication, Tracking and Escalation Plan 33
22.2 Technical Escalation Matrix 33
23. Change Management 34
23.1. Planned Maintenance 34
24. Risk Management Plan 35
24.1 Risk Identification 35
24.2 Potential Risks and Avoidance Measures 35
25. Public Safety NOC 36
25.1 NG911 PSS NOC Technicians 36
25.2 Trouble ticket handling for State of Nebraska Tickets 36
25.3 Trouble Management 36
25.4 Trouble Ticket Classifications 36
25.5 Escalation Procedures 36
25.6 Entrance Criteria for a Defect/Chronic ticket: 37
25.7 Reason for Outage (RFO) Request 37
26. Vocabulary 39

1. Document Control

Ownership of the *Program Management Plan* (PMP) belongs to the CenturyLink Program Management Office.

CenturyLink Program Manager	CenturyLink Program Director
Maggie Cook 571.730.3096 Margaret.Cook@CenturyLink.com	Gordon L. Gee 571.730.6591 Gordon.Gee@centurylink.com

2. Revision History

Date of Release	Version	Modification
May 5, 2020	1.0	Original Document Draft Completed.

DRAFT

3. Introduction

The *Program Management Plan (PMP)* outlines how CenturyLink works with the State of Nebraska to, deliver and implement Next Generation 911 (NG-911) services in Nebraska. The PMP is the controlling document regarding project process and procedures and is revised in conjunction with input from all stakeholders. In the event a change needs to be made to the PMP, the CenturyLink Program Manager completes the revision and provides a revised copy of the PMP to all stakeholders for review and agreement. The PMP describes the tasks necessary to execute project outcomes and shows the overlap and dependencies of each activity.

4. Project Management Approach

CenturyLink has mobilized several internal teams to address the many aspects of this project. These teams are comprised of Engineers, Technicians, and Subject Matter Experts (SMEs) devoted to implementing the Nebraska NG-911 solution successfully. Each team has specific responsibilities and duties to perform for the overall project. The CenturyLink Program Manager is responsible for the oversight of all personnel assigned to this project and maintains reach back across the organization when additional resources are needed, or escalations become necessary to achieve the goal. The combined effort of these teams allows for a smooth delivery of services associated with the NG-911 project.

Prior to the deployment stage, CenturyLink holds Project Kickoff meetings with each team separately and with all teams together to ensure complete understanding of the project goals and contracted outcomes. CenturyLink also holds Discovery meetings within each group to determine who would be best suited to provide the services necessary to meet the timelines and requirements of the NG-911 project. A Kickoff meeting is then held with the state to inspire further discussion, answer questions, and gain a mutual understanding of all expectations going forward.

5. Key Personnel

Designation of Key Staff is one of the first deliverables for the project. The following table represents an expanded form of the initial version. The team shown below is responsible for over program success.

5.1 Account Team

CenturyLink's account team, under the guidance of the Director of Sales provides the State of Nebraska with information about CenturyLink services and serves as the overall point of contact for CenturyLink sales. Our account team is responsible for gathering and confirming NG-911 all specifications and requirements necessary to submit an order. Our account team works closely with stakeholders to execute all quotes and orders for new and additional CenturyLink services, and assists them through the credit application process.

DRAFT

Name	Title	Phone/Mobile	Email
Bjorn Johnson	**Sr. Account Manager**	**605 977 2820**	**Bjorn.Johnson@CenturyLink.com**
Jon Osborne	**Account Director**	**402 998 7392**	**Jon.Osborne1@centurylink.com**
Carlos Simmonds	**Account Director**	**602 512 2535**	**Carlos.Simmonds@CenturyLink.com**
Stephen Doyle	**Sales Director**	**520-292-5618**	**Stephen.Doyle@centurylink.com**
John Shuttleworth	**Senior Director Sales**	**571 730 6522**	**John.Shuttleworth@centurylink.com**

5.2 Sales Engineer (SE) –

CenturyLink's SEs work with the State of Nebraska's stakeholders to identify technical options and define technical requirements for implementing the services. Our SEs are responsible for understanding the existing network, key locations and potential need or the customer. With technical knowledge and information about CenturyLink services, our SEs manage the engineering portion of the service quote the inventory and the capacity process for the new order.

	Contact	Title	Office	Mobile	Email
Level 1	Steve Deloach	Sales Engineer	434 971 3871		Steve.Deloach@centurylink.com
Level 1	Steve Klocek	Sales Engineer	763 400 5492		Steven.Klocek@centurylink.com
Level 1	Cathy Atkin	Sales Engineer	520 526 1877		Cathy.Atkin@CenturyLink.com
Level 1	Nancy Serafino	Sales Engineer	567 345 0814		Nancy.C.Serafino@centurylink.com
Level 2	Stephen Doyle	Mgr, Sales Engineer	520-292-5618		Stephen.Doyle@centurylink.com
Level 3	John Shuttleworth	Dir, Sales Engineers	571 730 6522		John.Shuttleworth@centurylink.com
Level 4	David Young	VP Sales, Government	571 730-6516	202 253-0452	David.Young@CenturyLink.com

5.3 Program Management – Maggie Cook, PMP, CISSP, CCSK and ITIL certified

CenturyLink's Program Manager (PM) is responsible for the oversight of the implementation and life cycle management of NG911 solutions. The Program Manager serves as a primary point of contact for all post sales activities, including program and service delivery issues and general program questions. The Program Manager also serves as a point of escalation for program issues, tracking and resolution has reach-back across all levels of CenturyLink, and acts as the customer advocate within our organization.

DRAFT

	Contact	Title	Office	Mobile	Email
Level 1	Maggie Cook	Senior Federal Program Manager	571-730-3096	703-867-2095	Margaret.Cook@CenturyLink.com
Level 2	Gordon Gee	Director, Federal PMO	703-386-2475	703-728-2834	Gordon.Gee@CenturyLink.com
Level 3	Seana Gilliland	VP, Federal PMO	571-730-6577	703-966-8701	Seana.Gilliland@CenturyLink.com
Level 4	David Young	VP Sales, Government	571-730-6516	202 253-0452	David.Young@CenturyLink.com

5.4 Customer Care Manager (CCM) -

The CCM serves as the point of contact for the CenturyLink Customer Care organization and is responsible for planning, directing, and coordinating service delivery activities to ensure the project goals and objectives remain on track. The CCM manages new install orders as soon as the sales representative promotes the quote to an actionable order in our systems. More specifically, CenturyLink's CCM reviews documents to make sure all necessary technical and contact information has been received and oversees the assignment of capacity, testing, and activation of the service. Our CCM ensures that required documents are properly filed, tracked the status of the order to support on-time delivery, and proactively communicates updates throughout the service activation process.

The Customer Care Management Contact and Escalation Matrix specifically for State of Nebraska is listed below:

	Contact	Title	Office	Mobile	Email
Level 1	Caroline Bussell	Customer Care Manager	317-697-4499		Caroline.Bussell@centurylink.com
Level 2	Mary Anderson	Mgr, Customer Service	402 998 7386		Mary.Anderson1@CenturyLink.com
Level 3	David Nguyen	Dir, Customer Service	872 759-9241	469 667-4023	David.Nguyen@CenturyLink.com

5.5 Operations Service Manager (OSM) –

CenturyLink's Operations Service Manager (OSM) serves as the customer advocate responsible for providing Operations Reviews including Metrics, Event and Escalation Management, and Reason For Outage (RFO) Management. It is important to note that the OSM is an addition to the primary escalation processes. Escalations should only be routed to the Operations Service Manager if the primary process has not achieved desired results to avoid confusion of information and ensure communication updates through resolution are provided to State of Nebraska as quickly as possible.

Name	Title	Phone/Mobile	Email
Rachel Renteria	Operations Service Manager	214-533-9452	Rachel.Renteria@CenturyLink.com
John Atkinson	Post Sales Engr Manager	602 563 3292	John.Atkinson@CenturyLink.com
David Mueller	Senior Manager: MAS	720 888 2634	Dave.Mueller@CenturyLink.com
Chris Noble	Director, Operations Management	918 547 9799	Chris.Noble@CenturyLink.com

DRAFT

6. Project Schedule

CenturyLink will build a detailed Project Schedule using Microsoft Project, which lists the Milestones for the project, along with detailed steps for each of those Milestones. The schedule will also provide the means for CenturyLink and the State of Nebraska to monitor the implementation of the project throughout all stages. Once a schedule is agreed on, detailed dates and anticipated days for performance will be added. Through a series of meetings with State designees CenturyLink Program Management will finalize the schedule and track the completion of the following milestones:

1. System Design
2. Development and Finalization of a Statement of Work
3. Build out and testing of the network and deployment of the Functional Elements
4. Interconnection with Originating Service Providers
5. Interconnection with Ancillary systems
6. Gateway/network interface
7. ALI format and interface testing
8. Comprehensive test and acceptance plans for all network connections, verifying all functionality with the PSAP and/or Call Handling Equipment provider solutions
9. Functional specifications testing
10. Final acceptance testing
11. 30-Day reliability testing
12. Solution acceptance

CenturyLink tracks major Milestones in the NG-911 management plan using the Project Schedule. Each of these Milestones represent significant progress during the program. Please refer to the sample project schedule in the attachment file named: "**2.e Sample Nebraska_Draft Project Schedule_Gantt Chart Format**".

DRAFT

7. Site Surveys

External Dependency: If necessary. Approved by the State of Nebraska Survey and Coordination Schedule

Task Name	% Complete	Duration	Start	Finish
Site Surveys				
Submit site survey to STATE for review		5 days		
STATE returns survey		5 days		
Authorization to Proceed with surveys		1 day		
Conduct Site surveys		32 days		

CenturyLink completes a Site Survey at each PSAP/location where the stakeholders determine Network terminations and Network Interfacing Device (NID) Equipment Installation. The CenturyLink Implementation Project Manager coordinates each site visit with the State of Nebraska.

CenturyLink arrives onsite at a predetermined time and date and uses the Site Survey Template provided by CenturyLink. We note all findings on the Site Survey form, along with pictures taken at the PSAP. To ensure accuracy when compiling documents, all pictures include dates and the PSAP name.

CenturyLink provides the Site Survey form and detailed supporting documentation to the State of Nebraska for approval prior to starting this project.

We provide a priority list we built that is based on the Site Survey results. PSAP's that require additional corrective actions (i.e., fiber extension to demarcation, additional power to racks, additional rack placement, etc.) are moved to the bottom of the installation schedule if needed to avoid delays in schedules.

Not all locations require site surveys due to the site nature, i.e. data center. In this case the site demark information are documented, and the team proceeds with installation.

DRAFT

Sites and planned dates for each site are as follows:

Task Name	Duration	Start	Finish
Site Surveys			
South Central Region (VIPER)			
Buffalo	1 day	TBD	TBD
Dawson	1 day	TBD	TBD
Dawes	1 day	TBD	TBD
South Eastern Region (Motorola)			
Data Center 1	1 day	TBD	TBD
Data Center 2	1 day	TBD	TBD
East Central Region (Motorola)			
Hall	1 day	TBD	TBD
Saunders	1 day	TBD	TBD
North Central Region (Ztron)			
Cherry	1 day	TBD	TBD
Holt	1 day	TBD	TBD
East Central Region (VIPER)	1 day	TBD	TBD
Douglas	1 day	TBD	TBD
Pottawattamie	1 day	TBD	TBD
Metro West (VIPER)			
Dodge	1 day	TBD	TBD
Colfax	1 day	TBD	TBD
North Eastern Region			
Madison	1 day	TBD	TBD
Wayne	1 day	TBD	TBD
Cedar	1 day	TBD	TBD
Dakota	1 day	TBD	TBD

DRAFT

8. Network Requirements and Final Design Solution

External Dependency: Complete Network requirements and final design requirements with STATE

Task Name	% Complete	Duration	Start	Finish
Product Development				
Design POI and Aggregation Points				
Design and build NGCS				
Design and build Ingress Circuits				
Design and build Egress Circuits				
Design and order NG-911 Trunk Services				
Develop and Document Interfaces				
Document Database Integration				
Dashboard Development				

8.1 Design Point of Interface (POI) and Aggregation

External Dependency: OSP LATA requirements

CenturyLink determines POI locations and trunk count based on dialog with the State, OSP and wireless carriers. Dialog diversity from each POI are established based on the amount of physical connectivity required to support trunking and network interconnections.

8.2 Design and Build-Out Next Generation Core Services (NGCS)

External Dependency: None

CenturyLink deploys physical hardware and necessary software in our geo-diverse datacenters.

8.3 Design and order NG-911 (Egress) Services

External Dependency: PSAP Access, Availability of Power, Space and Entrance Facilities.

CenturyLink will identify the appropriate access providers with the State of Nebraska who are available to build out diverse connectivity to each required location. When confirmed by the State, CenturyLink will order the circuits necessary to maintain diversity to each PSAP/datacenter.

DRAFT

8.4 Database Integration Design

External Dependency: Input from PSAPs

CenturyLink will work with the State on database design.

8.5 Dashboard Development

External Dependency: Input from stakeholders

CenturyLink works with the stakeholders to develop a dashboard that encompasses all the pertinent information needed.

DRAFT

9. Originating Service Providers (OSPs) Aggregation Connectivity

External Dependency: OSPs

Task Name	% Complete	Duration	Start	Finish
OSP Aggregation Connectivity	0%			
Letter of Agency (LOA)	0%			
Validate trunk count w/OSPs and other carriers	0%			
Establish POI	0%			
Establish LNG	0%			
Establish trunking w/OSPs and other carriers	0%			

CenturyLink's NG-911 Aggregations Services Coordinator works with the Originating Service Providers (OSPs) and other carriers to order and install trunks to support the ingress and aggregation of 9-1-1 traffic. Tracking and testing are completed by internal CenturyLink teams (i.e., provisioning, OSP, etc.).

- Letter of Agency (LOA) provided to the OSPs and carriers from CenturyLink
- Validate trunk count from serving End offices with OSPs and carriers
- Establish POI – CenturyLink Trunk Services Coordinator works with OSP to deliver T-1 circuits to Carrier Facility Access Points; this depends on Local Access Transport Area (LATA) restriction and are reviewed with the OSP as well as the State of Nebraska.
- Establish LNG – connect POI to diverse Legacy Network Gateways via diverse connectivity.
- Establish Time Division Multiplexing (TDM) (ISUP) trunks over T-1 links with OSP.

DRAFT

10. Interface and implementation

External Dependency: PSAP Facilities

Task Name	% Complete	Duration	Start	Finish
Infrastructure Build				
Finalize PSAP site list with the state of Nebraska				
Determine on-net/off-net sites				
ID logical network addresses				
Complete Network/circuit Design				
Order materials				
Review & approve w/State of Nebraska for PSAP Delivery				

10.1 Ordering:

CenturyLink will submit circuit orders for the ESINet and manage their delivery against the master project schedule. However, there may be delays caused by the following:

- Capacity issues – CenturyLink makes every effort to ensure that circuit capacity is available to support the new ESInet. However, capacity can occasionally become consumed during the timeframe from quote to customer order request. In these instances,CenturyLink advises the customer of the issue and works to find available capacity. If new construction is needed, CenturyLink Program Manager and CCM will work with internal engineering and construction teams to expedite delivery to keep the project on schedule. If delay is caused by construction or equipment upgrade for an offnet circuit, CenturyLink will escalate with the third party carrier using well established processes.
- Circuit Diversity Type (physical path, electronics, etc.) and avoidance(s) criteria not met
- Unknown connector types LC versus the CenturyLink standard SC, Fiber types requested such as Multi-mode versus the CenturyLink standard Single mode fiber.
- Deficient panel termination information such as specific ports or next available on which panel.
- Unclear availability of DC or AC Power types,amperages & termination requirements.
- Cabinet or rack types and dimension requirements.

When an order is submitted, it is the responsibility of the CenturyLink Customer Care Manager to ensure implementation is accurate and on time. The CenturyLink CCM, Caroline Bussell, provides order status, via spreadsheet, no less than three times per week. Status calls are held every Monday and can be moved or cancelled at the discretion of the customer.

Implementation time frames are built upon standard intervals for each service type. The draft Project Schedule included as an attachment to this document has been built on standard intervals.

Expedite orders:

In some cases, the standard interval may not meet the customer's need for implementation timeframes. In this case, an expedite request may be attached to the order. If the expedite is made at the request of the customer, an expedite charge may apply. However, if there is an issue that is beyond the customer's control, CenturyLink may submit an expedite request on the customer's behalf at no additional charge to the customer. All expedite implementations are handled as a priority by the Service Delivery Project Manager. However, all expedite orders, while they may result in a shortened implementation timeframe, are considered best effort and may vary depending upon the local provider. In other words, CenturyLink makes every effort to deliver the circuit(s) in a timeframe shorter than standard interval, however, if capacity or other issues exist, the timeframe may not be able to be shortened.

Order Information Verification and FOC Notification:

In order to ensure that all implementations go through the process smoothly the CCM attempts to verify all information on the order at the time of receipt. The CCM sends the provided point of contact the email below. The email has been standardized to address all service types and contains the pertinent information required. If the information on the email notification differs from that on the TSO or if the local point of contact has information that is contrary to that provided, the CCM, along with the rest of the team, should be notified as quickly as possible.

During the order entry process, an ASR must be issued to the local exchange carrier. If the address information is incorrect or the local point of contact provides information that differs from the TSO, CenturyLink requires a supplement to the TSO. All intervals are restarted upon receipt of the supplemental order by CenturyLink.

The notification email is re-sent to all parties upon receipt of a Firm Order Commitment or install date from CenturyLink or the third party carrier. Upon receipt of the FOC date notification, CenturyLink requests that the State of Nebraska and/or PSAP confirm the receipt and demark the location and availability of the local point of contact (LCON) for the PSAP. CenturyLink makes every effort to ensure that the operations field tech for CenturyLink or the third party carrier reaches out to the local point of contact prior to arriving at the site, however this is does not always happen. To ensure the LCON is kept aware of circuit delivery time and demark location, this notification and acknowledgement is a valuable tool.

11. Infrastructure Build

11.1 Finalize PSAP Site List with the State of Nebraska

CenturyLink received the PSAP list with address and contact information from the State of Nebraska. Additional missing detail for sites are updated prior to starting this project.


DRAFT

11.2 Determine On-net/Off-net sites

CenturyLink has evaluated the network locations for the entire state of Nebraska and has selected access providers for network. In this list, we have designated locations which already have CenturyLink facilities and sites that CenturyLink provides construction for fiber plant.

11.3 Complete Network Design

CenturyLink's network design is segmented into 3 parts: Ingress/Aggregation, NGCS, and NG-911 trunk or ESINet. Each segment has its own appropriate services that are documented as details are established to facilitate these designs. An initial diagram for the network design is provided below.

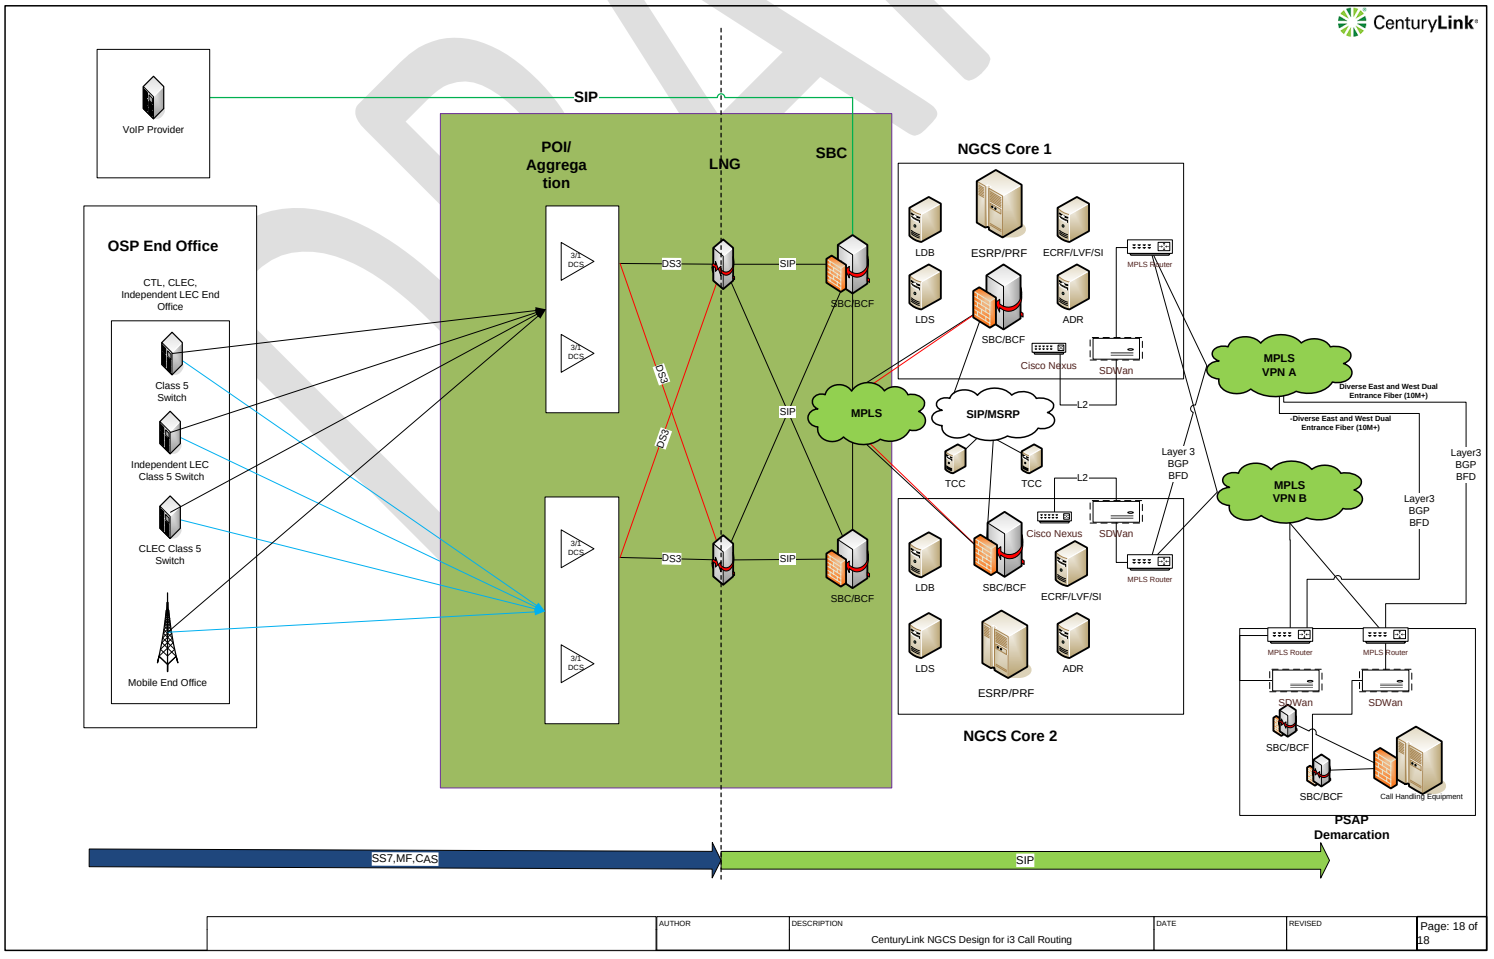

11.4 Order Materials

All hardware for delivery of PSAP endpoint is ordered, inventoried, and stored for PSAP implementation, by CenturyLink.

11.5 Review and Approve with State of Nebraska for PSAP Delivery

CenturyLink Program Manager will receive confirmation from the state of Nebraska to proceed with implementation.

12. Implement NG-911 Egress Circuits/Trunks at PSAPs

External Dependency: The State of Nebraska and CenturyLink need to compile an accurate contact list, identify unknown outside plant build requirements, and agree upon a Logical IP schema.

Task Name	% Complete	Duration	Start	Finish
PSAP Connectivity	**0%**			
Deliver and Test Circuits to all PSAPs	0%			
NG9-1-1 NGCS	**0%**			
NG-911 NGCS Connectivity	0%			
NG-911 Functional Element Provisioning	0%			
NG-911 Solution	0%			

12.1 Receive, Create and Verify IP Assignments

CenturyLink establishes logical address assignment (IPv4 or IPv6) based on the agree design terms. Based on these design terms, CenturyLink creates a record for the deployment and WAN assignments are ordered with the NG-911 trunk services that contain the routing and blocks associated with each specific site.

12.2 Order, Install, and Test NG-911 Trunks for PSAP

Upon completion of the site surveys and an evaluation of available CenturyLink, Local Exchange Carrier (LEC) and 3rd party providers, the CenturyLink Project team places all circuit orders for each of the PSAP's and Data Centers in Nebraska. The orders are placed in the same priority order as the site surveys were completed. Circuit orders are tracked to their completion by CenturyLink personnel in our circuit provisioning team. Then, CenturyLink sends a formal notice of circuit installation completion to the end customer once a circuit has been successfully installed, tested for Layer 1 connectivity, and is ready for use. We also track completion of each site and report our progress to the State of Nebraska office in our weekly status meetings.

12.3 Activate NG-911 Trunk

The CenturyLink NG-911 Trunk Services Coordinator is responsible for serving as the point of contact to facilitate the circuit installation at each PSAP in Nebraska and providing updates to the CenturyLink Program Manager. The CenturyLink NG-911 Trunk Services Coordinator also works closely with the CenturyLink NG-911 Core Services Coordinator to schedule circuit turn-ups at each of the PSAP's and backup Center sites. All work is coordinated between the CenturyLink Program Coordinator and the State of Nebraska.

12.3.1 **Network Services Connectivity Confirmation**: The CenturyLink NG-911 Trunk Services Coordinator verifies that the network is deployed to each defined location on a "location-by-location" basis. From this confirmation, a dispatch leads the installation of extended demarcation wiring and associated hardware to the location identified during the site survey.

DRAFT

12.3.2 **Turn-up Network Services**: Activation of Multi-Protocol Labeling Service (MPLS) network to the edge device.

12.3.3 **Test Network Services**: Validation of routing and throughput to the NGCS locations from each diverse circuit.

12.4 Design & Implementation (This section may change and will require discussions with OSP's and the State of Nebraska upon award of this contract.)

12.4.1 Integration of local jurisdictional GIS and configuration of NGCS

Our CenturyLink NG911 Solution uses the ESRP/PRF and ECRF/LVF services built into NGCS (Next Gen Core Services) to replace the ALI and selective routing functions of the legacy 9-1-1 network. In addition to providing the routing of the calls based on the Customer's requirements, our NGCS also provides geolocation data for any jurisdiction to serve as the LDB in a true NG9-1-1 deployment or as an ALI-DBMS in a migration strategy.

Our CenturyLink NG911 solution has been provisioned with the functional elements (Core Services) defined by the end-state architectural specifications in NENA-STA-010.2 (Originally 08-003). CenturyLink and our core provider work with the state of Nebraska to populate the required location information into the LDB and maintain links to OSPs to allow this information to be updated. CenturyLink and our core provider also develop and maintain the PSAP routing rules appropriate to Customer's jurisdiction.

12.4.2 Interconnecting selective routers

Nebraska wants to eliminate the incumbent selective router as the source for calls inbound to this system. In addition, the state desires to establish capabilities for transferring calls between the NGCS and PSAPs still served by legacy selective routers.

We can provide unidirectional interconnectivity to selective routers in neighboring state, which will allow calls to be delivered to the selective router. This service is available on a per call basis. Bi-directional interconnectivity is required to receive 9-1-1 calls from neighboring selective routers. Bi-directional interconnectivity requires mileage sensitive TDM circuits to be provisioned between any of our existing POIs and the selective router.

At a high level, selective router interconnectivity involves the following areas of effort:

1. Providing and installing sufficient gateway (PIF) capacity for the project
2. Establishing general, multipurpose SS7 interworking capability at both of the POI sites in each LATA, including CLLIs and point codes.
3. Establishing bidirectional tandem-to-tandem connectivity with the current Legacy Selective

DRAFT

Router Gateways (LSRG's).

4. Provide ongoing professional services to operate the PIFs, maintain SS7 capabilities, and facilitate ongoing interoperation

Our team is responsible for engineering, provisioning, and maintaining the SS7 signaling capabilities at each POI. We coordinate with the OSPs to facilitate their installation of bearer T1s to the POIs and engineer and order the bearer circuits between the POIs and the LSRG's, leveraging their status as a CLEC in Nebraska and as the designated 9-1-1 service provider for the state to accomplish these tasks.

DRAFT

13. NG-911 NGCS

13.1 NG-911 Next Generation Core Services Connectivity

External Dependency: Final PSAP list

CenturyLink creates infrastructure orders for the network to the NGCS datacenters via *Session Border Controllers* (SBCs). This network includes the following topology:

13.1.1 Diverse MPLS connections to the CenturyLink LNGs for Ingress SIP traffic to each of the listed datacenters.

13.1.2 Diverse MPLS connections to the diverse CenturyLink MPLS cores that are used to egress traffic destined for State of Nebraska PSAPs.

13.1.3 Diverse connectivity to the NGCS datacenters:

- Cross-connect orders for each datacenter are issued to extend the connectivity to the location of the hardware.

DRAFT

14. NG-911 Functional Element provisioning

External Dependency: Updates from OSP

14.1 Border Control Function (BCF)

CenturyLink installs and tests Highly Available Session Border Controllers for security policies and SIP call anchoring. SIP headers can be manipulated to meet the format of the NGCS at this anchor point.

14.2 Emergency Call Routing Function/Location Validation Function

Upon receipt of an updated Geographic Information System (GIS) dataset, CenturyLink loads the *Emergency Call Routing Function/Location Validation Function* (ECRF/LVF) using the *Spatial Interface* (SI). CenturyLink works to define a process for adjudicating instances where there is a conflict in validity determination between CenturyLink systems and the GIS dataset received.

At a high level, CenturyLink's recommended approach for this resolution is as follows:

14.2.1 Determine the type of discrepancy.

14.2.2 Assess the source of the conflict.

14.2.3 Apply automated and human intelligence (where necessary) to resolve.

14.2.4 Implement the resolution.

Validation of GIS: When changes are submitted, a quality control process begins immediately checking the data for errors, which are then rated for severity and flagged for follow-up. This solution includes configurable quality control thresholds that can be used to block publishing to the ECRF/LVF. CenturyLink collaborates with the state to define a process for communicating such cases when they arise in order to resolve the underlying discrepancy and effectively resolve each case.

14.3 Policy Routing Function (PRF) Provisioning

CenturyLink gathers alternate routing information from individual PSAP management and, from the State for this function based on this information Policy Routing Rules are loaded into the PRF for each PSAP. This information is detailed to include timers and destined paths for emergency calls based on stipulated criteria that would impede normal call delivery.

DRAFT

15. System Acceptance Testing

External Dependency: STATE and PSAP readiness

Task Name	% Complete	Duration	Start	Finish
System Acceptance Testing				

CenturyLink has provided a comprehensive Sample Test Plan in the attachment "**2.d_Testing_Sample CenturyLink Test Plan"** to illustrate the steps that our technical staff will take prior to releasing the system for testing in conjunction with the state. For ease of use, when the system is ready for final testing the Sample Staging and Final Acceptance Plan checklist must be completed and agreed to by both the CenturyLink technical team and the state. These checklists are provided in attachment named "**2.d ss15_SAMPLE Staging and acceptance checklist**". Similar documents are presented at the program/project planning kickoff meeting and discussed in the project planning sessions to finalize the steps that both parties have agreed upon.

DRAFT

16. Preliminary Staging Plan

Staging Acceptance Test Plan (SATP)

- CenturyLink PM ships Equipment to location. CenturyLink Technician confirms all equipment is included in the shipment and inventories serial numbers. CenturyLink Field Technician provides handoffs for PSAP equipment (CAD, etc. as applicable) CenturyLink Field Technician connects System to network.

Staging Hardware, Software

- PSAP premigration activities
- Prep system for Field Engineer to install NID
- Final equipment configurations and testing (Software/Firmware Updates, network/NID devices only)
- Pre-cutover call: Customer approval to proceed

Staging for Final Acceptance Test Plan (FATP)

- Final test of network components
- Network migration to new system
- Complete migration

Final Procedure Steps: Observation and Acceptance

- Execute ATP
- Provisional acceptance accorded by state
- Perform 30-day observation period
- Perform 30-day Test
- Close punch list
- Update location profile in CenturyLink system for NG911 NOC
- Transition to operational environment
- Final acceptance by state – Customer Acceptance Form

After completion of the final network test and cutover, the CenturyLink Program Manager will provide the State of Nebraska with the results of final testing to include what is listed below and request formal acceptance from the State.

Final Documentation of Test - CenturyLink Project Manager will provide the State of Nebraska and PSAP of final results of test.
Network Connectivity (Can be run simultaneously)
NGCS – DNS
NG911 Aggregation – NGCS network

DRAFT

NGCS – network
NG911 Trunk – ESInet for each PSAP and CenturyLink lab
System Components
Integration – Policy DB
Integration – Location DB
Integration – State GIS (Utilizes a common NG9-1-1 GIS data set available for all PSAPs when a common NG9-1-1 GIS data set is established
NGCS - ECRF
NGCS – ESRP
NG911 Aggregation - LIF/NIF
NGCS – i3 Logging
System Monitoring
Exfo Probe to PSAP – CenturyLink lab
Pre-Cut PSAP Testing – CenturyLink lab
Call Testing
Exfo Probe to PSAP – per PSAP
Pre-cut PSAP testing - per PSAP.

Upon completion and receipt of Customer Acceptance, the CenturyLink engineering team provides “As-Built” PSAP drawings for the state.

DRAFT

17. Monthly Billing and SLA

External Dependency: None

Task Name	% Complete	Duration	Start	Finish
Monthly Billing and SLA Plan				
Billing*				
Operational SLA in Effect**				

** Potentially the start of billing for circuits*
*** SLA in effect following system acceptance*

Invoices are submitted per the instructions outlined in the contract. Invoicing of project Milestones only begin after testing and acceptance of systems by the State. NRC and MRC are submitted on separate invoices for total monthly services following the month in which the charges accrue. Any issues or questions with invoicing are brought to the attention of the State finance person assigned and to the attention of the CenturyLink PM for resolution. Invoices are submitted via email.

17.2 Billing Disputes

All CenturyLink customer billing inquiry and disputes may be submitted by one of the following methods:

Please refer to the customer's invoice for the contact email address that is most pertinent for their account type, otherwise there are continuously monitored mailboxes that provide an additional method for submitting requests. The customer receives confirmation of the request submitted and the assigned case tracking number within 72 hours. Below are details on the different mailboxes:

CenturyLink Enterprise accounts - Care.Inquiry@CenturyLink.com.

CenturyLink Wholesale accounts - Wholesale.Dispute@CenturyLink.com

Legacy CenturyLink Kenan accounts - Billing@CenturyLink.com

A Customer Financial Services Billing Coordinator contacts the customer within five (5) days of their submission. At that time, they request any additional information that may be needed to process the customer's request. It is the responsibility of the customer to provide all pertinent information requested with fifteen (15) calendar days of the Billing Coordinator's request. In order to expedite the request, it is important to provide all the required information at the time of the request submission and any supporting documentation that may help us resolve the request.

DRAFT

Please note: In the event CenturyLink does not receive further information after the third (3rd) request from the customer that is required in order to process their submission, it may be necessary to cancel the customer's request. The customer would then need to resubmit their request once they have the information required to process their request. Once the customer submits all necessary information, CenturyLink determines a resolution of the inquiry or dispute. The customer can then expect to receive a resolution notification from the Billing Coordinator that includes an explanation to their inquiry or dispute. Disputes should be submitted within 90 days of the invoice date unless otherwise stated in the Customer's MSA.

DRAFT

18. PSAP Training

The NG-911 *Training Plan* outlines the objectives, requirements, strategy, and methodology that is used when providing NG training to the PSAP users. The purpose of this training is to provide information about commonly used tools and the operation of the new NG-911 systems.

The *Training Plan* defines the following:

- Needs and Skills Analysis
- Training Methodology and Delivery Methods
- Training Schedule and Milestones

18.1 Needs and Skills Analysis

The State identified the need for its PSAP users to transition to a new Next Gen 9-1-1 service that is controlled and coordinated by the State office to ensure always-on service. To successfully implement this service, CenturyLink develops a training course and materials for State identified users in order to familiarize management and operators with the new functionality.

18.2 Training Schedule and Milestones CenturyLink issues


Communications about training content and sessions will be provided approximately thirty (30) days prior to the cutover for each site in conjunction with or via the State office. A training schedule and training sessions are developed for and coordinated with each site. We include a live 2-hour session to provide training on the CenturyLink Customer Portal.

CenturyLink's Customer portals are designed to help monitor and manage CenturyLink services during the ordering, implementation, and post-implementation phases. Through points of secure access, the portals provide direct line of communication, 24x7, from virtually anywhere in the world.

The customer portal includes a context-sensitive and searchable online help system with detailed description, step-by-step instructions for each portal feature, and online tutorials and webinars. Our Portal Support Center is available to assist with a broad range of issues, including general application questions, setup and management of Delegated Administrators, and capability questions and issues.

Important customer notifications are also posted to the portal's Home page and sent via email to keep users well informed so they can prepare for impacting events. In addition, the portal contains a Contact Us page that provides email and phone information by region for each CenturyLink support team, as well as the contact information for the specific account team.

DRAFT

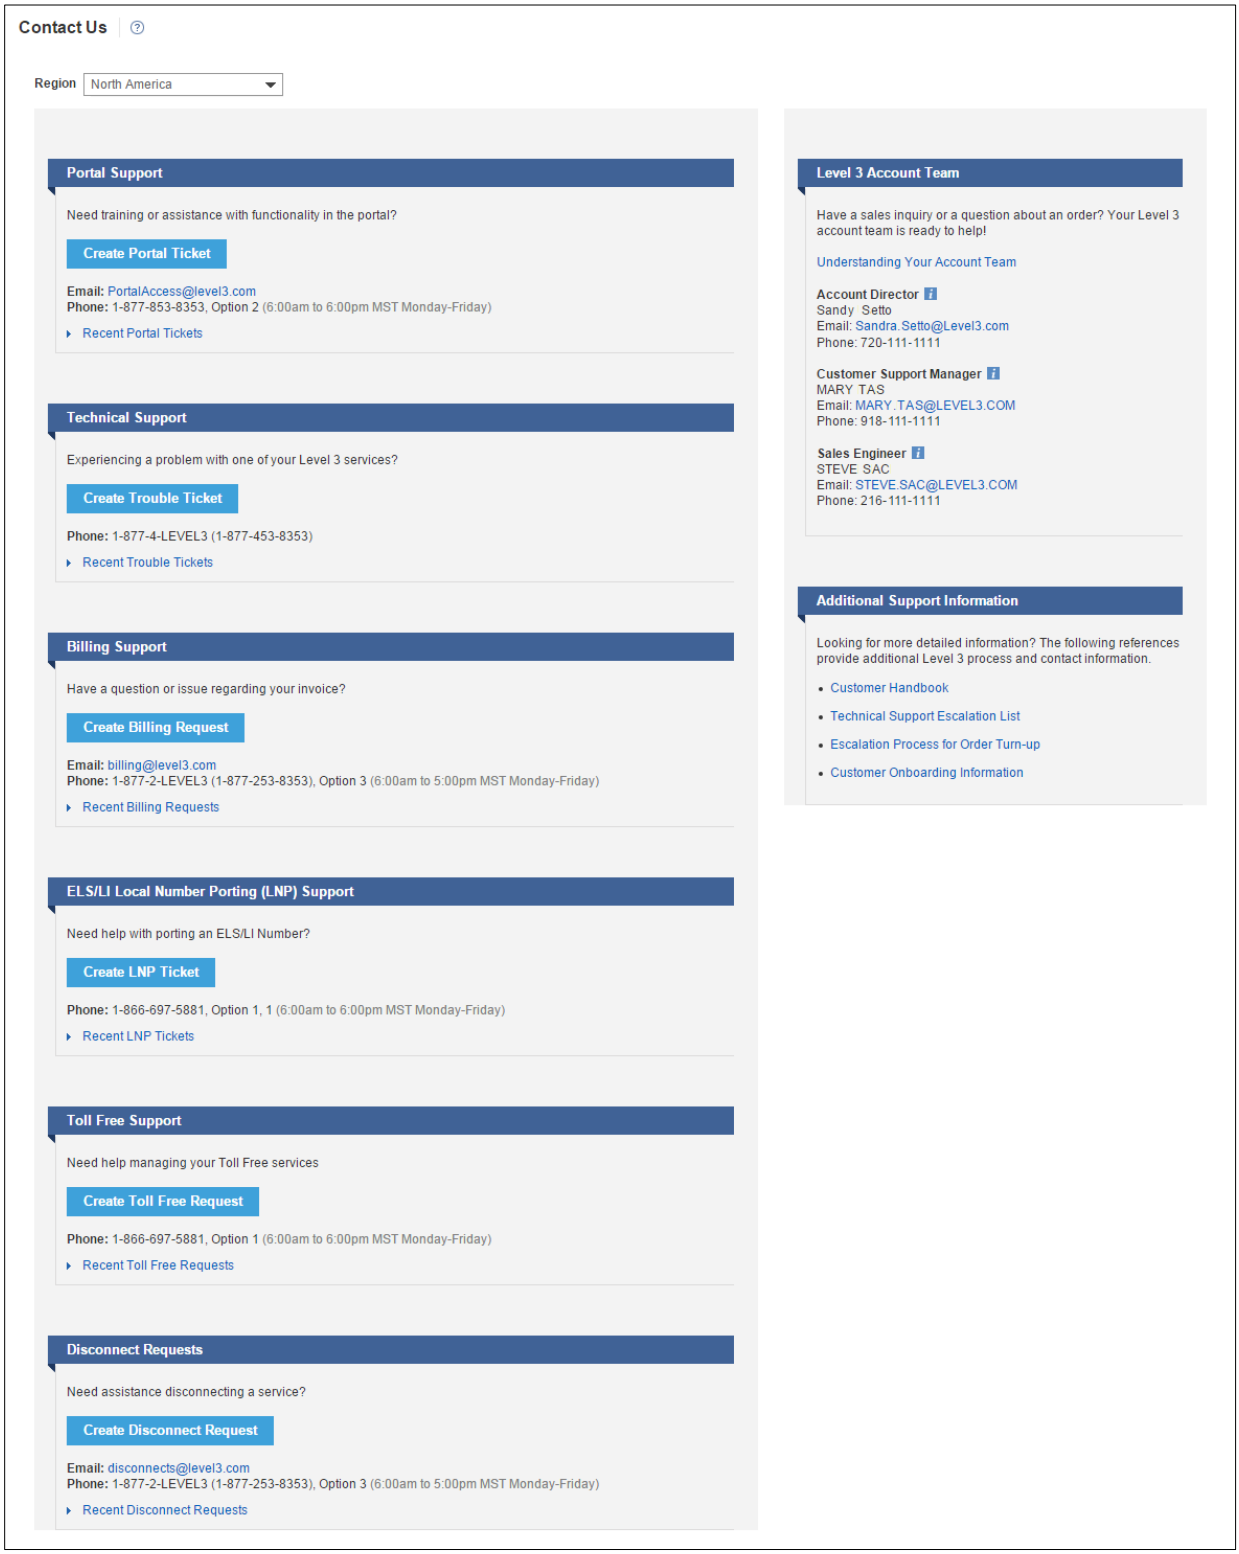
Contact Us
Region
North America
Portal Support
Need training or assistance with functionality in the portal?
Create Portal Ticket
Email: PortalAccess@level3.com
Phone: 1-877-853-8353, Option 2 (6:00am to 6:00pm MST Monday-Friday)
Recent Portal Tickets
Technical Support
Experiencing a problem with one of your Level 3 services?
Create Trouble Ticket
Phone: 1-877-4-LEVEL3 (1-877-453-8353)
Recent Trouble Tickets
Billing Support
Have a question or issue regarding your invoice?
Create Billing Request
Email: billing@level3.com
Phone: 1-877-2-LEVEL3 (1-877-253-8353), Option 3 (6:00am to 5:00pm MST Monday-Friday)
Recent Billing Requests
ELS/LI Local Number Porting (LNP) Support
Need help with porting an ELS/LI Number?
Create LNP Ticket
Phone: 1-866-697-5881, Option 1, 1 (6:00am to 6:00pm MST Monday-Friday)
Recent LNP Tickets
Toll Free Support
Need help managing your Toll Free services
Create Toll Free Request
Phone: 1-866-697-5881, Option 1 (6:00am to 6:00pm MST Monday-Friday)
Recent Toll Free Requests
Disconnect Requests
Need assistance disconnecting a service?
Create Disconnect Request
Email: disconnects@level3.com
Phone: 1-877-2-LEVEL3 (1-877-253-8353), Option 3 (6:00am to 5:00pm MST Monday-Friday)
Recent Disconnect Requests
Level 3 Account Team
Have a sales inquiry or a question about an order? Your Level 3 account team is ready to help!
Understanding Your Account Team
Account Director
Sandy Setto
Email: Sandra.Setto@Level3.com
Phone: 720-111-1111
Customer Support Manager
MARY TAS
Email: MARY.TAS@LEVEL3.COM
Phone: 918-111-1111
Sales Engineer
STEVE SAC
Email: STEVE.SAC@LEVEL3.COM
Phone: 216-111-1111
Additional Support Information
Looking for more detailed information? The following references provide additional Level 3 process and contact information.
Customer Handbook
Technical Support Escalation List
Escalation Process for Order Turn-up
Customer Onboarding Information

Contact Us

Benefits of Using the Customer Portal

- **Convenience**—CenturyLink handle all tickets and requests with the same level of care whether our customers open them through the portal or call us directly. Our free online portal provides our customers with an easy and convenient way to manage tickets and requests that saves them time.
- **Support and Communications** —Customers have access to comprehensive portal user support and education tools. Users can take advantage of our Portal Support Center or learn more about the portal capabilities with tutorials, webinars and user guides.
- **Security**— Our portal is designed to provide secure and private access with three tiers of authentication to help ensure the protection and integrity of network data.
- **Reliability**—Our portal serves as a dependable management tool. It provides transparent interactions with back-office source systems for timely delivery of information throughout a service lifecycle and fast resolution and response times to issues.
- **Personalization**—Users can customize views to see the information that is most important to them, save pages as favorites, assign personal IDs to tickets, manage their subscriptions, and more.

19. PSAP Cutover Plan

External Dependency: STATE and PSAP readiness

Task Name	% Complete	Duration	Start	Finish
PSAP Cutover				
Wireline Carrier 1				
Wireline Carrier 1				
Selective Router Decommissioning				

The CenturyLink NG-911 Program Manager and Aggregation Coordinator will host an OSP/Carrier Translations call that shifts traffic from the OSPs to the tested and established POIs. During this transition, calls are delivered over the NGCS to the destined PSAP via the new NG-911 network services. This migration strategy allows for all affected PSAPs to be migrated individually and in stages. Another option would be to have all the traffic switched by OSPs and wireless carriers at one time allowing the NG-911 Aggregation services to deliver to all PSAPs.

After the pre-cutover testing is complete, the cutover can proceed and calls will traverse to the CenturyLink NGCS and then routed to the PSAP via i3 SIP directly to the call handling equipment or Legacy PSAP Gateway.

The recommended cutover approach is as follows:

Cutover Approach

- In preparation for the cutover, CenturyLink will pre-test and loop-up the circuit in the customer equipment rooms at all locations.
- CenturyLink encourages customer participation in pre-testing, where feasible. Potential technical problems can be identified and resolved prior to the official

DRAFT

cutover by pre-testing the new CenturyLink circuits and new or reconfigured customer equipment.

- CenturyLink pre-tests circuits through the NID.
- The recommended approach is for CenturyLink to pre-test through their equipment with a remote CenturyLink/LEC tester.
- Once CenturyLink and the customer have agreed that sites are ready, the customer schedules the test and turn up with the CenturyLink Program Manager.
- Activations may be scheduled up to one day in advance; off-hours must receive CenturyLink authorization in advance. Normal hours of activation are 7 a.m. – 11 p.m. EST.
- OPTIONAL: A conference bridge is set up for the activations.
- Participants for site activations based on the scope of the cutover activity and can include:
- Customer technical contact, remote or onsite
- Customer site contact – required
- CenturyLink technician
    - CenturyLink/LEC remote tester
    - CenturyLink Program Manager
- Confirm Calls through legacy network are completing correctly (no known issues Wireless & Wireline)
- Run test calls to confirm call path
- Confirm NGCS is Ready
- Confirm Network is Ready
- Confirm Site Ready (call taker in place, site not busy with active 911 calls)
- Execute cutover
- Make a wireless 911 test call
- Make a wireline 911 test call
- Validate incoming call queue is playing appropriate ring back tones or hold message
- Test 3 Digit Star Code Transfer(s). Transfer to a PSAP on net and off net PSAP and Transfer back into PSAP migrating
- Validate transfer to 10 digit PSTN number
- Validate transfer to translation service

DRAFT

- Caller Hang up test - ring once and hang up
- Test alternate routing (optional)
- Test Abandonment Route (optional)
- Unabandon - Verify calls are back to the PSAP
- Release NGCS and CenturyLink Translations Resources

Front Room

- CAD Spill tested- Receiving Data
- Validate PSAP display and mapping
- Recording Tested * Analog recording
- Other requested tests

Final Acceptance

- Sign off and acceptance by PSAP and State

At time of activation, CenturyLink provides premises equipment ready to accept the new circuit. CenturyLink is prepared to run loops to the premise, and confirms connectivity is established. The Customer contact will provide verbal acceptance.

Formal service acceptance is required by the customer to close out the install order. The circuit will not move to 24 x 7 post install monitoring until the circuit has been accepted by the customer.

After 48 hours of customer circuit acceptance, the install order is closed and services are handed to the 24 x 7 post-install support team.

Upon cutover of each site, the Program Manager will ensure that the customer has the appropriate contact and escalation list.

Contingencies are discussed as part of the cutover plan and could include:

- If the data migration is not successful, the CenturyLink implementation group will follow the issue through to resolution;
- If new equipment is in use, this event will not impact service;
- The Customer responsibilities will include providing access to the site and equipment vendor support if applicable.

Assumptions:

Delivery of some circuits may be delayed outside of CenturyLink standard intervals due to provisioning and/or facility issues;

- Parallel system will be in place prior to cutover
- Activations are scheduled per the project scope and negotiated between customer and CenturyLink project managers;
- Further understanding of the network, equipment and site-specific requirements is necessary before detailed scope of work and project plan are developed;
- Phases will overlap to meet implementation timeframes;
- The customer will request extended demark on CenturyLink/LEC ordered loops.

DRAFT

20. Selective Router Decommissioning Plan

External Dependency: Successful PSAP cutover and OSP cooperation CenturyLink works with all OSPs in Nebraska to decommission their selective routers.

21. Project Management Approach

21.1 Review and Validate all Technical Requirements with STATE

One of the first tasks for the project is the review and validation of the technical requirements for NG-911 Services early in the project. This effort will minimize the implementation of incorrect requirements, change orders, schedule delays, and cost increases.

22. Execution

22.1 Communication, Tracking and Escalation Plan

The designated CenturyLink Program Manager, Maggie Cook, is responsible for the overall success of this project. As such, all project related questions, concerns, or issues should be directed to the Program Manager. During the project planning phase, the CenturyLink Program Manager meets with all stakeholders to establish a project status and issues tracking document, a weekly communications cadence and methodology for addressing any issues that may arise outside of these weekly meetings. An escalation matrix will be provided for both implementation and service issues should the customer feel that additional focus is necessary.

22.2 Technical Escalation Matrix

The following table outlines the escalation steps for any technical issues with the contract, implementation, or documentation required during the buildout phase of the NG-911 project. The Program Manager should always be the first line of contact.

CenturyLink	Title / Role	Office Phone	Cell Phone	email address
Rachel Renteria	Sr. Post Sales Engr. – Data Escalations (1st lvl)	214 989 3577	214 989 3577	Rachel.Renteria@centurylink.com
John Atkinson	Mgr, Post Sales Engr II – Data Escalations (2nd lvl)	602-563-3292	480-888-5104	John.Atkinson@centuryLink.com
Caroline Bussell	Client Support Manager – Order/Billing (1st lvl)	N/A	317 697 4499	Caroline.Bussell@centurylink.com
Mary Anderson	Mgr, Sales Support – Data Escalations (2nd lvl)	402-998-7386	402-215-2282	Mary.Anderson1@CenturyLink.com

DRAFT

23. Change Management

The established Change Management (CM) process is one of the many tools used to assist the Program Manager to provide systematic control of all changes and better overall project management. Comprehensive change management is vital to the success of complex projects and is necessary to ensure adequate control over the triple constraints of money, time, and scope while maintaining overall project execution.

The Program Manager (PM) tracks changes as part of the every-day process of project implementation. The PM will document and manage changes to ensure that changes do not affect the project negatively. Scope, budget, schedule, and documentation will all be tracked against the contract. Changes in any of these areas will be vetted within the CenturyLink tea. Once approved by the internal CenturyLink Change Management Board, they will be forwarded to the State for review and approval/rejection.

The PM will provide a change management form to the State of Nebraska for approval prior to implementing the CM process.

23.1. Planned Maintenance

CenturyLink performs scheduled maintenance to ensure the successful growth of the network. Scheduled maintenance is planned with as little customer impact and as much advance notice as possible. We are committed to using standardized methods and procedures for efficient and prompt handling of all changes to minimize the adverse impact of change-related incidents upon service quality.

CenturyLink sends customers email notifications with:

- Description of the work
- Date & time (GMT) of the scheduled maintenance
- List of the impacted services
- Location of the maintenance
- Status of the maintenance

Contact information for questions or concerns:

CenturyLink uses a Global Change Request (GCR) number as the unique identifier for network maintenance.
Call 855.CGH.MGMT (855.244.6468) option 1
Direct dial call 720-888-0229 or 01256 731731
Email change.Management.na@CenturyLink.com

DRAFT

24. Risk Management Plan

24.1 Risk Identification

Risks to a project are presented in many ways. There are internal risks with the project team and external risks that are outside of the project scope. The PM will manage and present these risks to the team to ensure they are considered and addressed as the project progresses.

CenturyLink identifies, analyzes, and responds to all possible risks to ensure delivery of service is not interrupted. During the planning phase of the project, the Program Manager reviews each step of the project/program to establish if it presents an "at risk" situation that may delay the project or create unreasonable downtime for each PSAP. As risks are identified throughout the life cycle of the project, the Program Manager develops a mitigation or contingency plan to ensure a successful transition of all contracted services. The next section illustrates some the potential risks.

24.2 Potential Risks and Avoidance Measures

Below are the known risks that may affect the execution and schedule of the project. Each risk identified is associated with a mitigation and contingency plan.

Example of Risk Assessment and Avoidance Matrix.

Area of Risk	Probability	Responsible Parties	Impact	Mitigation Strategy
Pre-configuration of Equipment and Pre-testing is not successful.	High *(when site is moving to a different vendor, equipment, new hardware, and software)*	CenturyLink, Vendor and (possibly) Customer	If customer information received or entered for configuration is incomplete or inaccurate or non-compatible it will delay cutover until resolved. If discovered during cut over it could result in stopping cut over and moving back to previous hardware and software.	Obtain technical support from Vendor as needed.
Purchase Order Errors	Avoidable	CenturyLink and State	Installation interval not met.	Conduct a complete inventory when equipment gets on site.
Others				

DRAFT

25. Public Safety NOC

CenturyLink is dedicated to providing the State of Nebraska with ongoing support for all of the installed services. We embrace a strong operational philosophy that is customer-focused and highly responsive. Strict performance metrics drive our internal organizations to deliver quality service to the customer on a consistent basis. In the event an issue arises with the service, CenturyLink works to rapidly respond to inquiries and quickly resolve any problems. The Public Safety team is responsible for your experience at critical times, such as when your service is having an outage or impairment. We strive to combine our technical expertise with a positive and pleasant customer experience.

25.1 NG911 PSS NOC Technicians

Once the CenturyLink Service has been installed, a NG911 PSS NOC technician becomes point of contact for service-related issues. The NG911 PSS NOC technician is trained to quickly address technical issues related to the CenturyLink service. The primary objectives of a NG911 PSS NOC technician are to provide start-to-finish accountability for network service performance and to drive resolution of issues based on the first call.

25.2 Trouble ticket handling for State of Nebraska Tickets

When the State of Nebraska NOC opens a trouble ticket directly with CenturyLink NG911 PSS NOC for services covering State of Nebraska Technologies circuits, CenturyLink sends a ticket notification via email to individuals within the State of Nebraska Program Management team notifying that a ticket has been opened by the NOC. This is the same ticket notification that is sent to the State of Nebraska NOC. Subsequent auto ticket notifications via email will continue to be sent, giving status on the progress of the fix action hourly until the ticket is closed. Normal ticket escalation process that has been established on tickets opened by the NOC for State of Nebraska tickets will need to occur from the State of Nebraska NOC to the CenturyLink Government Solutions Control Center.

25.3 Trouble Management

To report an issue, a ticket will need to be opened via the CenturyLink Portal. This ensures that the customer will receive the most up-to-date status as soon as it becomes available. The Portal also improves accuracy in routing tickets to the appropriate team by identifying what is impacting the service. Tickets can also be opened by calling our Public Safety NG911 NOC at **1-800-357-0911.**

25.4 Trouble Ticket Classifications

The priority for the ticket is based on the information provided while opening the ticket. It determines whether the ticket is classified as **Out of Service** (a complete disruption of service which renders it unusable) **or Impaired (**a problem which disrupts quality or connectivity of a service or feature).

25.5 Escalation Procedures

The escalation path is product and equipment agnostic and is exclusively for CenturyLink's valued NG911 clients.

DRAFT

CenturyLink Public Safety Service (PSS) Network Operations Center (NOC)				
Group	Name	Title	Contact	Number
PSS NOC	PSS Network Operations Center	24x7	PSS NOC Center Main Number	800-357-0911
PSS NOC	1st Level Escalation	1st Level Escalation	PSS NOC Center Main Number	800-357-0911 – request a first level escalation
PSS NOC	2nd Level Escalation	PSS NOC Supervisor – Monday – Friday 7am to 3pm CST	Linda Capetz	612-256-6357 (O)
		PSS NOC Supervisor – Monday – Friday 3pm to 11pm CST	Will Cave	612-439-8968 (O)
		PSS NOC Duty Supervisor After hours, weekends and holidays	Duty Supervisor	833-291-4450
PSS NOC	3rd Level Escalation	PSS NOC Manager	Carl Klein	612-439-8841 (O)
				651-442-5999 (M)
PSS NOC	4th Level Escalation	PSS NOC Director	Sally Bakarich	720-888-8988 (O)
				303-507-4367 (M)
PSS NOC	5th Level Escalation	VP Centralized Services	Jorge Magana	404-526-4428 (O)
				404-384-1576 (M)

updated 2/19/2020

25.6 Entrance Criteria for a Defect/Chronic ticket:

All of the following entrance criteria for a Defect and Chronic ticket must be met:

1. A Service Identifier (SID) has had three (3) or more Customer Trouble tickets, worked to resolve, in the past 45 days. Or, the SID has had five (five) Customer Trouble tickets, worked to resolve, in the past 6 months.

2. Each Customer Trouble ticket has been worked on a legitimate service issue. Tickets reporting on non-Customer Trouble issues should not be taken into consideration (i.e. duplicate tickets, GCR related tickets, Customer Power, etc.).

3. A Customer contact has requested that a Chronic ticket be opened on their circuit.

4. A Defect or Chronic ticket is not already open on the SID.

25.7 Reason for Outage (RFO) Request

RFO's can be requested one of the following three ways:

1. Initiate the request by calling the CenturyLink Service Center – 1-877-453-8353 and select the appropriate option (Transport, IP, Voice, etc.). Provide the technician with the ticket number associated to the closed case and let them know that you are the customer and request an RFO.

2. From the My CenturyLink Customer Portal go to "Service Management" > "Trouble Ticketing" > "View Trouble Tickets." A list of trouble tickets is displayed, select the ticket in question by locating it in the list or by typing it into the search box. Once the ticket in question has been selected, click the "Request Reason for Outage" button. Enter the requested information and hit "Submit."

DRAFT

3. Send an email to the assigned Customer Support Manager with the following information:
    - Contact name of the person to whom the RFO should be addressed
    - Email address of the person(s) to whom the RFO should be sent
    - CenturyLink Ticket number that corresponds with the RFO request
    - Reason for the RFO request
    - Any specific questions that need to be addressed in the RFO
    - RFO's are not provided for the following:
        - A service impairment or outage caused by the customer's network or equipment.
        - Open trouble tickets (requests can be opened once the ticket is closed).
        - Tickets closed to no trouble found, cleared before testing, cleared during testing.
        - "Switch hits," "latency"," or "failed calls" for which the issue has not been investigated and documented within a previous trouble ticket.

Receiving the RFO:

CenturyLink is committed to providing all valid RFOs within five business days of the initial request. The Service Level Objective (SLO) is measured from official request time (in queue start time) to the time the RFO is sent out (service restoral time). Weekends and holidays, as well as any time spent gathering follow-up information pertaining to questions, are not included in the SLO timeframe.

DRAFT

26. Vocabulary

Acronym	Definition
ACD	Automatic Call Distribution
API	Application Program Interface
ATP	Acceptance Test Plan
BCF	Border Control Function
CAD	Computer Aided Dispatch
STATE	Nebraska Communications Authority
CCM	Customer Care Manager
CenturyL	CenturyLink
DNS	Domain Name Server
ECRF	Emergency Call Routing Function
ESRP	Emergency Services Routing Proxy
FCC	Federal Communications Commission
FQDN	Fully qualified domain name
GIS	Geographic Information System
GUI	Graphical User Interface
ICMP	Internet control messaging protocol
ISUP	Integrated services digital network
ITIL	Infrastructure Technology Information Library
LATA	Local area transport area
LDB	Location Database
LEC	Local Exchange Carrier
LNG	Legacy Network Gateway
LPG	Legacy PSAP Gateway
LVF	Location Validation Function
MPC	Mobile provisioning center
NENA	National Emergency Number Association
NG-911	Next Generation 911 Services
NGCS	Next Generation Core Services
NGS	Next Generation Services
NOC	Network Operations Center
STATE	Nebraska State Authority
OSP	Originating Service Provider
PIF	Protocol Internetworking Function
PM	Program Manager

DRAFT

Acronym	Definition
PMP	Program Management Plan
PNSP	Primary Network Service Provider
POI	Point of Interface
POP	Point of Presence
PRF	Policy Routing Function
PSAP	Public Safety Answering Point (911 center)
RNSP	Regional Network Service Provider
SBC	Session Border Control
SD-WAN	Software-Defined Wide Area Network
SIP	Session Initiation Protocol
SLA	Service Level Agreement
SME	Subject Matter Expert
SOW	Statement of Work
TDM	Time Domain Multiplexer
URI	Uniform Resource Identifier
URN	Uniform resource name
VPC	VoIP Provisioning Center

DRAFT

SAMPLE NG911 STAGING & ACCEPTANCE CHECKLIST

PSAP NAME

PROJECT TASK	COMPLETE	CONFIRMED BY	DATE	Notes:
HOST NETWORK COMPLETE (PROJECT PLAN)				
UPS Testing				
Physical Network Connections Complete				
Circuit 1				
Network CUG confirmed				
Circuit Confirmed Up/Up				
BFD Established				
Able to Ping HLR and PHX and tunnels are up				
QOS confirmed				
EX1's can ping both sites				
PSAP EX1 - Monitoring online				
Circuit 2				
Network CUG confirmed				
Circuit Confirmed Up/Up				
BFD Established				
Able to Ping HLR and PHX and tunnels are up				
QOS confirmed				
EX1's can ping both sites				
Premigration Tasks Complete (Equipment testing)				
1.) Call Routed to PSAP through IEN - Test call sent to PSAP. Caller confirms routing and audio quality				
2.) Alternate Route via all trunks manual OOS- Set all trunks out of service and send test call.				
3.) Test both call paths to the PSAP - Force a test call to route through Englewood and Miami				
4.) Abandonment Routing- Intrado resource manually puts PSAP into abandoned state - test call made				
5.) Un-abandonment routing - Intrado resource manually unabandons PSAP.				
6.) Ring no answer timer- Test call sent to PSAP. Call is allowed to ring continuously until rolling over to alternate route.				
7.) Caller Hang Up - test call sent to PSAP, caller Hangs up prior to the PSAP answering. Confirm CPE abandon call feature works as designed.				
8.) Fixed Bridge conferencing confirmation - 3 digit star codes. - Test call sent to PSAP and transferred to 3 digit star code. All parties on the bridge talk to confirm conferencing is established. Call taker at PSAP disconnects. Caller confirms that caller and call taker are still bridged.				
9.) Manual Transfer to valid local TN - Test call sent to PSAP Manual Transfer to local TN				
10.) Manual Transfer to a Long distance Cell- Test call sent to PSAP , Manual Transfer to local TN				
11.) Test EXFO EX1				
Viper				
Premigration for xxxxxxxx Milestones Met (xxxxxxxy Project Log)				
Front Room				
Workstations configured and ready				
Viper to Host				
Admin Lines Make/Receive Calls				
Admin Transfers. * Hook Flash (3 way calling on lines) Can add conferencing on the lines. (Would need to use two admin lines) Ellen L to add the 3 way calling on lines.				
CAD Spill				
Radio Cable Tested				

PUNCH LIST ITEM	COMPLETE	DESCRIPTION

AGENCY	AUTHORIZED BY	VOTE

Test Plan

Introduction

The acceptance test plan (ATP) contained here is intended to demonstrate that the solution developed by CenturyLink meets all of the requirements set by the State of Nebraska for a Statewide ESInet and NG911 Solution. This will cover the following major areas:

- NG911 Aggregation network
- NG911 NG Core Services (NGCS)
- Integration
- System Monitoring (Dashboard SD-WAN controller)
- NG911 PSAP Trunk testing.
- EXFO probes to PSAP
- Pre-cut PSAP Testing

This Sample test plan was written based on the understanding of the CenturyLink RFP response for a Statewide ESInet and next Generation Core Services Solution requirements. CenturyLink will provide a custom test plan and submit to the State of Nebraska for approval prior to starting this project and upon award of contract.

Test Tools and Equipment Utilzed to Conduct Test and Test Facilities

The test tools used to execute the ATP consist of:
Networking tools – ping, traceroute, dns query etc.
System specific tools – policy editor and viewer, GIS data viewer …
Exfo Active Assurance (AA) call generator and probe – generates test calls from aggregation network through NGCS to probe at PSAP location

Manual calls – call initiated from aggregation network through NGCS core to PSAP call taker
CentuiryLink lab PSAP – used to validate core functionality prior to testing with production PSAPs.

Simulators and process for simuation of test calls (Refer to each tab for info in this workbook)

Test thresholds

Pass, Fail, Restart Test

Configuration of tests - Custom to be determined

Test Strategy & Environment

The primary objective is to demonstrate system readiness leading to a migration of traffic from the current systems to the new one. Based on the approach taken by State of Nebraska to minimize legacy integration all of the PSAP in the entire state must be ready to accept traffic prior to any traffic migration. Test execution will be sequenced starting with network connectivity followed by major system components and finishing with full call testing with each PSAP. The sections in the ATP correspond to the functional areas previously mentioned. The three sections related to the PSAP are templates. They will be repeated for each PSAP. The start of acceptance testing assumes that the component hardware and software has been installed and the CenturyLink has completed our internal Network Readiness Testing (NRT). ATP execution can be sequenced as follows:

Final Documenation of Test - CenturyLink Project Manager will provide the State of Nebraska and PSAP of final results of test.

Network Connectivity (Can be run simultaneously)
- NGCS – DNS
- NG911 Aggregation – NGCS network
- NGCS – network
- NG911 Trunk – ESInet for each PSAP and CTL lab

System Components
- Integration – Policy DB
- Integration – Location DB
- Integration – State GIS (Utilizes a common NG9-1-1 GIS data set available for all PSAPs when a common NG9-1-1 GIS data set is established
- NGCS - ECRF
- NGCS – ESRP
- NG911 Aggregation - LIF/NIF
- NGCS – i3 Logging
- System Monitoring
- Exfo Probe to PSAP – CTL lab
- Pre-Cut PSAP Testing – CTL lab

Call Testing
- Exfo Probe to PSAP – per PSAP
- Pre-cut PSAP testing - per PSAP.

Test #	Test Procedure	Expectations	Test Team	PSAP Resource	Execution Date	Result PassFail	Tester (print name)	Status
OSP Trunking								
1	SS7 ISUP COT testing on trunk group 1	COT testing passes	CTL/OSP	N				
2	SS7 ISUP COT testing on trunk group 2	COT testing passes	CTL/OSP	N				
3	CenturyLink disables multiple DS0s to TDM gateway 1	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL/OSP	N				
4	CenturyLink disables multiple DS0s to TDM gateway 2	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL/OSP	N				
5	CenturyLink disables DS1 to TDM gateway 1	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL/OSP	N				
6	CenturyLink disables DS1 to TDM gateway 2	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL/OSP	N				
NGCS Network								
7	CTL disables GigE 1 between CTL aggregation network and NGCS	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL	N				
8	CTL disables GigE 2 between CTL aggregation network and NGCS	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL	N				
9	CTL completely disables aggregation network SBC 1	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL	N				
10	CTL completely disables aggregation network SBC 1	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL	N				
Network								
11	CTL disables GigE 1 between CTL aggregation network	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL	N				
12	CTL disables GigE 2 between CTL aggregation network a	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL	N				
13	CTL completely disables aggregation network SBC 1	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL	N				
14	CTL completely disables aggregation network SBC 1	9-1-1 OPS sees alarm / Regional Dashboard indicates alarm/ Prime Dashboard indicates alarm	CTL	N				

Test #	Test Procedure	Expectations	Test Team	PSAP Resource	Date	Result	Tester (print name)	Status
DNS								
1	From network element run DNS A and SRV queries for all NGCS elements		CTL	N				
ESRP								
2	Disable an ESRP. Test call	Cal still completes with second ESRP.	CTL	N				
LIF/NIF								
3	Disable an LIF/NIF. Test call	Cal still completes with second LIF/NIF.	CTL	N				
ECRF								
4	Disable an ECRF. Test call	Cal still completes with second ECRF.	CTL	N				
LDB								
5	Disable an LDB. Test call	Cal still completes with second LDB.	CTL	N				
i3 Logging								
6	Retrieve logs for test calls and validate.		CTL	N				
Notes:								

Test #	Test Procedure	Expectations	Test Team	PSAP Resource	Date	Result	Tester (print name)	Status
Policy								
1	For each PSAP in the State of Nebraska + CTL lab load PSAP policy viapolicy editor tool. Verify Policy rules are transferred to all copies of the Policy Store.	Policy rules for each PSAP are transtered from CTL to the policy store	CTL	N				
2	Use the Policy editor tool to perform an update on the CTL lab PSAP policy. Verify update is transferred to all copies of the State of Nebraska Policy Store.	Policy update for CTL lab PSAP are updated from the policy store	CTL	N				
Location DB								
3	Create SOI records for test telephone numbers used in ATP. Have prime process them and needed data to populate the r Location DB.	Telephone numbers populated in LDB.	CTL	N				
State GIS								
4	Validate all state GIS data has been replicated to all copies in the NGCS core.	Initial GIS data loaded	CTL	N				
5	Generate a GIS update and validate that it is updated in all copies of the regional GIS.	Update populated in regional GIS DB	CTL	N				
Aggregation Failover								
6	Disable side-A connectivity to the core and run a test call.	Call will successfully route through the regional NGCS. Alarms will be generated.	CTL/PSAP	Y				
7	Disable side-A and side B connectivity to the core and run a test call.	Call will successfully route through the prime NGCS. Alarms will be generated.	CTL/PSAP	Y				
Core Failover								
8	Disable side-A connectivity to the NGCS core from the aggregation network and run call.	Call will successfully route through the regional NGCS. Alarms will be generated.	CTL/PSAP	Y				
9	Disable side-A and side-B connectivity to the NGCS core from the aggregation network and run call.	Call will successfully route through the prime NGCS. Alarms will be generated.	CTL/PSAP	Y				
PSAP transfer								
10	Ctl make test call with known call party number for given PSAP. Call is routed to PSAP and answered. Caller identifies call as a test call. Have call-taker transfer call to another PSAP ourside the region. After connecting have first PSAP call taker hang up. Then have second PSAP call taker hang up.	Original call is answered and call is successfully transferred to second PSAP via the Primer ESInet	CTL/PSAP	Y				
Notes:								

Test #	Test Procedure	Expectations	Test Team	PSAP Resource	Date	Result	Tester (print name)	Status
Dashboard								
1	Verify user accounts for logging into dashboard	Login successful and dashboard displayed		N				
2	Verfiy status of each of the monitored functional elements	Status are updated		N				
3	During testing that disables a network element or link verify that the status of the network element changes in the dashboard	Network element status enabled		N				
4	Verify Call statistics are updated after test calls.	statistics are updated		N				
SD-WAN Controller								
5	Verify user accounts for logging into SD-WAN controller	login successful		N				
6	Utilize SD-WAN controller to configure SD-WAN connections.			N				
Ticketing								
7	Verify user accounts for logging into ticketing system	Login successful		N				
Notes								


Test #	Test Procedure	Expectations	Test Team	PSAP Resource	Date	Result	Tester (print name)	Status
ESInet	For each PSAP							
1	CPE-SD-WAN Device 1 ping from Priv Router 1 TBD IP Address = Ethernet-1 IP PSAP end		CTL	N				
2	CPE-SD-WAN Device 1 ping from Priv Router 2 TBD IP Address = Ethernet-1 IP PSAP end		CTL	N				
3	CPE-SD-WAN Device 2 ping from Priv Router 1 TBD IP Address = Ethernet-2 IP PSAP end		CTL	N				
4	CPE-SD-WAN Device 2 ping from Priv Router 2 TBD IP Address = Ethernet-2 IP PSAP end		CTL	N				
5	Tracert to SD-WAN Device 1 - confirm and document network path from Priv Router 1. On Ethernet 1 via IP TBD		CTL	N				
6	Tracert to SD-WAN Device 1 - confirm and document network path from Priv Router 2. On Ethernet 1 via IP TBD		CTL	N				
7	Tracert to SD-WAN Device 2 - confirm and document network path from Priv Router 1. On Ethernet 1 via IP TBD		CTL	N				
8	Tracert to SD-WAN Device 2 - confirm and document network path from Priv Router 2. On Ethernet 1 via IP TBD		CTL	N				
9	Tracert to SBC1 - confirm and document network path from Priv Router 1. On Ethernet 1 via IP TBD		CTL	N				
10	Tracert to SBC1 - confirm and document network path from Priv Router 2. On Ethernet 1 via IP TBD		CTL	N				
11	Tracert to SBC2 - confirm and document network path from Priv Router 1. On Ethernet 1 via IP TBD		CTL	N				
12	Tracert to SBC2 - confirm and document network path from Priv Router 2. On Ethernet 1 via IP TBD		CTL	N				
13	Ping LPG1 from SBC1		CTL	N				
14	Ping LPG2 from SBC2		CTL	N				
15	NGCS BCF1 traceroute to PSAP SBC1		CTL	N				
16	NGCS BCF1 traceroute to PSAP SBC1		CTL	N				
17	NGCS BCF2 traceroute to SBC1		CTL	N				
18	NGCS BCF2 traceroute to PSAP SBC1		CTL	N				
MGMT Network								
19	SSH to SD-WAN Device 1 login, confirm and document network path from Priv Router 1.		CTL	N				

Test #	Test Procedure	Expectations	Test Team	PSAP Resource	Date	Result	Tester (print name)	Status
20	SSH to SD-WAN Device 1 login, confirm and document network path from Priv Router 2.		CTL	N				
21	SSH to SD-WAN Device 2 login, confirm and document network path from Priv Router 1.		CTL	N				
22	SSH to SD-WAN Device 2 login, confirm and document network path from Priv Router 2.		CTL	N				
23	SSH to SBC1 login, confirm and document network path from Priv Router 1.		CTL	N				
24	SSH to SBC1 login, confirm and document network path from Priv Router 2.		CTL	N				
25	SSH to SBC2 login, confirm and document network path from Priv Router 1.		CTL	N				
26	SSH to SBC2 login, confirm and document network path from Priv Router 2.		CTL	N				
27	HTTPS to SD-WAN 1 login, confirm and document network path from Priv Router 1.		CTL	N				
28	HTTPS to SD-WAN 1 login, confirm and document network path from Priv Router 2.		CTL	N				
29	HTTPS to SD-WAN 2 login, confirm and document network path from Priv Router 1.		CTL	N				
30	HTTPS to SD-WAN 2 login, confirm and document network path from Priv Router 2.		CTL	N				
Notes:								

Test #	Test Procedure	Expectations	Test Team	PSAP Resourc	Date	Result	Tester (print name)	Status
1	Run SIP Active Assurance call on side-A; verify test completes; Observe Exfo call reporting.	Call completes as expected	CTL	N				
2	Run SIP Active Assurance call on side-B; verify test completes; Observe Exfo call reporting.	Call completes as expected	CTL	N				
3	Disable ethernet port to EX1 probe for side-A. Run SIP Active Assurance call on side-A; Verify test call fails. Check for alarm	Call failed, alarm raised	CTL	N				
4	Disable ethernet port to EX1 probe for side-a and side-B. Run SIP Active Assurance call on side-B; Verify test call fails. Check for alarm	Call failed, alarm raised	CTL	N				
Notes:								

Test #	Test Procedure	Expectations	Test Team	Prime NOC Resource	Date	Result	Tester (print name)	Status
DNS								
1	Query (AAAA and SRV) DNS for all FQDNs associated with the PSAP.	Query successful	CTL					
2								
Policy								
3	Retrieve PSAP specific policy from policy store and verify it is correct.	PSAP policy validated	CTL					
Test Calls								
4	Ctl make test call with known call party number for given PSAP. Call is routed to PSAP and answered. Caller identifies call as a test call. Have call taker hang up.	Call is routed to PSAP and answered.	CTL/PSAP					
5	Ctl make test call with known call party number for given PSAP. Call is routed to PSAP and answered. Caller identifies call as a test call. Have call-taker transfer call to another PSAP. After connecting have first PSAP call taker hang up. Then have second PSAP call taker hang up.	Original call is answered and call is successfully transferred to second PSAP	CTL/PSAP					
6	Ctl make test call with known call party number for given PSAP. . Caller identifies call as a test call. Have call-taker transfer call to known PSTN destination. After connecting have first PSAP call taker hang up. Then have second PSAP call taker hang up.	Original call is answered and call is successfully transferred to known PSTN destination	CTL/PSAP					
7	Disable side-A link to PSAP. Ctl make test call with known call party number for given PSAP. Caller identifies call as a test call. Have call taker hang up.	Call is routed to PSAP and answered. Alarms are generated.	CTL/PSAP					
8	Disable side A and side-B link to PSAP. Ctl make test call with known call party number for given PSAP. Caller identifies call as a test call. Have call taker hang up.	Call is routed to overflow PSAP as defined in Policy Store for PSAP. Alarms are generated and status of PSAP changes in Dashboard	CTL/PSAP					
Notes:								


ID	Task Name	Duration	Start	Finish
0	**Nebraska NGCS Notional Project Plan**	**515 days**	**Tue 9/1/20**	**Mon 8/22/22**
1	**Phase I: Planning and Design**	**17 days**	**Tue 9/1/20**	**Wed 9/23/20**
2	Sign contract	1 day	Tue 9/1/20	Tue 9/1/20
3	Receive PO	1 day	Wed 9/9/20	Wed 9/9/20
4	Publish preliminary PM Plan for stakeholder review	1 day	Thu 9/10/20	Thu 9/10/20
5	Schedule stakeholder kickoff meetings	1 day	Fri 9/11/20	Fri 9/11/20
6	Meet with state and begin mobilization	2 days	Mon 9/21/20	Tue 9/22/20
7	Publish revised PM Plan and FSB	1 day	Wed 9/23/20	Wed 9/23/20
8	**South Central Region**	**81 days**	**Thu 9/24/20**	**Thu 1/14/21**
9	**OSP Connectivity Planning**	**77 days**	**Thu 9/24/20**	**Fri 1/8/21**
10	Distribute OSP survey forms and schedule individual OSP discussions	7 days	Thu 9/24/20	Fri 10/2/20
11	Conduct OSP discussions	60 days	Mon 10/5/20	Fri 12/25/20
12	Develop Draft OSP connectivity plan	10 days	Mon 12/28/20	Fri 1/8/21
13	Draft Aggregation plan and circulate for comment	10 days	Mon 12/28/20	Fri 1/8/21
14	**Survey (TBD) PSAPs and Dispatch Centers**	**15 days**	**Mon 10/5/20**	**Fri 10/23/20**
15	Publish survey form	1 day	Mon 10/5/20	Mon 10/5/20
16	schedule visits	5 days	Tue 10/6/20	Mon 10/12/20
17	Conduct visits, compile data and revise plans accordingly	15 days	Tue 10/13/20	Mon 11/2/20
18	Publish revised PM Plan	1 day	Tue 11/3/20	Tue 11/3/20
19	**Enhance datacenters as needed**	**7 days**	**Wed 11/4/20**	**Thu 11/12/20**
20	Confirm rack space and other DC needs satisfied	5 days	Wed 11/4/20	Tue 11/10/20
21	Plan for deploying ECRF, LVF and other GIS components	5 days	Wed 11/4/20	Tue 11/10/20
22	Identify enhancements needed in datacenters	5 days	Wed 11/4/20	Tue 11/10/20
23	Order new components and schedule labor	2 days	Wed 11/11/20	Thu 11/12/20
24	Identity and provision POIs	5 days	Wed 11/11/20	Tue 11/17/20
25	**Revise network design IAW tasks above**	**52 days**	**Wed 11/4/20**	**Thu 1/14/21**
26	Confirm network typology and provisioning plans	5 days	Wed 11/4/20	Tue 11/10/20
27	ID need for legacy gateways and provision	3 days	Wed 11/4/20	Fri 11/6/20
28	Complete NENA checklist 75-002	2 days	Wed 11/18/20	Thu 11/19/20

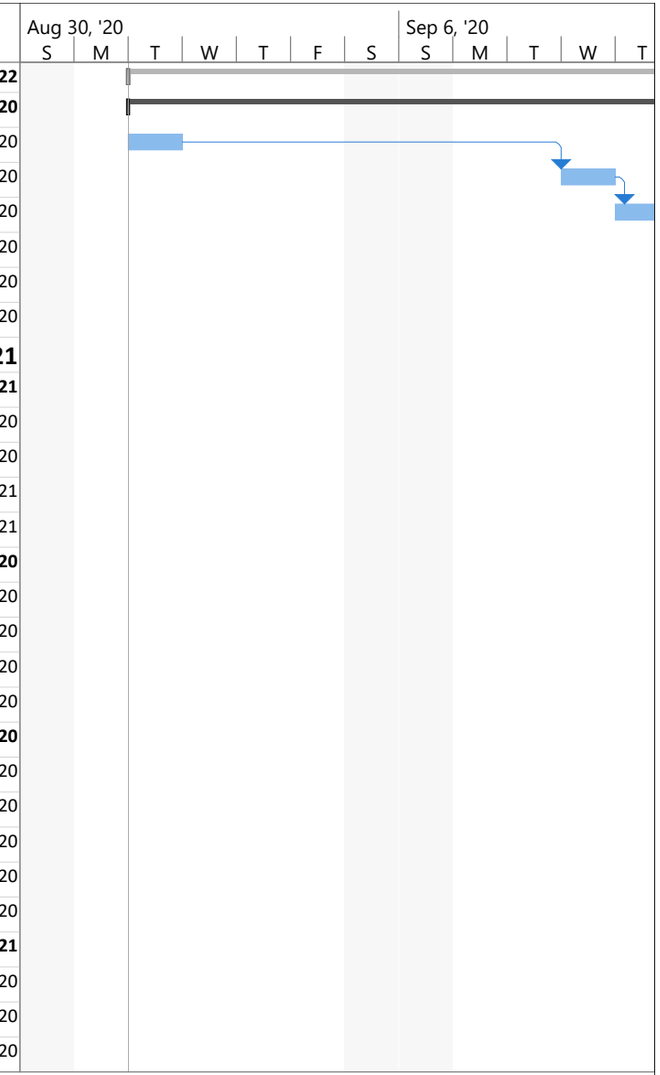

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task
Split
Milestone
Summary
Project Summary
Inactive Task
Inactive Milestone
Inactive Summary
Manual Task
Duration-only
Manual Summary Rollup
Manual Summary
Start-only
Finish-only
External Tasks
External Milestone
Deadline
Progress
Manual Progress


ID	Task Name	Duration	Start	Finish
29	Confirm compliance with network security plan	2 days	Fri 11/20/20	Mon 11/23/20
30	Confirm transport independence and diversity	5 days	Tue 11/24/20	Mon 11/30/20
31	Prepare circuit plan and place orders	5 days	Tue 11/24/20	Mon 11/30/20
32	**ID changes to standard dashboard required for this project**	**30 days**	**Wed 11/4/20**	**Tue 12/15/20**
33	**ID PSAP needs and place orders**	**30 days**	**Wed 11/4/20**	**Tue 12/15/20**
34	Schedule installs and establish links to PSAP CPE vendors	30 days	Wed 11/4/20	Tue 12/15/20
35	Develop test plans with all vendors to ensure interface effectiveness	30 days	Wed 11/4/20	Tue 12/15/20
36	**Provision Monitoring**	**52 days**	**Wed 11/4/20**	**Thu 1/14/21**
37	Program OCOM	10 days	Wed 12/16/20	Tue 12/29/20
38	Program FortiSIEM	10 days	Wed 12/16/20	Tue 12/29/20
39	Plan E-Bonding capability	10 days	Wed 12/16/20	Tue 12/29/20
40	Adapt Call Data Record Management System / 9-1-1 Traffic Logging to satisfy state requirements	10 days	Wed 12/16/20	Tue 12/29/20
41	**Provision NGCS (Core Services) per NENA standards**	**47 days**	**Wed 11/11/20**	**Thu 1/14/21**
42	Provision two geographically diverse cores capable of 99.999% availability	30 days	Wed 11/18/20	Tue 12/29/20
43	Confirm active-active deployment negates any possible single-points-of-failure	1 day	Wed 12/30/20	Wed 12/30/20
44	**Design GIS solution**	**47 days**	**Wed 11/11/20**	**Thu 1/14/21**
45	Finalize plans for ECRF, LVF and other GIS components	45 days	Wed 11/11/20	Tue 1/12/21
46	Identify and provision GIS elements for use in datacenters	1 day	Wed 1/13/21	Wed 1/13/21
47	Confirm two instances of ECRF/PRF	1 day	Wed 1/13/21	Wed 1/13/21
48	Confirm data QA/QC manager is capable of meeting state and local needs	1 day	Thu 1/14/21	Thu 1/14/21
49	Publish training plan for stakeholder comment	50 days	Wed 11/4/20	Tue 1/12/21
50	**Phase II: Deployment**	**140 days**	**Wed 11/11/20**	**Tue 5/25/21**
51	**Complete OSP integration**	**50 days**	**Mon 1/11/21**	**Fri 3/19/21**
52	Execute interconnect agreements	10 days	Mon 1/11/21	Fri 1/22/21
53	Deploy i3-Interconnect where needed	30 days	Mon 1/25/21	Fri 3/5/21
54	Execute POI and datacenter interconnection	10 days	Mon 3/8/21	Fri 3/19/21
55	**Install datacenter links and enhancements**	**124 days**	**Wed 11/11/20**	**Mon 5/3/21**
56	Complete rack installs	7 days	Wed 11/11/20	Thu 11/19/20
57	Deploy core services and test diversity and compliance with call delivery standards.	30 days	Fri 11/20/20	Thu 12/31/20

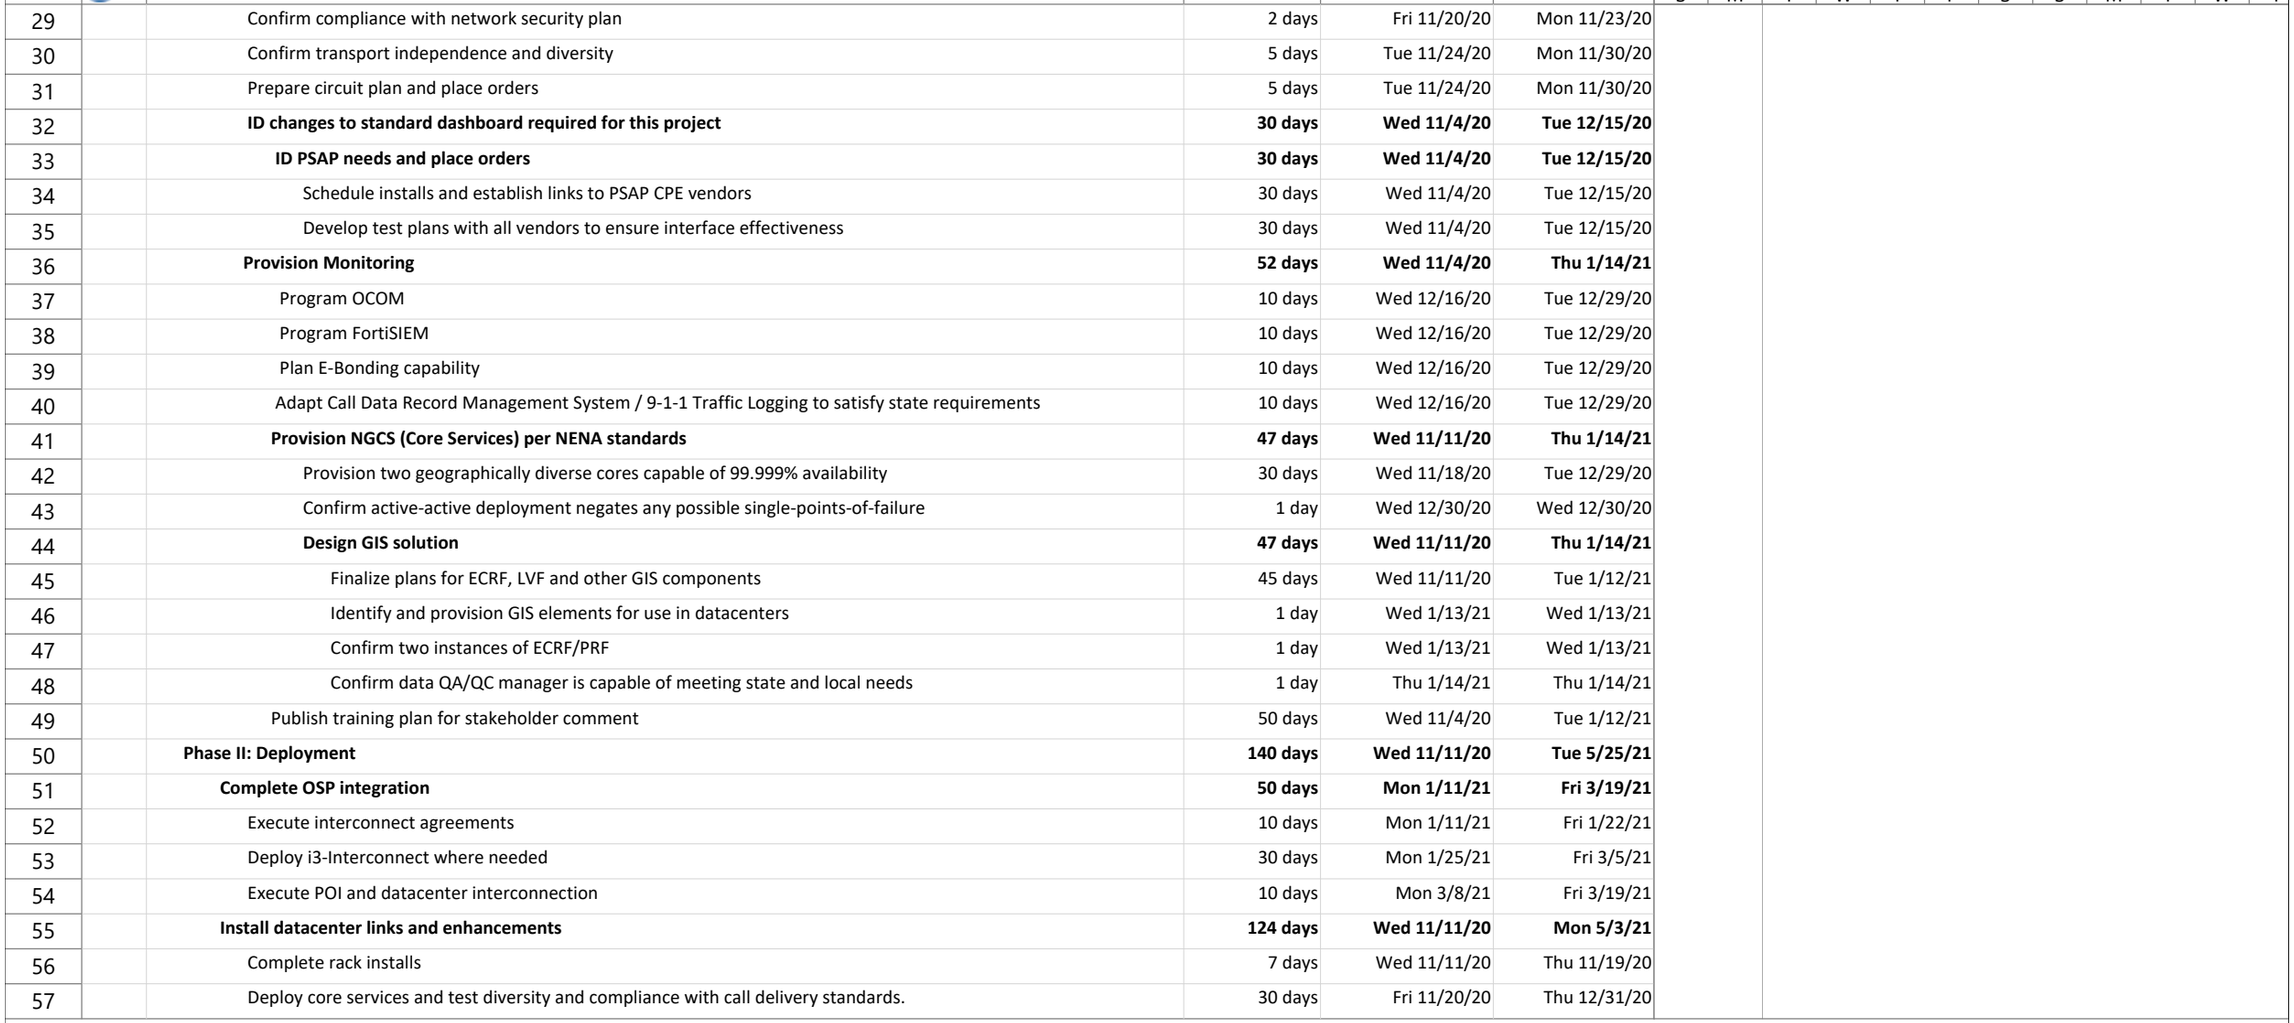

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	


ID	Task Name	Duration	Start	Finish
58	Install GIS components	30 days	Fri 11/20/20	Thu 12/31/20
59	Install circuits, cross-connects and FOC	30 days	Mon 3/22/21	Fri 4/30/21
60	Confirm datacenter readiness	1 day	Mon 5/3/21	Mon 5/3/21
61	Install network connections and gateways	70 days	Mon 1/25/21	Fri 4/30/21
62	**Complete PSAP configurations**	**6 days**	**Mon 5/3/21**	**Mon 5/10/21**
63	Test CPE interfaces	5 days	Mon 5/3/21	Fri 5/7/21
64	Test circuits	5 days	Mon 5/3/21	Fri 5/7/21
65	Execute interface agreements if needed with CPE vendors	1 day	Mon 5/10/21	Mon 5/10/21
66	Confirm end-to-end connectivity and gateways to accommodate legacy systems	1 day	Tue 5/11/21	Tue 5/11/21
67	Standup POIs	1 day	Wed 5/12/21	Wed 5/12/21
68	Publish and review cutover plan with stakeholders	10 days	Wed 5/12/21	Tue 5/25/21
69	**Phase III: Cutover**	**214 days**	**Tue 9/1/20**	**Fri 6/25/21**
70	Execute training plan	3 days	Wed 5/26/21	Fri 5/28/21
71	confirm readiness for cutover	1 day	Mon 5/31/21	Mon 5/31/21
72	Obtain state and local concurrence to cutover PSAP 1	5 days	Tue 6/1/21	Mon 6/7/21
73	**Prepare PSAP 1 for cutover**	**12 days**	**Tue 6/8/21**	**Wed 6/23/21**
74	Confirm fail-back plan in place	1 day	Tue 6/8/21	Tue 6/8/21
75	Confirm CPE interfaces operational	5 days	Tue 6/8/21	Mon 6/14/21
76	Confirm OSP readiness	2 days	Tue 6/15/21	Wed 6/16/21
77	Confirm training completed	1 day	Thu 6/17/21	Thu 6/17/21
78	Confirm PSAP ready for flash network cutover	1 day	Fri 6/18/21	Fri 6/18/21
79	Notify state PSAP 1 ready for flash cutover	1 day	Fri 6/18/21	Fri 6/18/21
80	Perform cutover	2 days	Mon 6/21/21	Tue 6/22/21
81	Confirm success	1 day	Wed 6/23/21	Wed 6/23/21
82	Obtain state approval to proceed with cutovers of remaining PSAPS	2 days	Thu 6/24/21	Fri 6/25/21
83	**Perform flash network cutover**	**14 days**	**Tue 9/1/20**	**Fri 9/18/20**
84	Confirm fail-back plan in place	1 day	Tue 9/1/20	Tue 9/1/20
85	Turn-up core services	1 day	Wed 9/2/20	Wed 9/2/20
86	Activate interface between core services and legacy network	3 days	Thu 9/3/20	Mon 9/7/20

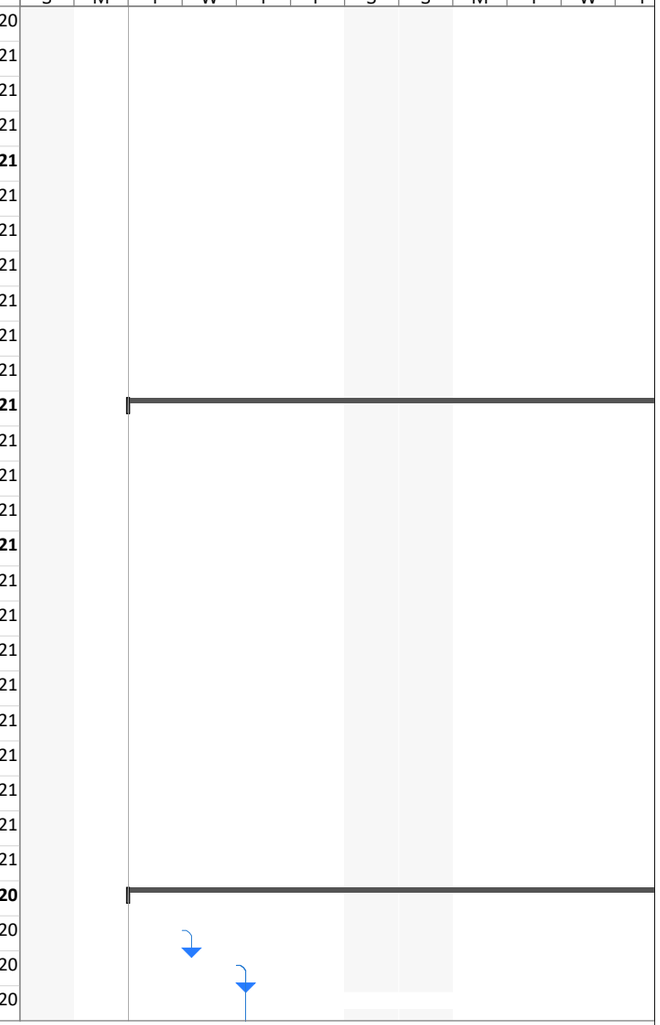

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	

ID	Task Name	Duration	Start	Finish
87	Migrate OSPs to i3 network	3 days	Thu 9/3/20	Mon 9/7/20
88	Onboard carriers into location database	3 days	Thu 9/3/20	Mon 9/7/20
89	Link core services to ESInet	1 day	Tue 9/8/20	Tue 9/8/20
90	Perform flash network cutover	1 day	Wed 9/9/20	Wed 9/9/20
91	Confirm carrier services	1 day	Thu 9/10/20	Thu 9/10/20
92	Confirm cutover of all PSAPs, datacenters and POIs	5 days	Fri 9/11/20	Thu 9/17/20
93	Cutover confirmed to state	1 day	Fri 9/18/20	Fri 9/18/20
94	**Phase IV: Observation and Acceptance**	**39 days**	**Mon 9/21/20**	**Thu 11/12/20**
95	Execute ATP	5 days	Mon 9/21/20	Fri 9/25/20
96	Provisional acceptance accorded by state	1 day	Mon 9/28/20	Mon 9/28/20
97	Perform 30-day observation period	30 days	Tue 9/29/20	Mon 11/9/20
98	Close punch list	30 days	Tue 9/29/20	Mon 11/9/20
99	Final acceptance by state	2 days	Tue 11/10/20	Wed 11/11/20
100	Transition to operational environment	1 day	Thu 11/12/20	Thu 11/12/20
101	**South Eastern Region**	**226 days**	**Mon 10/5/20**	**Mon 8/16/21**
102	**OSP Connectivity Planning**	**77 days**	**Fri 11/13/20**	**Mon 3/1/21**
103	Distribute OSP survey forms and schedule individual OSP discussions	7 days	Fri 11/13/20	Mon 11/23/20
104	Conduct OSP discussions	60 days	Tue 11/24/20	Mon 2/15/21
105	Develop Draft OSP connectivity plan	10 days	Tue 2/16/21	Mon 3/1/21
106	Draft Aggregation plan and circulate for comment	10 days	Tue 2/16/21	Mon 3/1/21
107	**Survey (TBD) PSAPs and Dispatch Centers**	**15 days**	**Mon 10/5/20**	**Fri 10/23/20**
108	Publish survey form	1 day	Mon 10/5/20	Mon 10/5/20
109	schedule visits	5 days	Tue 10/6/20	Mon 10/12/20
110	Conduct visits, compile data and revise plans accordingly	15 days	Tue 10/13/20	Mon 11/2/20
111	Publish revised PM Plan	1 day	Fri 11/13/20	Fri 11/13/20
112	**Enhance datacenters as needed**	**7 days**	**Mon 11/16/20**	**Tue 11/24/20**
113	Confirm rack space and other DC needs satisfied	5 days	Mon 11/16/20	Fri 11/20/20
114	Plan for deploying ECRF, LVF and other GIS components	5 days	Mon 11/16/20	Fri 11/20/20
115	Identify enhancements needed in datacenters	5 days	Mon 11/16/20	Fri 11/20/20

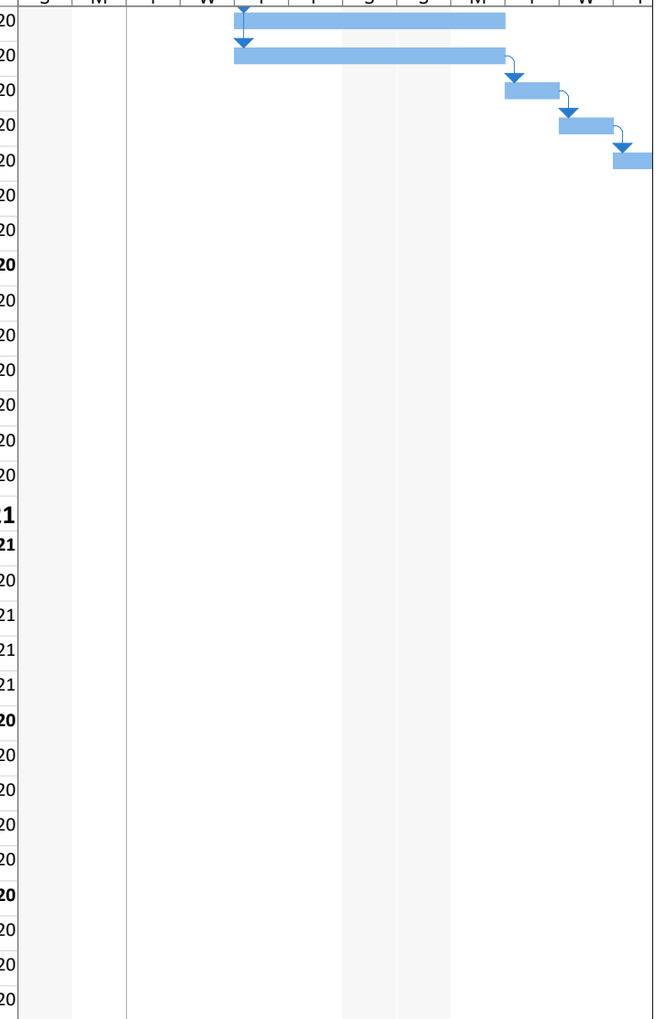

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	

ID	Task Name	Duration	Start	Finish
116	Order new components and schedule labor	2 days	Mon 11/23/20	Tue 11/24/20
117	Identity and provision POIs	5 days	Mon 11/23/20	Fri 11/27/20
118	**Revise network design IAW tasks above**	**52 days**	**Mon 11/16/20**	**Tue 1/26/21**
119	Confirm network typology and provisioning plans	5 days	Mon 11/16/20	Fri 11/20/20
120	ID need for legacy gateways and provision	3 days	Mon 11/16/20	Wed 11/18/20
121	Complete NENA checklist 75-002	2 days	Mon 11/30/20	Tue 12/1/20
122	Confirm compliance with network security plan	2 days	Wed 12/2/20	Thu 12/3/20
123	Confirm transport independence and diversity	5 days	Fri 12/4/20	Thu 12/10/20
124	Prepare circuit plan and place orders	5 days	Fri 12/4/20	Thu 12/10/20
125	**ID changes to standard dashboard required for this project**	**30 days**	**Mon 11/16/20**	**Fri 12/25/20**
126	**ID PSAP needs and place orders**	**30 days**	**Mon 11/16/20**	**Fri 12/25/20**
127	Schedule installs and establish links to PSAP CPE vendors	30 days	Mon 11/16/20	Fri 12/25/20
128	Develop test plans with all vendors to ensure interface effectiveness	30 days	Mon 11/16/20	Fri 12/25/20
129	**Provision Monitoring**	**52 days**	**Mon 11/16/20**	**Tue 1/26/21**
130	Program OCOM	10 days	Mon 12/28/20	Fri 1/8/21
131	Program FortiSIEM	10 days	Mon 12/28/20	Fri 1/8/21
132	Plan E-Bonding capability	10 days	Mon 12/28/20	Fri 1/8/21
133	Adapt Call Data Record Management System / 9-1-1 Traffic Logging to satisfy state requirements	10 days	Mon 12/28/20	Fri 1/8/21
134	**Provision NGCS (Core Services) per NENA standards**	**47 days**	**Mon 11/23/20**	**Tue 1/26/21**
135	Provision two geographically diverse cores capable of 99.999% availability	30 days	Mon 11/30/20	Fri 1/8/21
136	Confirm active-active deployment negates any possible single-points-of-failure	1 day	Mon 1/11/21	Mon 1/11/21
137	**Design GIS solution**	**47 days**	**Mon 11/23/20**	**Tue 1/26/21**
138	Finalize plans for ECRF, LVF and other GIS components	45 days	Mon 11/23/20	Fri 1/22/21
139	Identify and provision GIS elements for use in datacenters	1 day	Mon 1/25/21	Mon 1/25/21
140	Confirm two instances of ECRF/PRF	1 day	Mon 1/25/21	Mon 1/25/21
141	Confirm data QA/QC manager is capable of meeting state and local needs	1 day	Tue 1/26/21	Tue 1/26/21
142	Publish training plan for stakeholder comment	50 days	Mon 11/16/20	Fri 1/22/21
143	**Phase II: Deployment**	**168 days**	**Mon 11/23/20**	**Wed 7/14/21**
144	**Complete OSP integration**	**50 days**	**Tue 3/2/21**	**Mon 5/10/21**



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	


ID	Task Name	Duration	Start	Finish
145	Execute interconnect agreements	10 days	Tue 3/2/21	Mon 3/15/21
146	Deploy i3-Interconnect where needed	30 days	Tue 3/16/21	Mon 4/26/21
147	Execute POI and datacenter interconnection	10 days	Tue 4/27/21	Mon 5/10/21
148	**Install datacenter links and enhancements**	**152 days**	**Mon 11/23/20**	**Tue 6/22/21**
149	Complete rack installs	7 days	Mon 11/23/20	Tue 12/1/20
150	Deploy core services and test diversity and compliance with call delivery standards.	30 days	Wed 12/2/20	Tue 1/12/21
151	Install GIS components	30 days	Wed 12/2/20	Tue 1/12/21
152	Install circuits, cross-connects and FOC	30 days	Tue 5/11/21	Mon 6/21/21
153	Confirm datacenter readiness	1 day	Tue 6/22/21	Tue 6/22/21
154	Install network connections and gateways	70 days	Tue 3/16/21	Mon 6/21/21
155	**Complete PSAP configurations**	**6 days**	**Tue 6/22/21**	**Tue 6/29/21**
156	Test CPE interfaces	5 days	Tue 6/22/21	Mon 6/28/21
157	Test circuits	5 days	Tue 6/22/21	Mon 6/28/21
158	Execute interface agreements if needed with CPE vendors	1 day	Tue 6/29/21	Tue 6/29/21
159	Confirm end-to-end connectivity and gateways to accommodate legacy systems	1 day	Wed 6/30/21	Wed 6/30/21
160	Standup POIs	1 day	Thu 7/1/21	Thu 7/1/21
161	Publish and review cutover plan with stakeholders	10 days	Thu 7/1/21	Wed 7/14/21
162	**Phase III: Cutover**	**197 days**	**Fri 11/13/20**	**Mon 8/16/21**
163	Execute training plan	3 days	Thu 7/15/21	Mon 7/19/21
164	confirm readiness for cutover	1 day	Tue 7/20/21	Tue 7/20/21
165	Obtain state and local concurrence to cutover PSAP 1	5 days	Wed 7/21/21	Tue 7/27/21
166	**Prepare PSAP 1 for cutover**	**12 days**	**Wed 7/28/21**	**Thu 8/12/21**
167	Confirm fail-back plan in place	1 day	Wed 7/28/21	Wed 7/28/21
168	Confirm CPE interfaces operational	5 days	Wed 7/28/21	Tue 8/3/21
169	Confirm OSP readiness	2 days	Wed 8/4/21	Thu 8/5/21
170	Confirm training completed	1 day	Fri 8/6/21	Fri 8/6/21
171	Confirm PSAP ready for flash network cutover	1 day	Mon 8/9/21	Mon 8/9/21
172	Notify state PSAP 1 ready for flash cutover	1 day	Mon 8/9/21	Mon 8/9/21
173	Perform cutover	2 days	Tue 8/10/21	Wed 8/11/21



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	

ID	Task Name	Duration	Start	Finish
174	Confirm success	1 day	Thu 8/12/21	Thu 8/12/21
175	Obtain state approval to proceed with cutovers of remaining PSAPS	2 days	Fri 8/13/21	Mon 8/16/21
176	**Perform flash network cutover**	**14 days**	**Fri 11/13/20**	**Wed 12/2/20**
177	Confirm fail-back plan in place	1 day	Fri 11/13/20	Fri 11/13/20
178	Turn-up core services	1 day	Mon 11/16/20	Mon 11/16/20
179	Activate interface between core services and legacy network	3 days	Tue 11/17/20	Thu 11/19/20
180	Migrate OSPs to i3 network	3 days	Tue 11/17/20	Thu 11/19/20
181	Onboard carriers into location database	3 days	Tue 11/17/20	Thu 11/19/20
182	Link core services to ESInet	1 day	Fri 11/20/20	Fri 11/20/20
183	Perform flash network cutover	1 day	Mon 11/23/20	Mon 11/23/20
184	Confirm carrier services	1 day	Tue 11/24/20	Tue 11/24/20
185	Confirm cutover of all PSAPs, datacenters and POIs	5 days	Wed 11/25/20	Tue 12/1/20
186	Cutover confirmed to state	1 day	Wed 12/2/20	Wed 12/2/20
187	**Phase IV: Observation and Acceptance**	**39 days**	**Thu 12/3/20**	**Tue 1/26/21**
188	Execute ATP	5 days	Thu 12/3/20	Wed 12/9/20
189	Provisional acceptance accorded by state	1 day	Thu 12/10/20	Thu 12/10/20
190	Perform 30-day observation period	30 days	Fri 12/11/20	Thu 1/21/21
191	Close punch list	30 days	Fri 12/11/20	Thu 1/21/21
192	Final acceptance by state	2 days	Fri 1/22/21	Mon 1/25/21
193	Transition to operational environment	1 day	Tue 1/26/21	Tue 1/26/21
194	**Metro Region**	**197 days**	**Wed 1/27/21**	**Thu 10/28/21**
195	**OSP Connectivity Planning**	**77 days**	**Wed 1/27/21**	**Thu 5/13/21**
196	Distribute OSP survey forms and schedule individual OSP discussions	7 days	Wed 1/27/21	Thu 2/4/21
197	Conduct OSP discussions	60 days	Fri 2/5/21	Thu 4/29/21
198	Develop Draft OSP connectivity plan	10 days	Fri 4/30/21	Thu 5/13/21
199	Draft Aggregation plan and circulate for comment	10 days	Fri 4/30/21	Thu 5/13/21
200	**Survey (TBD) PSAPs and Dispatch Centers**	**21 days**	**Fri 2/5/21**	**Fri 3/5/21**
201	Publish survey form	1 day	Fri 2/5/21	Fri 2/5/21
202	schedule visits	5 days	Mon 2/8/21	Fri 2/12/21

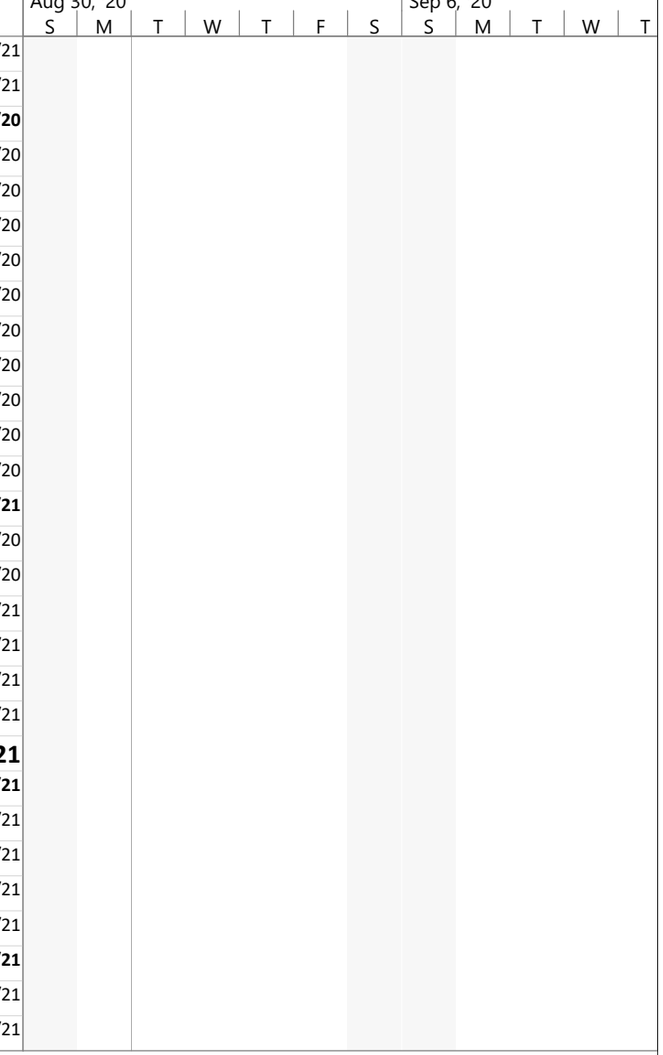

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	

ID	Task Name	Duration	Start	Finish
203	Conduct visits, compile data and revise plans accordingly	15 days	Mon 2/15/21	Fri 3/5/21
204	Publish revised PM Plan	1 day	Mon 3/8/21	Mon 3/8/21
205	**Enhance datacenters as needed**	**7 days**	**Tue 3/9/21**	**Wed 3/17/21**
206	Confirm rack space and other DC needs satisfied	5 days	Tue 3/9/21	Mon 3/15/21
207	Plan for deploying ECRF, LVF and other GIS components	5 days	Tue 3/9/21	Mon 3/15/21
208	Identify enhancements needed in datacenters	5 days	Tue 3/9/21	Mon 3/15/21
209	Order new components and schedule labor	2 days	Tue 3/16/21	Wed 3/17/21
210	Identity and provision POIs	5 days	Tue 3/16/21	Mon 3/22/21
211	**Revise network design IAW tasks above**	**52 days**	**Tue 3/9/21**	**Wed 5/19/21**
212	Confirm network typology and provisioning plans	5 days	Tue 3/9/21	Mon 3/15/21
213	ID need for legacy gateways and provision	3 days	Tue 3/9/21	Thu 3/11/21
214	Complete NENA checklist 75-002	2 days	Tue 3/23/21	Wed 3/24/21
215	Confirm compliance with network security plan	2 days	Thu 3/25/21	Fri 3/26/21
216	Confirm transport independence and diversity	5 days	Mon 3/29/21	Fri 4/2/21
217	Prepare circuit plan and place orders	5 days	Mon 3/29/21	Fri 4/2/21
218	**ID changes to standard dashboard required for this project**	**30 days**	**Tue 3/9/21**	**Mon 4/19/21**
219	**ID PSAP needs and place orders**	**30 days**	**Tue 3/9/21**	**Mon 4/19/21**
220	Schedule installs and establish links to PSAP CPE vendors	30 days	Tue 3/9/21	Mon 4/19/21
221	Develop test plans with all vendors to ensure interface effectiveness	30 days	Tue 3/9/21	Mon 4/19/21
222	**Provision Monitoring**	**52 days**	**Tue 3/9/21**	**Wed 5/19/21**
223	Program OCOM	10 days	Tue 4/20/21	Mon 5/3/21
224	Program FortiSIEM	10 days	Tue 4/20/21	Mon 5/3/21
225	Plan E-Bonding capability	10 days	Tue 4/20/21	Mon 5/3/21
226	Adapt Call Data Record Management System / 9-1-1 Traffic Logging to satisfy state requirements	10 days	Tue 4/20/21	Mon 5/3/21
227	**Provision NGCS (Core Services) per NENA standards**	**47 days**	**Tue 3/16/21**	**Wed 5/19/21**
228	Provision two geographically diverse cores capable of 99.999% availability	30 days	Tue 3/23/21	Mon 5/3/21
229	Confirm active-active deployment negates any possible single-points-of-failure	1 day	Tue 5/4/21	Tue 5/4/21
230	**Design GIS solution**	**47 days**	**Tue 3/16/21**	**Wed 5/19/21**
231	Finalize plans for ECRF, LVF and other GIS components	45 days	Tue 3/16/21	Mon 5/17/21



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	


ID	Task Name	Duration	Start	Finish
232	Identify and provision GIS elements for use in datacenters	1 day	Tue 5/18/21	Tue 5/18/21
233	Confirm two instances of ECRF/PRF	1 day	Tue 5/18/21	Tue 5/18/21
234	Confirm data QA/QC manager is capable of meeting state and local needs	1 day	Wed 5/19/21	Wed 5/19/21
235	Publish training plan for stakeholder comment	50 days	Tue 3/9/21	Mon 5/17/21
236	**Phase II: Deployment**	**140 days**	**Tue 3/16/21**	**Mon 9/27/21**
237	**Complete OSP integration**	**50 days**	**Fri 5/14/21**	**Thu 7/22/21**
238	Execute interconnect agreements	10 days	Fri 5/14/21	Thu 5/27/21
239	Deploy i3-Interconnect where needed	30 days	Fri 5/28/21	Thu 7/8/21
240	Execute POI and datacenter interconnection	10 days	Fri 7/9/21	Thu 7/22/21
241	**Install datacenter links and enhancements**	**124 days**	**Tue 3/16/21**	**Fri 9/3/21**
242	Complete rack installs	7 days	Tue 3/16/21	Wed 3/24/21
243	Deploy core services and test diversity and compliance with call delivery standards.	30 days	Thu 3/25/21	Wed 5/5/21
244	Install GIS components	30 days	Thu 3/25/21	Wed 5/5/21
245	Install circuits, cross-connects and FOC	30 days	Fri 7/23/21	Thu 9/2/21
246	Confirm datacenter readiness	1 day	Fri 9/3/21	Fri 9/3/21
247	Install network connections and gateways	70 days	Fri 5/28/21	Thu 9/2/21
248	**Complete PSAP configurations**	**6 days**	**Fri 9/3/21**	**Fri 9/10/21**
249	Test CPE interfaces	5 days	Fri 9/3/21	Thu 9/9/21
250	Test circuits	5 days	Fri 9/3/21	Thu 9/9/21
251	Execute interface agreements if needed with CPE vendors	1 day	Fri 9/10/21	Fri 9/10/21
252	Confirm end-to-end connectivity and gateways to accommodate legacy systems	1 day	Mon 9/13/21	Mon 9/13/21
253	Standup POIs	1 day	Tue 9/14/21	Tue 9/14/21
254	Publish and review cutover plan with stakeholders	10 days	Tue 9/14/21	Mon 9/27/21
255	**Phase III: Cutover**	**197 days**	**Wed 1/27/21**	**Thu 10/28/21**
256	Execute training plan	3 days	Tue 9/28/21	Thu 9/30/21
257	confirm readiness for cutover	1 day	Fri 10/1/21	Fri 10/1/21
258	Obtain state and local concurrence to cutover PSAP 1	5 days	Mon 10/4/21	Fri 10/8/21
259	**Prepare PSAP 1 for cutover**	**12 days**	**Mon 10/11/21**	**Tue 10/26/21**
260	Confirm fail-back plan in place	1 day	Mon 10/11/21	Mon 10/11/21



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task
Split
Milestone
Summary
Project Summary
Inactive Task
Inactive Milestone
Inactive Summary
Manual Task
Duration-only
Manual Summary Rollup
Manual Summary
Start-only
Finish-only
External Tasks
External Milestone
Deadline
Progress
Manual Progress

ID	Task Name	Duration	Start	Finish
261	Confirm CPE interfaces operational	5 days	Mon 10/11/21	Fri 10/15/21
262	Confirm OSP readiness	2 days	Mon 10/18/21	Tue 10/19/21
263	Confirm training completed	1 day	Wed 10/20/21	Wed 10/20/21
264	Confirm PSAP ready for flash network cutover	1 day	Thu 10/21/21	Thu 10/21/21
265	Notify state PSAP 1 ready for flash cutover	1 day	Thu 10/21/21	Thu 10/21/21
266	Perform cutover	2 days	Fri 10/22/21	Mon 10/25/21
267	Confirm success	1 day	Tue 10/26/21	Tue 10/26/21
268	Obtain state approval to proceed with cutovers of remaining PSAPS	2 days	Wed 10/27/21	Thu 10/28/21
269	**Perform flash network cutover**	**14 days**	**Wed 1/27/21**	**Mon 2/15/21**
270	Confirm fail-back plan in place	1 day	Wed 1/27/21	Wed 1/27/21
271	Turn-up core services	1 day	Thu 1/28/21	Thu 1/28/21
272	Activate interface between core services and legacy network	3 days	Fri 1/29/21	Tue 2/2/21
273	Migrate OSPs to i3 network	3 days	Fri 1/29/21	Tue 2/2/21
274	Onboard carriers into location database	3 days	Fri 1/29/21	Tue 2/2/21
275	Link core services to ESInet	1 day	Wed 2/3/21	Wed 2/3/21
276	Perform flash network cutover	1 day	Thu 2/4/21	Thu 2/4/21
277	Confirm carrier services	1 day	Fri 2/5/21	Fri 2/5/21
278	Confirm cutover of all PSAPs, datacenters and POIs	5 days	Mon 2/8/21	Fri 2/12/21
279	Cutover confirmed to state	1 day	Mon 2/15/21	Mon 2/15/21
280	**Phase IV: Observation and Acceptance**	**39 days**	**Tue 2/16/21**	**Fri 4/9/21**
281	Execute ATP	5 days	Tue 2/16/21	Mon 2/22/21
282	Provisional acceptance accorded by state	1 day	Tue 2/23/21	Tue 2/23/21
283	Perform 30-day observation period	30 days	Wed 2/24/21	Tue 4/6/21
284	Close punch list	30 days	Wed 2/24/21	Tue 4/6/21
285	Final acceptance by state	2 days	Wed 4/7/21	Thu 4/8/21
286	Transition to operational environment	1 day	Fri 4/9/21	Fri 4/9/21
287	**North Central Region**	**197 days**	**Mon 4/12/21**	**Tue 1/11/22**
288	**OSP Connectivity Planning**	**77 days**	**Mon 4/12/21**	**Tue 7/27/21**
289	Distribute OSP survey forms and schedule individual OSP discussions	7 days	Mon 4/12/21	Tue 4/20/21

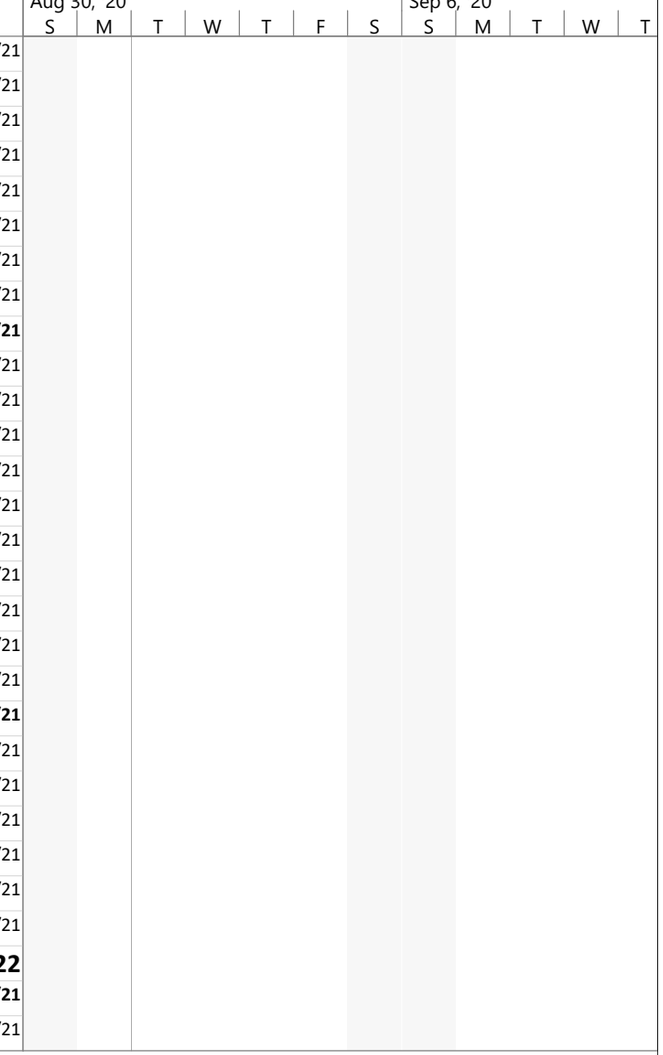

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task
Split
Milestone
Summary
Project Summary
Inactive Task
Inactive Milestone
Inactive Summary
Manual Task
Duration-only
Manual Summary Rollup
Manual Summary
Start-only
Finish-only
External Tasks
External Milestone
Deadline
Progress
Manual Progress


ID	Task Name	Duration	Start	Finish
290	Conduct OSP discussions	60 days	Wed 4/21/21	Tue 7/13/21
291	Develop Draft OSP connectivity plan	10 days	Wed 7/14/21	Tue 7/27/21
292	Draft Aggregation plan and circulate for comment	10 days	Wed 7/14/21	Tue 7/27/21
293	**Survey (TBD) PSAPs and Dispatch Centers**	**96 days**	**Wed 4/21/21**	**Wed 9/1/21**
294	Publish survey form	1 day	Wed 4/21/21	Wed 4/21/21
295	schedule visits	5 days	Thu 4/22/21	Wed 4/28/21
296	Conduct visits, compile data and revise plans accordingly	90 days	Thu 4/29/21	Wed 9/1/21
297	Publish revised PM Plan	1 day	Thu 9/2/21	Thu 9/2/21
298	**Enhance datacenters as needed**	**7 days**	**Fri 9/3/21**	**Mon 9/13/21**
299	Confirm rack space and other DC needs satisfied	5 days	Fri 9/3/21	Thu 9/9/21
300	Plan for deploying ECRF, LVF and other GIS components	5 days	Fri 9/3/21	Thu 9/9/21
301	Identify enhancements needed in datacenters	5 days	Fri 9/3/21	Thu 9/9/21
302	Order new components and schedule labor	2 days	Fri 9/10/21	Mon 9/13/21
303	Identity and provision POIs	5 days	Fri 9/10/21	Thu 9/16/21
304	**Revise network design IAW tasks above**	**52 days**	**Fri 9/3/21**	**Mon 11/15/21**
305	Confirm network typology and provisioning plans	5 days	Fri 9/3/21	Thu 9/9/21
306	ID need for legacy gateways and provision	3 days	Fri 9/3/21	Tue 9/7/21
307	Complete NENA checklist 75-002	2 days	Fri 9/17/21	Mon 9/20/21
308	Confirm compliance with network security plan	2 days	Tue 9/21/21	Wed 9/22/21
309	Confirm transport independence and diversity	5 days	Thu 9/23/21	Wed 9/29/21
310	Prepare circuit plan and place orders	5 days	Thu 9/23/21	Wed 9/29/21
311	**ID changes to standard dashboard required for this project**	**30 days**	**Fri 9/3/21**	**Thu 10/14/21**
312	**ID PSAP needs and place orders**	**30 days**	**Fri 9/3/21**	**Thu 10/14/21**
313	Schedule installs and establish links to PSAP CPE vendors	30 days	Fri 9/3/21	Thu 10/14/21
314	Develop test plans with all vendors to ensure interface effectiveness	30 days	Fri 9/3/21	Thu 10/14/21
315	**Provision Monitoring**	**52 days**	**Fri 9/3/21**	**Mon 11/15/21**
316	Program OCOM	10 days	Fri 10/15/21	Thu 10/28/21
317	Program FortiSIEM	10 days	Fri 10/15/21	Thu 10/28/21
318	Plan E-Bonding capability	10 days	Fri 10/15/21	Thu 10/28/21



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task
Split
Milestone
Summary
Project Summary
Inactive Task
Inactive Milestone
Inactive Summary
Manual Task
Duration-only
Manual Summary Rollup
Manual Summary
Start-only
Finish-only
External Tasks
External Milestone
Deadline
Progress
Manual Progress

ID	Task Name	Duration	Start	Finish
319	Adapt Call Data Record Management System / 9-1-1 Traffic Logging to satisfy state requirements	10 days	Fri 10/15/21	Thu 10/28/21
320	**Provision NGCS (Core Services) per NENA standards**	**47 days**	**Fri 9/10/21**	**Mon 11/15/21**
321	Provision two geographically diverse cores capable of 99.999% availability	30 days	Fri 9/17/21	Thu 10/28/21
322	Confirm active-active deployment negates any possible single-points-of-failure	1 day	Fri 10/29/21	Fri 10/29/21
323	**Design GIS solution**	**47 days**	**Fri 9/10/21**	**Mon 11/15/21**
324	Finalize plans for ECRF, LVF and other GIS components	45 days	Fri 9/10/21	Thu 11/11/21
325	Identify and provision GIS elements for use in datacenters	1 day	Fri 11/12/21	Fri 11/12/21
326	Confirm two instances of ECRF/PRF	1 day	Fri 11/12/21	Fri 11/12/21
327	Confirm data QA/QC manager is capable of meeting state and local needs	1 day	Mon 11/15/21	Mon 11/15/21
328	Publish training plan for stakeholder comment	50 days	Fri 9/3/21	Thu 11/11/21
329	**Phase II: Deployment**	**97 days**	**Wed 7/28/21**	**Thu 12/9/21**
330	**Complete OSP integration**	**50 days**	**Wed 7/28/21**	**Tue 10/5/21**
331	Execute interconnect agreements	10 days	Wed 7/28/21	Tue 8/10/21
332	Deploy i3-Interconnect where needed	30 days	Wed 8/11/21	Tue 9/21/21
333	Execute POI and datacenter interconnection	10 days	Wed 9/22/21	Tue 10/5/21
334	**Install datacenter links and enhancements**	**49 days**	**Fri 9/10/21**	**Wed 11/17/21**
335	Complete rack installs	7 days	Fri 9/10/21	Mon 9/20/21
336	Deploy core services and test diversity and compliance with call delivery standards.	30 days	Tue 9/21/21	Mon 11/1/21
337	Install GIS components	30 days	Tue 9/21/21	Mon 11/1/21
338	Install circuits, cross-connects and FOC	30 days	Wed 10/6/21	Tue 11/16/21
339	Confirm datacenter readiness	1 day	Wed 11/17/21	Wed 11/17/21
340	Install network connections and gateways	70 days	Wed 8/11/21	Tue 11/16/21
341	**Complete PSAP configurations**	**6 days**	**Wed 11/17/21**	**Wed 11/24/21**
342	Test CPE interfaces	5 days	Wed 11/17/21	Tue 11/23/21
343	Test circuits	5 days	Wed 11/17/21	Tue 11/23/21
344	Execute interface agreements if needed with CPE vendors	1 day	Wed 11/24/21	Wed 11/24/21
345	Confirm end-to-end connectivity and gateways to accommodate legacy systems	1 day	Thu 11/25/21	Thu 11/25/21
346	Standup POIs	1 day	Fri 11/26/21	Fri 11/26/21
347	Publish and review cutover plan with stakeholders	10 days	Fri 11/26/21	Thu 12/9/21

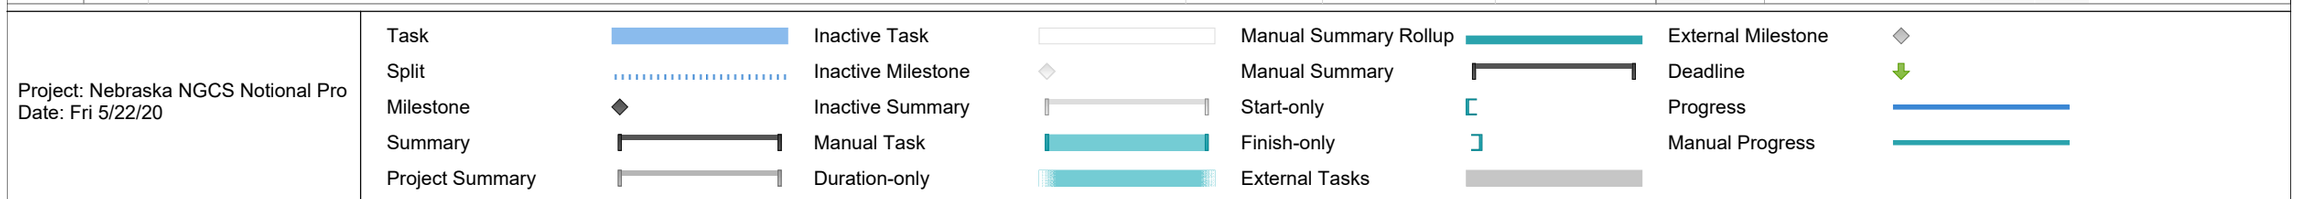

ID	Task Name	Duration	Start	Finish
348	**Phase III: Cutover**	**197 days**	**Mon 4/12/21**	**Tue 1/11/22**
349	Execute training plan	3 days	Fri 12/10/21	Tue 12/14/21
350	confirm readiness for cutover	1 day	Wed 12/15/21	Wed 12/15/21
351	Obtain state and local concurrence to cutover PSAP 1	5 days	Thu 12/16/21	Wed 12/22/21
352	**Prepare PSAP 1 for cutover**	**12 days**	**Thu 12/23/21**	**Fri 1/7/22**
353	Confirm fail-back plan in place	1 day	Thu 12/23/21	Thu 12/23/21
354	Confirm CPE interfaces operational	5 days	Thu 12/23/21	Wed 12/29/21
355	Confirm OSP readiness	2 days	Thu 12/30/21	Fri 12/31/21
356	Confirm training completed	1 day	Mon 1/3/22	Mon 1/3/22
357	Confirm PSAP ready for flash network cutover	1 day	Tue 1/4/22	Tue 1/4/22
358	Notify state PSAP 1 ready for flash cutover	1 day	Tue 1/4/22	Tue 1/4/22
359	Perform cutover	2 days	Wed 1/5/22	Thu 1/6/22
360	Confirm success	1 day	Fri 1/7/22	Fri 1/7/22
361	Obtain state approval to proceed with cutovers of remaining PSAPS	2 days	Mon 1/10/22	Tue 1/11/22
362	**Perform flash network cutover**	**14 days**	**Mon 4/12/21**	**Thu 4/29/21**
363	Confirm fail-back plan in place	1 day	Mon 4/12/21	Mon 4/12/21
364	Turn-up core services	1 day	Tue 4/13/21	Tue 4/13/21
365	Activate interface between core services and legacy network	3 days	Wed 4/14/21	Fri 4/16/21
366	Migrate OSPs to i3 network	3 days	Wed 4/14/21	Fri 4/16/21
367	Onboard carriers into location database	3 days	Wed 4/14/21	Fri 4/16/21
368	Link core services to ESInet	1 day	Mon 4/19/21	Mon 4/19/21
369	Perform flash network cutover	1 day	Tue 4/20/21	Tue 4/20/21
370	Confirm carrier services	1 day	Wed 4/21/21	Wed 4/21/21
371	Confirm cutover of all PSAPs, datacenters and POIs	5 days	Thu 4/22/21	Wed 4/28/21
372	Cutover confirmed to state	1 day	Thu 4/29/21	Thu 4/29/21
373	**Phase IV: Observation and Acceptance**	**39 days**	**Fri 4/30/21**	**Wed 6/23/21**
374	Execute ATP	5 days	Fri 4/30/21	Thu 5/6/21
375	Provisional acceptance accorded by state	1 day	Fri 5/7/21	Fri 5/7/21
376	Perform 30-day observation period	30 days	Mon 5/10/21	Fri 6/18/21



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	

ID	Task Name	Duration	Start	Finish
377	Close punch list	30 days	Mon 5/10/21	Fri 6/18/21
378	Final acceptance by state	2 days	Mon 6/21/21	Tue 6/22/21
379	Transition to operational environment	1 day	Wed 6/23/21	Wed 6/23/21
380	**East Central Region**	**197 days**	**Thu 6/24/21**	**Fri 3/25/22**
381	**OSP Connectivity Planning**	**77 days**	**Thu 6/24/21**	**Fri 10/8/21**
382	Distribute OSP survey forms and schedule individual OSP discussions	7 days	Thu 6/24/21	Fri 7/2/21
383	Conduct OSP discussions	60 days	Mon 7/5/21	Fri 9/24/21
384	Develop Draft OSP connectivity plan	10 days	Mon 9/27/21	Fri 10/8/21
385	Draft Aggregation plan and circulate for comment	10 days	Mon 9/27/21	Fri 10/8/21
386	**Survey (TBD) PSAPs and Dispatch Centers**	**96 days**	**Mon 7/5/21**	**Mon 11/15/21**
387	Publish survey form	1 day	Mon 7/5/21	Mon 7/5/21
388	schedule visits	5 days	Tue 7/6/21	Mon 7/12/21
389	Conduct visits, compile data and revise plans accordingly	90 days	Tue 7/13/21	Mon 11/15/21
390	Publish revised PM Plan	1 day	Tue 11/16/21	Tue 11/16/21
391	**Enhance datacenters as needed**	**7 days**	**Wed 11/17/21**	**Thu 11/25/21**
392	Confirm rack space and other DC needs satisfied	5 days	Wed 11/17/21	Tue 11/23/21
393	Plan for deploying ECRF, LVF and other GIS components	5 days	Wed 11/17/21	Tue 11/23/21
394	Identify enhancements needed in datacenters	5 days	Wed 11/17/21	Tue 11/23/21
395	Order new components and schedule labor	2 days	Wed 11/24/21	Thu 11/25/21
396	Identity and provision POIs	5 days	Wed 11/24/21	Tue 11/30/21
397	**Revise network design IAW tasks above**	**52 days**	**Wed 11/17/21**	**Thu 1/27/22**
398	Confirm network typology and provisioning plans	5 days	Wed 11/17/21	Tue 11/23/21
399	ID need for legacy gateways and provision	3 days	Wed 11/17/21	Fri 11/19/21
400	Complete NENA checklist 75-002	2 days	Wed 12/1/21	Thu 12/2/21
401	Confirm compliance with network security plan	2 days	Fri 12/3/21	Mon 12/6/21
402	Confirm transport independence and diversity	5 days	Tue 12/7/21	Mon 12/13/21
403	Prepare circuit plan and place orders	5 days	Tue 12/7/21	Mon 12/13/21
404	**ID changes to standard dashboard required for this project**	**30 days**	**Wed 11/17/21**	**Tue 12/28/21**
405	**ID PSAP needs and place orders**	**30 days**	**Wed 11/17/21**	**Tue 12/28/21**



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task
Split
Milestone
Summary
Project Summary
Inactive Task
Inactive Milestone
Inactive Summary
Manual Task
Duration-only
Manual Summary Rollup
Manual Summary
Start-only
Finish-only
External Tasks
External Milestone
Deadline
Progress
Manual Progress

ID	Task Name	Duration	Start	Finish
406	Schedule installs and establish links to PSAP CPE vendors	30 days	Wed 11/17/21	Tue 12/28/21
407	Develop test plans with all vendors to ensure interface effectiveness	30 days	Wed 11/17/21	Tue 12/28/21
408	**Provision Monitoring**	**52 days**	**Wed 11/17/21**	**Thu 1/27/22**
409	Program OCOM	10 days	Wed 12/29/21	Tue 1/11/22
410	Program FortiSIEM	10 days	Wed 12/29/21	Tue 1/11/22
411	Plan E-Bonding capability	10 days	Wed 12/29/21	Tue 1/11/22
412	Adapt Call Data Record Management System / 9-1-1 Traffic Logging to satisfy state requirements	10 days	Wed 12/29/21	Tue 1/11/22
413	**Provision NGCS (Core Services) per NENA standards**	**47 days**	**Wed 11/24/21**	**Thu 1/27/22**
414	Provision two geographically diverse cores capable of 99.999% availability	30 days	Wed 12/1/21	Tue 1/11/22
415	Confirm active-active deployment negates any possible single-points-of-failure	1 day	Wed 1/12/22	Wed 1/12/22
416	**Design GIS solution**	**47 days**	**Wed 11/24/21**	**Thu 1/27/22**
417	Finalize plans for ECRF, LVF and other GIS components	45 days	Wed 11/24/21	Tue 1/25/22
418	Identify and provision GIS elements for use in datacenters	1 day	Wed 1/26/22	Wed 1/26/22
419	Confirm two instances of ECRF/PRF	1 day	Wed 1/26/22	Wed 1/26/22
420	Confirm data QA/QC manager is capable of meeting state and local needs	1 day	Thu 1/27/22	Thu 1/27/22
421	Publish training plan for stakeholder comment	50 days	Wed 11/17/21	Tue 1/25/22
422	**Phase II: Deployment**	**97 days**	**Mon 10/11/21**	**Tue 2/22/22**
423	**Complete OSP integration**	**50 days**	**Mon 10/11/21**	**Fri 12/17/21**
424	Execute interconnect agreements	10 days	Mon 10/11/21	Fri 10/22/21
425	Deploy i3-Interconnect where needed	30 days	Mon 10/25/21	Fri 12/3/21
426	Execute POI and datacenter interconnection	10 days	Mon 12/6/21	Fri 12/17/21
427	**Install datacenter links and enhancements**	**49 days**	**Wed 11/24/21**	**Mon 1/31/22**
428	Complete rack installs	7 days	Wed 11/24/21	Thu 12/2/21
429	Deploy core services and test diversity and compliance with call delivery standards.	30 days	Fri 12/3/21	Thu 1/13/22
430	Install GIS components	30 days	Fri 12/3/21	Thu 1/13/22
431	Install circuits, cross-connects and FOC	30 days	Mon 12/20/21	Fri 1/28/22
432	Confirm datacenter readiness	1 day	Mon 1/31/22	Mon 1/31/22
433	Install network connections and gateways	70 days	Mon 10/25/21	Fri 1/28/22
434	**Complete PSAP configurations**	**6 days**	**Mon 1/31/22**	**Mon 2/7/22**



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	


ID	Task Name	Duration	Start	Finish
435	Test CPE interfaces	5 days	Mon 1/31/22	Fri 2/4/22
436	Test circuits	5 days	Mon 1/31/22	Fri 2/4/22
437	Execute interface agreements if needed with CPE vendors	1 day	Mon 2/7/22	Mon 2/7/22
438	Confirm end-to-end connectivity and gateways to accommodate legacy systems	1 day	Tue 2/8/22	Tue 2/8/22
439	Standup POIs	1 day	Wed 2/9/22	Wed 2/9/22
440	Publish and review cutover plan with stakeholders	10 days	Wed 2/9/22	Tue 2/22/22
441	**Phase III: Cutover**	**197 days**	**Thu 6/24/21**	**Fri 3/25/22**
442	Execute training plan	3 days	Wed 2/23/22	Fri 2/25/22
443	confirm readiness for cutover	1 day	Mon 2/28/22	Mon 2/28/22
444	Obtain state and local concurrence to cutover PSAP 1	5 days	Tue 3/1/22	Mon 3/7/22
445	**Prepare PSAP 1 for cutover**	**12 days**	**Tue 3/8/22**	**Wed 3/23/22**
446	Confirm fail-back plan in place	1 day	Tue 3/8/22	Tue 3/8/22
447	Confirm CPE interfaces operational	5 days	Tue 3/8/22	Mon 3/14/22
448	Confirm OSP readiness	2 days	Tue 3/15/22	Wed 3/16/22
449	Confirm training completed	1 day	Thu 3/17/22	Thu 3/17/22
450	Confirm PSAP ready for flash network cutover	1 day	Fri 3/18/22	Fri 3/18/22
451	Notify state PSAP 1 ready for flash cutover	1 day	Fri 3/18/22	Fri 3/18/22
452	Perform cutover	2 days	Mon 3/21/22	Tue 3/22/22
453	Confirm success	1 day	Wed 3/23/22	Wed 3/23/22
454	Obtain state approval to proceed with cutovers of remaining PSAPS	2 days	Thu 3/24/22	Fri 3/25/22
455	**Perform flash network cutover**	**14 days**	**Thu 6/24/21**	**Tue 7/13/21**
456	Confirm fail-back plan in place	1 day	Thu 6/24/21	Thu 6/24/21
457	Turn-up core services	1 day	Fri 6/25/21	Fri 6/25/21
458	Activate interface between core services and legacy network	3 days	Mon 6/28/21	Wed 6/30/21
459	Migrate OSPs to i3 network	3 days	Mon 6/28/21	Wed 6/30/21
460	Onboard carriers into location database	3 days	Mon 6/28/21	Wed 6/30/21
461	Link core services to ESInet	1 day	Thu 7/1/21	Thu 7/1/21
462	Perform flash network cutover	1 day	Fri 7/2/21	Fri 7/2/21
463	Confirm carrier services	1 day	Mon 7/5/21	Mon 7/5/21



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	


ID	Task Name	Duration	Start	Finish
464	Confirm cutover of all PSAPs, datacenters and POIs	5 days	Tue 7/6/21	Mon 7/12/21
465	Cutover confirmed to state	1 day	Tue 7/13/21	Tue 7/13/21
466	**Phase IV: Observation and Acceptance**	**39 days**	**Wed 7/14/21**	**Mon 9/6/21**
467	Execute ATP	5 days	Wed 7/14/21	Tue 7/20/21
468	Provisional acceptance accorded by state	1 day	Wed 7/21/21	Wed 7/21/21
469	Perform 30-day observation period	30 days	Thu 7/22/21	Wed 9/1/21
470	Close punch list	30 days	Thu 7/22/21	Wed 9/1/21
471	Final acceptance by state	2 days	Thu 9/2/21	Fri 9/3/21
472	Transition to operational environment	1 day	Mon 9/6/21	Mon 9/6/21
473	**Metro West Region**	**197 days**	**Tue 9/7/21**	**Wed 6/8/22**
474	**OSP Connectivity Planning**	**77 days**	**Tue 9/7/21**	**Wed 12/22/21**
475	Distribute OSP survey forms and schedule individual OSP discussions	7 days	Tue 9/7/21	Wed 9/15/21
476	Conduct OSP discussions	60 days	Thu 9/16/21	Wed 12/8/21
477	Develop Draft OSP connectivity plan	10 days	Thu 12/9/21	Wed 12/22/21
478	Draft Aggregation plan and circulate for comment	10 days	Thu 12/9/21	Wed 12/22/21
479	**Survey (TBD) PSAPs and Dispatch Centers**	**96 days**	**Thu 9/16/21**	**Thu 1/27/22**
480	Publish survey form	1 day	Thu 9/16/21	Thu 9/16/21
481	schedule visits	5 days	Fri 9/17/21	Thu 9/23/21
482	Conduct visits, compile data and revise plans accordingly	90 days	Fri 9/24/21	Thu 1/27/22
483	Publish revised PM Plan	1 day	Fri 1/28/22	Fri 1/28/22
484	**Enhance datacenters as needed**	**7 days**	**Mon 1/31/22**	**Tue 2/8/22**
485	Confirm rack space and other DC needs satisfied	5 days	Mon 1/31/22	Fri 2/4/22
486	Plan for deploying ECRF, LVF and other GIS components	5 days	Mon 1/31/22	Fri 2/4/22
487	Identify enhancements needed in datacenters	5 days	Mon 1/31/22	Fri 2/4/22
488	Order new components and schedule labor	2 days	Mon 2/7/22	Tue 2/8/22
489	Identity and provision POIs	5 days	Mon 2/7/22	Fri 2/11/22
490	**Revise network design IAW tasks above**	**52 days**	**Mon 1/31/22**	**Tue 4/12/22**
491	Confirm network typology and provisioning plans	5 days	Mon 1/31/22	Fri 2/4/22
492	ID need for legacy gateways and provision	3 days	Mon 1/31/22	Wed 2/2/22

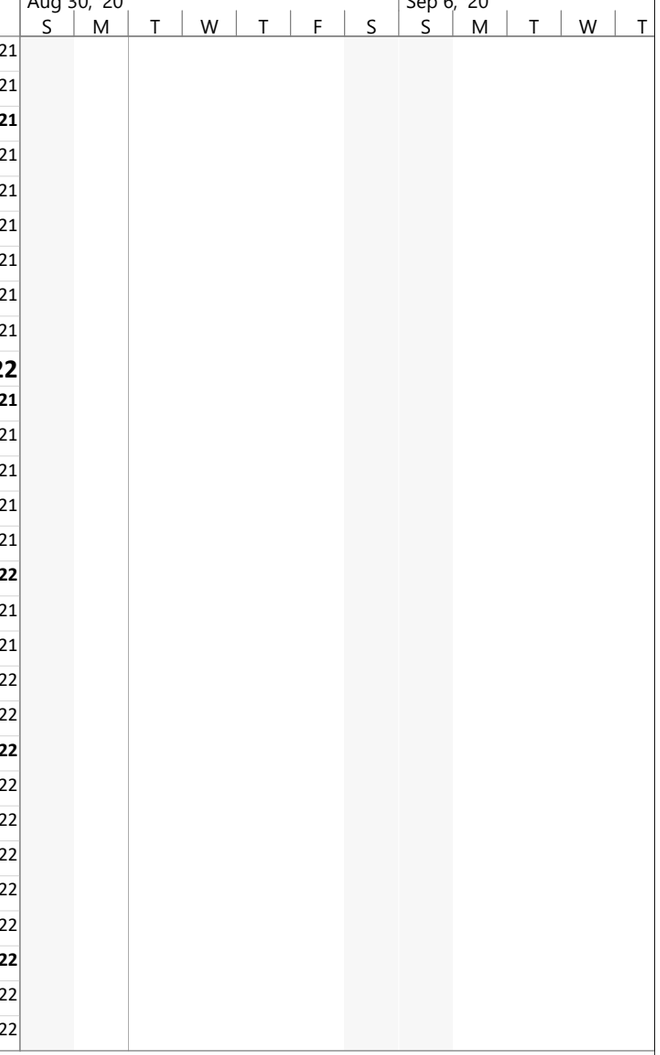

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	


ID	Task Name	Duration	Start	Finish
493	Complete NENA checklist 75-002	2 days	Mon 2/14/22	Tue 2/15/22
494	Confirm compliance with network security plan	2 days	Wed 2/16/22	Thu 2/17/22
495	Confirm transport independence and diversity	5 days	Fri 2/18/22	Thu 2/24/22
496	Prepare circuit plan and place orders	5 days	Fri 2/18/22	Thu 2/24/22
497	**ID changes to standard dashboard required for this project**	**30 days**	**Mon 1/31/22**	**Fri 3/11/22**
498	**ID PSAP needs and place orders**	**30 days**	**Mon 1/31/22**	**Fri 3/11/22**
499	Schedule installs and establish links to PSAP CPE vendors	30 days	Mon 1/31/22	Fri 3/11/22
500	Develop test plans with all vendors to ensure interface effectiveness	30 days	Mon 1/31/22	Fri 3/11/22
501	**Provision Monitoring**	**52 days**	**Mon 1/31/22**	**Tue 4/12/22**
502	Program OCOM	10 days	Mon 3/14/22	Fri 3/25/22
503	Program FortiSIEM	10 days	Mon 3/14/22	Fri 3/25/22
504	Plan E-Bonding capability	10 days	Mon 3/14/22	Fri 3/25/22
505	Adapt Call Data Record Management System / 9-1-1 Traffic Logging to satisfy state requirements	10 days	Mon 3/14/22	Fri 3/25/22
506	**Provision NGCS (Core Services) per NENA standards**	**47 days**	**Mon 2/7/22**	**Tue 4/12/22**
507	Provision two geographically diverse cores capable of 99.999% availability	30 days	Mon 2/14/22	Fri 3/25/22
508	Confirm active-active deployment negates any possible single-points-of-failure	1 day	Mon 3/28/22	Mon 3/28/22
509	**Design GIS solution**	**47 days**	**Mon 2/7/22**	**Tue 4/12/22**
510	Finalize plans for ECRF, LVF and other GIS components	45 days	Mon 2/7/22	Fri 4/8/22
511	Identify and provision GIS elements for use in datacenters	1 day	Mon 4/11/22	Mon 4/11/22
512	Confirm two instances of ECRF/PRF	1 day	Mon 4/11/22	Mon 4/11/22
513	Confirm data QA/QC manager is capable of meeting state and local needs	1 day	Tue 4/12/22	Tue 4/12/22
514	Publish training plan for stakeholder comment	50 days	Mon 1/31/22	Fri 4/8/22
515	**Phase II: Deployment**	**97 days**	**Thu 12/23/21**	**Fri 5/6/22**
516	**Complete OSP integration**	**50 days**	**Thu 12/23/21**	**Wed 3/2/22**
517	Execute interconnect agreements	10 days	Thu 12/23/21	Wed 1/5/22
518	Deploy i3-Interconnect where needed	30 days	Thu 1/6/22	Wed 2/16/22
519	Execute POI and datacenter interconnection	10 days	Thu 2/17/22	Wed 3/2/22
520	**Install datacenter links and enhancements**	**49 days**	**Mon 2/7/22**	**Thu 4/14/22**
521	Complete rack installs	7 days	Mon 2/7/22	Tue 2/15/22

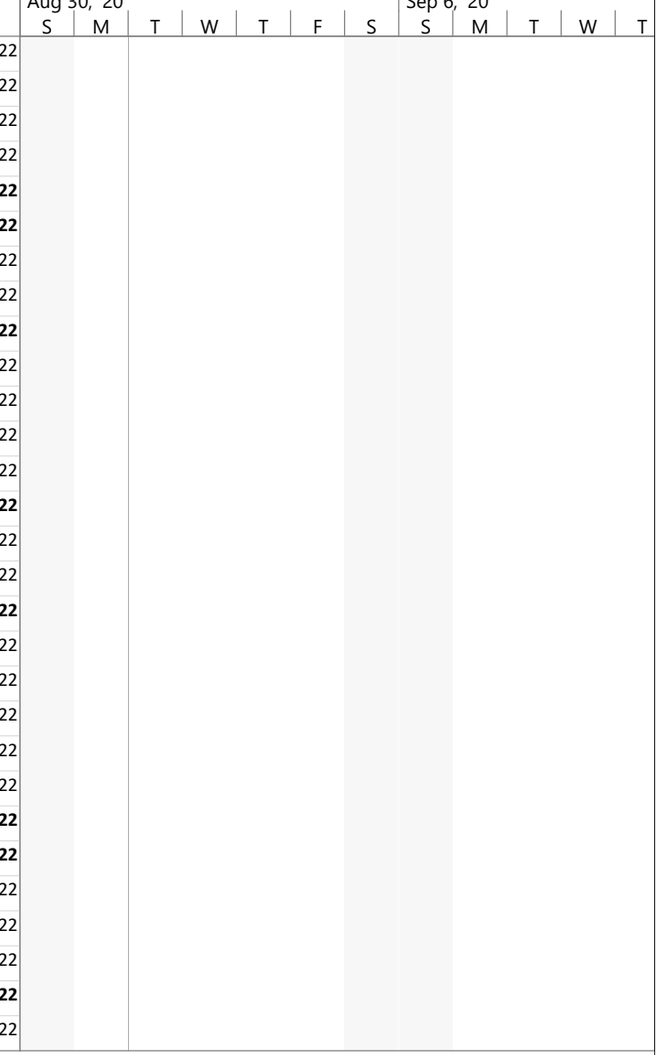

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	


ID	Task Name	Duration	Start	Finish
522	Deploy core services and test diversity and compliance with call delivery standards.	30 days	Wed 2/16/22	Tue 3/29/22
523	Install GIS components	30 days	Wed 2/16/22	Tue 3/29/22
524	Install circuits, cross-connects and FOC	30 days	Thu 3/3/22	Wed 4/13/22
525	Confirm datacenter readiness	1 day	Thu 4/14/22	Thu 4/14/22
526	Install network connections and gateways	70 days	Thu 1/6/22	Wed 4/13/22
527	**Complete PSAP configurations**	**6 days**	**Thu 4/14/22**	**Thu 4/21/22**
528	Test CPE interfaces	5 days	Thu 4/14/22	Wed 4/20/22
529	Test circuits	5 days	Thu 4/14/22	Wed 4/20/22
530	Execute interface agreements if needed with CPE vendors	1 day	Thu 4/21/22	Thu 4/21/22
531	Confirm end-to-end connectivity and gateways to accommodate legacy systems	1 day	Fri 4/22/22	Fri 4/22/22
532	Standup POIs	1 day	Mon 4/25/22	Mon 4/25/22
533	Publish and review cutover plan with stakeholders	10 days	Mon 4/25/22	Fri 5/6/22
534	**Phase III: Cutover**	**197 days**	**Tue 9/7/21**	**Wed 6/8/22**
535	Execute training plan	3 days	Mon 5/9/22	Wed 5/11/22
536	confirm readiness for cutover	1 day	Thu 5/12/22	Thu 5/12/22
537	Obtain state and local concurrence to cutover PSAP 1	5 days	Fri 5/13/22	Thu 5/19/22
538	**Prepare PSAP 1 for cutover**	**12 days**	**Fri 5/20/22**	**Mon 6/6/22**
539	Confirm fail-back plan in place	1 day	Fri 5/20/22	Fri 5/20/22
540	Confirm CPE interfaces operational	5 days	Fri 5/20/22	Thu 5/26/22
541	Confirm OSP readiness	2 days	Fri 5/27/22	Mon 5/30/22
542	Confirm training completed	1 day	Tue 5/31/22	Tue 5/31/22
543	Confirm PSAP ready for flash network cutover	1 day	Wed 6/1/22	Wed 6/1/22
544	Notify state PSAP 1 ready for flash cutover	1 day	Wed 6/1/22	Wed 6/1/22
545	Perform cutover	2 days	Thu 6/2/22	Fri 6/3/22
546	Confirm success	1 day	Mon 6/6/22	Mon 6/6/22
547	Obtain state approval to proceed with cutovers of remaining PSAPS	2 days	Tue 6/7/22	Wed 6/8/22
548	**Perform flash network cutover**	**14 days**	**Tue 9/7/21**	**Fri 9/24/21**
549	Confirm fail-back plan in place	1 day	Tue 9/7/21	Tue 9/7/21
550	Turn-up core services	1 day	Wed 9/8/21	Wed 9/8/21

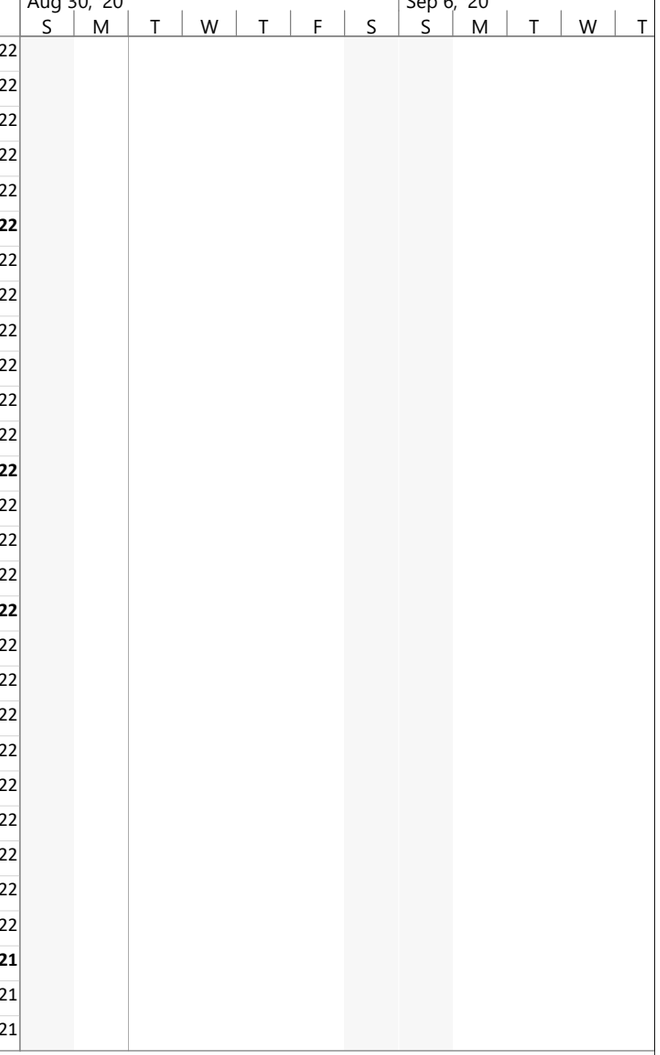

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	

ID	Task Name	Duration	Start	Finish
551	Activate interface between core services and legacy network	3 days	Thu 9/9/21	Mon 9/13/21
552	Migrate OSPs to i3 network	3 days	Thu 9/9/21	Mon 9/13/21
553	Onboard carriers into location database	3 days	Thu 9/9/21	Mon 9/13/21
554	Link core services to ESInet	1 day	Tue 9/14/21	Tue 9/14/21
555	Perform flash network cutover	1 day	Wed 9/15/21	Wed 9/15/21
556	Confirm carrier services	1 day	Thu 9/16/21	Thu 9/16/21
557	Confirm cutover of all PSAPs, datacenters and POIs	5 days	Fri 9/17/21	Thu 9/23/21
558	Cutover confirmed to state	1 day	Fri 9/24/21	Fri 9/24/21
559	**Phase IV: Observation and Acceptance**	**39 days**	**Mon 9/27/21**	**Thu 11/18/21**
560	Execute ATP	5 days	Mon 9/27/21	Fri 10/1/21
561	Provisional acceptance accorded by state	1 day	Mon 10/4/21	Mon 10/4/21
562	Perform 30-day observation period	30 days	Tue 10/5/21	Mon 11/15/21
563	Close punch list	30 days	Tue 10/5/21	Mon 11/15/21
564	Final acceptance by state	2 days	Tue 11/16/21	Wed 11/17/21
565	Transition to operational environment	1 day	Thu 11/18/21	Thu 11/18/21
566	**North Eastern Region**	**197 days**	**Fri 11/19/21**	**Mon 8/22/22**
567	**OSP Connectivity Planning**	**77 days**	**Fri 11/19/21**	**Mon 3/7/22**
568	Distribute OSP survey forms and schedule individual OSP discussions	7 days	Fri 11/19/21	Mon 11/29/21
569	Conduct OSP discussions	60 days	Tue 11/30/21	Mon 2/21/22
570	Develop Draft OSP connectivity plan	10 days	Tue 2/22/22	Mon 3/7/22
571	Draft Aggregation plan and circulate for comment	10 days	Tue 2/22/22	Mon 3/7/22
572	**Survey (TBD) PSAPs and Dispatch Centers**	**96 days**	**Tue 11/30/21**	**Tue 4/12/22**
573	Publish survey form	1 day	Tue 11/30/21	Tue 11/30/21
574	schedule visits	5 days	Wed 12/1/21	Tue 12/7/21
575	Conduct visits, compile data and revise plans accordingly	90 days	Wed 12/8/21	Tue 4/12/22
576	Publish revised PM Plan	1 day	Wed 4/13/22	Wed 4/13/22
577	**Enhance datacenters as needed**	**7 days**	**Thu 4/14/22**	**Fri 4/22/22**
578	Confirm rack space and other DC needs satisfied	5 days	Thu 4/14/22	Wed 4/20/22
579	Plan for deploying ECRF, LVF and other GIS components	5 days	Thu 4/14/22	Wed 4/20/22

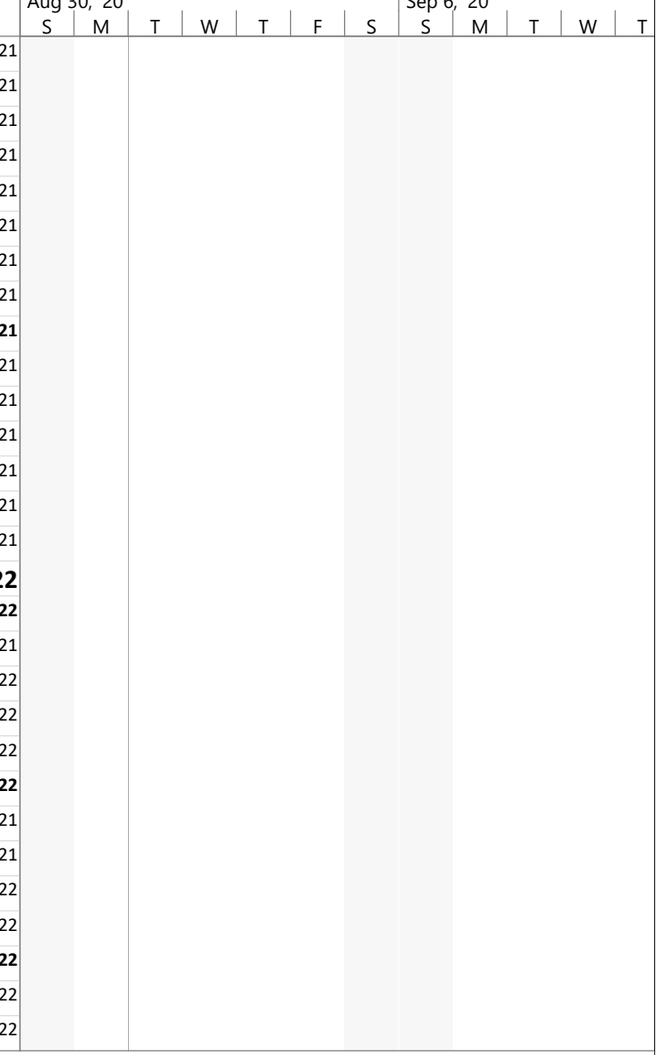

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task
Split
Milestone
Summary
Project Summary
Inactive Task
Inactive Milestone
Inactive Summary
Manual Task
Duration-only
Manual Summary Rollup
Manual Summary
Start-only
Finish-only
External Tasks
External Milestone
Deadline
Progress
Manual Progress


ID	Task Name	Duration	Start	Finish
580	Identify enhancements needed in datacenters	5 days	Thu 4/14/22	Wed 4/20/22
581	Order new components and schedule labor	2 days	Thu 4/21/22	Fri 4/22/22
582	Identity and provision POIs	5 days	Thu 4/21/22	Wed 4/27/22
583	**Revise network design IAW tasks above**	**52 days**	**Thu 4/14/22**	**Fri 6/24/22**
584	Confirm network typology and provisioning plans	5 days	Thu 4/14/22	Wed 4/20/22
585	ID need for legacy gateways and provision	3 days	Thu 4/14/22	Mon 4/18/22
586	Complete NENA checklist 75-002	2 days	Thu 4/28/22	Fri 4/29/22
587	Confirm compliance with network security plan	2 days	Mon 5/2/22	Tue 5/3/22
588	Confirm transport independence and diversity	5 days	Wed 5/4/22	Tue 5/10/22
589	Prepare circuit plan and place orders	5 days	Wed 5/4/22	Tue 5/10/22
590	**ID changes to standard dashboard required for this project**	**30 days**	**Thu 4/14/22**	**Wed 5/25/22**
591	**ID PSAP needs and place orders**	**30 days**	**Thu 4/14/22**	**Wed 5/25/22**
592	Schedule installs and establish links to PSAP CPE vendors	30 days	Thu 4/14/22	Wed 5/25/22
593	Develop test plans with all vendors to ensure interface effectiveness	30 days	Thu 4/14/22	Wed 5/25/22
594	**Provision Monitoring**	**52 days**	**Thu 4/14/22**	**Fri 6/24/22**
595	Program OCOM	10 days	Thu 5/26/22	Wed 6/8/22
596	Program FortiSIEM	10 days	Thu 5/26/22	Wed 6/8/22
597	Plan E-Bonding capability	10 days	Thu 5/26/22	Wed 6/8/22
598	Adapt Call Data Record Management System / 9-1-1 Traffic Logging to satisfy state requirements	10 days	Thu 5/26/22	Wed 6/8/22
599	**Provision NGCS (Core Services) per NENA standards**	**47 days**	**Thu 4/21/22**	**Fri 6/24/22**
600	Provision two geographically diverse cores capable of 99.999% availability	30 days	Thu 4/28/22	Wed 6/8/22
601	Confirm active-active deployment negates any possible single-points-of-failure	1 day	Thu 6/9/22	Thu 6/9/22
602	**Design GIS solution**	**47 days**	**Thu 4/21/22**	**Fri 6/24/22**
603	Finalize plans for ECRF, LVF and other GIS components	45 days	Thu 4/21/22	Wed 6/22/22
604	Identify and provision GIS elements for use in datacenters	1 day	Thu 6/23/22	Thu 6/23/22
605	Confirm two instances of ECRF/PRF	1 day	Thu 6/23/22	Thu 6/23/22
606	Confirm data QA/QC manager is capable of meeting state and local needs	1 day	Fri 6/24/22	Fri 6/24/22
607	Publish training plan for stakeholder comment	50 days	Thu 4/14/22	Wed 6/22/22
608	**Phase II: Deployment**	**97 days**	**Tue 3/8/22**	**Wed 7/20/22**



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task	Inactive Task	Manual Summary Rollup	External Milestone
Split	Inactive Milestone	Manual Summary	Deadline
Milestone	Inactive Summary	Start-only	Progress
Summary	Manual Task	Finish-only	Manual Progress
Project Summary	Duration-only	External Tasks	

ID	Task Name	Duration	Start	Finish
609	**Complete OSP integration**	**50 days**	**Tue 3/8/22**	**Mon 5/16/22**
610	Execute interconnect agreements	10 days	Tue 3/8/22	Mon 3/21/22
611	Deploy i3-Interconnect where needed	30 days	Tue 3/22/22	Mon 5/2/22
612	Execute POI and datacenter interconnection	10 days	Tue 5/3/22	Mon 5/16/22
613	**Install datacenter links and enhancements**	**49 days**	**Thu 4/21/22**	**Tue 6/28/22**
614	Complete rack installs	7 days	Thu 4/21/22	Fri 4/29/22
615	Deploy core services and test diversity and compliance with call delivery standards.	30 days	Mon 5/2/22	Fri 6/10/22
616	Install GIS components	30 days	Mon 5/2/22	Fri 6/10/22
617	Install circuits, cross-connects and FOC	30 days	Tue 5/17/22	Mon 6/27/22
618	Confirm datacenter readiness	1 day	Tue 6/28/22	Tue 6/28/22
619	Install network connections and gateways	70 days	Tue 3/22/22	Mon 6/27/22
620	**Complete PSAP configurations**	**6 days**	**Tue 6/28/22**	**Tue 7/5/22**
621	Test CPE interfaces	5 days	Tue 6/28/22	Mon 7/4/22
622	Test circuits	5 days	Tue 6/28/22	Mon 7/4/22
623	Execute interface agreements if needed with CPE vendors	1 day	Tue 7/5/22	Tue 7/5/22
624	Confirm end-to-end connectivity and gateways to accommodate legacy systems	1 day	Wed 7/6/22	Wed 7/6/22
625	Standup POIs	1 day	Thu 7/7/22	Thu 7/7/22
626	Publish and review cutover plan with stakeholders	10 days	Thu 7/7/22	Wed 7/20/22
627	**Phase III: Cutover**	**197 days**	**Fri 11/19/21**	**Mon 8/22/22**
628	Execute training plan	3 days	Thu 7/21/22	Mon 7/25/22
629	confirm readiness for cutover	1 day	Tue 7/26/22	Tue 7/26/22
630	Obtain state and local concurrence to cutover PSAP 1	5 days	Wed 7/27/22	Tue 8/2/22
631	**Prepare PSAP 1 for cutover**	**12 days**	**Wed 8/3/22**	**Thu 8/18/22**
632	Confirm fail-back plan in place	1 day	Wed 8/3/22	Wed 8/3/22
633	Confirm CPE interfaces operational	5 days	Wed 8/3/22	Tue 8/9/22
634	Confirm OSP readiness	2 days	Wed 8/10/22	Thu 8/11/22
635	Confirm training completed	1 day	Fri 8/12/22	Fri 8/12/22
636	Confirm PSAP ready for flash network cutover	1 day	Mon 8/15/22	Mon 8/15/22
637	Notify state PSAP 1 ready for flash cutover	1 day	Mon 8/15/22	Mon 8/15/22

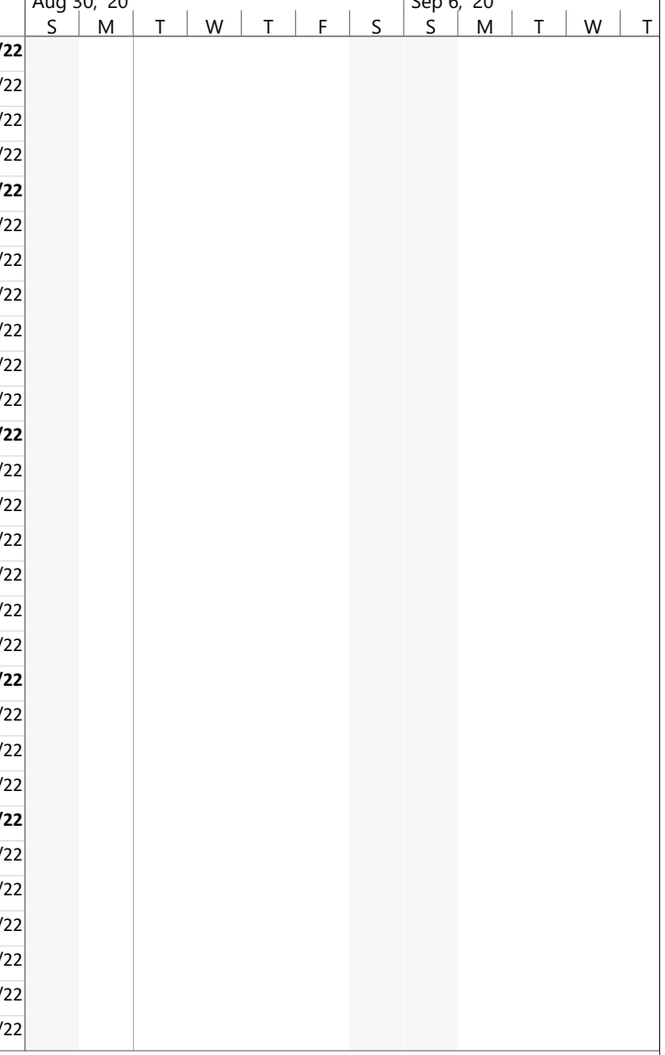

Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task
Split
Milestone
Summary
Project Summary
Inactive Task
Inactive Milestone
Inactive Summary
Manual Task
Duration-only
Manual Summary Rollup
Manual Summary
Start-only
Finish-only
External Tasks
External Milestone
Deadline
Progress
Manual Progress

ID	Task Name	Duration	Start	Finish
638	Perform cutover	2 days	Tue 8/16/22	Wed 8/17/22
639	Confirm success	1 day	Thu 8/18/22	Thu 8/18/22
640	Obtain state approval to proceed with cutovers of remaining PSAPS	2 days	Fri 8/19/22	Mon 8/22/22
641	**Perform flash network cutover**	**14 days**	**Fri 11/19/21**	**Wed 12/8/21**
642	Confirm fail-back plan in place	1 day	Fri 11/19/21	Fri 11/19/21
643	Turn-up core services	1 day	Mon 11/22/21	Mon 11/22/21
644	Activate interface between core services and legacy network	3 days	Tue 11/23/21	Thu 11/25/21
645	Migrate OSPs to i3 network	3 days	Tue 11/23/21	Thu 11/25/21
646	Onboard carriers into location database	3 days	Tue 11/23/21	Thu 11/25/21
647	Link core services to ESInet	1 day	Fri 11/26/21	Fri 11/26/21
648	Perform flash network cutover	1 day	Mon 11/29/21	Mon 11/29/21
649	Confirm carrier services	1 day	Tue 11/30/21	Tue 11/30/21
650	Confirm cutover of all PSAPs, datacenters and POIs	5 days	Wed 12/1/21	Tue 12/7/21
651	Cutover confirmed to state	1 day	Wed 12/8/21	Wed 12/8/21
652	**Phase IV: Observation and Acceptance**	**39 days**	**Thu 12/9/21**	**Tue 2/1/22**
653	Execute ATP	5 days	Thu 12/9/21	Wed 12/15/21
654	Provisional acceptance accorded by state	1 day	Thu 12/16/21	Thu 12/16/21
655	Perform 30-day observation period	30 days	Fri 12/17/21	Thu 1/27/22
656	Close punch list	30 days	Fri 12/17/21	Thu 1/27/22
657	Final acceptance by state	2 days	Fri 1/28/22	Mon 1/31/22
658	Transition to operational environment	1 day	Tue 2/1/22	Tue 2/1/22



Project: Nebraska NGCS Notional Pro
Date: Fri 5/22/20

Task
Split
Milestone
Summary
Project Summary
Inactive Task
Inactive Milestone
Inactive Summary
Manual Task
Duration-only
Manual Summary Rollup
Manual Summary
Start-only
Finish-only
External Tasks
External Milestone
Deadline
Progress
Manual Progress

CenturyLink®

CERTIFICATION REGARDING COMPLIANCE WITH E-VERIFY

CenturyLink, Inc. does hereby state the following facts to be true:

1. CenturyLink and its affiliates constitute a business entity that is an employer of employees in the United States or has subcontractors who employ employees in the United States.

2. CenturyLink is executing this affidavit to assure, confirm, and warrant that it has verified the work authorization of its employees at the time of hire through the E-Verify program operated by the United States Department of Homeland Security as defined in NCGS §64-25(5) since January 25, 2012. CenturyLink's subcontractors are contractually required to comply with all state and federal laws.

This the 13 day of February 2020

CenturyLink, Inc.

Signature: Abby McConnell
Name: Abby McConnell
Title: HR Shared Service Coordinator

State of

Louisiana
County of Ouachita
Parish


Carrick B. Inabnett, a Notary Public of the aforesaid
Parish
State and ~~County~~, do certify that Abby McConnell personally, appeared before me this day, and being duly sworn and in my presence signed and acknowledged the execution of the foregoing CERTIFICATION.

Witness my hand and official seal, this the 13th day of February, 2020

Carrick B. Inabnett
Notary Public My commission expires: Death

Carrick B. Inabnett

100 CenturyLink Drive
Monroe, LA 71203
Tel: 318.388.9000
www.centurylink.com



CENTURYLINK MASTER SERVICE AGREEMENT
CENTURYLINK MPLS (IPVPN AND VPLS) VPN SERVICE
SERVICE SCHEDULE

1. Applicability. This Service Schedule forms part of the Master Service Agreement between CenturyLink and Customer ("Agreement") and is applicable only where Customer orders CenturyLink MPLS (IPVPN and VPLS) VPN Service (which may also be called IP VPN, IPVPN, IPVPN Port, Private Port, IQ Networking Private Port, MPLS/IP VPN Port, VPN, NBIPVPN (Network Based IP VPN), Virtual Private Network, or IP Solutions Private Port on ordering, pricing, invoicing, or other documentation). Capitalized terms used but not defined herein have the definitions given to them in the Agreement. Customer expressly agrees that CenturyLink may use affiliates or third party suppliers to provide MPLS VPN Service, provided that CenturyLink remains responsible to Customer hereunder.

2. Service Description. MPLS VPN Service includes two (2) virtual private network ("VPN") services, IPVPN and VPLS, providing private site-to-site communications over CenturyLink's MPLS network. IPVPN utilizes Internet Protocol; VPLS is provided using Ethernet. Customer must purchase at least 2 ports to set up private site-to-site connections. The Service is connected to each site, including additional sites designated by Customer (together "Customer Sites") through the Customer port at either a circuit location address or a CenturyLink Point of Presence (PoP) as specified in the Order. Customer Sites will be connected to a port at one or more CenturyLink MPLS Network PoPs at a fixed data transmission rate. Standard network management web tools are also provided in conjunction with the MPLS VPN Services. The VPLS offer of Enterprise Switched Native LAN ("SNLAN") allows multiple Customer locations to interconnect within a single CenturyLink-defined metro area network ("MAN"). The VPLS offer of Extended Native LAN ("ENLAN") allows Customer to connect multiple SNLAN networks between MANs.

3. Additional features and functionality may include:

a. Enhanced Reporting. CenturyLink offers enhanced reporting features including Performance Assurance, Enhanced Management, and End to End Statistics (collectively these are referred to herein as "Enhanced Reporting"). Customer may subscribe to Performance Assurance and End to End Statistics for an additional charge. If available at Customer's location, Enhanced Management will be included with Customer's MPLS VPN Service at no additional charge. Customer may request information regarding the availability of Enhanced Management at any particular location. Where available, these features provide end-to-end reporting and SLA's for the following statistics: data delivery, latency and jitter that can be accessed by Customer via the CenturyLink provided customer portal.

b. Class of Service (CoS). Customer may purchase CoS where available providing the ability to prioritize certain identifiable traffic flows between MPLS network ports. Customer is solely responsible for the selection of classes of service as stated in the Order. If a Service Order references Premium Plus/Premium CIR (or PIR), the stated bandwidth is included in, and not in addition to, the Committed Information Rate or Peak Information Rate.

c. Smart Demarcation. In certain locations, where available, for VPN and VPLS services with Ethernet access in the domestic U.S. and VPLS services with Ethernet access outside of the U.S., CenturyLink provides 'Smart Demarcation' which is the supply and installation of a Smart Demarcation device (also referred to as a Network Interface Device or "NID") used for Ethernet connectivity fault management for up to 1Gbps port speeds at Customer Sites.

4. Charges. Customer shall be billed non-recurring charges ("NRC") and monthly recurring charges ("MRC") for MPLS VPN Services as set forth in the Order or pricing attachment. NRC includes applicable installation charges for local-access circuit and each port. MRC includes local-access charges, port connection charges and bandwidth charges. Bandwidth may be identified on an Order or pricing attachment as Bandwidth, Commit, Committed Information Rate (or CIR), or Peak Information Rate (or PIR). Other charges, including but not limited to usage based charges, may apply as stated in the Order or pricing attachment. Where Customer orders MPLS VPN Services bundled with either CenturyLink Internet Services or Level 3 Enterprise Voice SIP Based Services (either combination is referred to herein as a "Converged Service") such charges will show on the invoice as Converged Services. For clarification, the Converged Service is treated as a single Service and if Customer wishes to unbundle or terminate a part of the Converged Service, early termination liability may apply and Customer will be required to execute new orders for the desired stand-alone Service.

5. The following services may be available at an additional charge to be set forth in an Order and pursuant to the separate Service Schedule for such services:

a. CenturyLink Internet Services. As part of a Converged Service, Customer may order Internet Services which are high speed symmetrical Internet services providing access to the CenturyLink IP Network and the global internet.

b. CenturyLink Enterprise Voice SIP Based Services. As part of a Converged Service, Customer may order SIP based enterprise voice for Public Switched Telephone Network connectivity, outbound (1+) access to U.S. (interstate and intrastate) and international locations, inbound (8XX) service, and international toll free calling.

c. Application Performance Management. As an optional service feature for IPVPN, where available Customer may subscribe to Application Performance Management ("APM") which provides near real-time information for live monitoring and historical data for analysis and reporting on all network traffic end-to-end, including advanced statistics on latency, jitter and packet loss, as well as general utilization by way of an inline Analysis Service Element ("ASE").

d. Managed Network Services. As an additional Service offering, where available Customer may order CenturyLink Managed Network Services ("MNS") in which Customer premises equipment ("CPE") is provided by either the Customer or CenturyLink, but in all cases is managed and maintained by CenturyLink. MNS may include, but is not limited to, Routers, IADs, SBCs, and firewalls.

© CenturyLink. All Rights Reserved.

e. Secure Access. As an additional Service offering, where available Customer may order Secure Access Site and Secure Access Cellular.

f. Managed Security Services. As an additional Service offering, if available Customer may order certain managed security services ("MSS") which may be available on a cloud-based (MSS-Cloud) solution. The MSS Cloud solution may also be referenced as a Secure Internet Access Firewall or SIA Firewall when ordered in conjunction with CenturyLink MPLS Service.

6. Customer Responsibilities. Customer is responsible for providing the network design specifications including pre-existing LAN/WAN IP addressing schemes, MAC addresses and circuit designs. Customer is solely responsible for all equipment and other facilities used in connection with the Service which are not provided by CenturyLink. All IP addresses, if any, assigned to Customer by CenturyLink shall revert to CenturyLink upon termination of Service, and Customer shall cease using such addresses as of the effective date of termination. For installation of the Smart Demarcation device (NID) at Customer's Site, Customer shall (i) provide access at each Site for installation, implementation and maintenance ("Work") at scheduled times, (ii) make appropriate contact personnel available on-site for such Work, (iii) provide all necessary power distribution boxes, conduits, telco backboard space for equipment mounting, grounding, surge and lightning protection and associated hardware and power outlets within 4 feet (1 meter) of the location at which a NID is to be installed, (iv) provide all required extended demarcation inside wiring, including any necessary building alterations to meet wiring and any other site requirements, (v) ensure that the NID can be installed within 6 feet (2 meters) of the Customer provided equipment and the Customer provided or third party provided extension of the local access circuit demarcation, or otherwise provide additional cabling at the Customer's expense, (vi) clearly marking each telecommunications extended local access circuit demarcation point to allow the installer to connect the correct circuit to the correct NID interface, and (vii) connection of the NID to the Customer Router or LAN.

7. On-Net and Off-net Access. Access services provided entirely on the CenturyLink owned and operated network ("Network") are "On-Net Access Services". Additionally, CenturyLink may use third parties to reach Customer's site from the CenturyLink Network ("Off-Net Access Services"). Local Access may be provisioned utilizing one of the following service technologies: special access, ethernet local access, or wavelength local access.

8. Service Levels and Service Credits. The following Service Levels (SLAs) apply as set forth below. When Converged Services are ordered the SLAs below apply in lieu of any SLAs identified in the applicable CenturyLink Internet Service Schedule and/or CenturyLink Enterprise Voice SIP Based Service Schedule as referenced above in Section 5. Depending on the type of Service ordered by Customer, the Class of Service levels of Premium Plus, Premium, Enhanced Plus, Enhanced, and Basic may be referenced on an Order as Real Time, Interactive, Mission Critical, Priority and Best Effort, respectively.

a. Availability Service Level. The Availability Service Level in the United States is 99.99%. Outside the United States, the Availability Service Level for Fully On-Net MPLS VPN Service is 99.99% and 99.9% for Off-Net Service. Fully On-Net MPLS VPN Service is provided entirely on CenturyLink's owned and operated network. Off-Net Service is a service that is partially or entirely provided using third party circuits not owned and operated by CenturyLink. For IPVPN and VPLS, Service Availability is calculated on a per site basis.

b. Packet Delivery, Latency and Jitter Service Levels - PoP to PoP. CenturyLink's service levels for packet delivery, latency, or jitter are set forth below in Tables A and B. These latency calculations are averaged monthly between all CenturyLink designated points of presence ("POPs") in a given region.

Table A: PoP to PoP

SLA Boundary	Measurement Parameter	Class of Service		
		Premium Plus/ Premium (e.g. Voice/ Video)	Enhanced Plus/Enhanced (e.g. Critical/ Preferred Data)	Basic Plus/ Basic (e.g. Default/ Internet / Bulk Data)
Intra Continental U.S.	Average Packet Delivery	99.99%	99.95%	N/A
	Average Two Way Latency	City Pair*	City Pair*	City Pair*
	Jitter (one way)	≤ 3 ms	N/A	N/A
Intra EU and EU - US	Average Packet Delivery	99.99%	99.95%	N/A
	Average Two Way Latency	City Pair	City Pair	City Pair
	Jitter (one way)	≤ 10 ms	N/A	N/A
Rest of World	Average Packet Delivery	99.9%	99.8%	N/A
	Average Two Way Latency	City Pair	City Pair	City Pair
	Jitter (one way)	Regional	N/A	N/A

© CenturyLink. All Rights Reserved.

*Appendix 1 sets forth the "City Pair" monthly average two way latency in the MPLS VPN PoP to PoP two way latency SLA matrix. Appendix 1 is available upon request. For city pairs that are not listed in Appendix 1, the following regional metrics apply per Table B. Regional metric calculations are averaged monthly between all CenturyLink POPs in a given region.

Table B: Regional Two Way Latency and Jitter

Description	Average Two Way Latency (milliseconds)	Average Jitter Roundtrip (milliseconds)
Trans-Atlantic (London/Amsterdam – New York)	≤ 95 ms	≤ 6 ms
Intra–United Kingdom	≤ 25 ms	≤ 6 ms
European network	≤ 45 ms	≤ 6 ms
North American Network *	≤ 65 ms	≤ 6 ms
Pacific (Tokyo – Sacramento, CA)	≤ 150 ms	≤ 6 ms
Sydney – US West (Sacramento, CA)	≤ 270 ms	≤ 6 ms
Sydney – Asia (Tokyo)	≤ 200 ms	≤ 6 ms
Intra–Asia **	≤ 140 ms	≤ 6 ms
South America (Buenos Aires, Sao Paolo, Panama City, Santiago, and Miami)	≤ 170 ms	≤ 6 ms
New York – South Africa	≤ 295 ms	≤ 40 ms
London – South Africa	≤ 230 ms	≤ 40 ms

* Add 90ms from/to the Mexico PoP

** 'Intra-Asia' is defined as: Japan, Australia, Hong Kong, Taiwan, Philippines, South Korea, Thailand, Malaysia, and Indonesia.

c. Packet Delivery, Latency and Jitter Service Levels – End to End (Optional). End to End Packet Delivery, jitter and two way latency SLAs apply only to sites where Customer has ordered Enhanced Reporting or APM for IPVPN. For sites with DSL, microwave or satellite access, End to End packet delivery, jitter, and latency SLAs do not apply. To calculate an end to end two way latency SLA, the loop factor table applies per Appendix 1.

Table C: End to End

SLA Boundary	Measurement Parameter	Class of Service		
		Premium Plus/ Premium (e.g. Voice/Video)	Enhanced Plus/Enhanced (e.g. Critical/Preferred Data)	Basic Plus/ Basic (e.g. Default/Bulk Data)
Intra Continental U.S.	Average Packet Delivery	99.9%	99.5%	N/A
	Average Two Way Latency	City Pair Plus Loop Factor Table*	City Pair Plus Loop Factor Table*	City Pair Plus Loop Factor Table*
	Jitter (Round Trip)	≤ 3 ms	N/A	N/A
Intra EU and EU -US	Average Packet Delivery	99.9%	99.5%	N/A
	Average Two Way Latency	City Pair Plus Loop Factor Table*	City Pair Plus Loop Factor Table*	City Pair Plus Loop Factor Table*
	Jitter (Round Trip)	≤ 10 ms	N/A	N/A
Rest of World	Average Packet Delivery	99.5%	99.0%	N/A
	Average Two Way Latency	City Pair Plus Loop Factor Table*	City Pair Plus Loop Factor Table*	City Pair Plus Loop Factor Table*
	Jitter (Round Trip)	Regional	N/A	N/A

© CenturyLink. All Rights Reserved.

d. Credits for SLAs above. All SLA credits are calculated after deduction of all discounts and other special pricing arrangements, and are not applied to governmental fees, taxes, surcharges and similar additional charges. Credit percentages are applied to the MRC of the CIR/CDR rate, port charge, and local access circuits for applicable sites only. In no event will SLA credits in any calendar month exceed 100% of the total MRCs (excluding local access) for the affected Site(s). All approved SLA credits requested by Customer for a given month will be totaled and applied to Customer's next following invoice for the Service, or as promptly thereafter as is practical in the event of a dispute.

i. Availability Service Credit. Service is "Unavailable" (except in the case of an Excused Outage) if the Customer port at a Customer site is unable to pass traffic. Service Unavailability is calculated from the timestamp CenturyLink opens a trouble ticket following the report of a problem by the Customer until the time the ticket is closed. If credits are due under this SLA, no other SLAs apply to the same event. If Service is Unavailable for reasons other than an Excused Outage, Customer will be entitled to a service credit off of the MRC for the affected Service locations based on the cumulative Unavailability of the Service in a given calendar month as set forth in the tables below. For a Fully On-Net Service, the SLA and credits in Table D will apply. For Off-Net Service, the SLA and credits in Table E will apply.

Table D:
US Domestic Only or Fully On-Net MPLS VPN Service

Cumulative Unavailability (hrs:mins:secs)	Service Level Credit
00:00:01 – 00:04:18 (99.99%)	No Credit
00:04:19– 00:43:00	5%
00:43:01 – 04:00:00	10%
04:00:01 – 8:00:00	20%
08:00:01 – 12:00:00	30%
12:00:01 – 16:00:00	40%
16:00:01 – 24:00:00	50%
24:00:01 or greater	100%

Table E:
Off-Net MPLS VPN Service and Service outside the Domestic US

Cumulative Unavailability (hrs:mins:secs)	Service Level Credit
00:00:01 – 00:43:00 (99.9%)	No Credit
00:43:01 – 04:00:00	10%
04:00:01 – 8:00:00	20%
08:00:01 – 12:00:00	30%
12:00:01 – 16:00:00	40%
16:00:01 – 24:00:00	50%
24:00:01 or greater	100%

ii. Data Delivery, Latency, and Jitter Service Credits. The PoP to PoP SLAs are based on monthly average performance between nodes on CenturyLink's MPLS network. Where End to End SLAs apply, the monthly average performance is measured between the CenturyLink Equipment deployed for APM or Enhanced Reporting, as applicable. Customer will be entitled to a service credit off of the MRC for the affected Service locations as set forth below for the Service parameter(s) not met for reasons other than an Excused Outage. Customer will not be entitled to credits under the packet delivery, latency, or jitter SLA's for the affected Service where such failure is related to Unavailability under the Availability SLA.

Monthly Service Parameter	Service Level Credit
Data Delivery	10%
Latency	10%
Jitter	10%

e. Smart Demarcation Opt-Out. Where Smart Demarcation is required by CenturyLink and Customer wants the Service provisioned without Smart Demarcation, CenturyLink agrees upon Customer's request to meet with Customer to discuss alternative options (if available).

© CenturyLink. All Rights Reserved.

f. Chronic Outage. As its sole remedy, Customer may elect to terminate an affected MPLS VPN Service, or if applicable an affected Converged Service, prior to the end of the Service Term without termination liability if, for reasons other than an Excused Outage: such MPLS Service is Unavailable (as defined in Section 5(d)(i) above) in any calendar month for: (i) twice during a 30-day period, and becomes Unavailable a third time within 30 days following the second event, or (ii) more than 24 aggregate hours during a 30-day period.. Customer may only terminate such Service that is Unavailable as described above, and must exercise its right to terminate the affected Service under this Section, in writing, within 30 days after the event giving rise to a right of termination. For clarification, termination of a Converged Service will result in termination of all applicable Services bundled together as the Converged Service under the Order.

g. Installation Service Level. CenturyLink will exercise commercially reasonable efforts to install each MPLS VPN Service on or before the Customer Commit Date for the particular Service. This installation Service Level shall not apply to Orders that contain incorrect information supplied by Customer or Orders that are altered at Customer request after submission and acceptance by CenturyLink. In the event CenturyLink does not meet this Installation Service Level for a particular MPLS VPN Service for reasons other than an Excused Outage, Customer will be entitled to a service credit for each day of delay equal to the charges 1 day of the pro rata share of the MRC associated with the affected MPLS VPN service up to a monthly maximum credit of 10 days.

h. SLA Limitations. For circuits with Bandwidths of 15 Mbps or lower, the measurement of such Data Delivery, Latency and Jitter also excludes any time period that Customer's total bandwidth utilization or bandwidth utilization by CoS exceeds fifty percent (50%) of the applicable contracted bandwidth. For circuits with bandwidths over 15 Mbps, the measurement of such Data Delivery, Latency and Jitter also excludes any time period that Customer's total bandwidth utilization exceeds seventy percent (70%) of the applicable contracted bandwidth. The Enhanced Management SLA shall not apply to any site for any calendar month if CenturyLink's measurement of Data Delivery, Latency or Jitter does not include at least twenty five percent (25%) of the duration of any calendar month. Credits provided for the applicable metric are not cumulative and, in any calendar month, Customer shall only be entitled to one credit per metric per site. All measurements are based on the average of the metrics for that calendar month.

9. Resale Restriction. Notwithstanding anything to the contrary in the Agreement, Customer is prohibited from reselling any Service provided pursuant to this Service Schedule except as expressly provided by CenturyLink, provided however, if Customer requests to resell any Converged Services such permission from CenturyLink must be in the form of an amendment signed by authorized representatives of both parties.

10. Latin American Services. With respect to Services provided in Latin America, Customer agrees that it (or its local Affiliate) will enter into a separate local country addendum/agreement (as approved by local authorities) ("LCA") with the respective CenturyLink Affiliate which provides the local Service(s) containing terms necessary to comply with local laws/regulations, and such CenturyLink Affiliate will invoice the Customer (or its local Affiliate) party to the LCA for the respective local Service(s).

11. Business Contact Information. Customer must provide to CenturyLink the names of and contact information ("Business Contact Information") for its employees ("Business Contacts") who have purchasing or other responsibilities relevant to CenturyLink's delivery of international Service under this Service Schedule. Customer consents to CenturyLink's and its affiliates or subcontractors' use and transfer to the United States of Business Contact Information for the purpose of: (a) fulfilling its obligations under this Service Schedule; and (b) providing information to Customer about CenturyLink's products and services via these Business Contacts. Customer represents that the Business Contact Information is accurate and that each Business Contact has consented to CenturyLink's processing of their Business Contact Information for the purposes set forth in this Service Schedule. The Business Contact Information provided by Customer has been collected, processed, and transferred in accordance with applicable laws, including, where applicable, any necessary notification to the relevant data protection authority in the territory in which Customer is established ("Authority"). Customer will notify CenturyLink promptly of staffing or other changes that affect CenturyLink's use of Business Contact Information. CenturyLink will have in place technical and organizational measures that ensure a level of security appropriate to the risk represented by the processing and the nature of the Business Contact Information and that protects such information against accidental or unlawful destruction or accidental loss, alteration, and unauthorized disclosure or access. CenturyLink will use the information only for the express purposes set forth in this Service Schedule. CenturyLink will identify a contact authorized to respond to inquiries concerning processing of Business Contact Information and will reasonably cooperate in good faith with Customer and the Authority concerning all such inquiries without excessive delays.

12. Withholding Taxes. All invoices will be issued to Customer and paid in the currency specified in the Order or pricing attachment. Customer will pay such invoices free of currency exchange costs or bank charges. Service charges are exclusive of taxes and presented without reduction for any Withholding Tax, all of which are the responsibility of the Customer. "Withholding Tax" means any amount or account of tax on sources of income which a payor is obliged to deduct from payments due to a recipient and account for or to any tax authority. In the event that any payment to be made to CenturyLink hereunder should be subject to reduction by reason of a Withholding Tax, Customer agrees to pay CenturyLink such amounts as would have been necessary so that the aggregate net amount received by CenturyLink after application of a Withholding Tax is the same amount as would have been received by CenturyLink if there had been no requirement to deduct or withhold such tax.

© CenturyLink. All Rights Reserved.

PRICING ATTACHMENT

For pricing, please refer to the RFP. This Pricing Attachment will be completed upon award.

© CenturyLink. All Rights Reserved.

CENTURYLINK MASTER SERVICE AGREEMENT
STATE, LOCAL AND EDUCATION GOVERNMENT AGENCIES VERSION
CENTURYLINK® LOCAL ACCESS SERVICE EXHIBIT

1. General. This Service Exhibit is applicable only where Customer orders CenturyLink Local Access Service (the "Service") and incorporates the terms of the Master Service Agreement or other service agreement and the RSS under which CenturyLink provides services to Customer (the "Agreement"). CenturyLink may subcontract any or all of the work to be performed under this Service Exhibit. All capitalized terms that are used but not defined in this Service Exhibit are defined in the Agreement or Order.

2. Service Description and Availability.

2.1 Description. Service provides the physical connection between the Service Address and the CenturyLink Domestic Network. If a generic demarcation point (such as a street address) is provided, the demarcation point for On-Net Access will be CenturyLink's Minimum Point of Entry (MPOE) at such location (as determined by CenturyLink). Off-Net Access demarcation points will be the off-net vendor's MPOE. If the Order identifies aspects of services that are procured by Customer directly from third parties, CenturyLink is not liable for such services. Customer may request additional wiring from the demarcation point to Customer's network interface equipment (where available). If Customer requests additional wiring, CenturyLink will notify Customer of the charge to be billed to Customer. Customer may either approve or disapprove CenturyLink providing the additional wiring. Additional wiring could entail electrical or optical cabling into 1) existing or new conduit or 2) bare placement in drop down ceilings, raised floors, or mounted to walls/ceilings. Once Service is accepted by Customer, the additional wiring then becomes property of and maintained by Customer. CenturyLink will maintain Service to the demarcation point only. Customer is responsible for any facility or equipment maintenance and repairs on Customer's side of the demarcation point. All equipment owned by CenturyLink remains property of CenturyLink. Customer disclaims any interest in any equipment, property or licenses used by CenturyLink to provide Service. CenturyLink will not provide Service to a residential location, even if business is conducted at that location. Service is not a standalone service and Customer must purchase the Service in connection with another CenturyLink service for which a local loop is required.

2.2 Types of Service Technologies. CenturyLink uses the following different technologies to provide Service. Some technologies or speeds may not be available in all areas or with certain types of Service.

(a) Special Access. "Special Access" means Service using digital signal bandwidths DS0, DS1 and DS3 or Optical Carrier signal bandwidths OC3, OC12, OC48 and OC192.

(b) Ethernet Local Access ("ELA"). ELA means Service under Ethernet technology and is available at bandwidths varying from 1 Mbps to 1,000 Mbps (1G) and 10G (Cross-Connect Access only).

(c) Wavelength Local Access. "Wavelength Local Access" means Service using wave division multiplexing technology. Wavelength Local Access is available at bandwidths of 1 GbE, 10 GbE LAN PHY, 2.5 G (OC48), 10 GbE WAN PHY (OC192), 40G, OTU1, OTU2, OTU3, 1G, 2G, 4G and 10G.

(d) DSL Local Access. "DSL Local Access" means access using digital subscriber line ("DSL") technology. DSL Local Access is available at bandwidths varying from 128 kbps/64 kbps to 15000 Mbps/1000 Mbps.

2.2.1 Use of IP Connection. In some locations, CenturyLink will enable the Service using "IP Connection" which is a Layer 3, symmetrical functionality that utilizes established IP and MPLS transport technologies. In such cases, Customer agrees that it will use IP Connection functionality only for the provision of either: (i) wireline broadband Internet access (as defined in applicable Federal Communications Commission orders and regulations), or (ii) wireline broadband Internet access plus additional information services, with wireline broadband Internet access constituting a principal use. CenturyLink can provision IP Connection functionality over multiple designs with MPLS transport supporting speeds up to 1G/1G.

2.3 Types of Service. CenturyLink offers the following three types of Service: CenturyLink Provided Access, Customer Provided Access or Cross-Connect Access.

2.3.1 CenturyLink Provided Access. "CenturyLink Provided Access" or "CLPA" means either On-Net Access or Off-Net Access. "On-Net Access" is provided on the CenturyLink owned and operated network. Any access not provided on the CenturyLink owned and operated network is "Off-Net Access." Customer may request a Preferred Provider for Off-Net Access from a list of available providers with whom CenturyLink has interconnect agreements. CenturyLink will attempt to use Customer's Preferred Provider, but both final routing and the provider actually used will be chosen by CenturyLink. If CenturyLink is unable to use Customer's Preferred Provider for a specific Service Address as designated in the pricing attachment or a quote, then the rate for Service at that Service Address may be subject to change. Where available for Special Access, ELA and Wavelength Local Access, Customer may request CenturyLink to provide a separate fiber facility path for a protection system between the local access provider's serving wire center and the Service Address ("Protect Route"). Protect Route uses backup electronics and two physically separate facility paths in the provisioning of Service. If the working facility or electronics fail, or the Service performance becomes impaired, the facility is designed to automatically switch to the Service protect path in order to maintain a near-continuous flow of information between locations. Special Access and ELA are also generally available as a central office meet point at a local access provider central office to which Customer has a dedicated connection. Unless otherwise covered by another SLA, On-Net Access is subject to the On-Net Local Access Service Level Agreement located at http://www.centurylink.com/legal/docs/Local-Access-SLA.pdf, which is subject to change.

2.3.2 Customer Provided Access. "Customer Provided Access" or "CPA" means a local loop that Customer orders from a local access provider to connect Customer's premises to the CenturyLink Domestic Network at a connection point specified by CenturyLink. CenturyLink will provide Customer with a limited letter of agency ("LOA"), which is incorporated by this reference, authorizing Customer

© CenturyLink. All Rights Reserved.

to act as CenturyLink's agent so that Customer's local access provider will connect Customer's premises to the CenturyLink Domestic Network. Customer will also need to execute a CPA-DAR Addendum for CPA POP with ELA or Wavelength Local Access. Customer will pay a CPA charge to CenturyLink when Customer uses the following: (a) Special Access CPA dedicated facilities or ELA CPA virtual local area network ("VLAN"), both of which are dedicated entrance facilities CenturyLink leases from a local access provider and that carry traffic only from CenturyLink; or (b) ELA CPA POP, which requires CenturyLink to provide space and power for the local access provider to install Ethernet equipment; or (c) Wavelength Local Access. Customer will pay a CPA charge to CenturyLink when Customer uses Special Access CPA non-dedicated facilities owned by local access providers and that carry traffic from multiple carriers, including CenturyLink, if the provider charges CenturyLink for those facilities. CPA ELA VLAN is an access type where CenturyLink will provision and assign an Ethernet virtual circuit from a CenturyLink POP to a Customer designated Ethernet facility leased from a common Ethernet service provider. This access will be used to connect to a CenturyLink VLAN assignment on a CenturyLink IQ® Networking Private Port or E-Line. CenturyLink will not bill customer a CPA charge for an IP layer 3 expansion site because Customer, not CenturyLink, is responsible for ordering a cross-connect from the IP layer 3 expansion site manager to meet CenturyLink in the IP layer 3 expansion site's meet-me-room. CPA is the responsibility of Customer and CenturyLink will not pay for or troubleshoot components of CPA.

2.3.3 Cross-Connect Access. "Cross-Connect Access" or "XCA" means: (a) an intra-POP connection between certain Customer facilities with direct access to the CenturyLink Domestic Network and the CenturyLink backbone access point (either (i) located within CenturyLink's transport area where CenturyLink allows Customer to bring its own fiber directly to the CenturyLink fiber under an executed Direct Connect Agreement ("Direct Connect") or (ii) in an area where Customer has leased space in a CPOP, a remote collocation site, or a collocation hotel under a Telecommunications Collocation License Agreement or (b) a connection between a CenturyLink-determined data center and a CenturyLink IQ Networking Port, Optical Wavelength Service ("OWS"), or E-Line ("Data Center Access") under an executed CenturyLink TS Service Exhibit with a CenturyLink IQ Networking, OWS or E-Line Service Exhibit. Data Center Access is available in bandwidths of 100 Mbps, 1G, and 10G (CenturyLink IQ Networking and OWS only). Direct Connect requires splicing of Customer and CenturyLink fibers and cross-connection of individual circuits.

2.4 RSS. Customer understands that Service is an interstate telecommunications service, as defined by Federal Communications Commission regulations and represents while using the Service, more than 10% of its usage will be interstate usage.

3. Ordering. Customer may submit requests for Service in a form designated by CenturyLink ("Order"). CenturyLink will notify Customer of acceptance of an Order for Service by delivering (in writing or electronically) the date by which CenturyLink will install Service (the "Customer Commit Date"), or by delivering the Service. Provision of Services is subject to availability of adequate capacity and CenturyLink's acceptance of an Order. In lieu of installation Service Level credits, if CenturyLink's installation of Service is delayed by more than 30 business days beyond the Customer Commit Date, Customer may terminate the affected Service without liability upon written notice to CenturyLink, provided such written notice is delivered prior to CenturyLink delivering a Connection Notice for the affected Service. This termination right will not apply where CenturyLink is constructing facilities to a new location not previously served by CenturyLink.

4. Charges. Customer will pay the rates set forth in the attached pricing attachment or a quote or Order if the rates for Service at a particular Service Address are not included in the pricing attachment, and all applicable ancillary Service charges. CenturyLink invoices MRCs in advance and NRCs in arrears. If the delivery of a Connection Notice for any Service falls on any day other than the first day of the month, the first invoice to Customer will consist of: (a) the pro-rata portion of the applicable MRC covering the period from the delivery of the Connection Notice to the first day of the subsequent month; and (b) the MRC for the following month. Charges for Service will not be used to calculate Contributory Charges. Customer will receive the rates for Service as shown on the pricing attachment regardless of whether an NPA/NXX split or overlay occurs. If CenturyLink cannot complete installation due to Customer delay or inaction, CenturyLink may begin charging Customer and Customer must pay such charges.

4.1 Ancillary Charges. Ancillary charges applicable to Service include but are not limited to those ancillary services set forth in this section. If an ancillary charge applies in connection with provisioning a particular Service, CenturyLink will notify Customer of the ancillary charge to be billed to Customer. Customer may either approve or disapprove CenturyLink providing the ancillary service.

(a) Expedite. A local loop expedite charge applies to Orders where Customer requests the delivery of Service one or more days before the Customer Commit Date. Customer may only request to expedite CenturyLink Provided Access of Special Access and ELA Orders (where underlying local access provider allows CenturyLink to order an expedited service.)

(b) Construction. Construction charges apply if; (i) special construction is required to extend Service to the demarcation point; or (ii) other activities not covered under the Building Extension Service Service Schedule are required beyond the demarcation point, that cause CenturyLink to incur additional expenses for provisioning the Service ("Construction"). If Customer does not approve of the Construction charges after CenturyLink notifies Customer of the charges, the Service ordered will be deemed cancelled.

(c) Multiplexing. Customer may request multiplexing for Special Access where available. CenturyLink will multiplex lower level local loop into a higher local loop, or vice-versa, for an additional charge. CenturyLink offers multiplexing at a CPOP, at an On-Net Access building or at an ILEC/CLEC facility providing the Off-Net Access. For multiplexing at a CenturyLink On-Net Access building, CenturyLink provides multiplexed circuit handoffs to Customer at the same On-Net Access Service Address. For multiplexing at ILEC/CLEC facility, CenturyLink facilitates the delivery of multiplexed circuit handoffs to Customer at a single Service Address or at multiple Service Addresses per Customer's request. Multiplexing is generally available at DS1 and OCn circuit levels. Pricing for multiplexing at an ILEC/CLEC facility is on an individual case basis.

© CenturyLink. All Rights Reserved.

(d) Changes. Ancillary change charge applies where Customer requests CenturyLink to change a local loop to a different Service Address that is within the same Customer serving wire center as the existing local loop, but a Cancellation Charge does not apply.

5. Term; Cancellation.

5.1 Term. The term of an individual Service continues for the number of months specified in the attached pricing attachment for a particular Service Address or a quote or Order for Service issued by CenturyLink if the rates for Service at a particular Service Address are not included in the pricing attachment ("Service Term"). Excluding voice loops and Data Center Access with a month-to-month Service Term, the Service Term will not be less than 12 months. Service will continue month-to-month at the expiration of the Service Term at the existing rates, subject to adjustment by CenturyLink on 30 days' written notice.

5.2 Cancellation and Termination Charges.

(a) Customer may cancel an Order (or portion thereof) prior to the delivery of a Connection Notice upon written notice to CenturyLink identifying the affected Order and Service. If Customer does so, Customer will pay CenturyLink a cancellation charge equal to the sum of: (1) for Off-Net Access, third party termination charges for the cancelled Service; (2) for On-Net Access one month's monthly recurring charges for the cancelled Service; (3) the non-recurring charges for the cancelled Service; and (4) CenturyLink's out-of-pocket costs (if any) incurred in constructing facilities necessary for Service delivery.

(b) Customer may terminate a specified Service after the delivery of a Connection Notice upon 30 days' written notice to CenturyLink. If Customer does so, or if Service is terminated by CenturyLink as the result of Customer's default, Customer will pay CenturyLink a termination charge equal to the sum of: (1) all unpaid amounts for Service actually provided; (2) 100% of the remaining monthly recurring charges for months 1-12 of the Service Term; (3) 50% of the remaining monthly recurring charges for month 13 through the end of the Service Term; and (4) if not recovered by the foregoing, any termination liability payable to third parties resulting from the termination and any out-of-pocket costs of construction to the extent such construction was undertaken to provide Service hereunder. The charges in this Section represent CenturyLink's reasonable liquidated damages and are not a penalty.

(c) Customer Provided Access—Cancellation of Connectivity after Delivery of a Connection Notice. To cancel CPA, Customer must provide CenturyLink with a written disconnect firm order confirmation ("DFOC") notice from Customer's CPA provider along with notice to cancel the CPA. If Customer fails to provide CenturyLink with the DFOC notice within 30 calendar days after CenturyLink's receipt of the notice to cancel the CPA, or if CenturyLink disconnects CPA for Cause, then CenturyLink may disconnect the CPA or require the CPA provider to do so. Customer will remain liable for charges for the connectivity to CPA (even if Customer cannot use the CPA) until: (i) Customer furnishes the required DFOC to CenturyLink; or (ii) either party cancels the associated CPA with the CPA provider.

6. Provisioning, Maintenance and Repair. CenturyLink may re-provision any local access circuits from one off-net provider to another or to On-Net Access and such changes will be treated as scheduled maintenance. Scheduled maintenance will not normally result in Service interruption. If scheduled maintenance requires Service interruption CenturyLink will: (1) provide Customer seven days' prior written notice, (2) work with Customer to minimize interruptions and (3) use commercially reasonable efforts to perform such maintenance between midnight and 6:00 a.m. local time. Customer may request a technician dispatch for Service problems. Before dispatching a technician, CenturyLink will notify Customer of the dispatch fee. CenturyLink will assess a dispatch fee if it determines the problem is on Customer's side of the demarcation point or was not caused by CenturyLink's facilities or equipment on CenturyLink's side of the demarcation point. If third-party local access services are required for the Services, Customer will: (4) provide CenturyLink with circuit facility and firm order commitment information and design layout records to enable cross-connects to CenturyLink Service(s) (provided by CenturyLink subject to applicable charges), (5) cooperate with CenturyLink (including changing demarcation points and/or equipment and providing necessary LOAs) regarding circuit grooming or re-provisioning, and (6) where a related Service is disconnected, provide CenturyLink a written DFOC from the relevant third-party provider.

7. Other Terms.

7.1 General. Any references to a Revenue Commitment or Contributory Charges will not apply to this Service Exhibit.

7.2. Cancellation and Termination Charges. This Section replaces the Cancellation and Termination Charges Section in the Agreement:

> **Termination.** Either party may terminate a specified Service: (a) as set forth above with 60 days' prior written notice to the other party, or (b) for Cause. Customer may cancel an Order (or portion thereof) for Service prior to the delivery of a Connection Notice upon written notice to CenturyLink identifying the affected Order and Service. If Customer does so, Customer will pay Centurylink the termination charges set forth above, in addition to any and all charges that are accrued but unpaid as of the termination date. If the Agreement is terminated by Customer for any reason other than for Cause, or by CenturyLink for Cause prior to the conclusion of the Term, all Services are deemed terminated, and Customer will pay the termination charges set forth above, in addition to any and all charges that are accrued but unpaid as of the termination date. "Cause" means the failure of a party to perform a material obligation under the Agreement, which failure is not remedied: (a) for payment defaults by Customer, within five days of separate written notice from CenturyLink of such default; or (b) for any other material breach, within 30 days after written notice (unless a shorter notice period is identified in a Service Attachment).

© CenturyLink. All Rights Reserved.

7.3 Out-of-Service Credit. For Services without a Service Level or applicable out-of-service credit for service interruption in a Tariff, this Out-of-Service Credit is the Service Level provision for purposes of the Agreement. Customer must request the Out-of-Service Credit and open a trouble ticket to report to CenturyLink the interruption of Service to CenturyLink. If CenturyLink causes Downtime, CenturyLink will give Customer a credit; such credit will be paid as a percentage of the Customer's MRC based on the ratio of the number of minutes of Downtime relative to the total number of minutes in the month when the Downtime occurred. No credits will be given where the Downtime is caused by: (a) the acts or omissions of Customer, its employees, contractors or agents or its End Users; (b) the failure or malfunction of equipment, applications or systems not owned or controlled by CenturyLink or its international service providers; (c) Force Majeure Events; (d) scheduled service maintenance, alteration or implementation; (e) the unavailability of required Customer personnel, including as a result of failure to provide CenturyLink with accurate, current contact information; (f) CenturyLink's lack of access to the Customer premises where reasonably required to restore the Service; (g) Customer's failure to release the Service for testing or repair and continuing to use the Service on an impaired basis; (h) CenturyLink's termination of Service for Cause or Customer's violation of the Use of Service provisions in this Appendix or in the applicable Service Exhibit; or (i) improper or inaccurate network specifications provided by Customer. "Downtime" is an interruption of Service confirmed by CenturyLink that is measured from the time Customer opens a trouble ticket with CenturyLink to the time Service has been restored. "Cause" means the failure of a party to perform a material obligation under the Agreement, which failure is not remedied: (a) for payment defaults by Customer, within five days of separate written notice from CenturyLink of such default; or (b) for any other material breach, within 30 days after written notice.

7.4 Service Notices. Notices for disconnection of Service must be submitted to CenturyLink via Email at: BusinessDisconnects@Centurylink.com. Notices of non-renewal for Services must be sent via e-mail to: CenturyLink, Attn.: CenturyLink NoRenew, e-mail: Norenew@centurylink.com. Notices for billing inquiries/disputes or requests for Service Level credits must be submitted to CenturyLink via Customer's portal at https://www.centurylink.com/business/login/ or via Email at: Care.Inquiry@Centurylink.com. All other routine operational notices will be provided by Customer to its CenturyLink sales representative.

7.5 Acceptable Use Policy and Use of Service. CenturyLink may also terminate Service for Cause under this Section where Customer's use of the Service: (a) is contrary to the Acceptable Use Policy incorporated by this reference and posted at http://www.centurylink.com/legal/, (b) constitutes an impermissible traffic aggregation or Access Arbitrage, (c) avoids Customer's obligation to pay for communication services, and (d) violates the Use of Service terms or compliance terms. Customer may have obligations under 47 CFR 9.5 relating to 911 if Customer combines the Service with other products creating a VoIP or VoIP-like service that facilitates the transmission of voice services.

7.6 CPNI. CenturyLink is required by law to treat CPNI confidentially. Customer agrees that CenturyLink may share CPNI within its business operations (e.g., wireless, local, long distance, and broadband services divisions), and with businesses acting on CenturyLink's behalf, to determine if Customer could benefit from the wide variety of CenturyLink products and services, and in its marketing and sales activities. Customer may withdraw its authorization at any time by informing CenturyLink in writing. Customer's decision regarding CenturyLink's use of CPNI will not affect the quality of service CenturyLink provides Customer. "CPNI" means Customer Proprietary Network Information, which includes confidential account, usage, and billing-related information about the quantity, technical configuration, type, destination, location, and amount of use of a customer's telecommunications services. CPNI reflects the telecommunications products, services, and features that a customer subscribes to and the usage of such services, including call detail information appearing in a bill. CPNI does not include a customer's name, address, or telephone number.

7.7 Conflicts. If a conflict exists among the provisions of the Service Attachments, the order of priority will be as follows: the Service Exhibit and then the Agreement.

7.8 Fees. Charges for certain Services are subject to (a) a property tax surcharge and (b) a cost recovery fee per month to reimburse CenturyLink for various governmental taxes and surcharges. Such charges are subject to change by CenturyLink and will be applied regardless of whether Customer has delivered a valid tax exemption certificate. For additional details on taxes and surcharges that are assessed, visit http://www.centurylink.com/taxes. Additional rates, charges and fees for Service elements not identified in the Agreement are located in the applicable Tariff. "Tariff" includes as applicable: CenturyLink state tariffs, price lists, price schedules, administrative guidelines, catalogs, and rate and term schedules incorporated by this reference and posted at http://www.centurylink.com/tariffs.

8. Definitions.

"CenturyLink Domestic Network" means the CenturyLink network located within the contiguous U.S., Alaska and Hawaii, which is comprised only of physical media, including switches, circuits, and ports that are operated by CenturyLink.

"CPOP" means a CenturyLink-owned physical point of presence that lies directly on the CenturyLink Domestic Network where direct interconnection between the CenturyLink Domestic Network and a local access provider's network is possible.

"Service Address" means the building where Customer receives Service. Only a building that is classified by CenturyLink as a business address can be a Service address.

© CenturyLink. All Rights Reserved.

CENTURYLINK MASTER SERVICE AGREEMENT
STATE, LOCAL AND EDUCATION GOVERNMENT AGENCIES VERSION
CENTURYLINK® LOCAL ACCESS SERVICE EXHIBIT

PRICING ATTACHMENT

Except as set forth in this pricing attachment, capitalized terms will have the definitions assigned to them in the Agreement or the Local Access Service Exhibit.

1. Customer will pay the MRCs and NRCs for Service at the particular Service Address; or NPA/NXX or CLLI if no Service Address is provided, set forth in the pricing table below. In addition, Customer will pay all MRCs or NRCs for any ancillary services provided as described in the Local Access Service Exhibit, including without limitation Construction charges. The MRCs and NRCs set forth below apply to new Service only and do not apply to Service ordered prior to the effective date of this pricing attachment. All MRCs and NRCs set forth in the below table apply per circuit and not per Service Address. Any modifications to any attribute of the particular Service in the pricing table below (i.e., the NPA/NXX or CLLI, Service Address, Type of Local Access, Service Term or circuit speed) will render the pricing below void, and Customer will pay the revised rates agreed upon by the parties for the particular Service at the Service Address or NPA/NXX or CLLI, as applicable. If a DS1 is bonded with one or more DS1s to create a higher speed NxDS1 at the same Service Address, the MRC for the DS1 may be multiplied by the number of bonded DS1s to determine the MRC for the NxDS1.Any future Service ordered will be charged the current quoted MRC and NRC per Service as specified on a valid CenturyLink quote or Order, not the MRC and NRC per Service specified below. No other discounts or promotions apply. Certain types of Service have separate service or agreement requirements as defined in the Local Access Service Exhibit.

For pricing, please refer to the RFP. This Pricing Attachment will be completed upon award.

© CenturyLink. All Rights Reserved.

CENTURYLINK ON-NET LOCAL ACCESS
SERVICE LEVEL AGREEMENT
(not applicable to services offered under the CenturyLink Wholesale and Enhanced Services Agreements)

This Service Level Agreement ("SLA") only applies to On-Net Access circuits ("Service") ordered by CenturyLink's customer ("Customer") pursuant to a signed agreement ("Agreement") with CenturyLink Communications, LLC f/k/a Qwest Communications Company, LLC d/b/a CenturyLink QCC ("CenturyLink"). On April 1, 2014, Qwest Communications Company, LLC completed a name change to CenturyLink Communications, LLC. References in supporting agreements or other documents, to Qwest Communications Company, LLC or its predecessors are replaced with "CenturyLink Communications, LLC." Service terminates at CenturyLink's Minimum Point of Entry (MPOE) as determined by CenturyLink.

1. Definitions

"Calendar Month" refers to the period beginning at 12:00 midnight on the first day of a month and ending at 11:59 PM on the last day of that month.

2. Availability Objective

CenturyLink offers the following SLA for Service with a minimum one-year Service term. The SLA is effective as of the first day of the second month after initial installation and Customer acceptance of Service.

Customer will, subject to the terms, exclusions, and restrictions described in this SLA, be entitled to receive from CenturyLink a credit if the availability of a particular circuit ("Circuit Availability") for any Calendar Month falls below the percentage shown in the applicable credit schedule included in this section. CenturyLink guarantees the Circuit Availability only to the point to which CenturyLink can perform remote loop back testing, even if the demarcation point extends past such point. Service will for purposes of this document be deemed to be unavailable to Customer only if the circuit ("Affected Circuit") is subject to an interruption (other than as noted in this SLA) that results in the total disruption of the Service ("Outage").

The credit ("Outage Credit") to which Customer may be entitled under this section will be equal to the applicable credit percentage identified in the table below of Customer's monthly recurring charges ("MRCs") for the Affected Circuit after application of any credits or discounts ("Eligible Circuit Charges"). The Outage Credit will not include credits on any other MRCs charged to Customer for any other service.

Circuit Availability Percentage is calculated as follows:

$$\left[\frac{(\text{Applicable Days in Calendar Month} \times 24 \times 60) - (\text{Minutes of Outage on Affected Circuit in Calendar Month})}{(\text{Applicable Days in Calendar Month} \times 24 \times 60)}\right] \times 100$$

For purposes of measuring Customer's Circuit Availability, the CenturyLink Trouble Management System determines the number of minutes of an Outage. An Outage will be deemed to commence upon verifiable notification thereof by Customer to the CenturyLink Trouble Management System, and CenturyLink's issuance of a trouble ticket. An Outage will conclude upon the restoration of the Affected Circuit as evidenced by the appropriate network tests conducted by CenturyLink.

Credit Schedule for Service		
Circuit Availability		Amount of Credit (as a % of the Eligible Circuit Charges for the Affected Circuit)
Upper Level	Lower Level	
100%	99.999%	0%
< 99.999%	99.99%	5%
< 99.99%	99.9%	10%
< 99.9%	99.5%	25%
< 99.5%	0%	50%

Subject to the terms, exclusions and restrictions described in this SLA, in the event Customer experiences chronic Outages with respect to any circuit, Customer will be entitled to terminate the Affected Circuit. A circuit suffers from chronic Outages if such circuit, measured over any Calendar Month, experiences more than five Outages, or more than 48 aggregate hours of Outages. Customer may as its sole and exclusive remedy for chronic Outages, upon 30 days' prior written notice to CenturyLink, terminate the Affected Circuit without incurring any termination charges associated with that Affected Circuit except for all usage charges accrued to the date of termination. Customer must exercise any termination right available to it under this section within 30 days after Customer first becomes eligible to exercise the termination right. In the event Customer fails to comply with the condition set forth in the immediately preceding sentence, Customer will, with respect to the termination right, have waived its right to such termination right.

3. Terms and Conditions

CenturyLink is offering Service in accordance with the applicable CenturyLink agreement. In the event of a conflict between the terms of this document and the Rate and Services Schedule or applicable CenturyLink agreement, the terms of this document will control.

© CenturyLink. All Rights Reserved.

To be eligible for an Outage Credit under this SLA, Customer must, in addition to complying with the other terms included in this SLA, (i) be in good standing with CenturyLink and current in their obligations, other than those invoices that are recognized as being in dispute, and (ii) submit necessary supporting documentation and request reimbursement or credits hereunder within 30 days of the Outage resolution. In the event Customer fails to comply with the condition set forth in the immediately preceding sentence, Customer will, with respect to that remedy, have waived its right to such remedy.

CenturyLink will determine the Outage Credits provided to Customer by totaling the eligible Outage minutes throughout the Calendar Month on an Affected Circuit, subject to the restrictions and exclusions in this SLA. Outage Credits for any Calendar Month must exceed $25.00 to be processed. In no case will CenturyLink provide credit to Customer for an Affected Circuit that exceeds the monthly recurring charge or the stated applicable maximum credit percentage. Customer may receive Outage Credits for a particular Affected Circuit for a maximum of four months in any 12-month period.

CenturyLink will give notice to Customer of any scheduled maintenance as early as is practicable and a scheduled outage will under no circumstances be viewed as an Outage hereunder.

The remedies included in this SLA are Customer's sole and exclusive remedies for disruption of Service and will apply in lieu of any other Service interruption guarantee or credit, outage guarantee or credit or performance credit for which Customer might have otherwise been eligible. If Customer receives an Outage Credit, Customer is not entitled to receive any other credit that may be available under the local access service provided or ordered by CenturyLink on behalf of Customer for the Affected Circuit in that Calendar Month.

Except as provided in this SLA, the objectives and related remedies set forth herein will not apply to CenturyLink services other than the Service.

4. Restrictions and Exclusions

An Outage will not be deemed to have occurred if the Service is unavailable or impaired due to any of the following:

(a) Interruptions on a circuit that is not an "Accepted Circuit" where an Accepted Circuit is one that CenturyLink and Customer have tested and mutually agree is working as ordered following provisioning of an order or change order;

(b) Interruptions caused by the negligence, error or omission of Customer or others authorized by Customer to use or modify Service;

(c) Interruptions due to failure of power at Customer premises or failure or poor performance of Customer's premises equipment;

(d) Interruptions during any period in which CenturyLink or its agents are not afforded access to the premises where Service is terminated, provided such access is reasonably necessary to prevent a degradation or to restore Service;

(e) Interruptions during any period when CenturyLink has posted on the CenturyLink Web site or communicated to Customer in any other manner that Customer's Service will be unavailable for maintenance or rearrangement purposes, or Customer has released Service to CenturyLink for the installation of a customer service order;

(f) Interruptions during any period when Customer elects not to release the circuit for testing and/or repair and continues to use it on an impaired basis;

(g) Interruptions resulting from force majeure events beyond the reasonable control of CenturyLink including, but not limited to, acts of God, government regulation, labor strikes, national emergency or war (declared or undeclared);

(h) Interruptions resulting from Customer's use of Service in an unauthorized or unlawful manner;

(i) Interruptions resulting from a CenturyLink disconnect for Customer's breach of a term set forth in the Agreement pursuant to which CenturyLink is providing Service to Customer;

(j) Interruptions resulting from incorrect, incomplete or inaccurate orders from Customer;

(k) Interruptions due to improper or inaccurate network specifications provided by Customer;

(l) Interruptions resulting from a failure of a carrier other than CenturyLink providing local access circuits; or

(m) Special configurations of the Service that have been mutually agreed to by CenturyLink and Customer; provided, however, CenturyLink may provide a separate service level agreement to Customer for those special configurations.

© CenturyLink. All Rights Reserved.

CENTURYLINK® DOMESTIC NETWORK DIVERSITY®
SERVICE EXHIBIT

1. General; Definitions. This Service Exhibit is applicable only where Customer orders Domestic Network Diversity (the "Service" or "Diversity") for underlying services in the continental United States and incorporates the terms of the Master Service Agreement or other service agreement and RSS, under which CenturyLink provides services to Customer (the "Agreement"). CenturyLink may subcontract any or all of the work to be performed under this Service Schedule. All capitalized terms that are used but not defined in this Service Exhibit are defined in the Agreement or Order. Customer may submit requests for Service in a form designated by CenturyLink ("Order").

"Card Diversity" means the secondary or diverse circuit that originates and/or terminates onto a separate card on the same device within the same CenturyLink POP as the primary circuit.

"CenturyLink Domestic Network" means the CenturyLink network located within the contiguous U.S., Alaska and Hawaii, which is comprised only of physical media, switches, including switches, circuits, and ports that are operated by CenturyLink.

"Dedicated IP Access" means a special access local loop connection, from the Customer premises to an IP POP ("POP").

"Device Diversity" means the secondary or diverse circuit that originates and/or terminates in a separate aggregation device (such as routers, switches) within the same IP POP as the primary service.

"ELA" or "Ethernet Local Access" means CenturyLink Provided Access using Ethernet over SONET technology and is available at bandwidths varying from 1 Mbps to 1,000 Mbps (1Gbps).

"IP POP" is a CenturyLink POP where IP edge routers are located on the CenturyLink Domestic Network and IQ Networking Service is available.

"IP POP Diversity" means the diverse circuit that originates and/or terminates in a physically separate IP POP from the primary circuit.
"CenturyLink POP" means a point of presence ("POP") on the CenturyLink Domestic Network.

"Pricing Attachment" means a document containing rates specific to the Service and is incorporated by reference and made a part of this Service Exhibit.

"Single Circuit Diversity" unless otherwise stated in this Service Exhibit, means an individual circuit on the CenturyLink Domestic Network that either: (a) is routed to, or; (b) avoids a specified geographic location along the circuit's path between the originating and terminating CenturyLink transport POP buildings, subject to availability.

"SLA" means the service level agreement specific to the Service, located at http://www.centurylink.com/legal/, which is subject to change.

"Special Access" means CenturyLink Provided Access using Digital Signal speeds DS-0, DS-1, and DS-3 or Optical Carrier signal speeds OC-3, OC-12, OC-48, and OC-192.

"Switch Diversity" means the secondary or diverse circuit that originates and/or terminates in a separate CenturyLink switch from the primary circuit. Depending on available network facilities, the circuits may originate and/or terminate at the same or different CenturyLink POP.

"Transport Diversity" means two or more diversely related circuits that are independently routed on the CenturyLink Domestic Network transport systems between the originating and terminating CenturyLink POP buildings, subject to availability. At Customer's request and subject to availability, CenturyLink will provision diversely related Underlying Services from different CenturyLink POP buildings in the originating and/or terminating cities. In some instances, the diverse circuit may share common network facilities, infrastructure, and/or buildings with the primary circuit.

"Underlying Service" means an approved CenturyLink service offering on the CenturyLink Domestic Network that also supports Diversity.

"Wavelength Local Access" means CenturyLink Provided Access using wave division multiplexing technology at bandwidths of 1 GbE, 10 GbE LAN PHY, 2.5 G (OC48), 10 GbE WAN PHY (OC192), 40G, OTU1, OTU2, OTU3, 1G, 2G, 4G and 10G.

2. Service.

2.1 Description. Diversity is an enhanced routing option that routes an Underlying Service according to either: (a) a Customer-defined routing between two or more diversely related circuit(s); or (b) a predefined path that either routes to or avoids a specified geographic location on the circuit path ("Single Circuit Diversity") according to Customer's requirements, unless otherwise noted below; and (c) identifies and maintains the diversely routed circuit(s) in the CenturyLink provisioning systems, until the Service is cancelled. Diversity does not provide switching and/or routing of Customer's digital transmissions between primary and diversely routed circuits in the event of a failure on any one circuit or port. CenturyLink only offers protection switching, if any, inherent with the Underlying Services. The Diversity options described in this Service Exhibit are subject to availability and technical feasibility. The SLA is effective as of the first day of the second month after initial installation of Service. The SLA provides Customer's sole and exclusive remedy for service interruptions or service deficiencies of any kind whatsoever for the Service. CenturyLink's Underlying Services include: Domestic Private Line Service, EPL, Optical Wavelength, IQ Networking Service (including Internet Ports and Private Ports), ATM Service, Frame Relay Service, Dedicated Domestic Outbound/Inbound Long Distance Service ("Long Distance"), and related Local Access Service. The Underlying Services will, except to the extent modified in this Service Exhibit, be offered pursuant to the terms and conditions of the Agreement, Service Exhibits, and/or RSS applicable to the Underlying Services.

2.2 Diversity Configurations. Diversity configurations vary based on the Underlying Service. See below for options, subject to available network facilities.

© CenturyLink. All Rights Reserved.

(a) Domestic Private Line Diversity Service. Domestic Private Line Diversity Service is offered at circuit speeds of DS-1, DS-3, OC-3, OC-12, and OC-48. CenturyLink does not offer DS-0 and Fractional DS-1 Domestic Private Line Diversity Services. CenturyLink's routing of the diverse Domestic Private Line circuit(s) is based on the route of the designated working path of the circuit(s). Domestic Private Line Diversity Service is offered in the following configurations, but not in combination: Single Circuit Diversity or Transport Diversity. In some instances, the diverse circuit may share common network facilities, infrastructure, and/or buildings with the primary circuit.

(b) EPL Diversity Service. EPL Diversity Service is offered at circuit speeds of 50 Mbps, 100 Mbps, 150 Mbps, 500 Mbps, 600 Mbps, and 1000 Mbps. CenturyLink's routing of the diverse EPL circuit(s) is based on the route of the designated working path of the circuit(s). EPL Diversity Service is offered in the following configurations, but not in combination: Single Circuit Diversity or Transport Diversity.

(c) Optical Wavelength Diversity Service. Optical Wavelength Diversity Service is offered as an unprotected point-to-point transmission path between an originating and terminating CenturyLink POP at circuit speeds of 1 GbE, 2.5 Gbps and 10 Gbps. Optical Wavelength Diversity Service is offered in the following configurations, but not in combination: Single Circuit Diversity or Transport Diversity.

(d) IQ Networking Diversity Service. IQ Networking is offered at circuit speeds of DS-1, IMA (2xDS-1 up to 8xDS-1s), DS-3, OC-3, OC-12, and OC-48 transmission rates. DS-1s within an Nx bundle must all connect to the same POP. IQ Networking Diversity Service is offered in the following configurations but not in combination: IP POP Diversity, Device Diversity, Card Diversity, or Single Circuit Diversity. IQ Networking Single Circuit Diversity on the CenturyLink Domestic Network means a circuit that is routed to a specified IP POP. The secondary or diverse circuit cannot be used to load-balance Customer's traffic. The secondary or diverse circuit may share common network facilities, infrastructure, and/or buildings with the primary circuit.

(e) ATM/Frame Relay Diversity Service. ATM Diversity Service is offered at circuit speeds of DS-1, IMA (2xDS-1 up to 8xDS-1s), DS-3, OC-3, and OC-12 and Frame Relay Diversity Service is offered at circuit speeds of DS-1 and DS-3. DS-1s within an Nx bundle must all connect to the same POP. ATM/Frame Relay Diversity is offered in the following configurations, but not in combination: POP Diversity, Switch Diversity, Card Diversity, or Single Circuit Diversity. The diverse circuit may share common network facilities, infrastructure, and/or buildings with the primary circuit.

(f) Long Distance Diversity Service. Long Distance Diversity Service is offered at circuit speeds of DS-1, DS-3, OC-3, OC-12, and OC-48. The diverse circuit may share common network facilities, infrastructure, and/or buildings with the primary circuit. Long Distance Diversity Service is offered in the following configurations, but not in combination: Single Circuit Diversity, Switch Diversity, or Card Diversity. Long Distance Single Circuit Diversity on the CenturyLink Domestic Network means a circuit that is routed to a specified CenturyLink voice switch.

(g) Local Access Diversity Service. Local Access Diversity Service is an enhancement to Local Access that: (a) routes circuits based on Customer's reasonable routing requirements; and (b) identifies and maintains the Local Access circuits as diversely routed circuits in the CenturyLink provisioning systems. Local Access Diversity Service is offered with: (c) Special Access at circuit speeds of DS-1, 2xDS-1 up to 8xDS-1*, DS-3, OC-3, OC-12, and OC-48; (d) ELA at bandwidths varying from 1 Mbps to 1000 Mbps (1Gbps); or (e) Wavelength Local Access at 1 Gbps, 2.5 Gbps and 10 Gbps and may include CenturyLink ordering circuits utilizing alternate Central Offices or alternate Serving Wire Centers. DS-1s within an Nx bundle must all connect to the same POP. CenturyLink does not have direct control of the routing, installation, maintenance, performance, etc. of the third party local access facilities ordered on behalf of the Customer.

2.3 Ordering of Diversity Services. CenturyLink will notify Customer of acceptance of requested Service in the Order by delivering the date by which CenturyLink will install Service (the "Customer Commit Date"). CenturyLink will use commercially reasonable efforts to install each Service on or before the Customer Commit Date, but the inability of CenturyLink to deliver Service by that date will not be a default under the Agreement.

2.4 Service Conditions.

(a) CenturyLink will not provide special construction as part of the Service. Any requests for special construction are handled on an individual case basis.

(b) Customer understands and agrees that CenturyLink has no visibility into the location of fiber strands, conduits, and other network facilities of other carriers and that CenturyLink will not attempt to identify and/or manage other carrier's facilities as part of the Service. Furthermore, Customer understands and agrees that CenturyLink may rearrange (groom) Customer's circuits in accordance with standard CenturyLink network maintenance activities. If a CenturyLink-initiated network rearrangement removes the Customer's diversity, then CenturyLink will notify Customer to determine alternative Diversity solutions, if any.

(c) Customer may experience increased latency on diversely routed circuit(s) due to increased actual routing mileage.

(d) Single Diverse Circuit Additional Mileage Charges. If CenturyLink, in its sole discretion, determines that Customer's specified geographic routing criteria on a Single Circuit Diversity request results in excessive additional mileage, CenturyLink may charge Customer actual mileage charges on the Underlying Service.

(e) Customer acknowledges that diverse circuits must have traffic on them for CenturyLink to monitor connectivity.

© CenturyLink. All Rights Reserved.

3. Term. The term of this Service Exhibit will begin on the Effective Date of the Agreement (or, if applicable, an amendment to the Agreement if Customer adds this Service Exhibit after the Effective Date of the Agreement) and will continue until the termination of the last Service ordered under this Service Exhibit. Service will automatically terminate on the termination of the Underlying Service.

4. Charges. Customer will pay all Diversity charges set forth in a valid quote, Order Form or Pricing Attachment, in addition to the charges for the Underlying Services. If backhaul routing is required to complete Customer's Diversity order for IQ Networking (including Internet Ports and Private Ports), ATM Service, Frame Relay Service, or Long Distance, Customer will pay the backhaul charges for each diversely routed circuit. CenturyLink will deliver written or electronic notice (a "Connection Notice") to Customer when Service is installed, at which time billing will commence ("Service Commencement Date"). The Service is not entitled to the CTA Discount. Additional rates, charges and fees for Service elements not identified in the Agreement are located in the applicable Tariff. "Tariff" includes as applicable: CenturyLink state tariffs, price lists, price schedules, administrative guidelines, catalogs, and rate and term schedules incorporated by this reference and posted at http://www.centurylink.com/tariffs.

5. Other Terms.

5.1 General. Any references to a Revenue Commitment or Contributory Charges will not apply to this Service Exhibit.

5.2. Cancellation and Termination Charges. This Section replaces the Cancellation and Termination Charges Section in the Agreement:

(a) Cancellation. Customer may cancel an Order (or portion thereof) prior to the delivery of a Connection Notice upon written notice to CenturyLink identifying the affected Order and Service. Cancellation of an Order for Diversity will also cancel the Order for the Underlying Service and any cancellation charges for the Underlying Service will apply.

(b) Termination. Either party may terminate Diversity (i) after the delivery of a Connection Notice upon 60 days' prior written notice to the other party, or (ii) for Cause. If Customer terminates Diversity for any reason other than for Cause, or if Diversity is terminated by CenturyLink for Cause, Customer will also terminate the Underlying Service and Customer will pay CenturyLink the termination charge for the Underlying Service in addition to any charges for Diversity incurred but unpaid through the effective date of the termination. "Cause" means the failure of a party to perform a material obligation under the Agreement, which failure is not remedied: (a) for payment defaults by Customer, within five days of separate written notice from CenturyLink of such default; or (b) for any other material breach, within 30 days after written notice (unless a shorter notice period is identified in a Service Attachment). The charges in this Section represent CenturyLink's reasonable liquidated damages and are not a penalty.

(c) If the Agreement is terminated by Customer for any reason other than for Cause, or by CenturyLink for Cause prior to the conclusion of the Term, all Services are deemed terminated, and Customer will pay the applicable termination charges for all Services, in addition to any and all charges that are accrued but unpaid as of the termination date.

5.3 Installation, Maintenance and Repair. The following are supplemental terms to the Scheduled Maintenance and Local Access section of the Agreement: (a) Provision of Services is subject to availability of adequate capacity and CenturyLink's acceptance of a complete Order Form and (b) Customer is responsible for any facility or equipment repairs on Customer's side of the demarcation point. Customer may request a technician dispatch for Service problems. Before dispatching a technician, CenturyLink will notify Customer of the dispatch fee. CenturyLink will assess a dispatch fee if it determines the problem is on Customer's side of the demarcation point or was not caused by CenturyLink's facilities or equipment on CenturyLink's side of the demarcation point. "Order Form" includes both order request forms and quotes issued by CenturyLink. If a CenturyLink service requires a quote to validate the Order Form pricing, the quote will take precedence over the order request form, but not over the Service Exhibit.

5.4 Service Notices. Notices for disconnection of Service must be submitted to CenturyLink via Email at: BusinessDisconnects@Centurylink.com. Notices of non-renewal for Services must be sent via e-mail to: CenturyLink, Attn.: CenturyLink NoRenew, e-mail: Norenew@centurylink.com. Notices for billing inquiries/disputes or requests for Service Level credits must be submitted to CenturyLink via Customer's portal at https://www.centurylink.com/business/login/ or via Email at: Care.Inquiry@Centurylink.com. All other routine operational notices will be provided by Customer to its CenturyLink sales representative.

5.5 Acceptable Use Policy and Use of Service. CenturyLink may also terminate Service for Cause under this Section where Customer's use of the Service: (a) is contrary to the Acceptable Use Policy incorporated by this reference and posted at http://www.centurylink.com/legal/, (b) constitutes an impermissible traffic aggregation or Access Arbitrage, (c) avoids Customer's obligation to pay for communication services, and (d) violates the Use of Service terms or compliance terms.

5.6 CPNI. CenturyLink is required by law to treat CPNI confidentially. Customer agrees that CenturyLink may share CPNI within its business operations (e.g., wireless, local, long distance, and broadband services divisions), and with businesses acting on CenturyLink's behalf, to determine if Customer could benefit from the wide variety of CenturyLink products and services, and in its marketing and sales activities. Customer may withdraw its authorization at any time by informing CenturyLink in writing. Customer's decision regarding CenturyLink's use of CPNI will not affect the quality of service CenturyLink provides Customer. "CPNI" means Customer Proprietary Network Information, which includes confidential account, usage, and billing-related information about the quantity, technical configuration, type, destination, location, and amount of use of a customer's telecommunications services. CPNI reflects the telecommunications products, services, and features that a customer subscribes to and the usage of such services,

© CenturyLink. All Rights Reserved.

including call detail information appearing in a bill. CPNI does not include a customer's name, address, or telephone number.

5.7 Conflicts. If a conflict exists among the provisions of the Service Attachments, the order of priority will be as follows: the Service Exhibit, the RSS or ISS, the general terms of the Agreement, SLA, SOW (if any) and Order Form, as applicable, and then any other documents attached or expressly incorporated into the Agreement. "ISS" means CenturyLink's Information Services Schedule incorporated by this reference and posted at: http://www.centurylink.com/tariffs/clc_info_services.pdf ."RSS" means as applicable: CenturyLink's Rates and Services Schedules incorporated by this reference and posted at http://www.centurylink.com/tariffs/fcc_clc_ixc_rss_no_2.pdf for CenturyLink's International RSS and at http://www.centurylink.com/tariffs/fcc_clc_ixc_rss_no_3.pdf for CenturyLink's Interstate RSS. "Tariff" includes as applicable: CenturyLink state tariffs, price lists, price schedules, administrative guidelines, catalogs, and rate and term schedules incorporated by this reference and posted at http://www.centurylink.com/tariffs.

5.8 Fees. Charges for certain Services are subject to (a) a property tax surcharge and (b) a cost recovery fee per month to reimburse CenturyLink for various governmental taxes and surcharges. Such charges are subject to change by CenturyLink and will be applied regardless of whether Customer has delivered a valid tax exemption certificate.

© CenturyLink. All Rights Reserved.

DOMESTIC NETWORK DIVERSITY SERVICES PRICING ATTACHMENT

This Domestic Network Diversity Service Pricing Attachment ("Pricing Attachment") is appended to, and subject in all respects to, the CenturyLink® Master Service Agreement between CenturyLink Communications, LLC and Customer ("Agreement") and the Domestic Network Diversity ("Diversity") Service Exhibit to which this is attached. Except as set forth in this Pricing Attachment, capitalized terms will have the definitions assigned to them in the Agreement or the Domestic Network Diversity Service Exhibit.

Pricing in this Pricing Attachment is for Diversity-related charges only. The Agreement, Service Exhibit, and/or Services Schedule contain the pricing and terms for the Underlying Service(s).

RATES AND CHARGES

1. Rates and Charges - The following rates and charges apply to Domestic Network Diversity Service based on the Underlying Service's circuit speed.

Diversity Enhancement Monthly Recurring Charges – Customer will pay only one Diversity Enhancement MRC per end to end circuit (that is with or without diversity on the CenturyLink ordered local access).

For pricing, please refer to the RFP. This Pricing Attachment (tables below) will be completed upon award.

1. CenturyLink IQ Networking Diversity Service Rates

Check the applicable elements of Diversity Service ordered.

☒ IP POP Diversity ☐ Device (Router) Diversity
☐ Card Diversity ☐ Single Circuit Diversity

Location: Address and NPA/NXX	Circuit Type	Circuit ID (if available)	Diversity Enhancement MRC	Backhaul MRC	Other Related Local Access Diversity Charges

2. Local Access Diversity Service Rates

A Location: Address and NPA/NXX	Z Location: Address and NPA/NXX	Circuit Type	Circuit ID (if available)	Diversity Enhancement MRC	A Location: Other Related Local Access Diversity Charges	Z Location: Other Related Local Access Diversity Charges

© CenturyLink. All Rights Reserved.

CENTURYLINK DOMESTIC NETWORK DIVERSITY
SERVICE LEVEL AGREEMENT
(not applicable to services offered under the CenturyLink Wholesale and Enhanced Services Agreements)

1. Service Level Agreement. This Service Level Agreement ("SLA") applies to Domestic Network Diversity Service ("Diversity" or "Service") ordered by CenturyLink's customer ("Customer") pursuant to a signed agreement ("Agreement") with Qwest Communications Company, LLC d/b/a CenturyLink QCC ("CenturyLink"). Capitalized terms not defined in this SLA are defined in the Agreement.applies to the Diversity enhancement only. This SLA applies to the Diversity enhancement only. For purposes of this SLA, the CenturyLink Trouble Management System will be the sole source to determine the Customer's Diversity Availability. Unavailability will be deemed to commence upon verifiable notification thereof by Customer to the CenturyLink Trouble Management System, CenturyLink's issuance of a trouble ticket and verification by the CenturyLink Trouble Management System of Unavailability. Unavailability will conclude upon the restoration of the Service as evidenced by CenturyLink.

2 Service Availability. Customer will, subject to the terms, exclusions, and restrictions described herein, be entitled to receive from CenturyLink a credit if the Diversity for Domestic Private Line Service, Optical Wavelength Service Service, PRN Service, CenturyLink IQ™ Networking Service, ATM Service, Frame Relay Service, or Long Distance is unavailable as a result of CenturyLink's failure to maintain the desired Diversity routing on the CenturyLink Domestic Network, based upon the Diversity routing confirmed by CenturyLink at the time of ordering ("Unavailability"). The credit to which Customer may be entitled under this Section will be equal to 100% of the Diversity enhancement MRC for each of the affected circuits for the calendar month in which Diversity was Unavailable.

3 Network Rearrangements. In the event CenturyLink will perform a network rearrangement that materially affects Customer's Service such that the Diversity routing is terminated, then CenturyLink will provide prior notice in a commercially reasonable timeframe to Customer of an alternative Diverse routing of the affected circuit(s). Customer's existing charges of the Diversity enhancement and Underlying Service will not change as a result of Customer's acceptance of the alternative Diversity routing. Customer acceptance of alternative diverse routing will not be unreasonably withheld. Should Customer not accept the proposed alternative Diversity rerouting, Customer may as its sole and exclusive remedy, terminate the affected Service along with the affected Underlying Services without incurring cancellation charges for the Underlying Service, provided however, that Customer will be liable for any cancellation charges for circuits requiring special construction, third party cancellation charges, and Leased Local Access cancellation charges, if any, as more particularly set forth in the applicable Services Exhibit and/or Services Schedule for the Underlying Services.

4 Terms and Condition for the SLA.

4.1 To be eligible for a credit under this SLA, Customer must, in addition to complying with the other terms included herein: (a) be in good standing with CenturyLink and current in its obligations, other than those invoices that are recognized as being in dispute; and (b) submit necessary supporting documentation (if applicable) and request reimbursement or credit hereunder within 30 days of the conclusion of the service month in which the requisite Unavailability occurs. In the event Customer fails to comply with the condition set forth in the immediately preceding sentence, Customer will have waived such right.

4.2 Customer must exercise any termination right available to it under this SLA within 30 calendar days after Customer first becomes eligible to exercise the termination right. In the event Customer fails to comply with the condition set forth in the immediately preceding sentence, Customer will have waived such right.

4.3 The credit will not include credits on any other MRCs charged to Customer for any other Service including the Underlying Services. In no circumstance will Customer receive a credit that exceeds 100% of the Diversity enhancement MRC. Outages of the Underlying Services are governed by the service level agreement for such Underlying Service and CenturyLink will not provide a credit under this Service Level Agreement for failures of Diversity caused by outages.

© CenturyLink, Inc. All Rights Reserved.

CENTURYLINK® MASTER SERVICE AGREEMENT
CENTURYLINK® SELECT ADVANTAGE® SERVICE EXHIBIT

1. General; Definitions. This Service Exhibit for Products and Services (collectively "Solutions") is attached to and subject in all respects to the CenturyLink Master Service Agreement, CenturyLink Total Advantage, or CenturyLink Loyal Advantage Agreement between CenturyLink QCC and Customer. Capitalized terms not defined herein are defined in the Agreement. CenturyLink QCC will provide Solutions under the terms of the Agreement, the Service Exhibit, the Purchase Order and/or SOW. This Service Exhibit may not be used for the purchase of voice, data or IP services. In the event of a conflict in any term of any documents that govern the provision of Solutions hereunder, the following order of precedence will apply in descending order of control: any SOW, any Detailed Description(s), this Service Exhibit, the Agreement, and any PO. With respect to the Agreement, "Service" is replaced by "Solution" as defined herein, and "Order Form" is replaced with "Purchase Order" as defined herein.

"Change Order" means any change, submitted by Customer to CenturyLink or CenturyLink to Customer, to a SOW that was previously agreed upon by CenturyLink and Customer. Customer will be responsible for all charges related to such SOW Change Order.

"CPE" means either: (a) Customer Purchased Equipment, or (b) Customer Premises Equipment; and consists of hardware, software and materials used in the transport and/or termination/storage of data and voice transmission.

"Detailed Description(s)" means the terms and conditions of the Solution provided by CenturyLink which are posted at http://www.centurylinkselectadvantage.com/.

"Products" means CPE and Software offerings from CenturyLink.

"Purchase Order" or "PO" means either (a) a written document issued by Customer for the procurement of Solutions from CenturyLink; or (b) a CenturyLink quote or service order signed by Customer.

"Services" means offerings from CenturyLink that (a) install, maintain or manage CPE; (b) support Customer network management objectives, or (c) are consulting, professional, technical, development, and/or design services.

"Software" means software license offerings.

"SOW" means a statement of work that provides specific details, agreed to by CenturyLink and Customer, relating to the Solution purchased under a PO or the SOW. Agreement on the terms of the SOW will be satisfied by CenturyLink sending the final version of the SOW to Customer; and Customer's signature on the SOW.

2. CenturyLink Select Advantage Solutions.

2.1 Purchase. Customer may purchase Solutions by issuing a PO to CenturyLink, or executing an SOW. Customer's purchase of Solutions is subject to and controlled by Detailed Description(s) which are posted at http://www.centurylinkselectadvantage.com/ and are incorporated by this reference. Customer must register to create a username and password the first time the Web site is accessed to view these Detailed Descriptions. By issuing a PO or executing an SOW with CenturyLink, Customer warrants that Customer has read and agrees to the terms and conditions of the Detailed Description(s). CenturyLink reserves the right to amend the Detailed Description(s) effective upon posting to the Web site. Customer's continued use of the Solution constitutes acceptance of those changes. If a PO issued by Customer contains any preprinted terms, those terms will not amend, modify or supplement this Service Exhibit in any way whatsoever, notwithstanding any provisions in a PO to the contrary. Any PO or SOW must (a) reference and incorporate this Service Exhibit and its Effective Date, (b) contain the Customer's exact legal name, and (c) include any other requirements as may be further described in the Detailed Description(s).

2.2 Limitation of Liability. IN ADDITION TO THE LIMITATION OF LIABILITY UNDER THE AGREEMENT, CENTURYLINK'S TOTAL AGGREGATE LIABILITY ARISING FROM OR RELATED TO SOLUTIONS PURCHASED UNDER THIS SERVICE EXHIBIT, UNLESS OTHERWISE STATED IN THE DETAILED DESCRIPTIONS OR SOW, WILL IN NO EVENT EXCEED: (A) FOR CLAIMS ARISING OUT OF PRODUCTS, THE AMOUNT OF THE PRODUCT SET FORTH IN THE PO RELATING SOLELY TO THE AFFECTED PRODUCT; AND (B) FOR CLAIMS ARISING OUT OF NONRECURRING SERVICES, THE AMOUNT OF THE SERVICE SET FORTH IN THE PO OR SOW.

2.3 Additional Indemnification. CUSTOMER WILL DEFEND AND INDEMNIFY CENTURYLINK, ITS AFFILIATES, AGENTS AND CONTRACTORS FROM ALL THIRD PARTY CLAIMS, LIABILITIES, FINES, PENALTIES, COSTS AND EXPENSES, INCLUDING REASONABLE ATTORNEYS' FEES, ARISING FROM OR RELATED TO CUSTOMER'S, CUSTOMER'S END USER'S OR CUSTOMER'S THIRD PARTY PROVIDER'S ACTS, OMISSIONS (INCLUDING THE FAILURE TO PURCHASE OR IMPLEMENT FEATURES THAT ENABLE THE RECEIPT AND TRANSMISSION OF DIRECT-DIAL "911" CALLS OR MULTI-LINE TELEPHONE SYSTEM NOTIFICATIONS), OR FAILURES OF CONNECTIVITY THAT IMPEDE, PREVENT OR OTHERWISE MAKE INOPERABLE THE ABILITY OF CUSTOMER OR ITS END USERS TO DIRECTLY DIAL "911" OR TO RECEIVE OR TRANSMIT MULTI-LINE TELEPHONE SYSTEM NOTIFICATIONS, AS REQUIRED BY LAW, IN THE UNITED STATES.

3. Term; Termination. This Service Exhibit will commence on the Effective Date of the Agreement (or, if applicable, an amendment to the Agreement if this Service Exhibit is added to the Agreement after its Effective Date), and will remain in effect until canceled by either party upon 30 days prior written notice to the other party, or as otherwise stated in the SOW. If Service is terminated for any reason other than Cause, Service may be subject to Termination Charges as set forth in the Detailed Descriptions or SOW. Termination will not affect obligations under Purchase Orders accepted prior to the effective date of termination, and this Service Exhibit will remain in effect as to such obligations in the event it would otherwise have terminated.

4. Charges. Charges for Solutions will be specified in each PO or SOW and are due and payable upon Customer's receipt of the invoice or as otherwise stated in the PO or SOW. Any payment not received within 30 days after the invoice date may be subject to interest charges as permitted by applicable law. Customer will not be eligible for any discounts or promotional offers other than those specifically set forth in an executed PO.

OMR #R085547

© CenturyLink, Inc. All Rights Reserved

CENTURYLINK® TOTAL ADVANTAGE® AGREEMENT
TELECOMMUNICATIONS SERVICE PRIORITY SERVICE EXHIBIT

1. General. CenturyLink QCC will provide Telecommunications Service Priority ("Service" or "TSP") for National Security/Emergency Preparedness ("NS/EP") pursuant to the terms and conditions of the Agreement and this Service Exhibit.

2. Service.

2.1 Description. Customer can assign a 12-digit alphanumeric code issued by the Office of Priority Telecommunications ("OPT") with the TSP control identifier ("TSP Authorization Code") to its interstate telecommunications services that are used to maintain a state of readiness or to respond to and manage any event or crisis as set forth in 47 CFR Part 64, Appendix A ("NS/EP Telecommunications Services"). The TSP Authorization Code provides TSP priority levels that identify the provisioning and restoration priority-level assignment for a particular circuit. Telecommunications Service Priority allows CenturyLink to provision and restore Customer's NS/EP Telecommunications Services with TSP Authorization Codes before services without such assignments as set forth in 47 CFR part 64, Appendix A. TSP Service is available on CenturyLink services that have a unique and identifiable circuit identification number. The Service is only provided per-circuit on an end-to-end basis where the entire circuit is provided by CenturyLink (whether on its network or through leased facilities) so that the entire circuit is included in the TSP designation. The underlying NS/EP Telecommunications Service is offered pursuant to the terms and conditions of the Agreement, Service Exhibit, and/or Services Schedule applicable to the service and separate rates. TSP service is only available to federal, state, and local government users and certain private sector organizations that have services that support an NS/EP function and is applied only to interstate telecommunications services, as defined by Federal Communications Commission regulations.

2.2 Ordering. CenturyLink will provide the Service in accordance with 47 CFR Part 64, Appendix A and if: (a) Customer provides CenturyLink with a valid TSP Authorization code issued by the OPT for each circuit, via an Order Form; and (b) the Order Form is accepted by CenturyLink. CenturyLink will not accept TSP assignments or orders without an assigned TSP Authorization Code. TSP restoration priorities must be requested and assigned via an Order Form before a service outage occurs in order to have priority restoration. .

3. Term; Cancellation. The Service will become effective upon CenturyLink's acceptance of an order form and will terminate upon Customer's written notice of termination to CenturyLink or OPT's revocation of the TSP Authorization Code. Service will automatically expire should Customer terminate the circuit. In the event Customer cancels Service, Customer will pay for the Service provided through the effective date of the cancellation.

4. Charges. "Pricing Attachment" means the attached document containing Service rates, which is incorporated by reference and made a part of this Service Exhibit. Customer will pay all applicable MRCs and NRCs as set forth in the Pricing Attachment or Order Form. The rates will be used to calculate Contributory Charges. CenturyLink reserves the right to modify rates with 30 days written notice to Customer.

© CenturyLink, Inc. All Rights Reserved.

PRICING ATTACHMENT

TSP Service	Charge Type	Amount
TSP Provisioning installation and/or Restoration priority (excludes coordination of Leased Access) per circuit	NRC	$400
TSP Provisioning installation and/or Restoration priority for Leased Access, per Local Access circuit	NRC	$128
TSP Priority Level Change	NRC	$50
TSP Administration and Maintenance	MRC	$20

© CenturyLink, Inc. All Rights Reserved.

DATA SECURITY ADDENDUM

This Data Security Addendum ("Addendum") forms part of the service agreement ("Agreement") between Customer and CenturyLink and is applicable to the services provided by CenturyLink pursuant to the Agreement ("Services"). In the event of a conflict between the Agreement and this Addendum, the terms of this Addendum shall control.

CenturyLink has implemented the data security measures described in this Addendum and shall maintain them, or an equally secure equivalent, during the applicable term of the Services. These measures generally apply to CenturyLink's standard services and certain measures may not apply or may be applied differently to customized services, configurations, or environments ordered or as deployed by Customer. These measures have been implemented by CenturyLink to protect, directly or indirectly, the confidentiality, integrity and availability of Customer Data. As used in this Addendum, "Customer Data" means any data, content or information of Customer or its end users that is stored, transmitted, or otherwise processed using the CenturyLink Services.

1. COMPLIANCE WITH LAW, AUDIT REPORT

CenturyLink has adopted and implemented a corporate information security program as described below, which program is subject to reasonable changes by CenturyLink from time to time. CenturyLink has completed an AICPA sanctioned Type II audit report (SSAE18/ISAE3402 SOC 1 or SOC 2) for certain facilities/services and will continue to conduct such audits pursuant to a currently sanctioned or successor standard. Customer will be entitled to receive a copy of the then-available report upon request, which report is CenturyLink Confidential Information. Customer may make such report available to its end users subject to confidentiality terms provided by CenturyLink. Customer will ensure that all Customer Data complies with all applicable laws and appropriate information security practices, and nothing herein shall relieve Customer from its responsibility to select and implement such practices.

2. INFORMATION SECURITY PROGRAM

CenturyLink has implemented an information security program (the "Program") that includes reasonable measures designed to: (1) secure the confidentiality and integrity of Customer Data; (2) to the extent related to the Services and CenturyLink infrastructure, protect against foreseeable threats to the security or integrity of Customer Data; (3) protect against unauthorized access to, disclosure of or unauthorized use of Customer Data; and (4) provide that CenturyLink employees are aware of the need to maintain the confidentiality, integrity and security of Customer Data. CenturyLink will limit access to Customer Data to only those employees, agents, contractors or service providers of CenturyLink who need the information to carry out the purposes for which Customer Data was disclosed to CenturyLink.

The CenturyLink Program is modelled on the ISO27001:2013-based Information Security Management System ("ISMS"), which establishes the guidelines and general principles used for establishing, implementing, operating, monitoring, reviewing, maintaining and improving protections for CenturyLink information and Customer Data. The CenturyLink Program, in alignment with the ISMS, is designed to select adequate and proportionate security controls to protect information and provides general guidance on the commonly accepted goals of information security management and standard practices for controls in the following areas of information security management:

- Security policy
- Organization of information security
- Asset management
- Human resources security
- Physical and environmental security
- Communications and operations management
- Communications security
- Access control
- Information systems acquisition, development, and maintenance
- Information security incident management
- Business continuity management
- Compliance
- Cryptography
- Supplier relationships

CenturyLink has also implemented a formal information security policy and supporting methods and procedures, technical standards, and processes to reinforce the importance of information security throughout the organization ("Information Security Policy"). The Information Security Policy is in alignment with ISO 27002:2013 and is approved by the Chief Information Security Officer. The Information Security Policy outlines the requirements to maintain reasonable security for the Services. Employees and contractors with access to corporate information and Customer Data are

© CenturyLink. All Rights Reserved.

required to complete annual security training based on the Information Security Policy. The Information Security Policy includes the following:

- Physical Security Policy for data centers and Office Locations
- Electronic Use Policy including:
  - Email Usage
  - Wireless Networks
  - Internet Access
  - Anti-Virus control
- Password Management
- Remote and Home Working
- Computer Security Incident Response Plan
- Information Protection
- Third Party Connections Agreements
- Third Party Access
- Wireless Scanning
- Risk Management
- Vendor Management

3. SPECIFIC SECURITY CONTROLS

CenturyLink's security controls include:

- Logical access controls to manage access to Customer Data on a least privilege and need-to-know basis, including through the use of defined authority levels and job functions, unique IDs and passwords, strong (i.e. two-factor) authentication for remote access systems (and elsewhere as appropriate), and promptly revoking or changing access in response to terminations or changes in job functions.

- Password controls to manage and control password complexity and expiration. Any password controlling access to the CenturyLink infrastructure must be of a minimum length and complexity.

- Operational procedures and controls to provide that technology and information systems are configured and maintained according to prescribed internal standards.

- Network security controls, including the use of firewalls, layered DMZs, and updated intrusion detection/prevention systems to help protect systems from intrusion and/or limit the scope or success of any attack or attempt at unauthorized access.

- Vulnerability management procedures and technologies to identify, assess, mitigate and protect against new and existing security vulnerabilities and threats, including viruses, bots, and other malicious code.

- Approved anti-malware software is installed on CenturyLink equipment capable of running it where the risk of infection is high. It is configured to prevent users disabling the software where possible or altering its configuration without authorization. Periodic evaluations are performed to confirm whether systems continue to require (or not) antivirus software.

- Change management procedures outlining that modifications to CenturyLink technology and information assets are tested, approved, recorded, and monitored.

- Organizational management designed to ensure the proper development and maintenance of information security and technology policies, procedures and standards.

- Dedicated organizations with global responsibility for all physical security operations, security systems, access administration, and security controls within all CenturyLink-owned facilities and data centers. Third-party data

© CenturyLink. All Rights Reserved.

centers are utilized for certain services and, in such cases, certain physical security and other controls are reviewed by CenturyLink.

- Security policies which reinforce the importance of physical security of all company facilities including procedures specific to data center physical security. Data center security personnel are responsible for controlling data center access, monitoring local security alarms and managing all reported physical security-related events.

- CCTV (Closed Circuit Television) commonly deployed as a physical security control in high value facilities to deter, detect and identify intruders. The Corporate Security Operations Center (CSOC) provides global, 24/7 support with remote monitoring, management, administration and maintenance of the CCTV video surveillance systems used throughout CenturyLink.

- The Central Access Control Center (CACC) supports the distribution of all CenturyLink access badges and administration of access permissions within the access control system.

- Disposal procedures for different types and classifications of information which are documented and communicated to personnel. Employees have access to secure shredders for hardcopy. Electronic media are disposed of through certified disposal vendors.

- Pre-employment screening and background checks are conducted on incoming personnel in accordance with CenturyLink human resource on-boarding practices and applicable local law. The checks are dependent on, amongst other things: the role, location, any custom requirements, and can include: identity, drug, criminal, academic and credit checks.

- Annual security awareness training for CenturyLink employees and contractors working on CenturyLink premises. The training reflects current threats and encourages basic security good practice, access to and knowledge of Information Security Policy and procedures such as how to report an incident. Employees in particular positions receive supplementary security training and if a training or testing issue arises (e.g., internal phishing exercises), further guidance is provided. CenturyLink conducts a continuous program of phishing tests on staff to reinforce the requirement for awareness and good email and browsing habits and to assess the effectiveness of security awareness training. The company intranet and email system are used to disseminate flash announcements on security matters as appropriate.

4. SECURITY AUDITS.

Customer may, no more than once per year and at its own expense, audit CenturyLink's performance with respect to its security obligations under this Addendum ("Audit"). In the event Customer retains a third party to perform an Audit, CenturyLink may require additional documentation be executed by the third party auditor prior to granting access to a CenturyLink facility where Services are provided, and CenturyLink may, at its sole and reasonable discretion, decline to allow a third party access to a data center. CenturyLink shall reasonably cooperate with Customer in its performance of the Audit and shall make available to Customer or its auditors documents and records reasonably required to complete the Audit. CenturyLink shall provide Customer with reasonable access to the relevant facility for the purpose of inspection of the equipment and facilities which are used to provide the Services to Customer. For purposes of clarification, access will not be granted to certain areas of certain facilities (such as data centers) to which CenturyLink does not generally allow access to its customers (e.g. areas which house equipment used to support services for multiple customers). Audit access is subject to CenturyLink's reasonable security requirements for its most sensitive security policies/materials. Audit access must be within CenturyLink's normal business hours and must be scheduled at least ten (10) business days in advance, and Customer or its auditor shall be escorted by CenturyLink personnel during the period of access. The Audit and any findings related thereto shall be treated as Confidential Information.

5. SECURITY INCIDENTS AND RESPONSE.

In the event CenturyLink determines that a Security Incident has impacted Customer Data, CenturyLink shall promptly take the following actions:

- Notify Customer of such Security Incident and provide periodic updates as appropriate given the nature of the Security Incident and as information becomes available;
- Take reasonable steps to remediate and mitigate the Security Incident, to the extent such steps are technically feasible and appropriate in the circumstances;
- Conduct a preliminary investigation into the Security Incident to determine, to the extent reasonably feasible, its root cause; and

© CenturyLink. All Rights Reserved.

- Reasonably cooperate with Customer in its efforts to remediate or mitigate the Security Incident and its efforts to comply with applicable law and legal authorities, as necessary.

For purposes hereof, “Security Incident” means any unlawful or unauthorized access, theft, or use of Customer Data while being stored, transmitted or otherwise processed using CenturyLink services.

© CenturyLink. All Rights Reserved.

CENTURYLINK MASTER SERVICE AGREEMENT
NETWORK MANAGEMENT SERVICE EXHIBIT

1. General. CenturyLink QCC will provide Network Management Service ("NMS" or "Service") under the terms of the Agreement and this Service Exhibit.

2. Service.

2.1 Description. NMS provides performance reporting, change management, configuration management, fault monitoring, management and notification of customer premises equipment ("CPE") and network related issues. NMS does not include transport or Local Access, which may be separately purchased from CenturyLink. The following management types are available:

(a) Select Management. Select Management includes: 24x7x365 remote performance monitoring, reporting, and ticketing via NMS online portal for devices supported by CenturyLink. Select Management also includes complete fault monitoring, management, and notification (detection, isolation, diagnosis, escalation and remote repair when possible) change management supported by CenturyLink, (up to 12 changes per year), asset management (device inventory), and configuration management (inventory of customer physical and logical configuration). Customer may submit change management requests via Control Center at https://controlcenter.centurylink.com. Select Management only supports basic routing functions. Please reference the NMS Supported Device List to determine which devices qualify for NMS Select. NMS does not include new CPE initial configuration, lab testing, lab modeling, or on-site work of CPE. The NMS supported device list and a standard change management list are available on request and are subject to change without notice.

(b) Comprehensive Management. Comprehensive Management includes all of the Select Management features as well as total customer agency and change management (up to 24 configuration changes per year) of complex routing functions within routers, switches, and Firewall modules. This includes configuration and management of complex routing, switching, device NIC cards, Firewall module configurations, and basic router internal Firewall functions. "Firewall" means a set of related programs, located at a network gateway server that is designed to allow or deny certain hosts or networks to speak to each other, based on a set security policy. CenturyLink acts as the Customer's single point of contact in managing the resolution of all service, device, and transport faults covered by Comprehensive Management and will work with any third party hardware and/or transport providers the Customer has under contract until all network issues are successfully resolved. With Internet security protocol ("IPSec"), CenturyLink can configure full mesh, partial mesh, or hub-and-spoke topologies with secure tunnels for remote communication between Customer locations. IPSec is only available on approved Cisco and Adtran devices. IPSec opportunities greater than 25 devices or with other manufacturer's devices require CenturyLink approval before submitting an order.

(c) Monitor and Notification. CenturyLink will monitor Customer device 24x7x365 for up/down status and notify Customer of faults. This feature does not include any of the Select Management or Comprehensive Management features.

(d) CenturyLink Responsibilities.

(i) CenturyLink will provide Customer with a non-exclusive service engineer team, which will maintain a Customer profile for the portion of the Customer's network where the CenturyLink-managed devices reside. CenturyLink will work with the Customer to facilitate resolution of service-affecting issues as long as Customer chooses either Select Management or Comprehensive Management.

(e) Customer Responsibilities.

(i) Customer must provide all information and perform all actions reasonably requested by CenturyLink in order to facilitate installation of Service. For Out-of-Band management related to fault isolation/resolution, Customer will provide and maintain a POTS line(s) for each managed device. "Out-of-Band" means a connection between two devices that relies on a non-standard network connection, such as an analog dial modem, which must be a CenturyLink certified 56k external modem. Additionally, Customer will provide a dedicated modem for each managed device. It is not mandatory that Customer have a POTS line but Customer must understand that CenturyLink will not be able to troubleshoot issues if the device under management cannot be reached.

(ii) For Comprehensive Management, Customer must execute the attached Letter of Agency (Attachment 1) to authorize CenturyLink to act as Customer's agent solely for the purpose of accessing Customer's transport services.

(iii) Depending on transport type, Customer's managed devices must comply with the following set of access requirements: (a) for Service delivered via IP connectivity with CenturyLink IQ® Networking Internet Port or other public Internet service, devices must contain an appropriate version of OS capable of establishing IPsec VPNs; (b) for Service delivered with CenturyLink IQ Networking Private Port, CenturyLink will configure a virtual circuit to access Customer device at no additional charge. CenturyLink will add the CenturyLink NMS network operations center to the Customer user group to manage the devices within the customer's network. With CenturyLink IQ Networking Private Port, the Customer device does not need to be IPSec-capable unless customer is requesting an added layer of security; (c) for Private Line, both A and Z locations must be under management and accessible via a valid routable IP address.

(iv) Customer must provide: A routable valid IP address to establish the Service connection. Customer's primary technical interface person must be available during the remote installation process in order to facilitate installation of the Service. All Customer devices managed under NMS must be maintained under a contract from a CenturyLink approved on-site CPE maintenance provider. The response times for which the Customer contract with its CPE maintenance provider will affect CenturyLink's timing for resolution of problems involving Customer-provided devices. The performance of the CPE maintenance provider is Customer's responsibility.

© CenturyLink, Inc. All Rights Reserved.

2.2 International Terms and Conditions. International Service is available in many locations, but not all locations outside of the continental United States. Customer must verify with CenturyLink the availability of the Service in Customer's desired International locations. For Service outside of the continental United States, the following terms and conditions will apply.

(a) Export Controls. If equipment, software, or technical data is provided under this Service Exhibit, Customer's use of such items must comply fully with all applicable export and re-export controls under U.S. Export Administration Regulations and/or the relevant export control laws and regulations of any other applicable jurisdiction.

(b) Anti-Corruption. Each party acknowledges and agrees that certain anti-bribery and anti-corruption laws, including the Foreign Corrupt Practices Act, 15 U.S.C. Sections 78dd-1 et seq. and the UK Bribery Act, prohibit any person from making or promising to make any payment of money or anything of value, directly or indirectly, to any government official, political party, or candidate for political office for the purpose of obtaining or retaining business. Each party represents and warrants that in the performance of its obligations hereunder, it has not offered, made, or accepted and will not offer, make, or accept, any bribe or facilitation payment, and will otherwise comply with the requirements of applicable anti-bribery laws.

(c) Business Contact Information. Customer is providing to CenturyLink the names of and contact information ("Business Contact Information") for its employees ("Business Contacts") who have purchasing or other responsibilities relevant to CenturyLink's delivery of Service under this Service Exhibit. The Business Contact Information does not include personal data revealing racial or ethnic origin, political opinions, religious or philosophical beliefs, trade-union memberships, financial status, health or sex life. Customer consents to CenturyLink's and its affiliates or subcontractors' use and transfer to the United States of Business Contact Information for the purpose of: (i) fulfilling its obligations under this Service Exhibit; and (ii) providing information to Customer about CenturyLink's products and services via these Business Contacts. Customer represents that the Business Contact Information is accurate and that each Business Contact has consented to CenturyLink's processing of their Business Contact Information for the purposes set forth in this Service Exhibit. The Business Contact Information provided by Customer has been collected, processed, and transferred in accordance with applicable laws, including, where applicable, any necessary notification to the relevant data protection authority in the territory in which Customer is established ("Authority"). Customer will notify CenturyLink promptly of staffing or other changes that affect CenturyLink's use of Business Contact Information. CenturyLink will have in place technical and organizational measures that ensure a level of security appropriate to the risk represented by the processing and the nature of the Business Contact Information, and that protects such information against accidental or unlawful destruction or accidental loss, alteration, unauthorized disclosure or access. CenturyLink will use the information only for the express purposes set forth in this Service Exhibit. CenturyLink will identify a contact authorized to respond to inquiries concerning processing of Business Contact Information, and will reasonably cooperate in good faith with Customer and the Authority concerning all such inquiries without excessive delays.

(d) International Laws. CenturyLink will provide the International Service in compliance with applicable international laws and tariffs. Customer agrees to cooperate with CenturyLink in obtaining necessary domestic or foreign approvals. CenturyLink may elect to not offer International Service, or to terminate International Service, in or to any particular jurisdiction, location or country if CenturyLink determines that the provision of such International Service is not commercially reasonable or is not lawfully permitted. Any arbitration or notices between the parties will be conducted in the English.

3. Term; Cancellation. The term of this Service Exhibit will commence on the Effective Date of the Agreement (or, if applicable, an amendment to the Agreement if this Service Exhibit is added to the Agreement after its Effective Date) and continue for 60 months ("Service Term"). The first 12 months of the Service Term will be referred to as the "Minimum Service Term." Each subsequent location added will have its own Minimum Service Term and Service Term. Upon expiration of the Service Term, each Service will automatically renew for the same Service Term as originally selected by Customer, unless either party elects to cancel the Service by providing 60 days prior written notice of such cancellation to the other party. If the Agreement or any Service provisioned under this Service Exhibit is canceled prior to the expiration of the applicable Service Term for reasons other than by Customer for Cause, then Customer will pay to CenturyLink: (a) all accrued and unpaid charges for the canceled Service provided through the effective date of such cancellation; (b) the amount of any nonrecurring/installation charges that CenturyLink discounted or waived; and (c) a Cancellation Charge (the Cancellation Charge only applies during the initial Service Term and will not apply to any renewal Service Term). The Cancellation Charge applicable to the portion of the Service being canceled during the Minimum Service Term will be 100% of the balance of the MRCs that otherwise would have become due for the unexpired portion of the Minimum Service Term, if any, plus 35% of the balance of the MRCs that otherwise would have become due for the unexpired portion of the Service Term beyond the Minimum Service Term, if any.

4. Charges. Customer will pay all applicable charges in the attached pricing attachment. Charges will commence within five days after the date CenturyLink notifies Customer that Service is provisions and ready for use ("Start of Service Date"). The MRCs set forth in the pricing attachment will be used to calculate Contributory Charges. Location additions will be at CenturyLink's then-current rate.

5. AUP. All use of the Service must comply with the AUP, posted at http://www.qwest.centurylink.com/legal/, which is subject to change. CenturyLink may reasonably change the AUP to ensure compliance with applicable laws and regulations and to protect CenturyLink's network and customers. Any changes to the AUP will be consistent with the purpose of the AUP to encourage responsible use of CenturyLink's networks, systems, services, Web sites, and products.

6. SLA. Service is subject to the NMS service level agreement ("SLA"), located at http://www.qwest.centurylink.com/legal/, which is subject to change. The SLA is effective as of the first day of the second month after initial installation of Service. For Customer's

© CenturyLink, Inc. All Rights Reserved.

claims related to Service or NMS feature deficiencies, interruptions or failures, Customer's exclusive remedies are limited to those remedies set forth in the applicable SLA.

© CenturyLink, Inc. All Rights Reserved.

Pricing Attachment

For pricing, please refer to the RFP. This Pricing Attachment will be completed upon award.

© CenturyLink, Inc. All Rights Reserved.

ATTACHMENT 1

COMPREHENSIVE MANAGEMENT

LIMITED LETTER OF AGENCY
between
("Customer")
and
Qwest Communications Company, LLC d/b/a CenturyLink QCC ("CenturyLink")

This limited letter of agency ("LOA") hereby authorizes CenturyLink to act as the Customer's Agent for the limited purpose of contacting Customer's designated Local Exchange Carrier ("LEC"), Interexchange Carrier ("IXC"), Internet Service Provider ("ISP"), or customer premises equipment ("CPE") maintenance provider in conjunction with CenturyLink Network Management Service. Network Management Service activities will consist of working with Customer's LEC, IXC, ISP, and/or CPE maintenance provider for the purpose of: (a) extracting information concerning transmission data elements carried over Customer's network connection; (b) identifying Customer's links or data link connection identifiers ("DLCIs"); (c) opening, tracking, and closing trouble tickets with the LEC, IXC, ISP, or CPE maintenance provider on Customer's transport links or CPE when an alarm or fault has been detected; (d) dispatching CPE repair personnel on behalf of Customer to CPE for which a fault has been detected; and (e) discussing fault information with the LEC, IXC or CPE maintenance provider on behalf of Customer to facilitate resolution of the problem.

CenturyLink does not assume any of Customer's liabilities associated with any of the services the Customer may use.

The term of this LOA will commence on the date of execution below and will continue in full force and effect until terminated with 30 days written notice by one party to the other or until the expiration or termination of the Network Management Service.

A copy of this LOA will, upon presentation to LEC, IXC, ISP, and/or CPE maintenance provider, as applicable, be deemed authorization for CenturyLink to proceed on Customer's behalf.

_____
Authorized Signature

_____
Name Typed or Printed

_____
Title

_____
Date

© CenturyLink, Inc. All Rights Reserved.

NETWORK MANAGEMENT SERVICE ("NMS" or "Service"**)**
SERVICE LEVEL AGREEMENT ("SLA"**)**
(not applicable to services offered under the CenturyLink Wholesale and Enhanced Services Agreements)

This SLA applies to NMS ordered by customers pursuant to an agreement between a specific customer ("Customer") and Qwest Communications Company, LLC d/b/a CenturyLink QCC ("CenturyLink") ("Agreement"). Capitalized terms not defined in this SLA are defined in the Agreement. This SLA provides Customer's sole and exclusive remedy for service interruptions or service deficiencies of any kind whatsoever for Service.

1. Definitions.

"ICMP" means Internet Control Message Protocol and is the protocol used to "ping" a monitored device to verify if it is alive.

"Network Incident" means device and network performance issues that are recognized by the NMS NOC as being potentially harmful to Customer's network.

"SLO" means service level objective. An SLO differs from an SLA in that it does not provide for remedies.

"SNMP" means Simple Network Management Protocol and is the primary protocol used for monitoring and extracting device health information for use of management and reporting.

"UDP" means User Datagram Protocol and is the underlying protocol used by SNMP to monitor device health.

2. SLA Effective Date. This SLA becomes effective when the deployment process has been completed, the device has been set to "live," and support and management of the device has been successfully transitioned to the NOC. The SLA remedies are available provided Customer meets its obligations as defined in this SLA.

2.1 SLA. The SLA described below comprises the measured metrics for delivery of the Service. Unless explicitly stated below, no additional SLAs of any kind will apply to Services delivered under this SLA. This SLA only applies in cases where the incident is not the result of circuit or CPE failures, as those incidents will be covered by their respective SLAs. The sole remedies for failure to meet the SLA are specified in the below section entitled "SLA Remedies."

a. NOC Availability Commitments. The NOC is staffed 24x7x365 days a year, subject to the Scheduled Emergency and Portal Maintenance and SLA Exclusions and Stipulations section that prevent staffing or uptime of the NOC.

b. Incident Identification SLA. CenturyLink will classify all incidents by severity based on event data received by the NOC. The following definitions apply to all incidents:

High –An incident in which a device or devices is unreachable. The impact of this incident is widespread and may affect the functioning of many locations also.

Medium –An incident in which customer devices report degraded performance The impact of this incident is limited to a group of users, limited to a location. An example of this type is intermittent circuit errors or packet loss.

Low –An incident affecting an individual devicein the Customer's network will be classified as Low. Incidents and errors which are not immediately service affecting.

MACD – A scheduled change/project or a ticket that is informational in nature.

Table – Incident Response and Resolution Times

Severity	Notification Time	Resolution Time
High	10 minutes	3 hours
Medium	15 minutes	6 hours
Low	30 minutes	24 hours
MACD	30 minutes	48 hours

c. Incident Response SLA (applies to all service levels).
(1) Network Monitoring and Reporting Services. CenturyLink will respond to all identified incidents according to the table above, after ticket generation. Customer's designated incident contact will be notified via e-mail for all incidents. Incidents will be posted to the Service portal near real time upon identification.
(2) NMS. CenturyLink will respond to all identified incidents according to the table above, after ticket generation. Customer's designated incident contact will be notified by telephone and email for High severity incidents and via e-mail for Severity Medium, Low and MACD incidents. During a High severity incident escalation, CenturyLink will contact the designated Customer contact until all escalation contacts have been exhausted. Incidents will be posted to the Service portal near real time upon identification. Operational activities related to incidents and responses are documented and time-stamped within the CenturyLink trouble ticketing system, which will be used as the sole authoritative information source for purposes of this SLA.
d. Policy change request acknowledgement SLA. CenturyLink will acknowledge receipt of Customer's policy change request within two hours of receipt by CenturyLink. This SLA is only available for policy change requests submitted by one designated contact in accordance with the provided procedures.
e. Customer service request implementation SLA.
(1) CenturyLink will provide the Move, Add, Change, Delete ("MACD") service events to Customer based on the following material baselines. The baselines will be measured on a weighted average across the install base of the in scope devices of the Statement Of Work.

© CenturyLink, Inc. All Rights Reserved.

(2) The following table lists the maximum number of MACD events per device and target execution time. Note that target criteria for execution time is a target that 95% of all monthly MACD requests will be satisfied in the stated execution time.

Table: MACD for Network devices

Standard MACD	Execution Time
Major	2 Business Days
Medium	1 Business Day
Minor	1 Business Day

f. Emergency Change Request Implementation SLA. CenturyLink will implement Customer emergency policy change requests after the issue is categorized by the NMS NOC, complexity is assessed and resolution time is mutually agreed to by Customer and CenturyLink's NMS NOC engineer. All emergency policy requests will be documented via a change submission through the service portal following notification by telephone.

(1) This SLA is only available for policy change requests submitted by a valid customer contact in accordance with established procedures.

(2) CenturyLink will promptly notify Customer upon implementation of a change request by telephone, e-mail, pager, or electronic response via the Service portal

(3) A ticket will be generated per request and made visible via the service portal. The ticket will contain detail on the request.

Table – SLA Summary

Service Level Agreements	Remedies for NMS Customer (all service levels)
NOC Availability	NMS Customer may obtain no more than one credit for each SLA per incident per device managed by CenturyLink, not to exceed a total of 100% of the equivalent MRC in local currency for a given device, in a given calendar month. Customer SLA credits cannot exceed $25,000 in a calendar month.
Incident identification SLA	
Incident response SLA	
Policy change request acknowledgement SLA	
Policy change request implementation SLA	
Emergency change request implementation SLA (Premium level only)	
Proactive system monitoring SLA	

2.2 SLA Remedies.

a. A credit is calculated as: credit = 2 x daily prorated MRC

b. A credit will be issued to customer as the sole remedy for failure to meet any of the SLAs described in the section entitled "SLA," during any given calendar month. Customer may obtain no more than one credit for each SLA per incident per device managed by CenturyLink, not to exceed a total of 100% of the equivalent MRC in local currency for a given device, in a given calendar month. Customer SLA credits cannot exceed $25,000 in a calendar month.

(1) NOC availability, incident identification, incident response, policy change request acknowledgement, policy change request implementation, emergency change request implementation, proactive system monitoring and remedies – If CenturyLink fails to meet any of these SLAs, a credit will be issued for the applicable charges for two days of the monthly monitoring fee for the affected device.

Table - SLAs and Remedies Summary

Service Level Agreements	Remedies for NMS Customer (all service levels)
NOC Availability	NMS Customer may obtain no more than one credit for each SLA per day per device managed by CenturyLink, not to exceed a total of 100% of the equivalent MRC in local currency for a given device, in a given calendar month. Customer SLA credits cannot exceed $25,000 in a calendar month.
Incident identification SLA	
Incident response SLA	
Policy change request acknowledgement SLA	
Policy change request implementation SLA	
Emergency change request implementation SLA (Premium level only)	
Proactive system monitoring SLA	

2.3 Scheduled and Emergency Portal Maintenance. Scheduled maintenance will mean any maintenance:

a. of which Customer is notified at least five days in advance; or

b. that is performed during the standard monthly maintenance window on the second Tuesday of every month from 11 pm to 6 am. Central Time. Notice of scheduled maintenance will be provided to the designated Customer contact. No statement in the section entitled "SLA" will prevent CenturyLink from conducting emergency maintenance on an "as needed" basis. During such emergency maintenance, the affected Customer's primary point of contact will receive notification within 30 minutes of initialization of the emergency maintenance and within 30 minutes of the completion of any emergency maintenance.

2.4 SLA Exclusions and Stipulations.

a. Customer Contact Information. Multiple SLAs require CenturyLink to provide notification to the designated Customer contact after certain events occur. In the case of such an event, Customer is solely responsible for providing CenturyLink with accurate and current contact information for the designated contact(s). The current contact information on record is available to authorized contacts through the Service portal. CenturyLink will be relieved of its obligations under this SLA if Customer contact information is out of date or inaccurate due to Customer action or omission.

b. Customer Network/Server Change Notifications. Customer is responsible for providing CenturyLink advance notice regarding any network or server changes to the firewall environment. If the event advance notice cannot be provided, Customer is required to

© CenturyLink, Inc. All Rights Reserved.

provide CenturyLink with notification of changes within seven business days of said network or server changes. Notification is completed by the submission or update of a critical server ticket through the Service portal. If Customer fails to notify CenturyLink as stated above, all SLA remedies directly related to Customers failure to provide such notification are considered null and void.

c. Maximum Penalties/Remedies Payable to Customer. The total SLA credits (called "remedies") provided by NMS for network firewalls – Standard, and Managed UTM Service, described in the sections entitled "SLAs" and "SLA Remedies" above, will not exceed the MRCs for one calendar month.

d. Network Traffic Applicable to SLAs. Certain SLAs focus on the prevention, identification, and escalation of security incidents. These SLAs assume that traffic has successfully reached the firewall and therefore the firewall has the ability to process the traffic against the installed policy and generate a logged event. Traffic that does not pass through a firewall, or that does not generate a logged event, is not covered under these SLAs.

e. SLA Compliance and Reporting. SLA compliance and the associated remedies are based on fully functional network environments, Internet, and circuit connectivity, firewalls, and properly configured servers. If SLA compliance failure is caused solely by CPE hardware or software (including any and all software agents, all SLA remedies are considered null and void. CenturyLink will provide SLA compliance reporting through the Service portal.

f. Testing of Monitoring and Response Capabilities. Customer may test CenturyLink monitoring and response capabilities by staging simulated or actual reconnaissance activity, system or network attacks, and/or system compromises. These activities may be initiated directly by Customer or by a contracted third party with no advance notice to CenturyLink. SLAs will not apply during the period of such staged activities, and remedies will not be payable if the associated SLA(s) are not met.

g. Interruptions or Times of Service Degradation. In addition to other exclusions stated in this SLA, the commitments outlined in the UTM SLA section will not apply in the event Service is unavailable or impaired due to any of the following:

(1) Negligence, Error, or Customer Caused. Interruptions or times of Service degradation caused by the negligence, error, or omission of the Customer or others authorized by the Customer to use or modify the Customer's Service; to include changes made with read/write access

(2) No Access, Service Termination. Interruptions or times of Service degradation during any period in which CenturyLink or its agents are not afforded access to the premises where the access lines associated with the Customer's Service are terminated or where the Customer's CPE resides, provided such access is reasonably necessary to prevent a degradation or restore Service;

(3) Customer Elects Not to Release Service. Interruptions or times of Service degradation during any period when the Customer elects not to release the Service(s) for testing and/or repair and continues to use it on an impaired basis;

(4) CPE Failure Not Covered. Interruptions or times of Service degradation due to failure of CPE components not covered by NMS;

(5) Failure of Customer Supplied Wiring. If required for Service, interruptions or times of Service degradation due to failure of inside wiring components supplied by the Customer;

(6) Customer Use in Unauthorized/Unlawful Manner. Interruptions or times of Service degradation resulting from the Customer's use of the Service in an unauthorized or unlawful manner;

(7) Other Vendor Disconnect. Interruptions or times of Service degradation resulting from any other vendor disconnecting their service;

(8) Breach of Terms. Interruptions or times of Service degradation resulting from a CenturyLink disconnect for the Customer's breach of a term set forth in the Agreement pursuant to which CenturyLink is providing the Service to the Customer or CenturyLink is providing a local access service to the Customer;

(9) Incorrect, Incomplete, Inaccurate Information from Customer. Interruptions or times of Service degradation resulting from incorrect, incomplete, or inaccurate information from the Customer, including, without limitation, the Customer's over-subscription of ports or selection of insufficient committed information rate, or over utilization of CPE resources;

(10) Customer Requested Improper, Inaccurate, or Special Network Specifications. Interruptions or times of Service degradation due to improper, inaccurate, or special network specifications requested by the Customer that are not included in CenturyLink's standard specifications of the Service and/or CenturyLinks' contract with Customer and/or CenturyLink's internal operational processes;

(11) Unable to Reach Customer Contact Post Restoration of Service. Interruptions or times of Service degradation occurring after CenturyLink reasonably believes it has restored a particular Service and is unable to contact the person designated by the Customer as being the person to contact in the event of an interruption or degradation of the Service and restoration of a Service;

(12) Unavailable Bandwidth due to Overcapacity. SNMP polling is not available as a result of the Customer running at 100% capacity;

(13) Loss of SNMP Packet. The underlying protocol of SNMP is UDP. UDP is connectionless and therefore unreliable for retransmission. When an SNMP packet is sent from the end device, if there is a network outage, congestion, or the packet is somehow lost it will not be retransmitted by the end device;

(14) Unable to Reach Customer Contact During Power Outage. If CenturyLink loses monitoring connectivity to the managed device, and there is no Customer contact to identify a power outage, this down time will not be included in SLA calculations. If CenturyLink dispatches a technician and finds a no power situation, then the outage is considered a false callout scenario with associated charges;

(15) Customer Configurations. If the Customer makes its own configuration changes to its device causing network outages and/or issues.

(16) Force Majeure. Force Majeure Events as defined in the Agreement;

(17) Vendor Handling Time. Handling Time for vendor or CenturyLink time;

(18) Incomplete/Incorrect Service Order. SLA install time does not apply if a Service order is incomplete or if Customer provides incorrect information for a Service order.

3. SLOs. The following establish nonbinding objectives for the provision of certain features of the Service. The SLOs become effective when the deployment process has been completed, the device has been set to "live," and support and management of the device have been successfully transitioned to the NOC. CenturyLink reserves the right to modify these SLOs with 30 days prior written notice.

a. Service Portal. CenturyLink will provide a 99.9% accessibility objective for the Service portal outside of the times detailed in the

© CenturyLink, Inc. All Rights Reserved.

section entitled “Scheduled and Emergency Portal Maintenance”.

b. Internet Emergency. In the event CenturyLink declares an Internet emergency, it is CenturyLink’s objective to notify Customer’s specified points of contact via e-mail within 15 minutes of emergency declaration. This notification will include an incident tracking number. During declared Internet emergencies, CenturyLink will provide a summarized e-mail designed to Customer. Situation briefings following the onset of an Internet emergency will supersede any requirement for CenturyLink to provide Customer-specific escalations for events directly related to the declared Internet emergency. Standard escalation practices will resume upon conclusion of the stated Internet emergency.

4. Other Terms and Conditions. CenturyLink reserves the right to modify the terms of the SLAs any time by providing a minimum of 30 days prior notice via the Control Center Web portal or other electronic means. Should such modification reduce the scope or level of the Service being delivered (for example, eliminating a previously provided Service or lengthening the security incident response time), such change will not apply to Customer until the end of the Customer’s then-current Service term unless CenturyLink agrees to such modification in writing.

© CenturyLink, Inc. All Rights Reserved.

CENTURYLINK MASTER SERVICE AGREEMENT
PUBLIC SAFETY VERSION
NEXT GENERATION 9-1-1 SERVICE SCHEDULE

1. Services

Qwest Corporation d/b/a CenturyLink QC ("CenturyLink") will provide, and Customer will purchase, the CenturyLink Next Generation ("NG") 9-1-1 service ("Service" or "NG 9-1-1 Service") provided under this Service Schedule. Service enables the routing of 9-1-1 dialed calls to a Customer–designated Public Safety Answering Point ("PSAP") over an Internet Protocol ("IP") network. Service is provided as described in this Service Schedule and in a Statement of Work ("SOW"), if applicable. The number "9-1-1" is intended as a universal emergency telephone number that provides the public direct access to a PSAP. A PSAP is an agency authorized to receive and respond to emergency calls. One or more PSAPs may be required for any given municipality or metropolitan area. PSAPs are designated by the Customer and specified in Addendums to this Service Schedule. Service includes components necessary for the answering, transferring, and forced disconnect of emergency 9-1-1 calls originated by persons within the servicing area(s). Service does not include Customer's telecommunications equipment. Customer will provide telecommunications equipment with a capacity adequate to handle the number of incoming 9-1-1 calls recommended by CenturyLink to be installed. It is Customer's responsibility to ensure that the telecommunications equipment is compatible with the Service furnished under this Service Schedule. CenturyLink does not answer and forward 9-1-1 calls, but furnishes the use of its facilities to enable the Customer's NG 9-1-1 and/or 9-1-1 personnel to respond to such calls. PSAP information, service locations, and addresses are shown on Addendum 1, incorporated by reference into this Service Schedule. By checking the box below, the applicable SOW is incorporated into this Service Schedule. SOWs that are not specifically incorporated will not be considered part of this Service Schedule.

☒SOW [#_____] is hereby incorporated into this Service Exhibit.
This SOW will be completed upon award.

1.2 Service provided under this Service Schedule does not include IP transport. Customer acknowledges and understands that this Service requires IP transport between certain points in Customer's 9-1-1 network to deliver the ALI to the PSAP and that the IP transport provided by Customer must meet the requirements for this Service. Customer understands that the terms and conditions of any agreement imposed by Customer's provider of its IP transport will impact Customer's access to this Service. Customer further acknowledges and understands that IP transport may create limitations on access to 9-1-1 emergency services that are different from or in addition to access limitations of traditional E9-1-1 transport and such transport may limit its access to the Service provided under this Service Schedule. "ALI" means Automatic Location Identification.

1.3 Service provided under this Service Schedule does not include Data Transport. Customer acknowledges and understands that any new or existing Data Transport used in conjunction with this Service is subject to the terms of a separate agreement. "Data Transport" means traditional E9-1-1 circuits used to deliver the ALI to the PSAP that are provided under the terms of a CenturyLink tariff, price list, price, schedule, administrative guideline, catalog, and other rate and term schedules (hereinafter, whether individually or together, "Tariff"). Data Transport is not offered under this Service Schedule.

1.4 CenturyLink will not provide Service to less than an entire central office service area. Service does not include facilities provided by Independent Providers. CenturyLink will provide Service up to the Standard Network Interface ("SNI") for each of the service locations at Customer's location(s). The SNI is that location where CenturyLink's facilities end and Customer's inside wire or network begins. "Independent Providers" means telephone companies, Incumbent Local Exchange Carriers ("ILECS"), Competitive Local Exchange Carriers ("CLECS"), or other communications service providers, (i.e., wireless carriers and/or interconnected VoIP providers).

1.5 Customer will use the NG 9-1-1 Service only for receiving and responding to requests for emergency assistance. Customer will be responsible for ensuring that each PSAP will also use the NG 9-1-1 Service as prescribed herein. Any other use of the database will result in immediate termination of Service.

1.6 CENTURYLINK ACCEPTS NO RESPONSIBILITY FOR OBTAINING OR FOR THE ACCURACY OF SUBSCRIBER, STATION, OR END-USER RECORD INFORMATION RECEIVED FROM INDEPENDENT PROVIDERS OR PRIVATE TELECOMMUNICATIONS SYSTEMS, SUCH AS PBX OR SHARED TENANT SERVICES.

1.7 Customer will provide an MSAG to CenturyLink for use in the database preparation. The MSAG must follow the NENA recommended United States Postal Service street name and directional addressing standard. Customer will ensure that each participating telephone service provider's records are sent electronically in the NENA format for database updates as specified by CenturyLink. CenturyLink will not deliver Service until each participating telephone service provider's records for Customer's service area match the applicable Master Street Address Guide at rates shown below. Customer is fully responsible for correcting all erroneous records and achieving such rate. "MSAG" means Master Street Address Guide. "NENA" means National Emergency Number Association.

State	Rate
Minnesota	98%
Washington	97%
Oregon	97%
New Mexico	96%
Other (within CenturyLink's 14 state territory)	95%

© CenturyLink. All Rights Reserved.

1.8 Customer must promptly notify CenturyLink in the event the Service is not functioning properly. CenturyLink acknowledges some elements of the Service are monitored for performance as part of the routine maintenance of the network. This shall not be interpreted, construed, or regarded, either expressly or impliedly as a warranty, service commitment or creating any CenturyLink obligation nor does it relieve Customer of its responsibilities under this Service Schedule.

1.9 CenturyLink will perform inspection and/or monitoring of its facilities on a routine basis, to discover errors, defects and malfunctions that might affect the Service. Customer understands and acknowledges that this inspection and monitoring may not detect all errors that may occur. Some Service-related issues may arise that impact and delay or prevent call delivery. Some Service-related issues may occur which the system will not recognize and will therefore not cause an automatic rerouting of calls to an alternate destination. Customer may authorize CenturyLink to manually implement an alternate call route as required.

2. Service Term. The term of this Service Schedule is 12 months (the Service Term"). Customer agrees the Service is subject to a minimum term of the first 12-month period of the Service Term ("Minimum Service Period"). Customer may enter into a new Service Term that establishes a greater available term period without incurring non-recurring or termination charges. Customer and CenturyLink agree to begin discussions regarding the renewal or discontinuation of Service 90 days before expiration of the Service Term. Renewals will require a new Service Term. If the parties do not reach agreement by the expiration of the Service Term, Service will continue on a month-to-month basis under the terms of the Service Schedule and will convert to the then-current month-to-month rates as evidenced by CenturyLink's records). CenturyLink will inform Customer of its then-current rates for Service upon written request. If Service is continued on a month-to month basis, either party may terminate Service with 30 days' prior written notice to the other party.

3. Cancellation and Termination Charges.

3.1 Either party may terminate Service and/or this Service Schedule with 30 days' written notice, or for Cause. "Cause" means the failure of a party to perform a material obligation under this Service Schedule, which failure is not remedied: (a) for payment defaults by Customer, within five days of separate written notice from CenturyLink of such default; or (b) for any other material breach, within 30 days of written notice (unless a different notice period is specified a Service Attachment). Customer will remain liable for charges accrued but unpaid as of the termination date. If, prior to the conclusion of the Service Term, Service and/or this Service Schedule is terminated either by CenturyLink for Cause or by Customer for any reason other than Cause, then Customer will also be liable for:

(a) If termination is prior to installation of Service, termination charges will be those reasonable costs incurred by CenturyLink through the date of termination. If termination is after installation of Service but prior to the completion of the Minimum Service Period, Customer will pay the termination charges for Minimum Service Period in addition to the termination charges for the remainder of the Service Term.

(b) If Customer terminates Service to a level that is less than 80% of a total annual true-up monthly rate, a termination charge may apply to the Service removed below the 80% level. The termination charge will be equal to 100% of the monthly rate for the Service terminated below the 80% level multiplied by the number of months, or portion thereof, remaining in the Minimum Service Period; plus 50% of the monthly rate for Service removed below the 80% level multiplied by the number of months, or portion thereof, remaining in the Service Term.

3.2 A termination charge will be waived when the Customer discontinues Service and the following conditions are met: (a) Customer signs new service schedules for any other CenturyLink provided new service(s) and all applicable nonrecurring charges will be assessed for the new service(s); (b) Both the current Service and the new service(s) are provided solely by CenturyLink; (c) The order to discontinue Service and the order to establish new service(s) are received by CenturyLink within 30 days of each other for service in New Mexico, and at the same time for service in any other state; (d) The new service installation must be completed within 30 calendar days of the disconnection of Service, unless such installation delay is caused by CenturyLink; (e) The total value of the new service(s), excluding any special construction charges, is equal to or greater than 115% of the remaining value of this Service Schedule; (f) A new Minimum Service Period, if applicable, will go into effect when the new service(s) agreement term begins; and (g) Customer agrees to pay any previously billed, but unpaid recurring, and any outstanding nonrecurring charges - these charges cannot be included as part of the new service(s) agreement. The waiver does not apply to changes between regulated and unregulated or enhanced products and services. New service is defined as a newly installed service placed under a new CenturyLink service agreement(s), or newly installed additions to an existing service agreement(s), but does not include renewals of expiring service agreement(s), renegotiations of existing service agreement(s) and conversions from month-to-month service to contracted service.

4. Charges and Payment.

4.1 CenturyLink will notify Customer of the date Service is available for use. In the event Customer informs CenturyLink that it is unable or unwilling to accept Service at such time, the Service will be held available for Customer for a period not to exceed 30 business days from such date ("Grace Period"). If after the Grace Period, Customer still has not accepted Service, CenturyLink may either: (a) commence with regular monthly billing for the Service; or (b) cancel the Service. If Customer cancels Service prior to the date the Service is available for use, or is unable to accept the Service during the Grace Period and CenturyLink cancels the Service at the end of the Grace Period, termination charges may apply.

© CenturyLink. All Rights Reserved.

4.2 Customer will pay the rates for the Service as set forth in Addendum 2 and in the SOW, if applicable. CenturyLink reserves the right to revise rates if a change in the statutes or administrative rules affects the cost of providing Service.

4.3 Provision of Service under this Service Schedule may involve Independent Providers. Charges for Service only include Service provided within CenturyLink Territory up to the meet point of the Independent Provider. Other charges which involve work performed by the Independent Provider will be in addition to CenturyLink's charges and will be negotiated separately between Customer and the Independent Provider. "CenturyLink Territory" means CenturyLink's local service areas in the following states: Arizona, Colorado, Idaho, Iowa, Minnesota, Montana, Nebraska, New Mexico, North Dakota, Oregon, South Dakota, Utah, Washington, and Wyoming.

4.4 Customer may add Service under this Service Schedule at the rates and charges in effect at the time of the addition(s). New Service will be coterminous with existing Service. Requests to add Service must be by written amendment or by submitting a work request to CenturyLink. The amendment or work request will be signed by authorized representatives of both parties and made a part of this Service Schedule.

5. Other Terms.

5.1 Service Notices. Notices for disconnection of Service must be submitted to CenturyLink via Email at: BusinessDisconnects@Centurylink.com. Notices of non-renewal for Services must be sent via e-mail to: CenturyLink, Attn.: CenturyLink NoRenew, e-mail: Norenew@centurylink.com. Notices for billing inquiries/disputes or requests for Service Level credits must be submitted to CenturyLink via Customer's portal at https://www.centurylink.com/business/login/ or via Email at: Care.Inquiry@Centurylink.com. All other routine operational notices will be provided by Customer to its CenturyLink sales representative.

5.2 Conflicts. If a conflict exists among the provisions of the Service Attachments, the order of priority will be as follows: this Service Schedule and its Addendums, the general terms of the Agreement, SLA, SOW (if any) and Order Form, as applicable, and then any other documents attached or expressly incorporated into the Agreement.

© CenturyLink. All Rights Reserved.
CONFIDENTIAL

CENTURYLINK MASTER SERVICE AGREEMENT
PUBLIC SAFETY VERSION
NEXT GENERATION 9-1-1 SERVICE SCHEDULE

ADDENDUM 1
CENTRAL OFFICE PSAP INFORMATION

BILLING NUMBER: _____

PSAP NAME	PSAP ADDRESS	CENTRAL OFFICE CLLI CODE SERVING THE PSAP	NPA/NXX

© CenturyLink. All Rights Reserved.

ADDENDUM 2
SERVICE CHARGES

Description	Monthly Recurring Charge (MRC)	Nonrecurring Charge (NRC)
Population Base	$	$
Concurrent SIP Sessions	$	$
Egress MPLS Network to PSAP – Last mile	$	$
GIS Routing Services (includes SI, ECRF, LDB)	$	$

© CenturyLink. All Rights Reserved.

Intrado
Information to Insight

9-1-1 EGDMS

User Guide
Software Release 3.4

Notice

9-1-1 EGDMS User Guide
©2017–2020 by Intrado Life & Safety, Inc.
All Rights Reserved
Printed in U.S.A.

This software product is copyrighted and all rights reserved by Intrado Life & Safety, Inc. The product is licensed to the original Licensee only for use according to the terms and conditions set forth in the System Agreement or applicable document containing the licensing provisions. Copying, selling, or using the product contrary to those licensing terms and conditions is a violation of the law. All parts of the 9-1-1 EGDMS User Guide documentation are copyrighted and all rights reserved. This documentation may not be copied, photocopied, or reproduced in whole or in part without Intrado's prior written consent except as otherwise provided in writing. Any authorized copying or reproduction in whole or in part, must contain the following statement:

9-1-1 EGDMS User Guide
©2017–2020 by Intrado Life & Safety, Inc.
All Rights Reserved
Printed in U.S.A.

If you have any questions regarding the appropriate use of this software product and documentation, please direct your comments to:

Intrado Corp.
Life & Safety, Inc.
1601 Dry Creek Drive
Longmont, CO 80503
720.494.5800

Trademark Ownership

All trademarks used herein are the property of their respective owners.

Product Updates

It is the policy of Intrado to improve products as new technology, software, hardware, and firmware become available. Intrado, therefore, reserves the right to change specifications without prior notice. All features, functions, and operations described herein may not be available worldwide.

Contents

Preface ..... **v**

Chapter 1 Overview

Introduction 2
Quick Tips for 9-1-1 EGDMS 2
Attribute Field Mapping Guidelines 2
Connecting to 9-1-1 EGDMS 3

Chapter 2 Data Upload

Overview 8
Optional EGDMS Uploads 8
Prepare GIS Data for Upload 8
EGDMS Zip File Structure 9
Zip a File Geodatabase 9
Zip a Shape File 10
Data Upload 11
Optional ALI to GIS Comparisons 16
ALI/GIS Comparison Report with ESN 16
ALI/GIS Comparison Report without ESN 17

Chapter 3 Data Management

Overview 20
Upload History 20
Configure Field Mapping Attributes 21
Correct Field Mapping Attribute Errors 29
Attribute Field Mapping Sign-off 31
Configuration 33
Agency Details 33

Chapter 4 Reports

Overview 36
Accessing and Viewing Reports 36
QA/QC Validations 38
Validations for all Layers 38
Boundary Layer (Provisioning Boundary, PSAP, Fire, Law, EMS) 38
Street Centerlines 38
Address Points 38
Error Code Descriptions 39
Error Exception Codes 39

Appendix A Schema Tables 41
Overview 42
Authoritative/Provisioning Boundary 43
Street Centerlines 43
Address Points 45
PSAP Layers/Fire/Law/EMS 47
Municipal Boundary 48
Glossary 49

Preface

Contents

About This Guide vi
New in This Release vi
Document Conventions vii
Problem Reporting vii

About This Guide

This user guide describes 9-1-1 Enterprise Geospatial Database Management System (9-1-1 EGDMS) version 3.4.

New in This Release

- Updates to support NENA NG9-1-1 GIS data model schema.
- Export polygon gap/overlap errors to shape file - In previous versions, only the polygons containing errors were reported without identifying the specific gap/overlap areas themselves. This enhancement identifies the gaps/overlaps between the polygons, making it easier to identify and correct errors in the source data.
- Spatial validation processing times have been reduced.
- GeoMSAG update enhancements for Transitional Data Management Service (TDMS).

Optional New Features

- ALI to GIS comparison - The ability to request automated ALI to road centerline and/or ALI to address point comparisons.

NOTE This feature requires that ALI is managed by Intrado. Additionally, this feature enhancement must be provisioned and enabled; charges apply.

- MoveIt automated upload functionality - The ability to submit GIS data via MapSAG Data Exchange or python script to SFTP (MoveIt) for automated processing.

NOTE This feature enhancement must be provisioned and enabled; charges apply.

Continued Efforts Correcting Known Issues

In addition to the feature enhancements or feature-related CRs described above, the following enhancements or defects were addressed with version 3.4:

- Upload history table is retained after version upgrade.
- PDF report generation bug fix.
- Upload **Cancel**/**Delete** button process change.
- Road centerline validation changes - <NULL> and blank address range values are identified as critical errors.

Document Conventions

Convention	Description
`System-generated messages`	System-generated messages, terms, and field names display in the Courier Std font.
`User Entry`	Information that must be typed exactly as it appears displays in the Courier Std bold font.
Buttons, screen tabs, and screen panels	Buttons, tabs across the top of the screen that are used to access additional screens, and names of screen panels are identified by bold text.
Windows and Screen Names	Windows and screen names are identified by italics.
Web Links	All web-based hyperlinks are identified by bold blue underlined text.
Internal cross references	Cross references made to other sections in the same guide are identified by blue font. Note that these cross references link to the section.

Problem Reporting

Report problems to Intrado CTS at 1.877.856.7504. Recurring issues should be reported immediately.

Before reporting a problem, gather as much of the following information as possible:

1 What data was entered into the system immediately before the problem occurred?

2 What did the system do?

3 What was the system expected to do?

4 What messages did the system display?

5 Are there written or printed examples of what occurred?

6 Can the problem be verified by duplicating it on demand?

7 What type of system/modem do you use?

8 Did you consult your user guide on proper operations?

Chapter 1
Overview

Contents

Introduction 2
Quick Tips for 9-1-1 EGDMS 2
Attribute Field Mapping Guidelines . . . 2
Connecting to 9-1-1 EGDMS 3

Introduction

The 9-1-1 Enterprise Geospatial Database Management System (9-1-1 EGDMS) is a web application that serves as Intrado's front-end user interface for the NENA Spatial Interface (SI) requirement. GIS data submitted through 9-1-1 EGDMS is validated, coalesced, and used for provisioning to i3 systems (ECRF and LVF).

9-1-1 EGDMS includes the following features:

- Secure 2-factor authentication.
- A file-upload user interface that enables customers to identify the contents of the upload.
- Acceptance of file geodatabase files and shapefiles.
- Attribute field mapping configuration that is customer-driven.
- Automated schema change detection and error notification.
- Automated email notification for upload and processing status.
- GIS data validation report retrieval.

Quick Tips for 9-1-1 EGDMS

Attribute Field Mapping Guidelines

During the transitional period from legacy ALI/MSAG to NG9-1-1, it is recommended that the legacy street name fields (`Legacy Prefix Directional`, `Legacy Street Name`, `Legacy Street Suffix`, and `Legacy Post Directional`) be field mapped to four of the eight corresponding i3 street name fields within 9-1-1 EGDMS for provisioning the ECRF/LVF. This will also correlate to the MSAG/ALI fields used for subscriber location validation. The recommended field mapping is seen in figure 1.



Figure 1: Recommended Field Mapping

NOTE In the future, new specifications and standards will likely provide for consistent mechanisms to overcome these transitional issues and the fields will be used as intended.

Additionally, in this transitional period to support ALI matching to civic addresses in the GIS data, the MSAG Community from the source data set should be field mapped to the Incorporated Municipality (A3) field in the ESInet GIS data model.

Geometry Best Practices

- Run topology before uploading polygon boundary layers to ensure there are no gaps and overlaps in your boundaries and all features fall within your provisioning boundary.
- Ensure that there are no gaps and overlaps with neighboring agencies.
- Intrado's geometry validator uses OGC standards (not ESRI) to check for errors.
- Check for too many vertices (stroked curves, traced features, etc.).
- Check for self-intersecting geometry.
- Ensure boundary features are polygons and not polylines.

Field Type and Length Guidelines

- Field type and length matters only if the data is in error. For example, an address number field can be a string but can only contain whole numbers. If an alpha character is placed in that field it will be an error.

Recommended Reference Documents

- NENA Standard for NG9-1-1 GIS Data Model
- NENA Standards for the Provisioning and Maintenance of GIS data to ECRF/LVF

Connecting to 9-1-1 EGDMS

1 Open your browser and enter the IUP URL in the browser's address field: **http://IUP.intrado.com**. The *Login* screen displays.

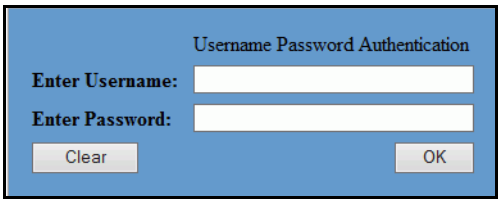


Figure 2: IUP Login

2 Enter your username in the `Enter Username` field and your password in the `Enter Password` field.

3 Click the **OK** button. A screen displays asking you to enter your Entrust token sequence.

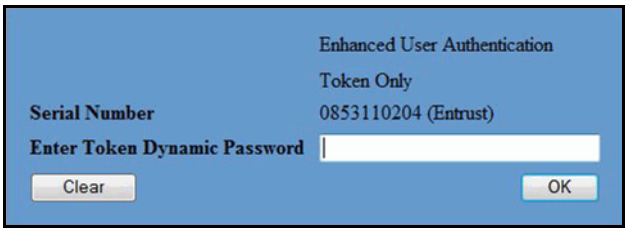


Figure 3: Enter Token Sequence

4 Press and hold the button on your Entrust token (figure 4) until the eight number sequence displays. Only press the button once. If you press the button without logging into the application, the token may become out of sync with the server.



Figure 4: Entrust Token

5 Enter the numeric sequence in the `Enter Token Dynamic Password` field and select the **OK** button. A security banner displays.

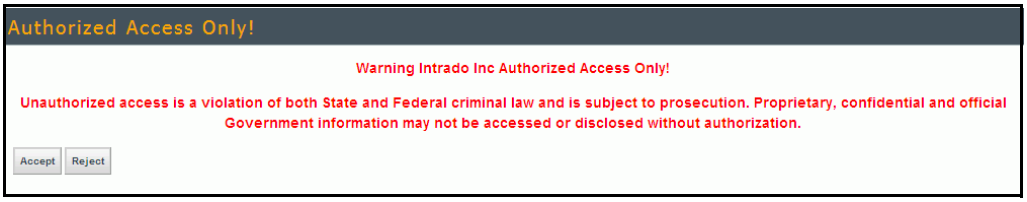


Figure 5: Security Banner

6 Click the **Accept** button. The *IUP Home* screen displays.



Figure 6: IUP Home

7 Click on the **Applications +** icon to display the list of applications to which you have access.

8 Click on the **9-1-1 EGDMS** link to launch the applcation.

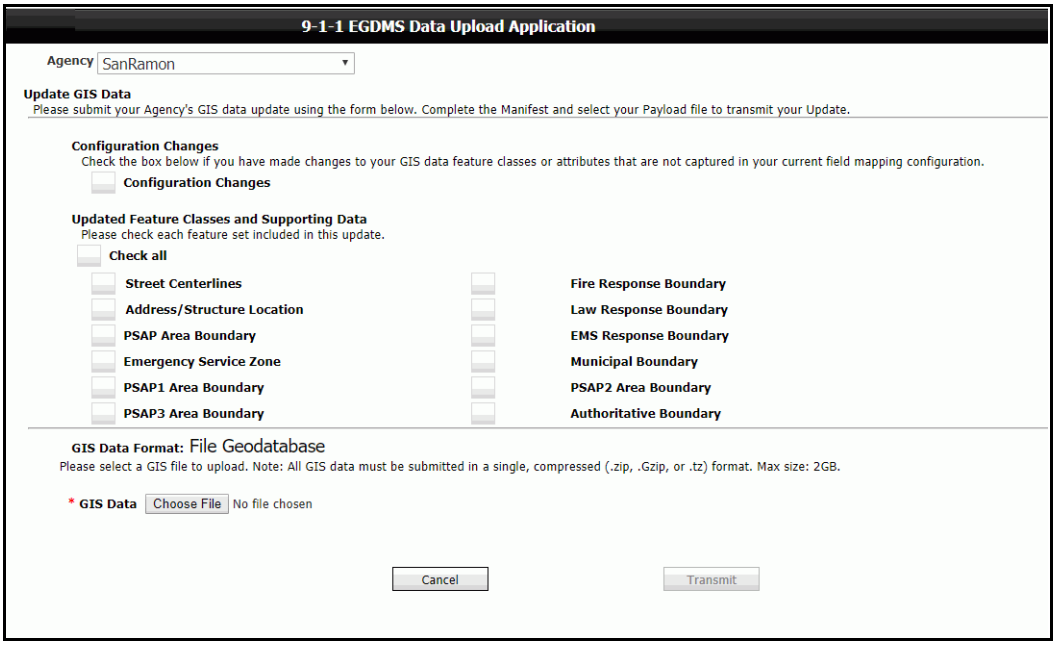


Figure 7: 9-1-1 EGDMS Data Upload Application

The 9-1-1 EGDMS Data Upload application is used to upload files containing GIS data. The 9-1-1 EGDMS Data Management application is used to configure the field mapping attributes in your database to match those in the Intrado database, as well as to review your agency's existing configuration and agency contact details.

Chapter 2
Data Upload

Contents

Overview 8
  Optional EGDMS Uploads 8
Prepare GIS Data for Upload 8
EGDMS Zip File Structure 9
  Zip a File Geodatabase 9
  Zip a Shape File 10
Data Upload 11
Optional ALI to GIS Comparisons 16
  ALI/GIS Comparison Report with ESN 16
  ALI/GIS Comparison Report without ESN 17

Overview

The 9-1-1 EGDMS Data Upload application is used to upload files containing GIS data. This chapter describes how to prepare your file for upload and how to use the Data Upload application.

Optional EGDMS Uploads

As an option, 9-1-1 EGDMS provides the ability to submit GIS data via MapSAG Data Exchange or python script to Intrado's sSFTP application (MoveIt) for automated processing after the initial field mapping configurations have been performed in the 9-1-1 EGDMS portal. This functionality requires customer specific configuration. Contact AT&T/Intrado for more details. Charges may apply.

Prepare GIS Data for Upload

Before uploading your GIS data to 9-1-1 EGDMS, it must be in the correct format. Accepted formats include:

- File geodatabase
- Shape file

The feature classes supported by Intrado include:

- Provisioning Boundary - Provisioning Boundary polygon that covers the geographic region for which your agency has jurisdiction.
- Street Centerlines - Street centerline data for your agency's jurisdiction.
- Address/Structure Location - Address/structure points for your agency's jurisdiction.
- PSAP Area Boundary - Public Safety Answering Point boundary polygons for your agency's jurisdiction.
- PSAP1 - Pre-provisioned alternate routing PSAP polygon boundaries (1 of 3). (Not required.)
- PSAP2 - Pre-provisioned alternate routing PSAP polygon boundaries (2 of 3). (Not required.)
- PSAP3 - Pre-provisioned alternate routing PSAP polygon boundaries (3 of 3). (Not required.)
- Fire Response Boundary - Fire response boundary polygons for your agency's jurisdiction.
- Law Response Boundary - Law response boundary polygons for your agency's jurisdiction.
- EMS Response Boundary - EMS/medical response boundary polygons for your agency's jurisdiction.

- Municipal Boundary - Municipal boundary polygon(s) for your agency's jurisdiction. (Not required.)
- Emergency Service Zone - Service response boundary (ESN boundary) polygons that include Fire, Law, and EMS response agencies in your jurisdiction. (Not required.)

Files must be zipped and the recommended file name format is:

`[Your agency name]GIS[today's date]`

For example:

`SmithCountyGIS_6212018.zip`

EGDMS Zip File Structure

Zip a File Geodatabase

1 Right click the .gdb file.

2 From the menu, select **`Send to`**. An additional menu displays.

3 Select **`Compressed (zipped) folder`**. The zipped file displays with the same name under the zipped icon.



Figure 8: Zipped Icon

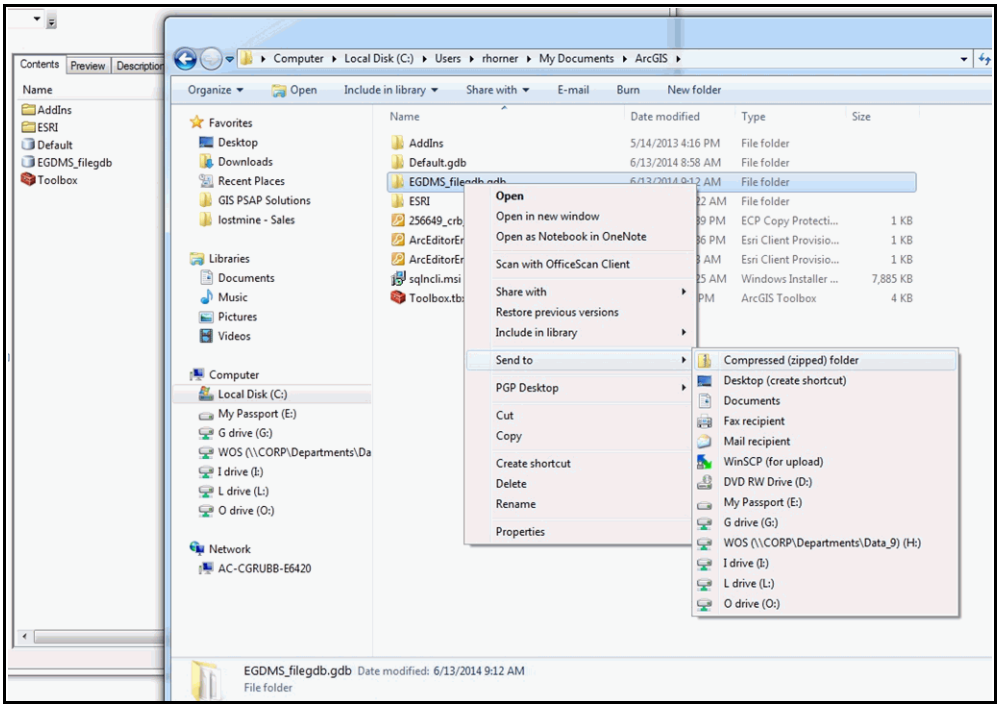


Figure 9: Zip File Geodatabase

Zip a Shape File

Shape files must be placed in a folder and then be zipped. The correct file structure is:

shapeGIS.zip

ShapeFileFolder

shapeFiles.shp

shapeFiles.shx

shapeFiles.sbx

shapeFiles.prj

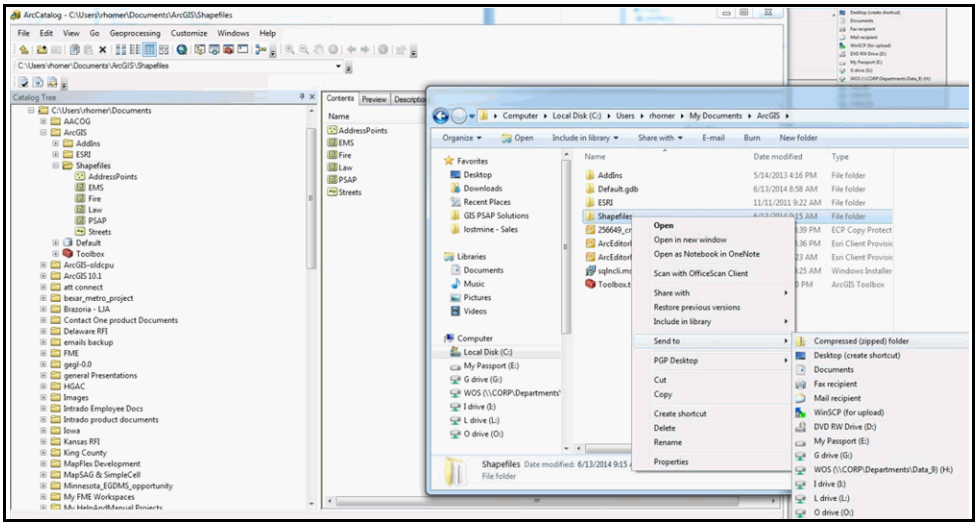


Figure 10: Zip Shape File

Data Upload

To upload a zip file, complete the following steps:

1 Log into IUP and access the *9-1-1 EGDMS Data Upload* application as described in "Connecting to 9-1-1 EGDMS" on page 3. The *Select Agency* screen displays if you are assigned to multiple agencies.

2 If you are assigned to multiple agencies, select an agency from the drop-down menu. The *9-1-1 EGDMS Data Upload* screen displays (figure 11 on page 12).

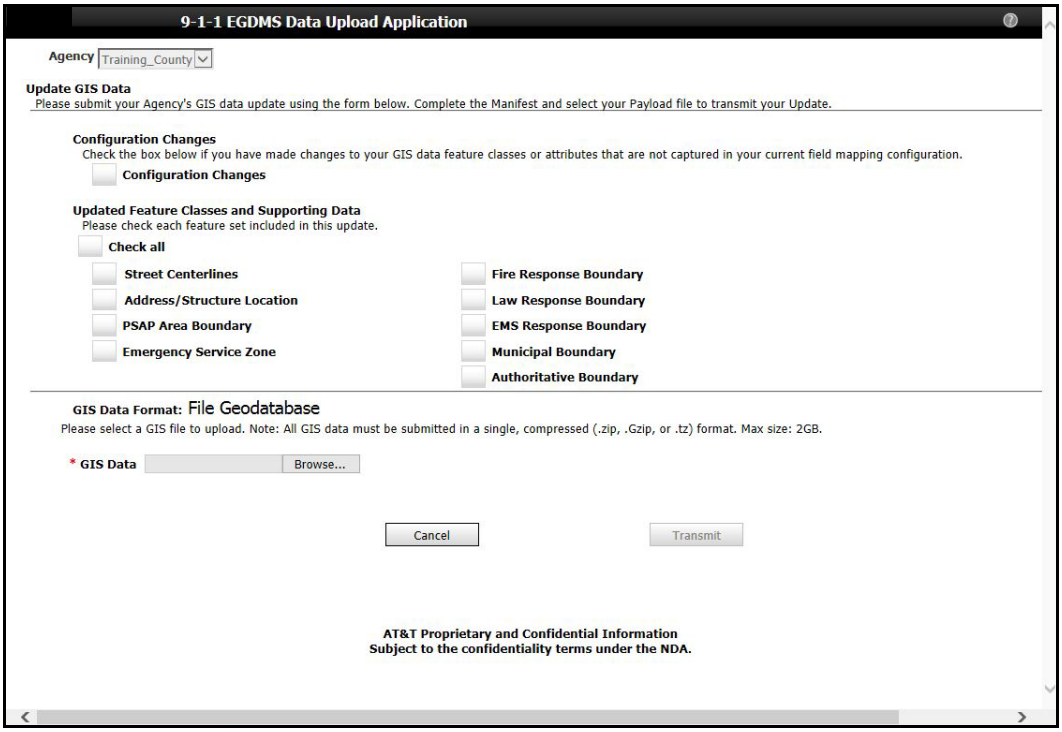


Figure 11: 9-1-1 EGDMS Data Upload

3 If you have made changes to your GIS data feature classes or attributes that are not captured in the current field mapping configuration, check the `Configuration Changes` box.

NOTE This field only appears on subsequent uploads. Initial uploads do not have this option.

4 Indicate the contents of your GIS upload by selecting the feature classes that you would like to have processed by the system.

NOTE Hovering over a field displays the field description. See figure 12.




Figure 12: Field Description Pop-up

Once you have finished selecting the appropriate checkboxes, click the **Browse** button to locate the file to upload on your local computer (figure 13). The *Choose File to Upload* dialog box displays (figure 14).




Figure 13: Upload File

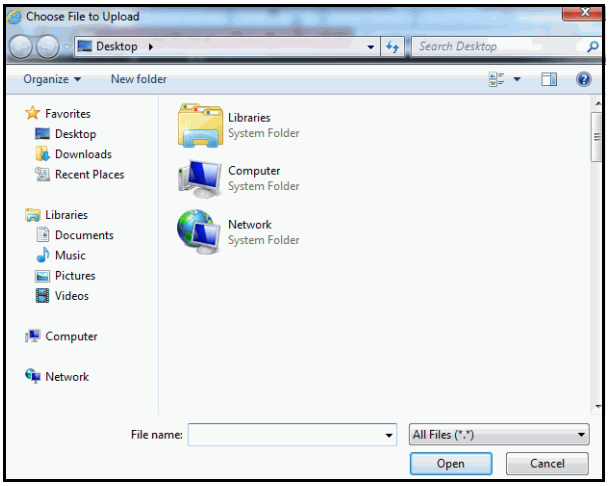


Figure 14: Choose File to Upload Dialog Box

5 Select the file from your computer and click the **Open** button on the dialog box. The dialog box closes and the file name appears in the `GIS Data` text box on the *9-1-1 EGDMS Data Upload* screen (figure 15).

IMPORTANT Uploaded files must be zipped.




Figure 15: GIS Data Text Box

6 Click the **Transmit** button. A message displays indicating that the file is uploading (figure 16).

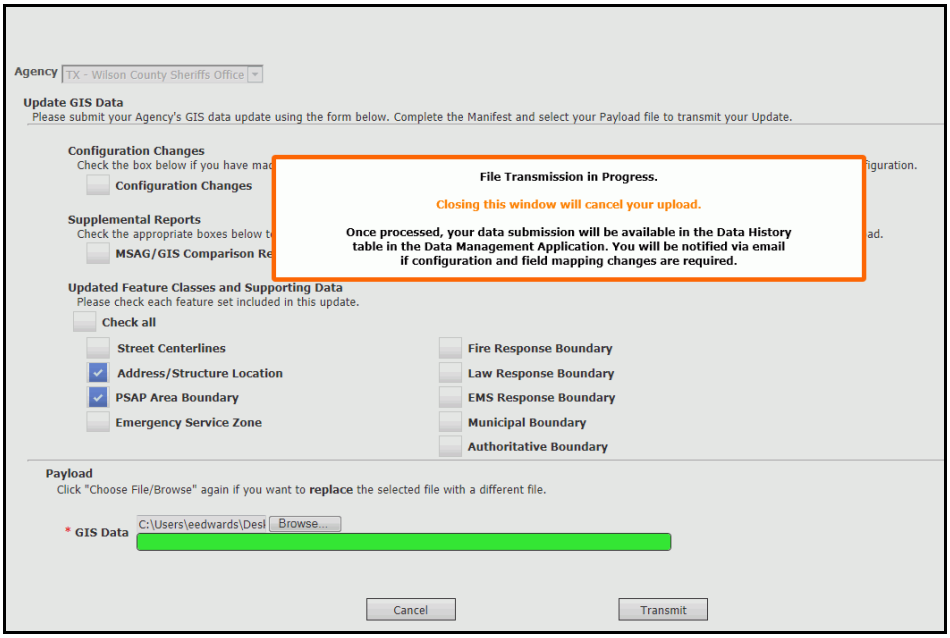


Figure 16: Upload in Progress Message

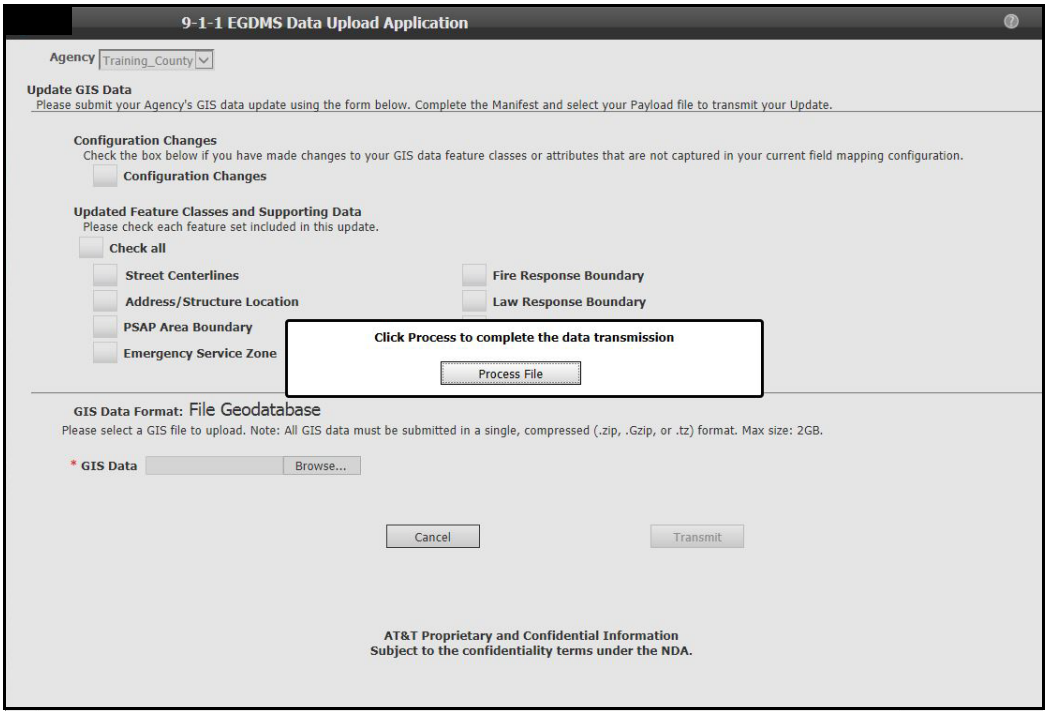


Figure 17: File Upload Complete

7 Once the file has completed uploading, click the **Process File** button to continue.

8 When the upload has completed, a confirmation message displays.

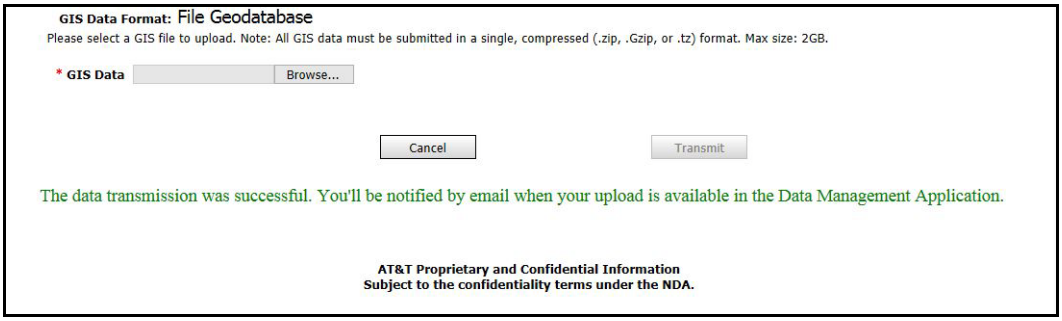


Figure 18: Upload Success Confirmation

9 Exit the Data Upload application by clicking the red "X" in the upper right corner of the browser window.



Figure 19: Close Browser Window

10 When the upload has finished processing, you will receive an email with further instructions.

Optional ALI to GIS Comparisons

NOTE Setup and configuration of these tools is required. Requests to use these optional services should be directed to AT&T/Intrado.

The ALI to GIS Comparison Report section of the Data Upload application is displayed only when the ALI Compare has been enabled for your Agency, otherwise you will not see the options. Once Street Centerlines or Address/Structure Location feature classes are selected, the ALI Compare options are enabled, if the agency has been configured for this service.

ALI/GIS Comparison Report with ESN

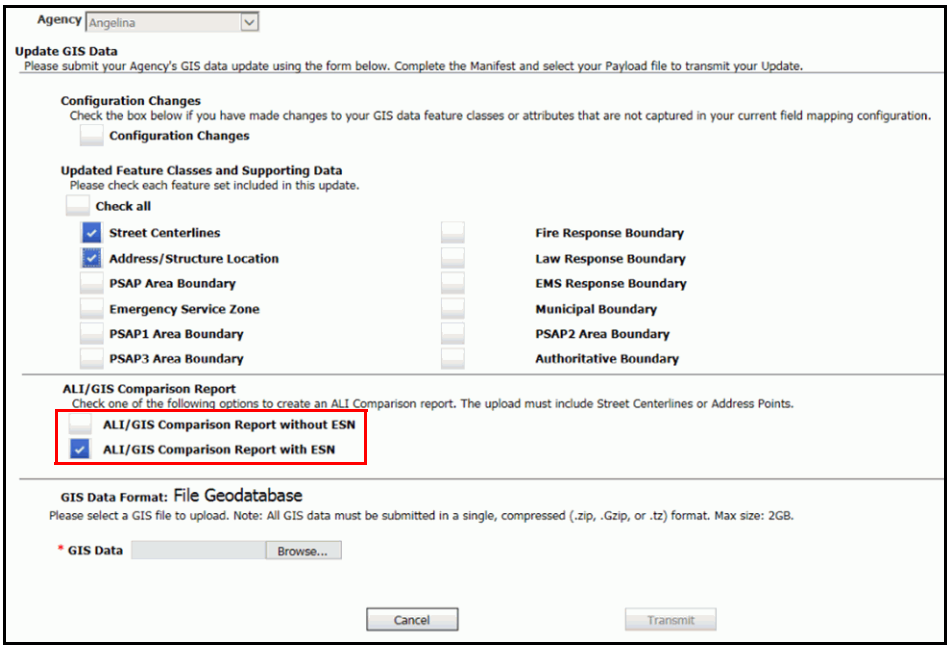


Figure 20: Run an ALI/GIS Comparison Report

If this option is selected, 9-1-1 EGDMS pulls the associated ALI records for comparison to the GIS road centerline and address points, and ESN is considered in the comparison criteria. The ALI error/fallout report is performed and packaged with the 9-1-1 EGDMS reports.

NOTE If the ALI/GIS comparison option is checked, the comparison is performed on the address points and/or the road centerlines if they are checked and included in the GIS data upload only.

ALI/GIS Comparison Report without ESN

If this option is selected, 9-1-1 EGDMS pulls the associated ALI records for comparison to the GIS road centerline and address points, and ESN is not considered in the comparison criteria. The ALI error/fallout report is performed and packaged with the 9-1-1 EGDMS reports.

Chapter 3
Data Management

Contents

Overview 20
Upload History 20
Configure Field Mapping Attributes . . 21
Correct Field Mapping Attribute Errors 29
Attribute Field Mapping Sign-off 31
Configuration 33
Agency Details 33

Overview

The 9-1-1 EGDMS Data Management application is used to configure the field mapping attributes in your database to match those in the Intrado database, as well as to review your agency's current configuration details and to review and update your agency contact information. Using the primary navigation tabs at the top of the *9-1-1 EGDMS Data Management* screen, you can access the different areas of the application.



Figure 21: 9-1-1 EGDMS Data Management Navigation Tabs

The **Upload History** tab displays the *Upload History* screen (figure 23 on page 21). From this screen, you can access your data upload details via the *Upload Details* screen (figure 24 on page 22). From the *Upload Details* screen, you can launch the *Field Mapping Tool* screen to configure your field mapping attributes.

The **Configuration** tab displays the *Configuration* screens (figure 44 on page 33). These screens display your agency's current attribute field mapping configuration.

The **Agency Details** tab displays the *Agency Details* screen (figure 45 on page 34). From this screen you can review your agency's contact information and update the name, email, telephone number, and telephone number extension of your agency contact person.

Upload History

After uploading your GIS data file (as described in Chapter 2: "Data Upload"), the file is processed and you are notified via email that further action is required.

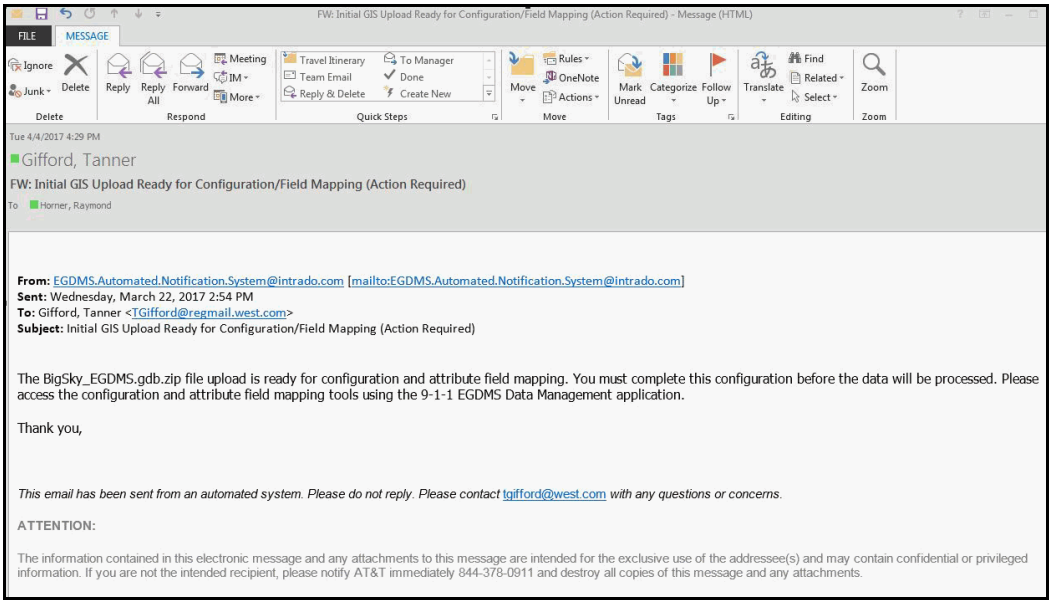


Figure 22: Sample Email Notification

1 After receiving the notification, log into the 9-1-1 EGDMS application by following the steps described in "Connecting to 9-1-1 EGDMS" on page 3.

2 Select the **9-1-1 EGDMS** link. The *Select Agency* screen displays if you are assigned to multiple agencies.

3 Choose an agency from the drop-down menu. The *Upload History* screen for the selected agency displays. This screen displays both current and historical uploads. The `Current State` field identifies which file requires action and specifies the type of action required.



	Start Date	Current State	GIS File Name	Upload ID	Last State Update	Reports
View	02/21/2017 15:41 MST	QA/QC Completed	RCL_AP_StreetErr....zip	20170221T224118.tx-egdms20	02/21/2017 15:41 MST	Download
View	02/21/2017 13:52 MST	QA/QC Completed	RCL_AP_StreetErr....zip	20170221T205232.tx-egdms20	02/21/2017 13:55 MST	Download
View	02/17/2017 14:25 MST	QA/QC Completed	RCL_AP_Clean.gdb.zip	20170217T212524.tx-egdms20	02/17/2017 14:25 MST	Download

Figure 23: Upload History

Configure Field Mapping Attributes

To configure field mapping attributes using the *Field Mapping Tool* screen, complete the following steps:

1 From the *Upload History* screen (figure 23), select the **View/Edit** button. The *Upload Details* screen for that file displays (figure 24 on page 22). Hovering over the "i" information icon displays a description of the action required (figure 25 on page 23).

The *Upload Details* screen is comprised of four areas. The top section displays details of the upload, including its current state (action required, completed, etc.), the system-generated upload ID, the date of the most recent state change, and the date the file was originally uploaded. The second section identifies the configuration data included in the upload. The third section identifies the name of the GIS file and the fourth section is the activity log. The activity log captures the date, time, and a description of all state changes associated with the file.

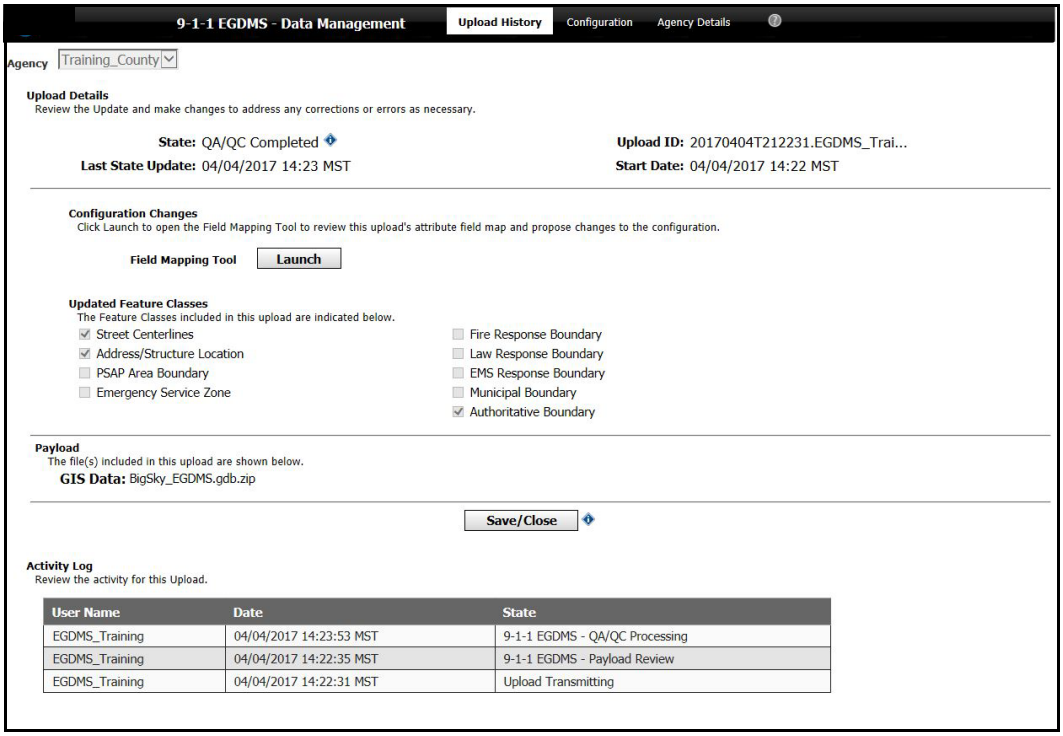


Figure 24: Upload Details

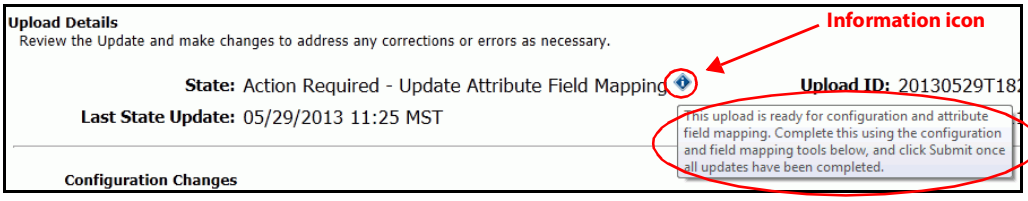


Figure 25: Action Required Description

IMPORTANT Checking or unchecking any of the feature classes listed in the `Uploaded Feature Classes` list and then selecting the **Save** button makes the feature class available or unavailable on the *Field Mapping Tool* screen, depending on your selection.

Table 1: Upload Details Button Descriptions

Button	Description
Cancel/Delete Upload	Cancels or deletes the upload.
Save/Close	Saves changes to the feature class configurations but does not submit the changes.
Submit	Submits the changes.

NOTE Uploads can only be canceled prior to QA/QC processing beginning.

2 Open the *Field Mapping Tool* screen by clicking the **Launch** button. The *Field Mapping Tool* screen displays (figure 26 on page 24). This screen shows the first feature class selected. In the sample screen, *Street Centerlines* is the first feature class to display. The feature class list that displays on the upper left corner of the screen (figure 27 on page 25) identifies which one you are currently working in.

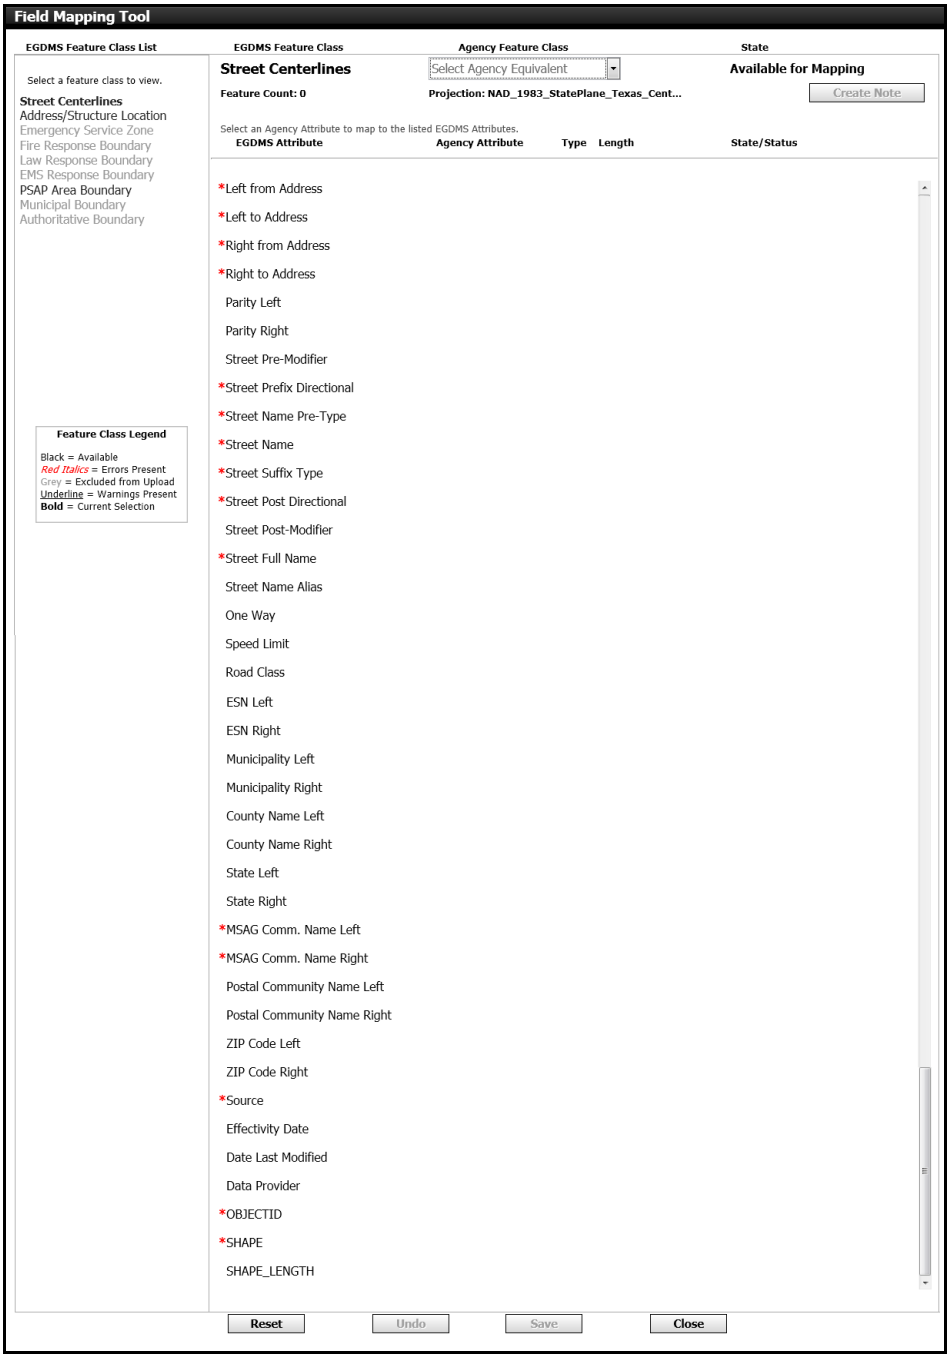


Figure 26: Street Centerlines Field Mapping




Figure 27: Feature Class List

Table 2: Field Mapping Tool Button Descriptions

Button	Description
Reset	Discards all changes made during the session and returns settings to the last known configuration.
Undo	Discards all changes made since the last save, including changes made to other feature classes.
Save	Saves changes, including those made to other feature classes.
Close	Closes the *Field Mapping Tool* screen.

3 Select a layer name from the `Agency Feature Class` drop-down menu (figure 28). The `Agency Attribute` column populates with drop-down menus for each field mapping attribute (figure 29 on page 26).

NOTE The `Agency Feature Class` drop-down menu filters your GIS data by feature type (point, line, or polygon).




Figure 28: Agency Feature Class

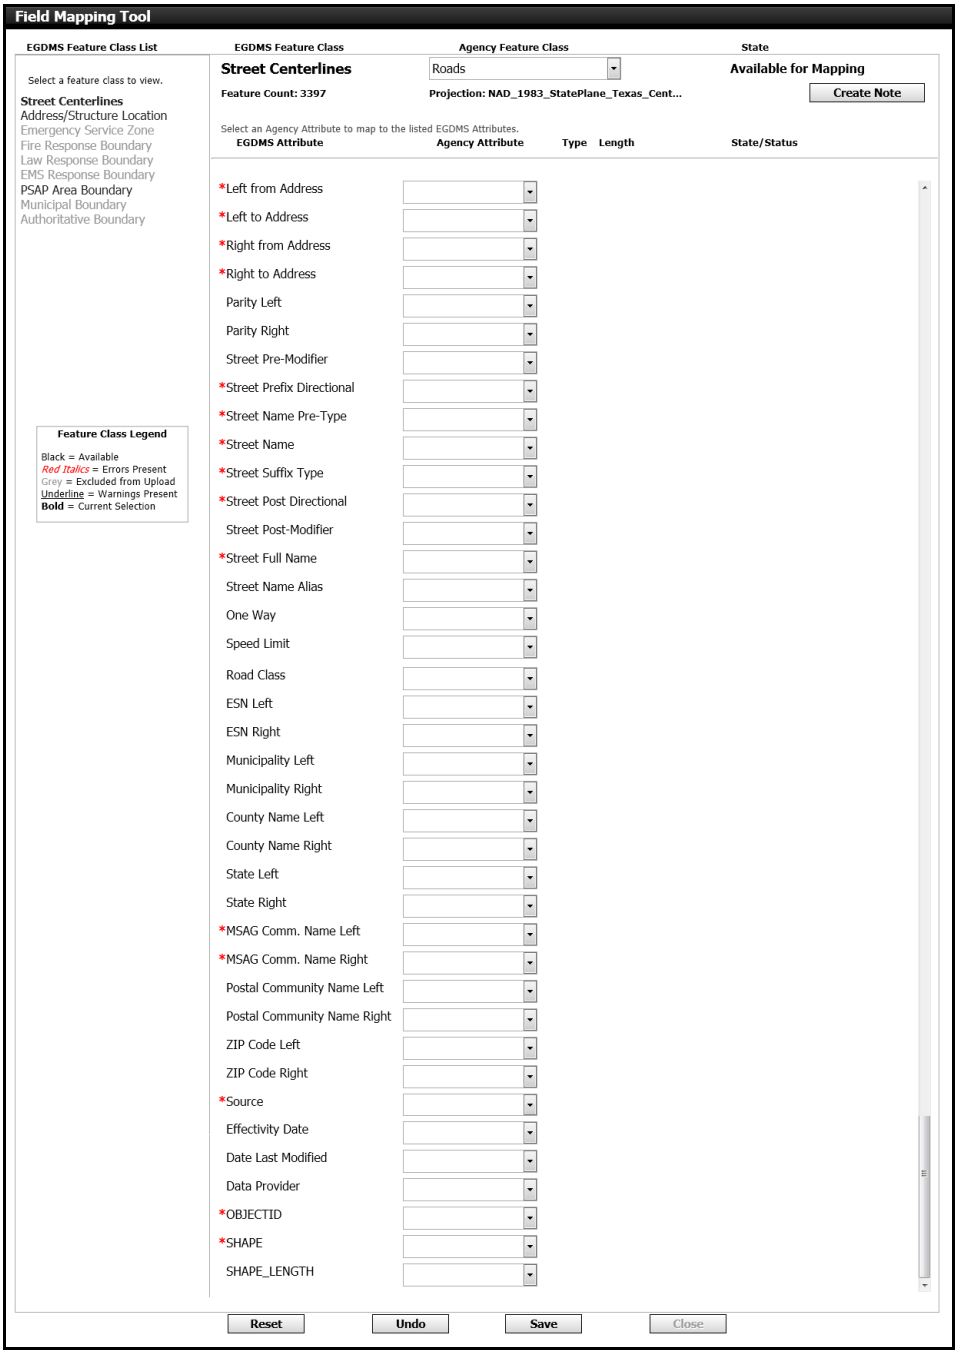


Figure 29: Street Centerlines Field Mapping - Agency Feature Class Selected

4 Select values from the drop-down menu to match your GIS data attributes to Intrado's attribute fields. Fields marked with a red asterisk are required.

NOTE If the field type does not match, a warning message displays. You can still submit with a warning, but it must be reviewed by Intrado before it is accepted.

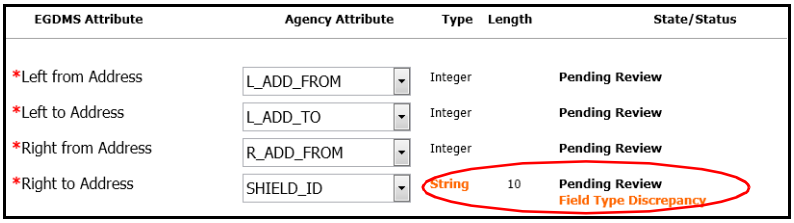


Figure 30: Field Type Discrepancy Warning

IMPORTANT Select **N/A** (not available) for a field if you do not plan to add the attribute in the near future and do not wish to be reminded/receive errors on subsequent uploads. The field mapping is stored as **N/A** and is accepted by 9-1-1 EGDMS.

Select **NONE** if you do not wish to map the field attribute at the moment, but want to be reminded on your next upload that the field mapping is missing. Selecting **NONE** allows the current upload to proceed, but provides a reminder upon the next upload that the required field mapping is missing.

It is acceptable to map a required field to **N/A** or **NONE** - the asterisks indicate NENA-required fields, but not all NENA-required fields must be populated for geospatial call routing to function properly.

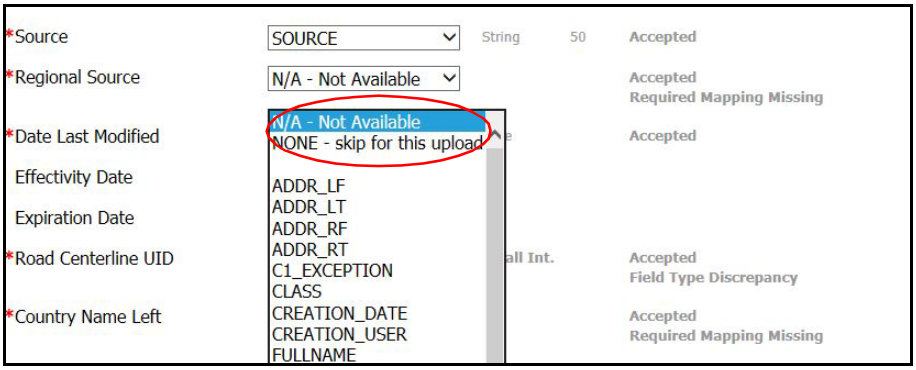


Figure 31: N/A and None Options

5 Click the **Save** button when you are finished. A message displays at the bottom of the screen indicating that your changes were successfully saved.



Figure 32: Changes Saved Confirmation Message

6 Click on the next highlighted feature class item that displays in the upper left corner of your screen (figure 27 on page 25).

7 Complete steps 3-5 for each additional feature class that requires configuration.

8 When you are finished and have saved your data, click the **Close** button at the bottom of the screen. The *Field Mapping Tool* screen closes and the *Upload Details* screen displays.



Figure 33: Upload Details - Submit Button

IMPORTANT If any warnings persist in your field mapping, they must be corrected before submitting.

9 Click the **Submit** button to send the configuration changes to Intrado. A confirmation message displays indicating that the data was successfully submitted.



Figure 34: Submission Success Confirmation Message

10 When Intrado has finished processing your submission, you will receive an email either indicating that the field mapping attributes have been accepted and no further action is required or that errors were found that must be corrected.

Correct Field Mapping Attribute Errors

If errors are found by Intrado in your field mapping configuration, you will receive an email notification telling you to log into the Data Management application to correct the errors. To correct the errors, complete the following steps:

1 Log into the Data Management application following the steps described in "Connecting to 9-1-1 EGDMS" on page 3.

2 If you are assigned to more than one agency, choose your agency from the from the *9-1-1 EGDMS Data Management Select Agency* screen. The *Upload History* screen for your agency displays. The `Current State` column identifies the action required.

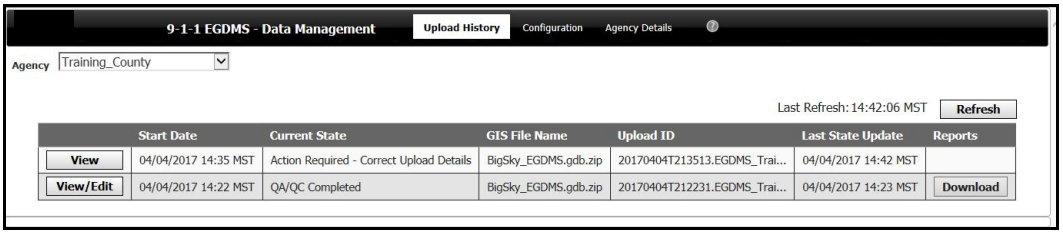


Figure 35: Upload History - Correct Upload Details

3 Click the **View/Edit** button to display the *Upload Details* screen. Hovering over the "i" information icon identifies the work required (figure 36 on page 29).

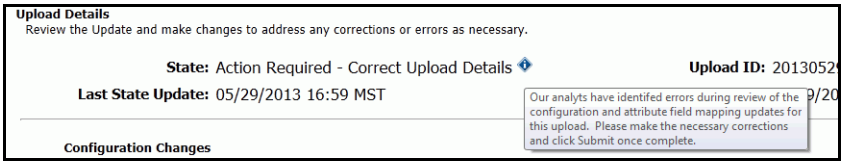


Figure 36: Upload Details - Information Icon

4 Click the **Launch** button to open the *Field Mapping Tool* screen.

5 Sections requiring corrections are highlighted in red in the `EGDMS Feature Class List`. Click the feature class to correct errors.




Figure 37: Feature Class List - Error Correction

6 When the feature class requiring error correction is displayed, locate the field with the error. Fields containing errors are highlighted in red.

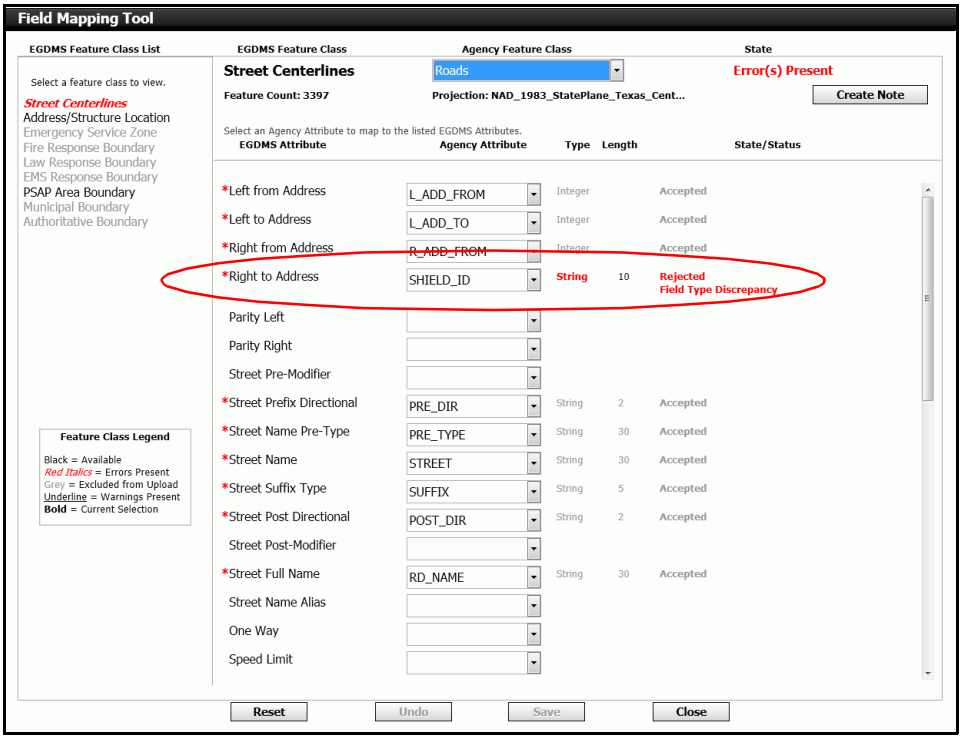


Figure 38: Street Centerlines Field Mapping Tool - Error Correction

7 Select the correct value from the drop-down menu.

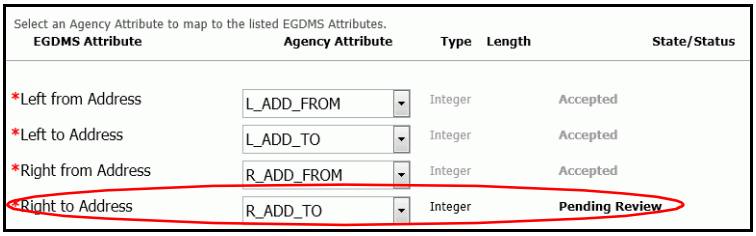


Figure 39: Corrected Field

8 Repeat steps 5-7 for each feature class that contains errors.

9 Click the **Save** button. A confirmation message displays at the bottom of the screen indicating that your changes were successfully saved (figure 32 on page 28).

10 Click the **Close** button to return to the *Upload Details* screen.



Figure 40: Upload Details - Submit Button

11 Click the **Submit** button. A confirmation message displays at the bottom of the screen indicating that your changes were successfully submitted to Intrado (figure 34 on page 29).


12 When Intrado has finished processing your submission, you will receive an email either indicating that the field mapping attributes have been accepted and that sign-off is required or that additional errors may have been identified. If additional errors are found, repeat steps 1-9 in this section until no further errors are found.

Attribute Field Mapping Sign-off

Signing off on the attribute field mapping and/or configuration changes allows your upload to proceed to QA/QC processing. To sign off:

1 Log into the Data Management application following the steps described in "Connecting to 9-1-1 EGDMS" on page 3.

2 If you are assigned to more than one agency, choose your agency from the from the *9-1-1 EGDMS Data Management Select Agency* screen. The *Upload History* screen for your agency displays and the `Current State` field identifies that the data is ready for sign-off.



	Start Date	Current State	GIS File Name	Upload ID	Last State Update	Reports
View/Edit	04/04/2017 14:35 MST	Action Required - Attribute Field Mapping Signoff	BigSky_EGDMS.gdb.zip	20170404T213513.EGDMS_Trai...	04/04/2017 14:45 MST	
View	04/04/2017 14:22 MST	QA/QC Completed	BigSky_EGDMS.gdb.zip	20170404T212231.EGDMS_Trai...	04/04/2017 14:23 MST	Download

Figure 41: Upload History - Attribute Field Mapping Sign-off

3 Click the **View/Edit** button to displays the *Upload Details - Sign-off* screen (figure 42 on page 32).

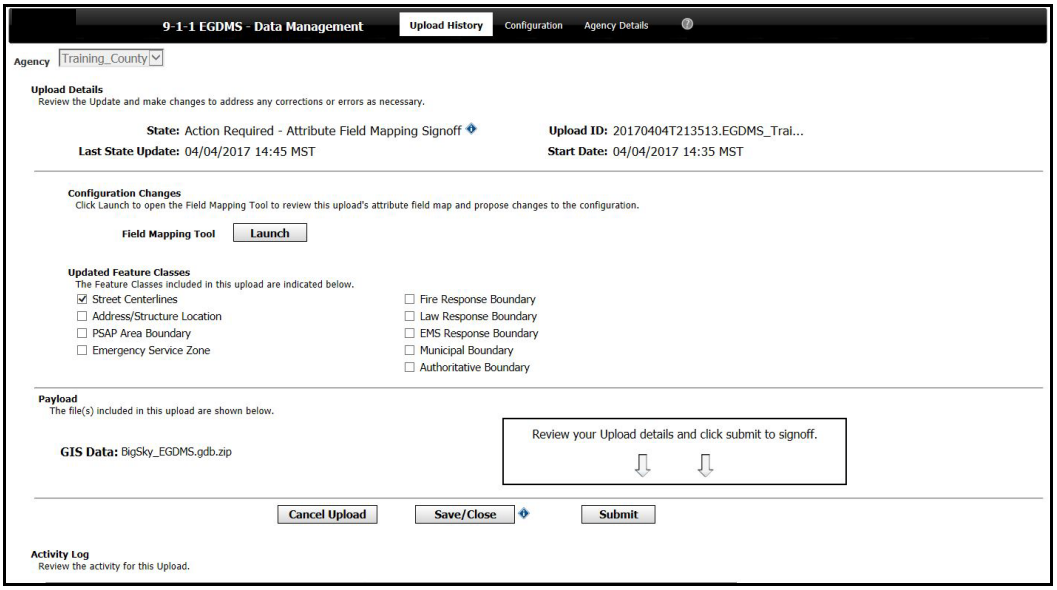


Figure 42: Upload Details - Sign-off

4 If necessary, you can review the data by launching the *Field Mapping Tool* screen. When you have finished reviewing the data, click the **Submit** button. A confirmation message displays indicating that the submission was successful.



Figure 43: Submission Confirmation

5 You will receive an email once QA/QC processing has begun.

Configuration

The *Configuration* screens display the current attribute field mapping configuration. These are view-only screens.

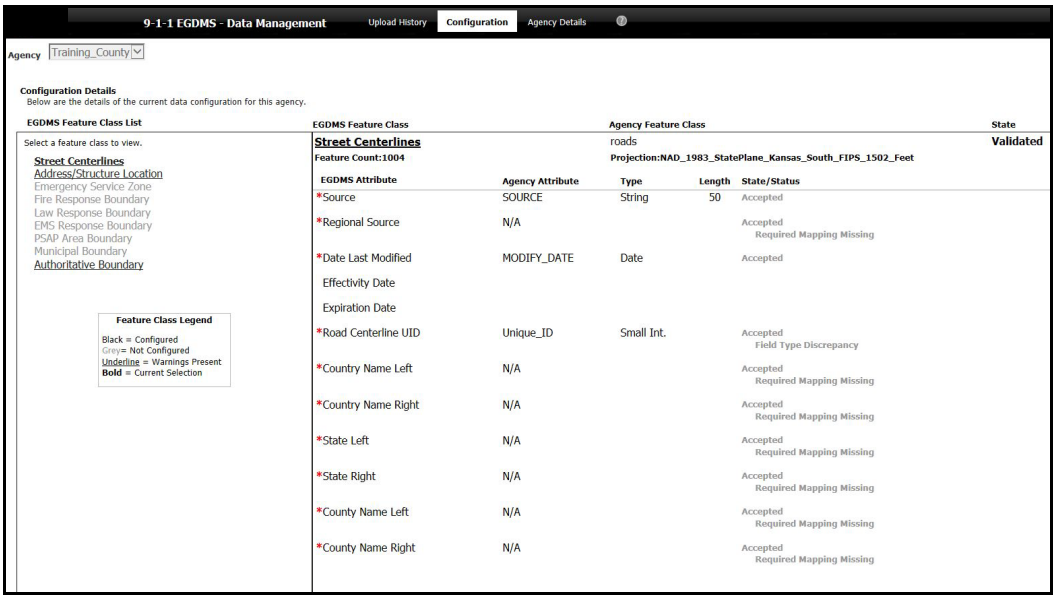


Figure 44: Configuration Screen

To access the *Configuration* screens:

1 Log into the Data Management application following the steps described in "Connecting to 9-1-1 EGDMS" on page 3.

2 If you are assigned to more than one agency, choose your agency from the *9-1-1 EGDMS Data Management Select Agency* screen. The *Upload History* screen for your agency displays.

3 Select the **Configuration** tab at the top of the screen. The first feature class field mapping is displayed. Use the links in the `EGDMS Feature Class List` to view other feature class configurations.

Agency Details

The *Agency Details* screen displays information about your agency. From this screen, you can view the existing contact data.

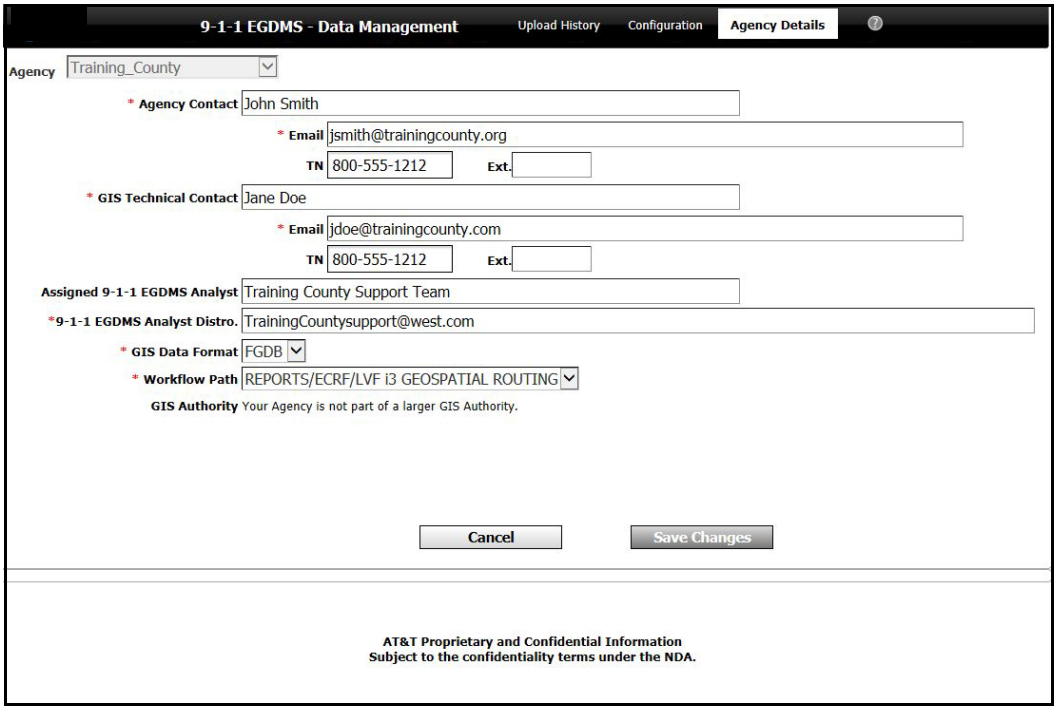


Figure 45: Agency Details

To access the *Agency Details* screen:

1 Log into the Data Management application following the steps described in "Connecting to 9-1-1 EGDMS" on page 3.

2 If you are assigned to more than one agency, choose your agency from the from the *9-1-1 EGDMS Data Management Select Agency* screen. The *Upload History* screen for your agency displays.

3 Select the **Agency Details** tab at the top of the screen. The *Agency Details* screen displays.

Chapter 4
Reports

Contents

Overview 36
Accessing and Viewing Reports 36
QA/QC Validations 38
Validations for all Layers 38
Boundary Layer (Provisioning Boundary, PSAP, Fire, Law, EMS) 38
Street Centerlines 38
Address Points 38
Error Code Descriptions 39
Error Exception Codes 39

Overview

9-1-1 EGDMS users can access data validation reports that identify errors and discrepancies generated during data processing. Validations include road centerline, address point, and polygon validations for each data upload. Identified errors must be corrected by resubmitting the data in 9-1-1 EGDMS.

Data validation reports are PDFs; the report package contains two types of reports:

- Data upload and GIS validation summary - this PDF report includes the date and time of the upload, the feature count, and changed feature counts from the delta detection, as well as a summary of the GIS validations showing upload counts and validation results.
- Detailed Error Shape files - shape files (per layer) that include features that contain an error, with the error type and description added to the attribute table.
- Responder Boundary error shapefile - This shapefile contains critical errors identified during validation.

Accessing and Viewing Reports

1 Log into 9-1-1 EGDMS following the steps described in "Connecting to 9-1-1 EGDMS" on page 3.

2 Once available, reports are accessed from the Data Upload history table by clicking the **Download** button (figure 23 on page 21). The report package is downloaded as a .zip folder.


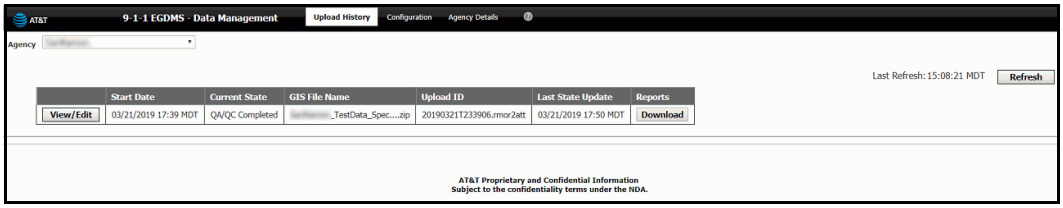


Figure 46: Viewing Reports

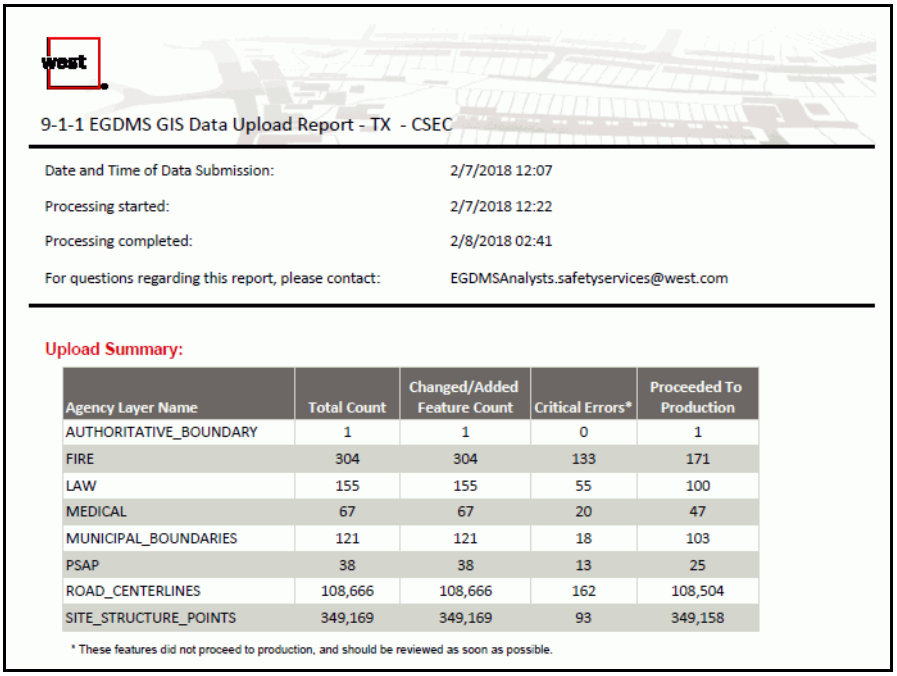

9-1-1 EGDMS GIS Data Upload Report - TX - CSEC

Date and Time of Data Submission:	2/7/2018 12:07
Processing started:	2/7/2018 12:22
Processing completed:	2/8/2018 02:41
For questions regarding this report, please contact:	EGDMSAnalysts.safetyservices@west.com

Upload Summary:

Agency Layer Name	Total Count	Changed/Added Feature Count	Critical Errors*	Proceeded To Production
AUTHORITATIVE_BOUNDARY	1	1	0	1
FIRE	304	304	133	171
LAW	155	155	55	100
MEDICAL	67	67	20	47
MUNICIPAL_BOUNDARIES	121	121	18	103
PSAP	38	38	13	25
ROAD_CENTERLINES	108,666	108,666	162	108,504
SITE_STRUCTURE_POINTS	349,169	349,169	93	349,158

* These features did not proceed to production, and should be reviewed as soon as possible.

Figure 47: Sample Data Upload Report

ERRORTYPE	ERRORNAME	REASON
9	Attribute Duplicate	Attribute Duplicate, Unique Geometry
9	Attribute Duplicate	Attribute Duplicate, Unique Geometry
4	Outside Authoritative Boundary	
4	Outside Authoritative Boundary	
4	Outside Authoritative Boundary	
4	Outside Authoritative Boundary	
4	Outside Authoritative Boundary	
4	Outside Authoritative Boundary	
4	Outside Authoritative Boundary	

Figure 48: Sample Shape File Error Report

NOTE To see a detailed error view, view the shape files in your GIS data management system.

QA/QC Validations

View 9-1-1 EGDMS Report for a detailed description of the QAQC Validations and error types. Any errors identified are included in PDF upload summary reports and shape file error layers. Reports are available in the upload history table within 9-1-1 EGDMS.

Validations for all Layers

- Compare the schema and data structure and properties of the source dataset with the schema and properties of the master database and report discrepancies in the 9-1-1 EGDMS Field Mapping Tool.
- Incompatible schema field value.
- Exact/stacked feature duplicate.
- Attribute Duplicate.
- Unique ID Duplicate.
- Null Value for required fields.
- Geometry error.

NOTE Any arc or ellipse feature types will be transformed into line and polygon features during processing.

Boundary Layer (Provisioning Boundary, PSAP, Fire, Law, EMS)

- Polygon gap/overlap validation (for errors involving multiple agencies, participants must work with neighbor agencies to resolve issues. Intrado works with agencies to facilitate error resolution prior to provisioning data to the ECRF/LVF.)
- Routing URI populated and valid.

Street Centerlines

- Address range overlap issues

Address Points

- Street name parsing issues
- Street name element standardization recommendations
- Low frequency street name

Error Code Descriptions

The table below includes descriptions of the validation errors used in the report:

Table 3: Critical Errors

Error Name	Error Description
Outside Authoritative Boundary	All or part of the feature falls outside the authoritative boundary Boundary - Neighbor - Gap A gap exists between the boundary polygon and an adjacent data source's boundary polygon.
Boundary - Internal - Gap	A gap exists between the boundary polygon and another boundary polygon within your database Boundary - Neighbor - Overlap The boundary polygon feature overlaps an adjacent data source's boundary polygon.
Boundary - Internal - Overlap	The boundary polygon feature overlaps another boundary polygon within your database Routing URI The Routing URI is either missing or invalid within the service response boundary polygon.
Field Constraint	An attribute value is incompatible with the EGDMS database schema and cannot be loaded True Duplicate The exact feature is duplicated multiple times in the layer - EGDMS deletes the duplicate features, leaving a single record.
Attribute Duplicate	The feature's attributes are duplicated in multiple features, but each feature has a unique location - All records are returned as errors and must be corrected to proceed to production Address Range Overlap An overlap exists in one or both sides of the address ranges between two connected and identically named street centerline segments.
Unique ID Duplicate	The feature's Unique ID is duplicated within the agency's layer - these are critical errors and must be corrected to proceed to production Geometry Error A record exists in the attribute table that is not associated with a geographic feature or the geometry of a feature is in error.
NULL Value Critical	NULL value for a critical field.

Error Exception Codes

Certain error types can be marked as exceptions so that they do not continue to fail validation, and are able to load to production. Exceptions must be maintained in an exception field and field mapped to the exception field in the 9-1-1 EGDMS field mapping tool. The following table describes the exceptions.

Table 4: Error Exception Codes

Address Range Overlap (ARO) in Road Centerlines	Address range overlap errors can be flagged as exceptions using the "ARO" value in a mapped exception field. The ARO exception should only be used after the agency has confirmed the road segment is not a true address range overlap error or is due to inconsistent addressing.
Outside Authoritative Boundary (OAB) for Road Centerlines	Features that fall on the provisioning boundary border can be marked as exceptions by using the "OAB" value in a mapped exception field. OAB exceptions should only be used on segments that are not duplicated between the neighboring agency.

Appendix A
Schema Tables

Overview

The following conventions are used in the schema tables of this appendix:

- The `M/O` table column specifies if the attribute information for individual data fields is mandatory, conditional, or optional.
  - M - Mandatory indicates that an attribute value must exist for the data field.
  - O - Optional indicates an attribute value may or may not be included in the data field.
- The `Type` table column identifies the type of data used within the data field and attributes.
  - A - Alphanumeric (any combination of upper and lower case letters A to Z and/or any numeral from 0 to 9).
  - D - Date and time fields follow the International Organization for Standardization (ISO) 8601 standard and are a NENA requirement. The ISO 8601 compliant format is YYYY-MM-DDThh:mm:ss±TZD, where Y is the year, M is the month, D is the day, T designates the switch to time, h is the hour, m is the minute, s is the second, and ±TZD is plus or minus the time zone designation based on the offset from the coordinated universal time (UTC).

    For example: 2014-02-20T23:16:30-05:00

    2014 = The year

    02 = The month

    20 = The day

    23 = The hour

    16 = The minute

    30 = The second

    -05:00 = The offset from UTC

NOTE The offset from UTC is the optional separator to indicate the time zone designation, which in this example is -5:00 to indicate the local Eastern Standard Time (EST) time difference from UTC.

  - N - numeric/number consisting of whole numbers only.

Authoritative/Provisioning Boundary

Table 1: Provisioning Boundary

Descriptive Name	M/O	Type	Field Width
Discrepancy Agency ID	M	A	75
Regional Source	O	A	50
Date Updated	M	D	Date
Effective Date	M	D	Date
Expiration Date	O	D	Date
Authoritative Boundary Unique ID	M	A	254

Street Centerlines

Table 2: Street Centerlines

Descriptive Name	M/O	Type	Field Width
Discrepancy Agency ID	M	A	75
Regional Source	O	A	50
Date Updated	M	D	Date
Effective Date	O	D	Date
Expiration Date	O	D	Date
Road Centerline NGUID	M	A	254
Exception	O	A	30
Country Left	M	A	2
Country Right	M	A	2
State Left	M	A	2
State Right	M	A	2
County Left	M	A	40
County Right	M	A	40
Additional Code Left	O	A	6

Table 2: Street Centerlines (Continued)

Descriptive Name	M/O	Type	Field Width
Additional Code Right	O	A	6
Incorporated Municipality Left	M	A	100
Incorporated Municipality Right	M	A	100
Unincorporated Community Left	O	A	100
Unincorporated Community Right	O	A	100
Neighborhood Community Left	O	A	100
Neighborhood Community Right	O	A	100
Left Address Number Prefix	O	A	15
Right Address Number Prefix	O	A	15
Left FROM Address	M	N	Long Int
Left TO Address	M	N	Long Int
Right FROM Address	M	N	Long Int
Right TO Address	M	N	Long Int
Parity Left	M	A	1
Parity Right	M	A	1
Postal Community Name Left	O	A	40
Postal Community Name Right	O	A	40
Postal Code Left	O	A	7
Postal Code Right	O	A	7
ESN Left	O*	A	5
ESN Right	O*	A	5
MSAG Community Name Left	O*	A	30
MSAG Community Name Right	O*	A	30
Street Name Pre Modifier	O	A	15
Street Name Pre Directional	O	A	9
Street Name Pre Type	O	A	50
Street Name Pre Type Separator	O	A	20
Street Name	M	A	60
Street Name Post Type	O	A	50

Table 2: Street Centerlines (Continued)

Descriptive Name	M/O	Type	Field Width
Street Name Post Directional	O	A	9
Street Name Post Modifier	O	A	25
Speed Limit	O	N	Long Int
One-Way	O	A	2
Road Class	O	A	15
FROM Road Level	O	A	1
TO Road Level	O	A	1
Validation Left	O	A	1
Validation Right	O	A	1
Entity Left	O**	A	3
Entity Right	O**	A	3
Exchange Left	O**	A	4
Exchange Right	O**	A	4
Legacy Street Name Pre Directional	O*	A	2
Legacy Street Name	O*	A	75
Legacy Street Name Post Type	O*	A	4
Legacy Street Post Directional	O*	A	2

* Required for Transitional Data Management Service/GeoMSAG Services and for compatibility for ALI matching in an i3 transitional period.

** Transitional Data Management Service, Entity, and Exchange Left and Right fields and values may be required to be populated within the road centerline schema where more than one selective router serves the geographic area.

Address Points

Table 3: Address Points

Descriptive Name	M/O	Type	Field Width
Discrepancy Agency ID	M	a	75
Regional Source	O	A	50
Date Updated	M	D	Date

Table 3: Address Points (Continued)

Descriptive Name	M/O	Type	Field Width
Effective Date	O	D	Date
Expiration Date	O	D	Date
Site Unique ID	M	A	254
Country	M	A	2
State	M	A	2
County	M	A	40
Additional Code	O	A	6
Additional Data URI	O	A	254
Incorporated Municipality	M	A	100
Unincorporated Community	O	A	100
Neighborhood Community	O	A	100
Address Number Prefix	O	A	15
Address Number	M	N	Long Int
Address Number Suffix	O	A	15
Street Name Pre Modifier	O	A	15
Street Name Pre Directional	O	A	9
Street Name Pre Type	O	A	50
Street Name Pre Type Separator	O	A	20
Street Name	M	A	60
Street Name Post Type	O	A	50
Street Name Post Directional	O	A	9
Street Name Post Modifier	O	A	25
ESN	O*	A	5
MSAG Community Name	O*	A	30
Postal Community Name	O	A	40
Postal Code	O	A	7
ZIP Plus 4	O	A	4
Building	O	A	75
Floor	O	A	75

Table 3: Address Points (Continued)

Descriptive Name	M/O	Type	Field Width
Unit	O	A	75
Room	O	A	75
Seat	O	A	75
Additional Location Information	O	A	225
Complete Landmark Name	O	A	150
Mile Post	O	A	150
Place Type	O	A	50
Placement Method	O	A	25
Longitude	O	DOUBLE	-
Latitude	O	DOUBLE	-
Elevation	O	DOUBLE	-
Legacy Street Name Pre Directional	O*	A	2
Legacy Street Name	O*	A	75
Legacy Street Name Post Type	O*	A	4
Legacy Street Post Directional	O*	A	2

*Required for compatibility and ALI matching in an i3 transitional period.

PSAP Layers/Fire/Law/EMS

Table 4: PSAP/Fire/Law/EMS

Descriptive Name	M/O	Type	Field Width
Discrepancy Agency ID	M	A	75
Regional Source	O	A	50
Date Updated	M	D	Date
Effective Date	O	D	Date
Expiration Date	O	D	Date
(PSAP/Fire/Law/EMS)_Unique_ID	M	A	254
Agency ID	M	A	100
Service URI	M	A	254

Table 4: PSAP/Fire/Law/EMS (Continued)

Descriptive Name	M/O	Type	Field Width
Service URN*	M	A	50
Service Number	O	A	15
Agency vCard URI	M	A	254
Display Name	M	A	60

*Note that the service URN is not required as this value is assigned by a layer within 9-1-1 EGDMS.

Municipal Boundary

Table 5: Municipal Boundary

Descriptive Name	M/O	Type	Field Width
Discrepancy Agency ID	M	A	75
Regional Source	O	A	50
Date Updated	M	D	Date
Effective Date	O	D	Date
Expiration Date	O	D	Date
Incorporated Municipality Unique_ID	M	A	254
Country	M	A	2
State	M	A	2
County	M	A	75
Additional Code	O	A	6
Incorporated Municipality	M	A	100

Glossary

Table 6: Glossary

Attribute	Definition
Additional Code	A code that specifies a geographic area. Used in Canada to hold a standard geographical classification code; it differentiates two municipalities with the same name in a province that does not have counties.
Additional Code Left	The additional code on the left side of the road segment relative to the FROM node.
Additional Code Right	The additional code on the right side of the road segment relative to the FROM node.
Additional Data URI	URI(s) for additional data associated with the site/structure address point. This attribute is contained in the site/structure address points layer and will define the service URI of additional information about a location, including building information (blueprints, contact info, floor plans, etc.).
Additional Location Information	A part of a sub-address that is not a building, floor, unit, room, or seat.
Address Number	The numeric identifier of a location along a thoroughfare or within a defined community.
Address Number Prefix	An extension of the address number that precedes it and further identifies a location along a thoroughfare or within a defined area.
Address Number Suffix	An extension of the address number that follows it and further identifies a location along a thoroughfare or within a defined area.
Agency ID	A domain name system (DNS) domain name which is used to uniquely identify an agency. An agency is represented by a domain name. Each agency must use one domain name consistently in order to correlate actions across a wide range of calls and incidents. Any domain name in the public DNS is acceptable so long as each distinct agency uses a different domain name. This ensures that each agency ID is globally unique.
Agency vCard URI	A vCard is a file format standard for electronic business cards. The agency vCard URI is the Internet address of an eXtensible markup language (XML) data structure which contains contact information (name of agency, contact phone numbers, etc.) in the form of a vCard (RFC 6350). vCard files may be exported from most email programs or created with a text editor. The vCard URI is used in the service boundary layers to provide contact information for that agency. The agency locator will provide these URIs for agencies listed in it.
Building	One among a group of buildings that have the same address number and complete street name.

Table 6: Glossary

Attribute	Definition
Complete Landmark Name	The name by which a prominent site/structure is publicly known.
Country	The name of a country represented by its two-letter ISO 3166-1 English country alpha-2 code elements in capital ASCII letters.
Country Left	The name of the country on the left side of the road segment relative to the FROM node, represented by its two-letter ISO 3166-1 English country alpha-2 code elements in capital ASCII letters.
Country Right	The name of the country on the right side of the road segment relative to the FROM node, represented by its two-letter ISO 3166-1 English country alpha-2 code elements in capital ASCII letters.
County	The name of a county or county-equivalent where the address is located. A county (or its equivalent) is the primary legal division of a state or territory.
County Left	The name of a county or county-equivalent on the left side of the road segment relative to the FROM node. A county (or its equivalent) is the primary legal division of a state or territory.
County NENA Globally Unique ID	The NENA globally unique ID for each county (or its equivalent) boundary. Each record in the counties or equivalents layer must have a globally unique ID. When coalescing data from other local 9-1-1 authorities into the ECRF and LVF, this unique ID must continue to have only one occurrence. One way to accomplish this is to append the 9-1-1 authority's domain to the end of the "locally unique ID."
County Right	The name of a county or county-equivalent on the right side of the road segment relative to the FROM node. A county (or its equivalent) is the primary legal division of a state or territory.
Date Updated	The date and time that the record was created or last modified. This value must be populated upon modifications to attributes, geometry, or both.
Discrepancy Agency ID	Agency that receives a discrepancy report (DR), should a discrepancy be discovered, and will take responsibility for ensuring discrepancy resolution. This may or may not be the same as the 9-1-1 authority. This must be represented by a domain name that is an agency identifier as defined in the NENA master glossary.
Display Name	A description or name of the service provider that offers services within the area of a PSAP or an emergency service boundary. This value must be suitable for display.
ECRC	Emergency call relay center.
Effective Date	The date and time that the record is scheduled to take effect.

Table 6: Glossary

Attribute	Definition
Elevation	The elevation, given in meters above a reference surface defined by the coordinate system, associated with the site/structure address.
Emergency Service Boundary NENA Globally Unique ID	The NENA globally unique ID for each emergency service boundary and PSAP boundary. Each record in the emergency service boundary layer and the PSAP boundary layer must have a globally unique ID. When coalescing data from other local 9-1-1 authorities into the ECRF and LVF, this unique ID must continue to have only one occurrence. One way to accomplish this is to append the 9-1-1 authority's domain to the end of the "locally unique ID." Emergency service boundary data is unique in that the data fields and their attributes are only a template to be reused for each emergency service boundary. For the emergency service boundary, there may be a separate dataset for law, fire, and EMS, and other emergency services such as poison control, forest service, coast guard, etc.
Entity Left	The entity on the left side of the road segment. Entity is a legacy MSAG system data element used to simplify data management by grouping MSAG records. The entity represents a geographical area that generally corresponds to E9-1-1 selective routing boundaries.
Entity Right	The entity on the right side of the road segment. Entity is a legacy MSAG system data element used to simplify data management by grouping MSAG records. The entity represents a geographical area that generally corresponds to E9-1-1 selective routing boundaries.
ESN	A 3-5 character alphanumeric string that represents an emergency service zone (ESZ).
ESN Left	The emergency service number (ESN) on the left side of the road segment relative to the FROM node.
ESN Right	The emergency service number (ESN) on the right side of the road segment relative to the FROM node.
ESRI	Environmental systems research institute.
Exception	A field used to mark features as error exceptions.
Exchange Left	The exchange on the left side of the road segment. Exchange is a defined area, served by one or more telephone central offices, within which a local exchange carrier furnishes service.
Exchange Right	The exchange on the right side of the road segment. Exchange is a defined area, served by one or more telephone central offices, within which a local exchange carrier furnishes service.
Expiration Date	The date and time when the information in the record is no longer considered valid.
Floor	A floor, story, or level within a building.

Table 6: Glossary

Attribute	Definition
From Road Level	Specifies the elevation of a segment FROM node (start point). This field does not require actual elevation in terms of real-world measurements. The value is only used to determine whether a turn is allowed from one street to a street that intersects it in a 2-dimensional space, similar to floors in a building. Nodes at the lowest level are assigned 0, with overlapping nodes representing additional level(s)/ overpass(es) are assigned the next sequential integer value accordingly.
Incorporated Municipality	The name of the incorporated municipality or other general-purpose local governmental unit (if any) where the address is located.
Incorporated Municipality NENA Globally Unique ID	The NENA globally unique ID for each incorporated municipality boundary. Each record in the incorporated municipality boundary layer must have a globally unique ID. When coalescing data from other local 9-1-1 authorities into the ECRF and LVF, this unique ID must continue to have only one occurrence. One way to accomplish this is to append the 9-1-1 authority's domain to the end of the "locally unique ID."
Incorporated Municipality Left	The name of the incorporated municipality or other general-purpose local governmental unit (if any), on the left side of the road segment relative to the FROM node.
Incorporated Municipality Right	The name of the incorporated municipality or other general-purpose local governmental unit (if any), on the right side of the road segment relative to the FROM node.
Latitude	The angular distance of a location north or south of the equator as defined by the coordinate system, expressed in decimal degrees.
Left Address Number Prefix	An extension of the address number that precedes it and further identifies a location along a thoroughfare or within a defined area, on the left side of the road segment relative to the FROM node. It contains any alphanumeric characters, punctuation, and spaces preceding the left FROM address and left TO address.
Left FROM Address	In a GIS road centerlines layer, each feature has a begin point and an endpoint. The FROM node is the begin point while the TO node is the endpoint. Each has a left side and a right side relative to a begin node and an end node. The left FROM address is the address number on the left side of the road segment relative to the left FROM node.
Left TO Address	In a GIS, each feature has a begin point and an endpoint. The FROM node is the begin point while the TO node is the endpoint. Each has a left side and a right side relative to a begin node and an end node. The left TO address is the address number on the left side of the road segment relative to the left TO node.

Table 6: Glossary

Attribute	Definition
Legacy Street Name	The street name field as it would appear in the MSAG, as assigned by the local addressing authority.
Legacy Street Name Post Directional	The trailing street direction suffix as it previously existed prior to the adoption of the NG9-1-1 data model as assigned by the local addressing authority.
Legacy Street Name Pre Directional	The leading street direction prefix as it previously existed prior to the adoption of the NG9-1-1 data model as assigned by the local addressing authority.
Legacy Street Name Type	The valid street abbreviation as it previously existed prior to the adoption of the NG9-1-1 data model as assigned by the local addressing authority.
Longitude	The angular distance of a location east or west of the prime meridian of the coordinate system, expressed in decimal degrees.
LVF	Location validation function.
Mile Post	A distance traveled along a route such as a road or highway, typically indicated by a milepost sign. There is typically a post or other marker indicating the distance in miles/kilometers from or to a given point.
MSAG Community Name	The community name associated with an address as given in the MSAG and may or may not be the same as the community name assigned by the United States Postal Service (USPS).
MSAG Community Name Left	The existing MSAG community name on the left side of the road segment relative to the FROM node.
MSAG Community Name Right	The existing MSAG community name on the right side of the road segment relative to the FROM node.
Neighborhood Community	The name of an unincorporated neighborhood, subdivision, or area, either within an incorporated municipality or in an unincorporated portion of a county or both, where the address is located.
Neighborhood Community Left	The name of an unincorporated neighborhood, subdivision or area, either within an incorporated municipality or in an unincorporated portion of a county or both, on the left side of the road segment relative to the FROM node.
Neighborhood Community Right	The name of an unincorporated neighborhood, subdivision or area, either within an incorporated municipality or in an unincorporated portion of a county or both, on the right side of the road segment relative to the FROM node.
OGC	Open geospatial consortium.

Table 6: Glossary

Attribute	Definition
One-Way	The direction of traffic movement along a road in relation to the FROM node and TO node of the line segment representing the road in the GIS data. The one-way field has three possible designations: B (Both), FT (From-To) and TF (To-From). ■ B - Travel in both directions allowed ■ FT - One-way traveling from FROM node to TO node ■ TF - One way traveling from TO node to FROM node
Parity Left	The even or odd property of the address number range on the left side of the road segment relative to the FROM node.
Parity Right	The even or odd property of the address number range on the right side of the road segment relative to the FROM node.
Placement Method	The methodology used for placement of the address point.
Place Type	The type of feature identified by the address.
Postal Code	A system of 5-digit (US) or 7-character codes (Canada) that identify the individual USPS or Canadian Post Office or metropolitan area delivery station associated with an address.
Postal Code Left	The postal code on the left side of the road segment relative to the FROM node.
Postal Code Right	The postal code on the right side of the road segment relative to the FROM node.
Postal Community Name	A city name for the ZIP code of an address, as given in the USPS city state file.
Postal Community Name Left	A city name for the ZIP code of an address, as given in the USPS city state file on the left side of the road segment relative to the FROM node.
Postal Community Name Right	A city name for the ZIP code of an address, as given in the USPS city state file on the right side of the road segment relative to the FROM node.
Provisioning Boundary NENA Globally Unique ID	The NENA globally unique ID for each provisioning boundary. Each record in the provisioning boundary layer must have a globally unique ID. When coalescing data from other local 9-1-1 authorities into the ECRF and LVF, this unique ID must continue to have only one occurrence. One way to accomplish this is to append the 9-1-1 authority's domain to the end of the "locally unique ID."
Regional Source	The regional source of data. This field is used if a regional data source is responsible for data coalescing and provisioning.

Table 6: Glossary

Attribute	Definition
Right FROM Address	In a GIS road centerlines layer, each feature has a begin point and an endpoint. The FROM node is the begin point while the TO node is the endpoint. Each has a left side and a right side relative to a begin node and an end node. The right FROM address number is the address number on the right side of the road segment relative to the right FROM node.
Right TO Address	In a GIS road centerlines layer, each feature has a begin point and an endpoint. The FROM node is the begin point while the TO node is the endpoint. Each has a left side and a right side relative to a begin node and an end node. The right TO address number is the address number on the right side of the road segment relative to the right TO node.
Road Centerline NENA Globally Unique ID	The NENA globally unique ID for each road centerline. Each record in the road centerlines layer must have a globally unique ID. When coalescing data from other local 9-1-1 authorities into the ECRF and LVF, this unique ID must continue to have only one occurrence. One way to accomplish this is to append the 9-1-1 authority's domain to the end of the "locally unique ID."
Road Class	The general description of the type of road. The road classifications used in this document are derived from the US census MAF/TIGER feature classification codes (MTFCC), which is an update to the now deprecated census feature class codes (CFCC).
Room	A single room within a building.
Seat	A place where a person might sit within a building.
Service Number	The numbers that would be dialed on a 12-digit keypad to reach the emergency service appropriate for the location. This is not the same as an emergency service number (ESN) in legacy E9-1-1 systems. This field is used for all emergency boundaries including PSAP; law; fire; EMS; and others such as poison control. Within the United States the service number for most emergency services is 9-1-1, however, there may be emergency service boundaries that have a different number that may be associated with them such as poison control. Additionally, in areas outside of the United States, different numbers may be used for law, fire, and EMS - this field would be used to denote those numbers.
Service URI	URI for call routing. This attribute is contained in the emergency service boundary layer and will define the service URI of the service. The URI is usually a session initiation protocol (e.g., SIP or SIPs) URI but may be a telephone number (e.g., tel) URI that defines the route to reach the service.

Table 6: Glossary

Attribute	Definition
Service URN	The URN used to select the service for which a route is desired. The ECRF is queried with a location and a service URN that returns the service URI.
Site NENA Globally Unique ID	The NENA globally unique ID for each site/structure address point. Each record in the site/structure address points layer must have a globally unique ID. When coalescing data from other local 9-1-1 Authorities into the ECRF and LVF, this unique ID must continue to have only one occurrence. One way to accomplish this is to append the 9-1-1 authority's domain to the end of the "locally unique ID."
Speed Limit	Posted speed limit in MPH in US or Km/h in Canada
State	The name of a state or state equivalent, represented by the two-letter abbreviation. A state is a primary governmental division of the United States.
State Left	The name of a state or state equivalent on the left side of the road segment relative to the FROM node, represented by the two-letter abbreviation.
State Right	The name of a state or state equivalent on the right side of the road segment relative to the FROM node, represented by the two-letter abbreviation.
Street Name	The official name of the road, usually defined by the loIntrado jurisdictional authority (e.g., city). The street name does not include any street types, directionals, or modifiers.
Street Name Post Directional	A word following the street name element that indicates the direction taken by the road from an arbitrary starting point or line, or the sector where it is located.
Street Name Post Modifier	A word or phrase that follows and modifies the street name element, but is separated from it by a street name post type or a street name post directional or both.
Street Name Post Type	A word or phrase that follows the street name element and identifies a type of thoroughfare in a complete street name.
Street Name Pre Directional	A word preceding the street name element that indicates the direction taken by the road from an arbitrary starting point or line, or the sector where it is located.
Street Name Pre Modifier	A word or phrase that precedes and modifies the street name element but is separated from it by a street name pre type or a street name pre directional or both.
Street Name Pre Type	A word or phrase that precedes the street name element and identifies a type of thoroughfare in a complete street name.

Table 6: Glossary

Attribute	Definition
Street Name Pre Type Separator	A preposition or prepositional phrase between the street name pre type and the street name.
To Road Level	Specifies the elevation of a segment TO node (end point). This field does not require actual elevation in terms of real-world measurements. The value is only used to determine whether a turn is allowed from one street to a street that intersects it in a 2-dimensional space, similar to floors in a building. Nodes at the loIntrado level would be assigned 0, with overlapping nodes representing additional level(s)/overpass(es) will be assigned the next sequential integer value accordingly.
Unincorporated Community	The name of an unincorporated community, either within an incorporated municipality or in an unincorporated portion of a county, or both, where the address is located.
Unincorporated Community Left	The unincorporated community, either within an incorporated municipality or in an unincorporated portion of a county, or both, on the left side of the road segment relative to the FROM node.
Unincorporated Community Right	The unincorporated community, either within an incorporated municipality or in an unincorporated portion of a county, or both, on the right side of the road segment relative to the FROM node.
Unit	A group or suite of rooms within a building that are under common ownership or tenancy, typically having a common primary entrance.
Validation Left	Indicates if the address range on the left side of the road segment should be used for civic location validation. A value of "Y" may be entered if any address number within the address range on the left side of the road segment should be considered by the LVF to be valid. A value of "N" may be entered if the address number should only be validated using the site/structure address points layer. If not present, a value of "Y" is assumed.
Validation Right	Indicates if the address range on the right side of the road segment should be used for civic location validation. A value of "Y" may be entered if any address number within the address range on the right side of the road segment should be considered by the LVF to be valid. A value of "N" may be entered if the address number should only be validated using the site/structure address points layer. If not present, a value of "Y" is assumed.
ZIP Plus-4	The addition of the ZIP plus-4 refines the mail delivery point down to a specific block or building, and may prove useful to validate locations. ZIP plus-4 codes change more often than US postal codes.

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
1	1	Senior Management Statement	4.1	Has Senior Management created a Senior Management Statement (SMS) of Policy?(Audit Guidance: this could take the shape of a security plan, executive level security policy, or other such documents. The auditor should use his/her discretion as to whether the document in question meets the requirements of this portion of the NG-SEC standard)	R	C	
2	1	Senior Management Statement	4.1	Does the SMS designate the person responsible for security (e.g. Security Administrator)?	R	C	
3	1	Senior Management Statement	4.1	Does the SMS clearly document the security goals and objectives of the organization?	R	C	
4	2	Acceptable Use Policy	4.2	Does the organization have an Acceptable Usage Policy?	R	C	Customers may access CenturyLink's AUP at: http://www.centurylink.com/aboutus/legal/acceptable-use-policy.html
5	2	Acceptable Use Policy	6.6	Are any and all actual, attempted, and/or suspected misuses of Public Safety assets reported and documented by appropriate organizations?	R	C	
6	3	Authentication / Password Policy	4.2	Does the organization have an Authentication / Password Policy?	R	C	
7	3	Authentication / Password Policy	7.1.1	Is each individual requiring access to the NG9-1-1 System provided a unique Identification and authentication?	R	CP	There is a shared Application User ID in use on some systems.
8	3	Authentication / Password Policy	7.1.1	Do individuals share their authentication information (including usernames and passwords) with other individuals or groups?	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
9	3	Authentication / Password Policy	7.1.2	Are requests for new User Accounts, User IDs, and File and Resource authorization documented? (Audit	R	C	
10	3	Authentication / Password Policy	7.1.2	Do personnel performing entity or security administration ensure that only approved entities are granted access?	R	C	
11	3	Authentication / Password Policy	7.1.2.1	Does the organization have procedures for changing access authority?	R	C	
12	3	Authentication / Password Policy	7.1.2.1	Does the organization have procedures for removing access authority for terminated personnel?	R	C	
13	3	Authentication / Password Policy	7.1.3	When system to system access is implemented does the system mask individual accountability for transactions?(Audit Guidance: The system shall not mask individual accountability for transactions)	R	CP	For automated system to system access; individual user actions are logged at the application level through unique credentials and never masked. There is less detailed logging when changing through interactive sessions.
14	3	Authentication / Password Policy	7.1.3	When system to system access is implemented is the source system authenticated before each transfer session?	R	C	
15	3	Authentication / Password Policy	7.1.3	When system to system access is implemented and push technology is utilized, is the destination authenticated by the source?	R	N/A	The ESInet solution does not push system updates
16	3	Authentication / Password Policy	7.1.3	When system to system access is implemented and a continuous connection is utilized, was authentication performed at the initial connection?	R	C	
17	3	Authentication / Password Policy	7.1.3	When system to system access is implemented are individuals accessing any of the systems required to Authenticate when initially accessing each system?	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
18	3	Authentication / Password Policy	7.1.5	Are Authentication Credentials displayed in an obscured format when entered on computer screens? (Auditor Guidance: Check to see if passwords can be seen on the screen when typed in. They should not be able to be seen so as to prevent “shoulder surfing.”)	R	C	
19	3	Authentication / Password Policy	7.1.4	Are users locked out after no more than 5 invalid sign on attempts?	R	C	
20	3	Authentication / Password Policy	7.1.5	Are Default and Null Passwords changed when installing new equipment or software?	R	C	
21	3	Authentication / Password Policy	7.1.5	Are Authentication Credentials encrypted when stored on a computer?	R	C	
22	3	Authentication / Password Policy	7.1.5	When two-factor authentication is used, (e.g. SecurID + Pin or Certificate + Passphrase) are two authentication factors stored in such fashion that one incident can compromise both? (Auditor Guidance: e.g. password or pin isn’t written down on the token, or stored with the token)	R	C	
23	3	Authentication / Password Policy	7.1.5.1	All user accounts shall require a password	R	C	
24	3	Authentication / Password Policy	7.1.5.1	Passwords are not based on the user’s account name.	R	C	
25	3	Authentication / Password Policy	7.1.5.1	Passwords must meet the following complexity requirements: Contains characters from three of the following four categories: Uppercase alphabet characters (A–Z)Lowercase alphabet characters (a–z)Arabic numerals (0–9)Non-alphanumeric characters (for example, !$#,%)	R	C	
26	3	Authentication / Password Policy	7.1.5.1	Minimum password length shall be 8 characters or greater	R	C	
27	3	Authentication / Password Policy	7.1.5.1	Minimum password age shall be 3 days or greater	R	C	
28	3	Authentication / Password Policy	7.1.5.1	Maximum password age requirement 60 days or less	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
29	3	Authentication / Password Policy	7.1.5.1	Maximum password age **recommendation** 30 days	BP	No	Maximum password age is 60 days.
30	3	Authentication / Password Policy	7.1.5.1	If feasible, authentication schemes shall provide for password exchange in a format that cannot be captured and reused/replayed by unauthorized users to gain authenticated access, e.g., random password generating tokens or one-way encryption (also known as hashing) algorithms.	R	C	
31	3	Authentication / Password Policy	7.1.5.1	When using temporary passwords they shall be required to be changed upon initial login	R	C	
32	3	Authentication / Password Policy	7.1.5.1	Passwords should not be hard coded into automatic login sequences, scripts, source code and batch files, etc., unless required by business need and then only if protected by security software and/or physical locks on the workstation, and passwords are encrypted.	BP	C	
33	3	Authentication / Password Policy	7.1.5.1	Password construction should be complex enough to avoid use of passwords that are easily guessed, or otherwise left vulnerable to cracking or attack. Names, dictionary words, or combinations of words shall not be used; nor shall they contain substitutions of numbers for letters, e.g., s3cur1ty. Repeating numbers or sequential numbers shall also not be used	BP	CP	While required by policy, this requirement is not enforceable on all ESInet systems.
34	3	Authentication / Password Policy	7.1.5.1	Passwords should not contain sequences of three (3) or more characters from the user's login ID or the system name.	BP	CP	While required by policy, this requirement is not enforceable on all ESInet systems.
35	3	Authentication / Password Policy	7.1.5.1.4	Passwords should not contain sequences of three (3) or more characters from previous chosen or given passwords.	BP	CP	While required by policy, this requirement is not enforceable on all ESInet systems.

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
36	3	Authentication / Password Policy	7.1.5.1.5	Passwords should not contain a sequence of two (2) or more characters more than once, e.g., a12x12.	BP	CP	While required by policy, this requirement is not enforceable on all ESInet systems.
37	3	Authentication / Password Policy	7.1.5.1.5	Passwords used to access Public Safety systems and resources should not be used on any external systems, e.g., Home PC's, Internet sites, shared public systems.	BP	C	
38	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used do they have a required length of at least 15 characters? (Audit Guidance: Alpha, numeric and special characters may all be used.)	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
39	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used they shall not use repeating words, or sequential characters or numbers.	R	N/A	The CenturyLink ESInet systems require password. They do not use passphrases.
40	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used they shall be case sensitive	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
41	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used and where they are automatically set or set by administrator, the initial passphrase shall be randomly generated and securely distributed.	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
42	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used first-time users may create their own passphrase after authenticating.	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
43	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used Users shall have the capability of changing their own passphrase online. However, the old passphrase shall be correctly entered before a change is allowed	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
44	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used a lost or forgotten passphrase can be reset only after verifying the identity of the user (or process owner) requesting a reset.	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
45	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used passphrases shall automatically expire every 180 days or less for General Users.	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
46	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used systems shall notify users at expiration time and allow the user to update the passphrase.	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
47	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used and when it is changed, the old passphrase shall not be reused until either: 1. at least four (4) other passphrases have been used, or 2. at least 4 months have passed.	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
48	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used systems shall not display the passphrase in clear text as the user enters it.	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
49	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used shall not be stored in script files or function keys.	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
50	3	Authentication / Password Policy	7.1.5.2	When Passphrases are used Passphrases shall always be encrypted for transmission	R	N/A	The CenturyLink ESInet systems require passwords. They do not use passphrases.
51	3	Authentication / Password Policy	7.1.5.3	If Digital Certificates are used is a revocation procedure in place if compromised?	R	C	
52	3	Authentication / Password Policy	7.1.5.3	Are Digital Certificates kept current and expired or invalid certificates not used?	R	C	
53	3	Authentication / Password Policy	7.1.5.3	Cryptographic implementations use standard implementations of security applications, protocols, and format?	R	C	
54	3	Authentication / Password Policy	7.1.5.3	Cryptographic implementations shall be purchased from reputable vendors?	R	C	
55	3	Authentication / Password Policy	7.1.5.3	If Cryptographic solutions are developed in-house staff should be properly trained in cryptology.	R	C	
56	3	Authentication / Password Policy	7.1.5.3	Do employees protect and safeguard any encryption keys for which they are responsible?	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
57	3	Authentication / Password Policy	7.1.5.3	Employees do not share private encryption keys with others except when applicable or appropriate authorities demand the key be surrendered (Termination, Promotion, Investigation etc.)	R	C	
58	3	Authentication / Password Policy	7.1.5.3	A process exists by which current validity of a certificate can be checked and a certificate can be revoked Validity testing includes: Do key holders initiate key revocation when they believe access to their keys have been compromised Has the Certificate Authority signature on the certificate been validated Is the date the certificate is being used within the validity period for the certificate The Certificate Revocation List for the certificates of that type are checked to ensure they have not been revoked The identity represented by the certificate - the "distinguished name" is valid (distinguished name refers to the location in the x.500 database where the object in question exists)	R	C	
59	3	Authentication / Password Policy	7.2.6	In order to help assure segregation of duties, developers shall not be System Administrators for the Production Systems they have developed (small, stand-alone systems can be excepted from this requirement)	R	C	
60	4	Data Protection	4.2	Does the organization have a Data Protection Policy?	R	C	
61	4	Data Protection	6.2	Application, system, and network administrators perform a security self-review on systems for which they have operational responsibility at least once per year.	R	C	
62	4	Data Protection	6.2	The self-review assessments are in writing and retained by the Security Manager and the NG9-1-1 Entity	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
63	4	Data Protection	6.2	A copy of the current security self-review or security assessments/audit reports are retained until superseded by another security assessment or the system is retired	R	C	
64	4	Data Protection	6.3	Application, system, and network administrators have identified which security solutions have or require periodic review and the frequency by which they shall occur (Auditor Guidance: This finding refers to recurring security solutions, such as audit logs, or Intrusion Prevention Systems.)	R	C	
65	4	Data Protection	6.3	Application, system, and network administrators conduct the periodic reviews defined in audit number 64	R	C	
66	4	Data Protection	6.4.2	All networks have a clearly defined purpose or mission so appropriate security measures can be implemented. (Auditor Guidance: To verify if this has occurred request documentation such as drawings, mission statements, policies, etc., that clearly indicate that the network in question's mission is defined)	BP	C	
67	4	Data Protection	6.4.3	For systems on the network in question, an accurate and current inventory is maintained. (Auditor Guidance: Request copies of a current inventory. Acceptable inventories included automated systems, paper logs, or logbooks).	R	C	
68	4	Data Protection	6.4.3	Inventories are appropriately classified and in accordance with the implemented information classification and protection policy	R	CP	A uniform data classification scheme is in the process of being implemented.
69	4	Data Protection	6.4.4	All administrative access to the network is precisely controlled with appropriate identification, authentication, and logging capabilities	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
70	4	Data Protection	6.4.4	Uncontrolled points of entry are not allowed on the network	R	C	
71	4	Data Protection	6.4.4	All point of ingress and egress to a network are fully documented, approved, and protected	R	C	
72	4	Data Protection	6.4.5	Connecting multi-homed computers to networks that have different security postures is not allowed	R	C	
73	4	Data Protection	6.4.5	When multi-homed computers are implemented Host IPS shall be installed on the multi-homed computer	R	N/A	No computers are multi-homed across security domains.
74	4	Data Protection	6.4.5	When multi-homed computers are implemented, all other appropriate security countermeasures, including those	R	N/A	No computers are multi-homed across security domains.
75	4	Data Protection	6.4.5	When multi-homed computers are implemented Anti-virus is running on both/all networks and the multi-	R	N/A	No computers are multi-homed across security domains.
76	4	Data Protection	6.4.5	When multi-homed computers are implemented, IP-forwarding is explicitly disabled?	R	N/A	No computers are multi-homed across security domains.
77	4	Data Protection	6.4.5	When multi-homed computers are implemented multi-homed computers should have 'Hardened Operating Systems'	BP	N/A	No computers are multi-homed across security domains.
78	4	Data Protection	6.4.5	When multi-homed computers are implemented multi-homed computers should have 'Hardened Applications'	BP	N/A	No computers are multi-homed across security domains.
79	4	Data Protection	6.4.6.3	Firewalls are maintained at all 4.9GHz network boundaries	R	C	
80	4	Data Protection	7.1.2.2	Does the organization have procedures for reviewing access authority for inactive accounts?	R	C	
81	4	Data Protection	7.2.1	Accounts shall be created based on "Least Privilege"	R	C	
82	4	Data Protection	7.2.1	Are users given access to only the functions and data necessary to perform their assigned duties	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
83	4	Data Protection	7.2.1	All computer resource access is restricted to only the command, data, and systems necessary to perform authorized functions	R	C	
84	4	Data Protection	7.2.1.1	All data has appropriate minimum access privileges, e.g. read, write, modify, as defined by the data owner and is in compliance with local laws	R	C	
85	4	Data Protection	7.2.1.2	Access is restricted to only those individuals and groups with a business need, and subject to the data's classification.	R	C	
86	4	Data Protection	7.2.1.2	Unrestricted/global access should be avoided whenever possible and is only used where specifically appropriate and with the data owners approval	BP	C	
87	4	Data Protection	7.2.1.2.a	Is an annual review of all resources, (e.g., files or directories, to which access is not restricted, i.e., have universal or public access) shall be performed and the resource owners shall be notified of the results.	R	C	
88	4	Data Protection	7.2.1.2.b	Is group membership restricted only to persons performing the given function?	R	C	
89	4	Data Protection	7.2.1.3	All unnecessary services and network services are disabled.	R	C	
90	4	Data Protection	7.2.1.3	Any application service which lets the user escape to a shell, provide access to critical system files, or maps/promotes IDs to privileged user levels is disabled.	R	C	
91	4	Data Protection	7.2.1.3a	Is an annual review for compliance with Audit Area 90 completed and findings documented?	R	CP	This section will be added to internal audit schedules.
92	4	Data Protection	7.2.1.3a	Are findings from the audit conducted in Audit Area 91 closed or has the risk been managed?	R	CP	Any findings will be tracked through existing nonconformance corrective action systems.
93	4	Data Protection	7.2.1.4	Administrator shall ensure that system access controls (e.g. filters that restrict access from only authorized source systems), are used where they exist and only contain necessary system authorizations?	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
94	4	Data Protection	7.2.1.4.a	Is an annual review for compliance with Audit Area 93 completed and findings documented?	R	CP	This section will be added to internal audit schedules.
95	4	Data Protection	7.2.1.4.a	Are findings from the audit conducted in Audit Area 94 closed or has the risk been managed?	R	CP	Any findings will be tracked through existing nonconformance corrective action systems.
96	4	Data Protection	7.2.1.5	Do Administrators use non-Administrative accounts when performing non-Administrative tasks?	R	C	
97	4	Data Protection	7.2.1.6	Do ALL System Administrators have a personal Administrator account rather than use a generic account? (Auditor Guidance: Administrators shall not use default, or built-in Administrator accounts except during disaster recovery or initial installations. Each Administrator must have his or her own unique Administrator account to provide traceability. Administrator accounts shall never be shared)	R	C	
98	4	Data Protection	7.2.1.6	Systems that do not support unique administrative accounts should not be used as they pose a significant threat. Entities are encouraged to prevent inclusion of such systems onto the NG9-1-1 networks. .	BP	N/A	Users have unique identifiers and there will be no guest, shared, or anonymous accounts.
99	4	Data Protection	7.2.2	The login "Warning Notice" is displayed during the boot up or logon sequence (either before or after the authentication, preferably before, but it is displayed before any substantive data	R	C	
100	4	Data Protection	7.2.2	The "Warning Notice" remains displayed until positive action by the user is taken to acknowledge the message	R	C	
101	4	Data Protection	7.2.3	Computer resources, systems, applications, and networks shall be restricted at all times to authorized personnel	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
102	4	Data Protection	7.2.3	Where possible access control is accomplished with "role bases" privileges that assign users to roles and grant access to members of a role rather than to individuals	R	C	
103	4	Data Protection	7.2.4	Non-privileged users do not have read/write access to system files or resources such as protected memory, critical devices, executable programs, network configuration data, application file systems, etc.	R	C	
104	4	Data Protection	7.2.4	Only administrative users are assigned passwords to access and modify sensitive files/resources	R	C	
105	4	Data Protection	7.2.5	Files/File Folders are restricted to only those requiring access	R	C	
106	4	Data Protection	7.2.5	Rights assigned only to those who actually need them and are documented as needing them	R	C	
107	4	Data Protection	7.2.5	Access Groups used whenever possible to simplify administration	R	C	
108	4	Data Protection	7.2.5	Has the organization renamed built-in Administrator accounts?	R	C	
109	4	Data Protection	7.2.5	Anonymous and/or guest accounts are disabled to prevent exploitation	R	C	
110	4	Data Protection	7.2.5	Are periodic audits of user account access conducted to ensure users have only the "effective rights" required to perform their functions?	R	C	
111	4	Data Protection	7.2.6	Are Production and Non-Production systems separated to protect integrity of the Production System?	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
112	4	Data Protection	7.2.6	If the Non-Production System is intended to become a Production System is it governed by the requirements of a Production System. (Auditor Guidance: While it is unlikely a non-production system will be “in-scope” during an audit, if it is, this requirement refers to the need for that system to comply with all requirements herein)	R	C	
113	4	Data Protection	7.2.6	Production data is not copied off the system without the service owner's permission and is protected to an equivalent or greater degree	R	C	
114	4	Data Protection	7.2.6	Production systems do not contain any software development tools except where essential for the application	R	C	
115	4	Data Protection	7.2.6	While software development tools may be installed for software upgrades, or installation of new software packages, or for troubleshooting, but they must be removed immediately after use	R	CP	Some software development tools are required and installed on production systems.
116	4	Data Protection	7.2.6	When software development tools are essential for production operation, they must be inaccessible to users	R	CP	Some software development tools are required and installed on production systems.
117	4	Data Protection	7.2.7	All devices capable of enforcing a password protected screensaver or a keyboard lock do so with an inactivity timeout of 15 minutes or less exceptions will comply with Para 7.2.7.1, .2,and .3 The following are exceptions: When superseded by local public safety policy	R	C	
118	4	Data Protection	7.2.7	All devices not capable of enforcing a password protected screensaver or a keyboard lock will have controlled access in accordance with all applicable physical and logistical security or have session inactivity timeouts set for 15 minutes	R	C	
119	4	Data Protection	7.2.7	Consoles not capable of enforcing a password protected screensaver or a keyboard lock are configured to automatically log out after 15 minutes of inactivity	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
120	4	Data Protection	7.2.7	If automatic inactivity logout is not supported are users required to logout when console is left unattended	R	C	
121	4	Data Protection	7.2.8.4	Peer to Peer Networking is NOT allowed in the NG 9-1-1 environment	R	C	
122	4	Data Protection	7.3.1	NG9-1-1 Entity information which is either discoverable or otherwise requested by the general public or media must be clearly identified.	R	C	
123	4	Data Protection	7.3.1	Specific guidelines must be written and followed to document what data is released, when and to whom when releasing NG9-1-1 Entity information which is either discoverable or otherwise requested by the general public or media must be clearly identified.	R	C	
124	4	Data Protection	7.3.1	The guidelines identified in Audit Area 123 shall capture any specific release requirements for data such as video, names, call content, message text, or other personal content	R	C	
125	4	Data Protection	7.3.1	Where such data is intermingled with other data of differing classification, consideration shall be given to replicating the public domain data into a separate data store	BP	C	
126	4	Data Protection	7.3.2	Where email is used to send NG 9-1-1 Sensitive Information, is the message clearly marked with its classification, do the senders ensure recipients are aware of the safeguards required.	R	C	
127	4	Data Protection	7.3.2	Where email is used for emergency communications, senders must verify the recipient's email ID is correct prior to sending	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
128	4	Data Protection	7.3.2	Where email is used for emergency communications, the recipient shall understand the safeguards associated with the proprietary marking	R	C	
129	4	Data Protection	7.3.2	Where email is used for emergency communications and email with Sensitive Information is printed it shall be protected according to the rules associated with its	R	C	
130	4	Data Protection	7.3.2	Where email is used for emergency communications, Sensitive Information must be encrypted when sent by email	R	CP	Encryption of restricted data when being sent across public networks.
131	4	Data Protection	7.3.2	Does the NG9-1-1 entity control the domain used for email communication unless otherwise covered by a formal contractual document. (Auditor Guidance: The intent of this audit question is to ensure that entities register a legitimate DNS domain name for any NG9-1-1	R	C	
132	4	Data Protection	7.3.2	Internal NG9-1-1 Entity email should not be made available on a 9-1-1 call-taking position workstation, but rather on a separate system.	BP	CP	In rare cases the West SFS Emergency Call RelayCenter may support calls that personnel have email on the same machine used for receiving emergency calls, however this does not directly impact service provide through the ESInet.
133	4	Data Protection	7.3.2	In lieu of detailed security standards for email use in an NG9-1-1 environment, NG9-1-1 Entities are encouraged to follow best practices such as those offered by the National Institute for Standards and Technology (NIST)	BP	N/A	We have and use detailed corporate security standards.

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
134	4	Data Protection	7.3.2.1	Individual messaging services have been evaluated to ensure they comply with NG9-1-1 Entity production and security requirements	R	C	
135	4	Data Protection	7.3.3.1	Do cryptographic installations use industry standard cryptographic algorithms and standard modes of operations and comply with the laws of the United States	R	C	Information Security defines security requirements for the configuration of key servers, Public Key Infrastructures and related equipment. Information Security will also set standards for encryption algorithms, hashes, key lengths, key lifetimes, and other factors relevant to encryption practices. The user of proprietary encryption algorithms, either in-house or from Suppliers/Contributors of freeware/shareware is not permitted.
136	4	Data Protection	7.3.3.1	The use of encryption algorithm or device complies with the laws of the United States and any country in which there are plans to use data encryption	R	C	The use of proprietary encryption algorithms, either in-house or from Suppliers/Contributors of freeware/shareware is not permitted.
137	4	Data Protection	7.3.3.1	It is recommended the algorithm certified by the NIST FIPS 140 certification, currently AES, be used	BP	C	
138	4	Data Protection	7.3.3.1	Where there are no US federal standards for specific encryption functions e.g. public key cryptography, message digests, commercial algorithms may be used.	BP	C	A list of acceptable encryption standards are included in Security Policy.

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
139	4	Data Protection	7.3.3.1	Implementations of cryptography shall follow best commercial practices e.g. Public Key Cryptography Standards.	R	C	Information Security defines security requirements for the configuration of key servers, Public Key Infrastructures and related equipment. Information Security will also set standards for encryption algorithms, hashes, key lengths, key lifetimes, and other factors relevant to encryption practices. The user of proprietary encryption algorithms, either in-house or from Suppliers/Contributors of freeware/shareware is not permitted.
140	4	Data Protection	7.3.3.1	Implementations and modes shall use the strongest available product (encryption algorithms)	R	C	
141	4	Data Protection	7.3.3.2	If Public Key Cryptography is used does the NG9-1-1 entity have a Public Key Infrastructure to manage and distribute public keys?	R	C	
142	4	Data Protection	7.3.3.2	Does the PKI manage both Symmetric and Asymmetric Keys through the entire life cycle?	R	CP	Separate PKIs for management of symmetric and asymmetric.
143	4	Data Protection	7.3.3.2	Encryption Devices and any server used to store encryption keys are protected from unauthorized access	R	C	
144	4	Data Protection	7.3.3.2	Key generation is performed using a commercial tool that comply with x.509 standards and produce x.509 compliant keys.	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
145	4	Data Protection	7.3.3.2	Keys are not generated using predictable function or values	R	C	
146	4	Data Protection	7.3.3.2	Symmetric keys must be at least 112 bits in length and Asymmetric keys at least 1024 bits in length	R	C	
147	4	Data Protection	7.3.3.2	Keys are distributed to appropriate recipients through secure channels	R	C	
148	4	Data Protection	7.3.3.2	Keys used to secure stored data are safeguarded so authorized persons can recover them at any time	R	C	
149	4	Data Protection	7.3.3.3	Does the Public Key Infrastructure (PKI) have a documented Certificate Practice Statement defining how security is provided for the infrastructure, registration process, relative strength of the system, and Legitimate uses?	R	C	
150	4	Data Protection	7.3.3.3	Does the PKI implement a registration process that identifies the requester by an acceptable form of identification before the Certificate Authority (CA) creates a Digital Certificate?	R	C	
151	4	Data Protection	7.3.3.3	Does the PKI have a review process for validity checks and revocation as required?	R	C	
152	4	Data Protection	7.3.3.3	Do key holders initiate key revocation if they believe access to their keys have been compromised?	R	C	
153	4	Data Protection	7.4.1	Are all files and software scanned for viruses and malicious code, and verified as free of logic bombs or other malicious code?	R	C	
154	4	Data Protection	7.4.3	Does the NG 9-1-1 entity use licensed industry standard antivirus (or anti-malware) software on all devices capable of running it?	R	CP	AV software is loaded on all Window devices and Linux servers that are publically accessibility.
155	4	Data Protection	7.4.3	Does the NG 9-1-1 entity, install and maintain the latest version (including engine) of their licensed anti-virus	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
156	4	Data Protection	7.4.3	Is the antivirus software installed and maintained on any personal equipment used for business functions?	R	N/A	Personal equipment is not used for business functions.
157	4	Data Protection	7.4.3	Is the software current with the latest available and applicable virus definitions?	R	C	
158	4	Data Protection	7.4.3	Does the software scan all files when opened and/or executed (including files on network shares)?	R	CP	Scans are performed on all files that do not impact call processing performance.
159	4	Data Protection	7.4.3	Does the software scan files on local drives at least once a week?	R	C	
160	4	Data Protection	7.4.3	Does the software scan all files, attachments, and software received via email and/or downloaded from websites before opening?	R	C	
161	4	Data Protection	7.4.3	Does the software scan all removable media and software (including new workstations equipped with pre-loaded software) before opening and/or executing?	R	CP	Removable media is not scanned when it is plugged in. A scan is performed if the user attempts to open a file or if a file attempts to auto-execute
162	4	Data Protection	7.4.3	Does the NG 9-1-1 Entity scan all removable media and software before opening and/or executing if it has not been kept secure within its control?	R	C	
163	4	Data Protection	7.4.3	Are all files made available as network shares scanned at least once per week?	R	CP	A scan is performed when a file is opened. Servers that are hosts on are scanned once per week.
164	4	Data Protection	7.5.4	Does the NG 9-1-1 Entity have a backup procedure?	R	C	
165	4	Data Protection	7.5.4	Is a copy of the routine full backup media described in Audit Area 164 sent to a secure offsite location?	R	C	
166	4	Data Protection	7.6	All systems, applications, and databases have internal controls for logging, tracking, and personnel accountability	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
167	4	Data Protection	7.6.1	All systems, including but not limited to applications and databases, have a security event record(log) capable for after-the-fact investigation of loss, impropriety, or other inappropriate activity	R	C	
168	4	Data Protection	7.6.2	A written Security Audit Log Review Plan has been developed	R	C	
169	4	Data Protection	7.6.3	A Security Alarm Plan has been developed and documented which sets criteria for generating alarms, who is notified, and what actions are to be taken.	R	C	
170	4	Data Protection	8.3	Sensitive data is printed only on attended printers or on printers in a secured area. Distribution is controlled and printouts of sensitive information are secured when not in use.	R	C	
171	4	Data Protection	8.3	Data stored on removable media that are external to the system hardware is safeguarded.	R	C	
172	4	Data Protection	8.3	Personal storage devices are not used within the NG9-1-1 entity location. (Auditor Guidance: Examples of personal storage devices include USB Thumbstick, etc.)	R	C	
173	4	Data Protection	8.3	When storage media and output is destroyed it is in a manner that contents cannot be recovered or recreated	R	C	
174	4	Data Protection	8.3	When producing copies containing classified, the originals and copies are not left unattended	R	C	
175	4	Data Protection	8.3	NG9-1-1 Entity personnel ensure re-used storage media is "clean" (i.e. does not contain any residual of information from previous uses)	R	C	
176	4	Data Protection	8.3	All media distributed outside NG9-1-1 Entity is either new or comes directly from a recognized pool of "Clean" media	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
177	4	Data Protection	8.4.2	If possible, information resources using a power supply are connected to electrical outlets and communications connections that utilize surge protection	BP	C	
178	4	Data Protection	8.6.2.10	Combustible materials are not stored in the computer center or server room	R	C	
179	4	Data Protection	8.6.2.11	Furniture, storage cabinets, and carpets are of nonflammable material.	R	C	
180	4	Data Protection	8.6.2.12	Carpets are anti-static.	R	C	
181	4	Data Protection	8.6.2.6	All critical information resources are on UPS	R	C	
182	4	Data Protection	8.6.2.7&.8	Food, drinks, or smoking is not allowed in the server room	R	C	
183	4	Data Protection	8.6.2.9	Storage under raised floors or suspended ceilings is prohibited.	R	C	
184	5	Exception Request / Risk Assessment	12	An Exception Approval / Risk Assessment process is in place.	R	C	
185	5	Exception Request / Risk Assessment	12	The exception approval and risk acceptance process includes Risk Justification, Risk Identification, Risk Assessment, Risk analysis, and Risk Acceptance and Approval.	R	C	
186	5	Exception Request / Risk Assessment	12	The exception approval and risk acceptance process is documented on each Exception Approval / Risk Acceptance Form (EA/RAF), including the names and contact information of the people who carried out the analysis.	R	C	
187	5	Exception Request / Risk Assessment	12.1	The EA/RAF process is followed for "ALL RISKS" (e.g., security vulnerabilities cannot be fixed or security patched, or cases of non-compliance with this Security Standard.	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
188	5	Exception Request / Risk Assessment	12.1	The specific non-compliance or vulnerability documented in each EA/RAF was reviewed by NG9-1-1 Entity security organization and the legal department.	R	C	
189	5	Exception Request / Risk Assessment	12.1	The actual form is maintained and tracked by the NG9-1-1 Entity Security Risk Manager, the Security Point of Contact, and all involved parties.	R	C	
190	5	Exception Request / Risk Assessment	12.2.1	The NG9-1-1 Entity has assigned a Security Risk Manager to manage security risks and is responsible for completing the EA/RAF in a complete and accurate manner prior to submitting to the Security Point of Contact / Team for review.	R	C	
191	5	Exception Request / Risk Assessment	12.2.1	The Security Risk Manager collaborates with other members of the pertinent security team in completing the form and obtains the approval signature from the NG9-1-Entity Risk Acceptance Approver.	R	C	
192	5	Exception Request / Risk Assessment	12.2.1	The Security Risk Manager is an employee or an authorized agent acting on behalf of the NG9-1-1 Entity.	R	C	
193	5	Exception Request / Risk Assessment	12.2.1	The Security Risk Manager is the person identifying the need for the execution of the exception approval and risk acceptance process with technical and business knowledge of the asset(s) at risk or, meets 195	R	C	
194	5	Exception Request / Risk Assessment	12.2.1	The Security Risk Manager is a system administrator, systems engineer, project manager, or other key stakeholder with technical and business knowledge of the asset(s) at risk.	R	C	
195	5	Exception Request / Risk Assessment	12.2.1	The Security Risk Manager acts as Point of Contact for the organization owning the identified asset(s) at risk within the scope of the exception approval and risk assessment process for the duration of the EA/RAF	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
196	5	Exception Request / Risk Assessment	12.2.1	If the Security Risk Manager leaves the entity or is changes job during the active duration of the EA/RAF, a new Security Risk Manager is identified to fill the role	R	C	
197	5	Exception Request / Risk Assessment	12.2.2	A Security Point of Contact / Team is assigned to review for completeness, accuracy, and consistency and subject matter expertise.	R	C	
198	5	Exception Request / Risk Assessment	12.2.2	For high level risks, a team of Subject Matter Experts (SME) is assembled to review, document concurrence, and sign the EA /RAF prior to submission for final approval.	R	C	
199	5	Exception Request / Risk Assessment	12.2.3	Has the senior official of the NG9-1-1 Entity has signed forms accepting complete accountability for any identified risk?	R	C	
200	5	Exception Request / Risk Assessment	12.3	Risks to the NG9-1-1 Entity are acknowledged, assessed, and managed according to their severity.	R	C	
201	5	Exception Request / Risk Assessment	12.3	Responsibility is not delegated to subordinates or peers, and adheres to the management level or higher.	R	C	
202	5	Exception Request / Risk Assessment	12.3	The Risk Acceptance Approver is the senior manager with financial and legal responsibilities for the services and operation of the specific NG9-1-1 Entity.	R	C	
203	5	Exception Request / Risk Assessment	12.3.1	The NG9-1-1 entity manages the process flow as noted below: 1. The NG9-1-1 Entity's Security Risk Manager identifies, justifies, assesses, and analyzes the risk. If the identification and/or analysis of the risk prove to be difficult, then a security team shall be contacted for assistance.	R	C	
204	5	Exception Request / Risk Assessment	12.3.2	The entity tracks and documents risks in accordance with the chart provided in Appendix A.	R	N/A	Timelines allow for thorough regression and interoperability testing before applying a patch to the production network.

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
205	5	Exception Request / Risk Assessment	12.4	Risk assessments are reviewed periodically in compliance with the following timeframes: Critical 0 Months High 3 Months	R	C	
206	5	Exception Request / Risk Assessment	12.5	Any change to the circumstances identified in the EA/RAF that affect the associated risk is immediately documented and submitted through the EA/RAF process.	R	C	
207	5	Exception Request / Risk Assessment	12.6.1-.3	When conducting risk assessments, vulnerability assessments, and impact assessments they should be conducted using the guidance provided in sections 12.6	BP	CP	The majority of the section and field content are included.
208	5	Exception Request / Risk Assessment	12.6.8	The EA/RAF should comply with the requirements of Para 12.6.8.	BP	CP	The majority of the section and field content are included.

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
209	6	Hiring Practices	4.2	Does the organization have a Hiring Practice Policy?	R	C	
210	7	Incidence Response	13 & 4.2	Has a formal, written Incident Response Plan detailing how the organization will respond to a computer security incident been created?	R	C	
211	7	Incidence Response	7.2.6	Are software and/or data changes initiated due to outage/recovery process documented and retained until it is determined the production system and data were not corrupted?	R	C	
212	7	Incidence Response	7.5.5	Have Business Continuity/Disaster Recovery (BC/DR) procedures been developed and tested?	R	C	
213	7	Incidence Response	7.5.5	Do the plans allow for the 'Worst Case' event (i.e. Incident Recovery outside 50 miles from normal location)?	R	C	
214	7	Incidence Response	7.5.5	Are BC/DR drills conducted at least annually?	R	C	
215	8	Information Classification and Protection	5	Does the organization have an Information Classification and Protection Policy that encompasses both administrative and production systems?	BP	C	
216	8	Information Classification and Protection	5.10.1	Does the organization have disposal procedures for hard copy or printed sensitive data?	BP	C	
217	8	Information Classification and Protection	5.10.2	Does the organization have sanitation procedures for media/devices containing sensitive data?	BP	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
218	8	Information Classification and Protection	5.2.1	Have Data **Owner** responsibilities been defined?	BP	C	
219	8	Information Classification and Protection	5.2.2	Have Data **Custodian** responsibilities been defined?	BP	C	
220	8	Information Classification and Protection	5.2.3	Are Data Classifications defined and used?	BP	C	
221	8	Information Classification and Protection	5.4.6	Is sensitive data received from a third party treated as if it were internal sensitive data?	BP	C	
222	8	Information Classification and Protection	5.5	When receiving information where the classification of information is unknown, does the organization treat it as Sensitive (Internal Use Only) until the proper classification is determined or it is determined to be Public Information by the originator or other applicable laws and regulations?	BP	C	
223	8	Information Classification and Protection	5.6	Does the organization protect classified information from unauthorized access?	BP	CP	Classification is not currently used in making access decisions, however, access to specific datasets is restricted to vetted employees and/or contractors.
224	8	Information Classification and Protection	5.7	Does the organization encrypt stored or transmitted classified information using AES Encryption Algorithm?	BP	CP	Encryption is not used in protected trust zones in all cases.
225	8	Information Classification and Protection	5.7	Does the organization have a policy for removing Mobile Computing Devices with classified data from the NG9-1-1 Entity?	BP	C	
226	8	Information Classification and Protection	5.8	Does the entity utilize recorded/certified delivery for transporting sensitive data or media/devices containing sensitive data?	BP	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
227	9	Physical Security	4.2	Does the organization have a Physical Security Policy?	R	C	
228	9	Physical Security	6.5	Does the Public Safety entity require annual Security Awareness Training?	R	C	
229	9	Physical Security	6.5	Have all Public Safety employees completed the annual Security Awareness Training?	R	C	
230	9	Physical Security	6.6	Does the entity have procedures for reporting any suspicious or unusual activity which may indicate an attempt to breach the Public Safety networks and systems?	R	C	
231	9	Physical Security	8	Is the entity is physically secured and protected from theft, misappropriation, misuse, and unauthorized access, and damage?	R	C	
232	9	Physical Security	8.1	Doors with security mechanisms shall not be propped open.	R	C	
233	9	Physical Security	8.1	Employees, suppliers, contractors and agents authorized to enter a controlled physical access area shall not allow unidentified, unauthorized or unknown persons to follow them through a controlled access area entrance.	R	C	
234	9	Physical Security	8.1	Each person entering a controlled access facility shall follow the physical access control procedures in place for that facility.	R	C	
235	9	Physical Security	8.1	Personnel shall be vigilant while inside the building and challenge and/or report unidentified persons including persons not displaying identification badges who have gained access.	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
236	9	Physical Security	8.1	When automated access control and logging devices are installed, personnel shall use them to record their entry and exit.	R	C	
237	9	Physical Security	8.2.1	Personnel authorized with reoccurring unescorted access do not loan or share physical access devices or codes with another person?	R	C	
238	9	Physical Security	8.2.1.1	Non-employees granted reoccurring access are sponsored by NG9-1-1 management personnel?	R	C	
239	9	Physical Security	8.2.1.1	Does the facility's Physical Security Policy comply with all federal, state, and local laws?	R	C	
240	9	Physical Security	8.2.1.2	Identification badges containing a picture of the holder shall be issued to all residents of buildings containing information resources.	R	C	
241	9	Physical Security	8.2.1.2	Are ID Badges with picture issued to all residents of buildings containing information resources	R	C	
242	9	Physical Security	8.2.1.2	If the facility is guarded, identification badge is displayed to the guard on entry?	R	C	
243	9	Physical Security	8.2.1.2	Are persons on NG9-1-1 Entity premises required to present identification badges for examination and/or validation upon request?	R	C	
244	9	Physical Security	8.2.1.2	Building residents and non-residents with reoccurring access who do not have a valid identification badge in their possession are signed in and vouched for by an authorized building resident who possesses and displays a valid picture identification badge?	R	C	
245	9	Physical Security	8.2.1.2	Are temporary identification badge issued to all persons who do not have a permanent identification badge when entering the facility?	R	C	
246	9	Physical Security	8.2.1.2	Are persons who do not have a permanent identification badge escorted while in the facility?	R	C	
247	9	Physical Security	8.4.1	All portable computing devices in work areas are kept physically secure?	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
248	9	Physical Security	8.4.1	When equipped with locks, portable computing devices are kept locked to prevent theft.	R	C	
249	9	Physical Security	8.4.1	Keys are stored in a secure location	R	C	
250	9	Physical Security	8.4.1	Docking station style portable devices are stored in a secure location when not in use.	R	C	
251	9	Physical Security	8.4.1	Docking station style portable devices are not left unattended outside normal working hours even when in the docking station	R	C	
252	9	Physical Security	8.4.1	Other portable devices are stored in a locked cabinet, drawer, or office (not just the building) when not in use	R	C	
253	9	Physical Security	8.4.1	Extra security precautions are implemented in and around the receiving, staging, assembly, and storage areas used for large deployments of portable computing devices	R	C	
254	9	Physical Security	8.4.2	Vigilance is maintained in airport luggage inspection and transfer areas, hotel check in and checkout areas and other public areas	R	C	
255	9	Physical Security	8.4.2	Devices are not left unattended in conference rooms, etc.	R	C	
256	9	Physical Security	8.4.2	Devices are not exposed to extreme heat or cold.	R	C	
257	9	Physical Security	8.5	Information resources are protected by a UPS system and/or a 'mirrored site' second location not subject to the same power outage.	R	C	
258	9	Physical Security	8.5	All buildings and critical support facilities have protective physical measures in place.	R	C	
259	9	Physical Security	8.6.1	Server Rooms, Data Centers, Wire Closets, and any other critical locations have limited and controlled access 24/7/365.	R	C	
260	9	Physical Security	8.6.1	Raised floors or suspended ceilings do not allow physical access to limited access areas.	R	C	
261	9	Physical Security	8.6.2.1	The facility has a fire protection/detection system which meets code and is maintained and inspected at regular intervals.	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
262	9	Physical Security	8.6.2.2	If sprinkler systems are provided, fire retardant polyethylene sheeting is readily available to protect media and equipment.	R	CP	The ESInet complies for media. In some locations there are dry pipe water-based sprinkler systems and the area is too large to cover with sheeting. The ESInet has multiple redundant sites that immediately support call processing when one physical location is compromised.
263	9	Physical Security	8.6.2.4	Cooling equipment is installed and in good working order.	R	C	
264	9	Physical Security	8.6.2.5	HVAC systems are used to maintain environmental conditions meeting manufacturer's requirements and are supported by backup power systems dedicated.	R	C	
265	9	Physical Security	8.7.1	Network equipment and access to cabling and physical wiring infrastructure are secured with appropriate physical access controls.	R	C	
266	9	Physical Security	8.7.2	Active network jacks and connections are located only in physically secured locations (i.e., entity owned or leased space, in locked cabinets, or protected by locked physical barriers).	R	C	
267	9	Physical Security	8.7.3	Unused network connections are disabled or removed in a timely manner.	R	C	
268	9	Physical Security	8.7.4	Network Media are selected and located so as to minimize the possibility of wiretapping, eavesdropping, or tampering.	R	C	
269	10	Compliance Audits and Reviews	11	Internal audits are, at minimum, conducted annually.	R	C	
270	10	Compliance Audits and Reviews	11	Findings from such assessments are subject to corrective actions and are applied to the satisfaction of the auditing entity.	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
271	10	Compliance Audits and Reviews	11	External security audits are conducted at a minimum, once every 3 years	R	C	
272	10	Compliance Audits and Reviews	11	Security audits utilize various methods to assess the security of networks and processes, applications, services, and platforms. Suggested methods include automated tools, checklists, documentation review, penetration testing, and interviews	R	C	
273	11	Network / Firewall / Remote Access	7.2.8.1	Before deployment of new forms of communication, a risk assessment should be conducted in accordance with: The impact of resource availability	BP	C	
274	11	Network / Firewall / Remote Access	4.2	Does the organization have a Remote Access Policy?	R	C	
275	11	Network / Firewall / Remote Access	9	No remote access is permitted to any NG9-1-1 Entity unless addressed by contract, employee policy, or similar legal instrument which contains adequate security language as determined by a security professional?	R	C	
276	11	Network / Firewall / Remote Access	9.1	Networks are segmented by business and technical functions to allow appropriate levels of protection be created while not placing unneeded restrictions on lesser risk areas	R	C	
277	11	Network / Firewall / Remote Access	9.1	All boundaries and points of ingress and egress are clearly defined for each network?	R	C	
278	11	Network / Firewall / Remote Access	9.1.1	Firewalls have been established at all boundary points to control traffic in and out.	R	C	
279	11	Network / Firewall / Remote Access	9.1.1	Firewalls use "fail all" as default?	R	C	
280	11	Network / Firewall / Remote Access	9.1.1	Application Layer Firewalls are in use (recommended)	BP	C	
281	11	Network / Firewall / Remote Access	9.1.10	Firewall logs are retained in accordance with applicable information retention requirements?	R	C	
282	11	Network / Firewall / Remote Access	9.1.10	Logs are replicated off of the firewall?	BP	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
283	11	Network / Firewall / Remote Access	9.1.11	Identification, authentication, and access rights to log data are controlled to preserve the chain of custody for evidentiary purposes?	R	C	
284	11	Network / Firewall / Remote Access	9.1.2	Access through firewalls is governed by an established policy defining clear guidelines for what is or will be allowed?	R	C	
285	11	Network / Firewall / Remote Access	9.1.3	At a minimum, restriction of source and destination IP addresses are specific to individual addresses?	R	C	
286	11	Network / Firewall / Remote Access	9.1.3	The security risks for every host or platform within the network range or subnet are evaluated?	R	C	
287	11	Network / Firewall / Remote Access	9.1.4	The Firewall Administrator has minimized the number of ports exposed or permitted though the firewall? Clarifying note: the firewall administrator should be employing the least-access necessary privilege to ensure that only the necessary ports required for operation are permitted through the firewall.	R	C	
288	11	Network / Firewall / Remote Access	9.1.5	All Firewall Administrators are highly qualified and experienced and have an in depth knowledge and/or experience in firewall support and management, various operating systems including application and operating system protocols (ports and sockets), networking, routing, LAN/WAN technologies and associated security implications? (Auditor Guidance: Qualifications considered are, industry and or vendor certifications with various firewall products)	R	C	
289	11	Network / Firewall / Remote Access	9.1.6	Is the use of ports used by the operating system or infrastructure functions and features across network boundaries strictly controlled at the firewall?	R	C	
290	11	Network / Firewall / Remote Access	9.1.7	Firewall rules are reviewed at least once per year to verify continued need?	R	C	
291	11	Network / Firewall / Remote Access	9.1.8	Firewalls are accessed at least annually to address vulnerabilities identified since the last inspection?	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
292	11	Network / Firewall / Remote Access	9.1.9	All firewalls must log traffic with at minimum, source and destination addresses and ports are captured along with relevant time stamps and actions by the firewall.	R	C	
293	11	Network / Firewall / Remote Access	9.2	No remote access is allowed to any NG9-1-1 Entity unless addresses by contract, employee policy, or similar legal instrument which contains adequate security language as determined by a security professional	R	C	
294	11	Network / Firewall / Remote Access	9.2.1	Client based VPNs and/or consolidated modem pools are operated by NG9-1-1 Entity security personnel or personnel contracted for the purpose.	R	C	
295	11	Network / Firewall / Remote Access	9.2.1	Strict control is maintained for the VPN and/or consolidated modem infrastructures as they enable access to the NG9-1-1 Entity from public networks such as the Internet or public switched telephone network	R	C	
296	11	Network / Firewall / Remote Access	9.2.1	All client based VPNs utilize industry standard technologies.	R	C	
297	11	Network / Firewall / Remote Access	9.2.1	All client based VPNs and/or consolidated modem pools access utilize strong authentication which includes single use passwords.	R	C	
298	11	Network / Firewall / Remote Access	9.2.1	All client based VPNs and/or consolidated modem pools access are controlled by a Firewall.	R	C	
299	11	Network / Firewall / Remote Access	9.2.1	All client based VPNs and/or consolidated modem pools access are logged.	R	C	
300	11	Network / Firewall / Remote Access	9.2.2	If directly attached modems are used, have they been approved using the exception methodology in Section 12?	R	N/A	Modems are not used with the ESInet service.
301	11	Network / Firewall / Remote Access	9.2.2	Directly attached modems utilize industry standard third party authentication schema.	R	N/A	Modems are not used with the ESInet service.
302	11	Network / Firewall / Remote Access	9.2.2	Use of only 'secured modems' is permitted. Uncontrolled use of modems can result in serious vulnerabilities and shall use risk mitigation measures	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
303	11	Network / Firewall / Remote Access	9.2.2	When such modems are utilized through approved exception, they meet all criteria established for client based VPN or consolidated modem pools. Including firewall access controls and single use passwords.	R	N/A	Modems are not used with the ESInet service.
304	11	Network / Firewall / Remote Access	9.2.2	An accurate inventory of directly attached modems is maintained.	R	C	
305	11	Network / Firewall / Remote Access	9.2.2	Other modem technologies which shall be considered include "dial/dial back", only when primary access means is down or attached only to devices which have strong authentication mechanisms.	R	C	
306	11	Network / Firewall / Remote Access	9.2.2	The use of modems which are directly attached to servers, routers, switches, or other such equipment is strongly discouraged and should be prohibited by default	BP	C	
307	11	Network / Firewall / Remote Access	9.3.1	When using private facility networks such as T1, DS-2, etc., whenever possible the network technologies should be always considered in lieu of communications over public transport	BP	C	
308	11	Network / Firewall / Remote Access	9.3.1	Organizations should evaluate the importance of the data traversing the network and determine if encryption is appropriate to meet the necessary privacy levels (note: Use of these network technologies does not necessarily preclude the need for end to end encryption)	BP	C	
309	11	Network / Firewall / Remote Access	9.3.2	Communications over the Internet must be encrypted using IPSEC or SSL.	R	C	
310	11	Network / Firewall / Remote Access	9.3.2	If using endpoint authentication it has been implemented using either certificates or similar credentials.	R	C	
311	11	Network / Firewall / Remote Access	9.3.2	When using Internet protocols, industry standard protocols are to be used with minimum key length of 128 bit.	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
312	11	Network / Firewall / Remote Access	9.3.3	When external connections are clearly identified as un-trusted, a firewall must be utilized to control communication between the external endpoint or network and the NG9-1-1 environment.	R	C	
313	11	Network / Firewall / Remote Access	9.3.4	When applications require access from external, public transport (i.e. Internet) they have been placed on a DMZ or employ network based encryption and authentication.	R	C	
314	11	Network / Firewall / Remote Access	9.4	When using Intrusion Detection / Prevention technologies they shall be positioned on internal networks at strategic locations. Note: use of IPS/IDS is not mandatory.	R	C	
315	11	Network / Firewall / Remote Access	9.4	When using Intrusion Detection / Prevention technologies, their signatures must be routinely updated with processes that include well defined schedules for signature updates and emergency update protocols for high risk and zero day events.	R	C	
316	11	Network / Firewall / Remote Access	9.5	When used, technologies such as VLAN, VRF, or VPN are classified as required in section 9.3 and once classified they are treated as separate networks.	R	C	
317	11	Network / Firewall / Remote Access	9.5	All support equipment for virtual or logical networks shall have a management tunnel for support and monitoring.	R	C	
318	11	Network / Firewall / Remote Access	9.5	All support equipment for virtual or logical networks limits user group access to the particular virtual facilities when possible.	R	C	
319	11	Network / Firewall / Remote Access	9.5	Commands (like Telnet), which allow direct access between virtual facilities, are disabled or is only allowed under the highest administrative privilege supported by the device.	R	C	
320	11	Network / Firewall / Remote Access	9.5	Layer 3 interactions between networks of differing security classifications are only done using a firewall or similar device.	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
321	11	Network / Firewall / Remote Access	9.5	User access to devices supporting multiple virtual networks should utilize an industry standard authentication and access control protocol such as TACACS or RADIUS.	BP	CP	Local authentication must be available as a fallback.
322	12	Security Enhancement Technical Upgrade	4.2	Does the organization have a Security Enhancement/Technology Upgrade Policy?	R	C	
323	12	Security Enhancement Technical Upgrade	6.7	Do the design, development, administration, and use of any computer resource, network, system, or application always enable compliance with security policies and requirements to its intended use?	R	C	
324	12	Security Enhancement Technical Upgrade	6.7	Is incorporating security into new products, services, systems, and networks before they are deployed a priority?	R	C	
325	12	Security Enhancement Technical Upgrade	6.7	Is a security assessment of controls and procedures conducted and documented before deployment to certify compliance with security policy and is this document retained as evidence for any future audit?	R	C	
326	12	Security Enhancement Technical Upgrade	7.2.8	Is a full business and security assessment conducted for any new form of communications prior to it being connected to the NG 9-1-1 environment?	R	C	
327	12	Security Enhancement Technical Upgrade	7.2.8.2	Are communication partners and the full scope of products subjected to full risk assessment?	BP	CP	A risk assessment is performed to the fullest extent possible.
328	12	Security Enhancement Technical Upgrade	7.2.8.3.1	Are Client Software Add-ons ("plug ins") assessed for security risks?	R	CP	A level of testing is performed, as practical. Ability of users to install software and plug-ins is limited due to local admin right restrictions.

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
329	12	Security Enhancement Technical Upgrade	7.2.8.3.1	Is client software configured to disallow auto installation of software add-on or plug-ins?	R	C	
330	12	Security Enhancement Technical Upgrade	7.2.8.3.1	Are new add-ons or plug-ins tested prior to installation?	R	CP	A level of testing is performed, as practical. Ability of users to install software and plug-ins is limited due to local admin right restrictions.
331	12	Security Enhancement Technical Upgrade	7.2.8.5	If the NG 9-1-1 Entity uses a VoIP system it does not connect to another VoIP System without securing the connection?	R	C	
332	12	Security Enhancement Technical Upgrade	9.6.1	Network **redundancy** is considered and implemented where possible for On-Site / Local High Availability environments.	R	C	
333	12	Security Enhancement Technical Upgrade	9.6.2	Network **diversity** is considered and implemented where possible when implementing NG9-1-1 networks.	R	C	
334	12	Security Enhancement Technical Upgrade	9.6.2	Traffic failover between different cities and firewall sites can result in dropping sessions at the time of failure. When employing applications in a network diversity-type model, applications shall be designed to recover such events and users advised to proper "restart" procedures in case such a failover event happens	R	C	
335	13	Technical Solutions Standards	10	Formalized pre and post security reviews are conducted when changes to architecture, design, or engineering of NG9-1-1 networks.	R	C	
336	13	Technical Solutions Standards	10	Security reviews are conducted by the NG91-1 security representative and any 3rd party vendors.	R	C	
337	13	Technical Solutions Standards	10	When changes to architecture, design, or engineering of NG9-1-1 network are made, a formal change control process is followed and appropriate documentation is produced and retained.	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
338	13	Technical Solutions Standards	10	When architecture, design, or engineering are major, a team of Subject Matter Experts is assembled to review and approve the change.	R	C	
339	13	Technical Solutions Standards	4.2	Does the organization have a Technology Selection Policy?	R	C	
340	13	Technical Solutions Standards	7.4.2	Is time synchronization in accordance with the NENA 04-002 NG9-1-1 Entity Master Clock standard?	R	C	
341	13	Technical Solutions Standards	7.4.4	Do formal documented procedures exist for any changes to computer systems and operating systems software?	R	C	
342	13	Technical Solutions Standards	7.4.4	Are the procedures identified in the preceding finding followed?	R	C	
343	13	Technical Solutions Standards	7.4.4	Is the appropriate level of authorization required and obtained prior to change?	R	C	
344	13	Technical Solutions Standards	7.4.4	Does the System Administrator control software changes that affect the operation of an application, operating system, or utilities?	R	C	
345	13	Technical Solutions Standards	7.4.4	Does the System Administrator control updates and upgrades that could affect user response, machine performance or operations, security, or system availability?	R	C	
346	13	Technical Solutions Standards	7.4.4	Has a detailed audit trail of all modifications to network hardware and software been created, retained, and reviewed at least annually?	R	CP	Policies and processes are in place for ESInet systems. Changes are documented and retained in the service / change management system.
347	13	Technical Solutions Standards	7.4.4	Are records of all system/application changes kept at least one year or the last major upgrade whichever is longer?	R	C	
348	13	Technical Solutions Standards	7.4.4	Do System Controls identify accountability for all program changes to a specific programmer and approving manager?	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
349	13	Technical Solutions Standards	7.4.4	Excepting reporting procedures are built into the system software to detect computer program, communications and operations failures. .	R	C	
350	13	Technical Solutions Standards	7.4.4	Are error checking and validation controls are present in software?	R	C	
351	13	Technical Solutions Standards	7.4.4	Current complete backups are ALWAYS present prior upgrades to provide recovery capability in the event of system problems due to the changes?	R	C	
352	13	Technical Solutions Standards	7.4.4	If System Administration or Maintenance is outsourced all records kept by such agencies are available to the NG 9-1-1 Entity?	R	C	
353	13	Technical Solutions Standards	7.4.5	Have procedures been instituted to verify and document that the business hardware and software are currently supported by the manufacturer or supplier that advisories	R	C	
354	13	Technical Solutions Standards	7.4.5	Are Temporary Fixes applied when Permanent Fixes are not yet available and are Permanent Fixes applied promptly when they become available?	R	C	
355	13	Technical Solutions Standards	7.4.5	A process is in place which ensures all applicable Permanent fixes are installed and Temporary Fixes cannot become disabled until Permanent Fixes have been installed?	R	C	
356	13	Technical Solutions Standards	7.4.5	Are all Permanent or Temporary fixes tested prior to using them in a production environment?	R	C	
357	13	Technical Solutions Standards	7.4.6	Servers, workstations, desktops, or laptops shall be hardened utilizing recognized 'Best Practices for Operating System Hardening' like the National Institute For Standards and Technology (NIST) Guidelines or ISO 2700*x* standards?	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
358	13	Technical Solutions Standards	7.4.6	All unused services are disabled and end users do not have local administrator rights?	R	CP	Local administrator rights are restricted for some, but not all users in the organization. Justification related to employee role is required for end users who have local administrator rights.
359	13	Technical Solutions Standards	7.5.2	Has the entity identified all 'single point of failure' items for their system and have the alternate strategies been planned and documented?	R	C	
360	13	Technical Solutions Standards	7.5.2	Is a plan in place to distribute the 'downtime window' if possible?	R	C	
361	13	Technical Solutions Standards	7.5.2	Is equipment managed and monitored so if one element is down the entity and management are notified?	R	C	
362	13	Technical Solutions Standards	7.5.3	Is 'geographic redundancy' available. If so, are procedures in place for activation, use, and testing of the alternate site. Are the results of testing documented	R	C	
363	13	Technical Solutions Standards	7.5.3	Are the results of testing of failover procedures documented?	R	C	
364	14	Wireless Security	4.2	Does the organization have a Wireless Policy?(Auditor Guidance: if no wireless technologies are in place, then this finding, and all subsequent findings is not applicable. All requirements of this document also apply to communications in the 4.9G Hz band)	R	N/A	The ESInet does not implement any wireless technology.
365	14	Wireless Security	6.4.6.1	Default router management passwords have been changed and is treated as an Administrator level password for syntax, history, and periodically changed?	R	N/A	The ESInet does not implement any wireless technology.
366	14	Wireless Security	6.4.6.1	Router management over wireless link is disabled. Router management uses an encrypted protocol?	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
367	14	Wireless Security	6.4.6.1	The SSID has been changed from the Default value to an identifier not easily associated with the NG 9-1-1 or easily guessed	R	N/A	ESInet does not implement any wireless technology.
368	14	Wireless Security	6.4.6.1	SSID broadcast is disabled?	R	N/A	ESInet does not implement any wireless technology.
369	14	Wireless Security	6.4.6.1	Wireless encryption is enabled WPA or greater is used? (Auditor Guidance: WEP is not allowed)	R	N/A	ESInet does not implement any wireless technology.
370	14	Wireless Security	6.4.6.1	The TKIP passphrase is non-trivial and meets the requirements of this document?	R	N/A	ESInet does not implement any wireless technology.
371	14	Wireless Security	6.4.6.1	The rekey maximum is no greater than 3600 seconds?	R	N/A	ESInet does not implement any wireless technology.
372	14	Wireless Security	6.4.6.1	The WIFI LAN is dedicated to the NG 9-1-1 entity and not shared with any other entity?	R	N/A	ESInet does not implement any wireless technology.
373	14	Wireless Security	6.4.6.1	Media Access Control (MAC) address filters are enabled and MAC Filter List is reviewed at least monthly and immediately after a machine is retired from the network?	R	N/A	ESInet does not implement any wireless technology.
374	14	Wireless Security	6.4.6.1	Ad hoc modes are disabled?	R	N/A	ESInet does not implement any wireless technology.
375	14	Wireless Security	6.4.6.1	Users should be authenticated to the wireless LAN using a two factor mechanism or emerging authentication standards like 802.1x?	BP	N/A	ESInet does not implement any wireless technology.
376	14	Wireless Security	6.4.6.1	The WIFI LAN should be separated from other networks by a firewall which limits access to and from the wireless network on an exception only basis.	BP	N/A	ESInet does not implement any wireless technology.

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
377	14	Wireless Security	6.4.6.1	Use of Intrusion Detection Systems (IDS) is encouraged on WIFI LANs	BP	N/A	ESInet does not implement any wireless technology.
378	14	Wireless Security	6.4.6.1	Maximum encryption key lengths supported by the device should be utilized	BP	N/A	ESInet does not implement any wireless technology.
379	14	Wireless Security	6.4.6.1	The WIFI LAN hardware should utilize a third party authentication service for management(such as TACAS, Radius) when supported	BP	N/A	ESInet does not implement any wireless technology.
380	14	Wireless Security	6.4.6.1	The default SSID channel should be changed from its default value	BP	N/A	ESInet does not implement any wireless technology.
381	14	Wireless Security	6.4.6.1	If DHCP is used, automatic assignment of other services(e.g. DNS servers, WINS servers) is allowed and should be reviewed in concert with the overall security plan	BP	N/A	ESInet does not implement any wireless technology.
382	14	Wireless Security	6.4.6.1	DHCP should be disabled and require static IP Addresses for connected devices. If DHCP must be used the DHCP scope(range of addresses) should be kept to a minimum	BP	N/A	ESInet does not implement any wireless technology.
383	14	Wireless Security	6.4.6.1	The WIFI LAN should utilize a Network Access Control technology to ensure proper patching and malicious software screening is performed on all LAN assets. At minimum, use of a rogue machine device detection capability is strongly recommended.	BP	N/A	ESInet does not implement any wireless technology.
384	14	Wireless Security	6.4.6.2	Bluetooth shall not be used for backup of any medium or device which contains sensitive (internal data only) or greater data.	R	C	
385	14	Wireless Security	6.4.6.2	If Bluetooth is used is shall be configured to require device identifiers.	R	C	
386	14	Wireless Security	6.4.6.2	Presence of frequency hopping, phase shifting, device serialization, or other technologies alone shall not satisfy encryption or identification requirements	R	C	

Audit Item Number	Section	Section Title	NG-SEC Standard	Audit Area	Compliance Type	Compliance Finding	Comments
387	14	Wireless Security	6.4.6.2	Bluetooth wireless networks should be avoided, where possible, including wireless headsets and other human interface devices such as mice and keyboards	BP	C	
388	14	Wireless Security	6.4.6.3	Does the entity use the 4.9 MHz band spectrum licensed by the FCC?	R	N/A	The ESInet does not implement any wireless technology.
389	14	Wireless Security	6.4.6.3	If the 4.9 MHz band is used are all communications encrypted and all authentication, authorization, and accountability policies complied with?	R	N/A	ESInet does not implement any wireless technology.
390	14	Wireless Security	6.4.6.3	If the 4.9 MHz band is used a Firewall is deployed at the network boundary	R	N/A	ESInet does not implement any wireless technology.
391	14	Wireless Security	6.4.6.3	All communications on the 4.9G Hz band should be encrypted?	BP	N/A	ESInet does not implement any wireless technology.
392	14	Wireless Security	6.4.6.3	Authentication, authorization, and accountability should be maintained.	BP	N/A	ESInet does not implement any wireless technology.
393	14	Wireless Security	6.4.6.4	Each of these technologies(i.e. 3G, EDGE, etc.) should be regarded as a "remote access" capability and all security standards relevant to remote access found in this document are applicable	R	C	
394	14	Wireless Security	6.5	Does the NG 9-1-1 entity require contracting agencies to hold specific or certain certifications to prove compliance with this requirement?	R	N/A	ESInet does not implement any wireless technology.
395	14	Wireless Security	6.5	Entities responsible for system and security administration (including those contracted to do such tasks) employ individuals who have received current security training on their assigned systems.	R	C	
396	14	Wireless Security	6.5	All Public Safety employees receive complete security awareness training as established by each Public Safety Organization on an annual basis?	R	C	

brixKv_oneflexProbes Lookup Information

brixInstance	probe.sla_usage_count	psap.customer_name	psap.intrado_id	psap.psap_id	verifier_id	verifier_name
oneflex-standalone	1		13326	CO/EVXR/326/MS-C	7443	CO326-DENVPD-NG911PRB-2009130100

PSAP Profile Data

verifierfive	i_id	PSAP_Name	probe5
CO326		C	CO326

Sip Test Data

Time	Event
2020-05-27T12:44:57-0500	1590601497,42891,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3433,4640,139556,102735,57334,100000,100000,100000,100000,0,100000, 100000,1298,0,0,48,0,0,0,,,,,,0,,,0,,,64.58.61.20,13702,,,,,4.34,0,0,0,0,0,134916,0,90,2,0,90. 909,9.09,0,,0,2268," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= a6b4fb77,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T12:37:56-0500	1590601076,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3436,4653,135137,105943,58088,100000,100000,100000,100000,0,100000, 100000,1298,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13772,,,,,4.34,0,0,0,0,0,130484,0,90,2,0,90. 909,9.09,0,,0,1791," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= bdf658c3,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T12:30:56-0500	1590600656,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3451,4667,137478,102572,55463,100000,100000,100000,100000,0,100000, 100000,1298,0,0,44,0,0,0,,,,,,0,,,0,,,64.58.61.20,13792,,,,,4.34,0,0,0,0,0,132811,0,90,2,0,90. 909,9.09,0,,0,304," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= afedc82f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T12:23:56-0500	1590600236,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3474,4808,157723,102125,58084,100000,100000,100000,100000,0,100000, 100000,1298,0,0,85,0,0,0,,,,,,0,,,0,,,64.58.61.20,13720,,,,,4.34,0,0,0,0,0,152915,0,90,2,0,90. 909,9.09,0,,0,7005," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5dbbc953,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T12:16:56-0500	1590599816,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3467,4919,138364,102013,55459,100000,100000,100000,100000,0,100000, 100000,1298,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13752,,,,,4.34,0,0,0,0,0,133445,0,90,2,0,90. 909,9.09,0,,0,418," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 655d3271,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T12:09:56-0500	1590599396,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3469,4684,138520,105530,57732,100000,100000,100000,100000,0,100000, 100000,1298,0,0,36,0,0,0,,,,,,0,,,0,,,64.58.61.20,13722,,,,,4.34,0,0,0,0,0,133836,0,90,2,0,90. 909,9.09,0,,0,330," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 11e9bfd7,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T12:02:56-0500	1590598976,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3330,4656,125705,106531,55455,100000,100000,100000,100000,0,100000, 100000,1298,0,0,60,0,0,0,,,,,,0,,,0,,,64.58.61.20,13730,,,,,4.34,0,0,0,0,0,121049,0,90,2,0,90. 909,9.09,0,,0,2212," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 919d5e2d,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T11:55:56-0500	1590598556,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3433,4652,141757,107031,59930,100000,100000,100000,100000,0,100000, 100000,1298,0,0,54,0,0,0,,,,,,0,,,0,,,64.58.61.20,13744,,,,,4.34,0,0,0,0,0,137105,0,90,2,0,90. 909,9.09,0,,0,325," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5dd38662,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T11:48:56-0500	1590598136,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3404,4716,137249,100734,55451,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13786,,,,,4.34,0,0,0,0,0,132533,0,90,2,0,90. 909,9.09,0,,0,846," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c4ca561c,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T11:41:56-0500	1590597716,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3425,4638,139314,105526,57866,100000,100000,100000,100000,0,100000, 100000,1298,0,0,44,0,0,0,,,,,,0,,,0,,,64.58.61.20,13794,,,,,4.34,0,0,0,0,0,134676,0,90,2,0,90. 909,9.09,0,,0,364," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c1669135,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T11:34:56-0500	1590597296,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3433,4658,140894,106104,59924,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13760,,,,,4.34,0,0,0,0,0,136236,0,90,2,0,90. 909,9.09,0,,0,2297," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 7f16cdcd,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T11:27:56-0500	1590596876,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3422,4634,140547,103398,57862,100000,100000,100000,100000,0,100000, 100000,1298,0,0,42,0,0,0,,,,,,0,,,0,,,64.58.61.20,13758,,,,,4.34,0,0,0,0,0,135913,0,90,2,0,90. 909,9.09,0,,0,275," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= b66b5a8b,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T11:20:56-0500	1590596456,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3336,4652,139601,106375,56446,100000,100000,100000,100000,0,100000, 100000,1298,0,0,68,0,0,0,,,,,,0,,,0,,,64.58.61.20,13766,,,,,4.34,0,0,0,0,0,134949,0,90,2,0,90. 909,9.09,0,,0,2613," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 608b5d56,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T11:13:56-0500	1590596036,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3452,4662,137794,106986,57192,100000,100000,100000,100000,0,100000, 100000,1298,0,0,52,0,0,0,,,,,,0,,,0,,,64.58.61.20,13714,,,,,4.34,0,0,0,0,0,133132,0,90,2,0,90. 909,9.09,0,,0,1897," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 75f628b3,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-27T11:06:56-0500	1590595616,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3427,4635,138767,102182,56442,100000,100000,100000,100000,0,100000, 100000,1298,0,0,55,0,0,0,,,,,,0,,,0,,,64.58.61.20,13722,,,,,4.34,0,0,0,0,0,134132,0,90,2,0,90. 909,9.09,0,,0,342," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 8850d1d8,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-27T10:59:56-0500	1590595196,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3458,4671,136500,105450,57188,100000,100000,100000,100000,0,100000, 100000,1298,0,0,54,0,0,0,,,,,,0,,,0,,,64.58.61.20,13782,,,,,4.34,0,0,0,0,0,131829,0,90,2,0,90. 909,9.09,0,,0,4797," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5cfb9f54,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-27T10:52:56-0500	1590594776,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3465,4765,139052,105976,59912,100000,100000,100000,100000,0,100000, 100000,1298,0,0,42,0,0,0,,,,,,0,,,0,,,64.58.61.20,13788,,,,,4.34,0,0,0,0,0,134287,0,90,2,0,90. 909,9.09,0,,0,299," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 2097099c,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-27T10:45:56-0500	1590594356,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3393,4871,137327,106603,57664,100000,100000,100000,100000,0,100000, 100000,1298,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13796,,,,,4.34,0,0,0,0,0,132456,0,90,2,0,90. 909,9.09,0,,0,3999," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 7778c734,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-27T10:38:56-0500	1590593936,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3410,4638,335019,106061,56434,100000,100000,100000,100000,0,100000, 100000,1298,0,0,50,0,0,0,,,,,,0,,,0,,,64.58.61.20,13708,,,,,4.34,0,0,0,0,0,330381,0,90,2,0,90. 909,9.09,0,,0,892," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 4d22434d,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-27T10:31:56-0500	1590593516,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3882,5214,137251,100692,58052,100000,100000,100000,100000,0,100000, 100000,1298,0,0,40,0,0,0,,,,,,0,,,0,,,64.58.61.20,13750,,,,,4.34,0,0,0,0,0,132037,0,90,2,0,90. 909,9.09,0,,0,1014," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= a8104a0a,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-27T10:24:56-0500	1590593096,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3456,4690,139712,105121,55427,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13756,,,,,4.34,0,0,0,0,0,135022,0,90,2,0,90. 909,9.09,0,,0,2147," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 7f10ed09,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed

Time	Event
2020-05-27T10:17:56-0500	1590592676,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3412,4620,138407,105465,57176,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13702,,,,,4.34,0,0,0,0,0,133787,0,90,2,0,90. 909,9.09,0,,0,744," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 64f87e47,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T10:10:56-0500	1590592256,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3460,4679,142853,107142,57654,100000,100000,100000,100000,0,100000, 100000,1298,0,0,42,0,0,0,,,,,,0,,,0,,,64.58.61.20,13772,,,,,4.34,0,0,0,0,0,138174,0,90,2,0,90. 909,9.09,0,,0,754," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= e2a95b4e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T10:03:56-0500	1590591836,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3369,4860,140097,106870,57172,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13728,,,,,4.34,0,0,0,0,0,135237,0,90,2,0,90. 909,9.09,0,,0,866," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= b0d3a2c5,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T09:56:56-0500	1590591416,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3413,4628,141443,103322,57650,100000,100000,100000,100000,0,100000, 100000,1298,0,0,57,0,0,0,,,,,,0,,,0,,,64.58.61.20,13720,,,,,4.34,0,0,0,0,0,136815,0,90,2,0,90. 909,9.09,0,,0,1365," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= f0bc7008,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T09:49:56-0500	1590590996,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3444,4663,139207,99965,56420,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13790,,,,,4.34,0,0,0,0,0,134544,0,90,2,0,90. 909,9.09,0,,0,279," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 2abaa02a,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T09:42:56-0500	1590590576,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3443,4655,139755,107286,57646,100000,100000,100000,100000,0,100000, 100000,1298,0,0,46,0,0,0,,,,,,0,,,0,,,64.58.61.20,13716,,,,,4.34,0,0,0,0,0,135100,0,90,2,0,90. 909,9.09,0,,0,280," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= fa283814,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T09:35:56-0500	1590590156,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3464,4673,136053,110105,54617,100000,100000,100000,100000,0,100000, 100000,1298,0,0,51,0,0,0,,,,,,0,,,0,,,64.58.61.20,13766,,,,,4.34,0,0,0,0,0,131380,0,90,2,0,90. 909,9.09,0,,0,2122," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= de7ec826,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T09:28:56-0500	1590589736,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3344,4677,134820,105843,56414,100000,100000,100000,100000,0,100000, 100000,1298,0,0,82,0,0,0,,,,,,0,,,0,,,64.58.61.20,13784,,,,,4.34,0,0,0,0,0,130143,0,90,2,0,90. 909,9.09,0,,0,4818," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 9f30c626,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T09:21:56-0500	1590589316,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3347,4704,120846,108025,56374,100000,100000,100000,100000,0,100000, 100000,1299,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13780,,,,,4.34,0,0,0,0,0,116142,0,90,2,0,90. 909,9.09,0,,0,1007," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c069eac2,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-27T09:14:56-0500	1590588896,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3447,4694,122666,107276,56410,100000,100000,100000,100000,0,100000, 100000,1299,0,0,40,0,0,0,,,,,,0,,,0,,,64.58.61.20,13798,,,,,4.34,0,0,0,0,0,117972,0,90,2,0,90. 909,9.09,0,,0,1486," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 4d9eed6f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-27T09:07:56-0500	1590588476,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3443,4651,135423,104386,58464,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13736,,,,,4.34,0,0,0,0,0,130772,0,90,2,0,90. 909,9.09,0,,0,2853," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 01c87669,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T09:00:56-0500	1590588056,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3422,4637,142634,103841,57406,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13710,,,,,4.34,0,0,0,0,0,137997,0,90,2,0,90. 909,9.09,0,,0,1040," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 6fe1d10e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T08:53:56-0500	1590587636,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3437,4634,145504,107364,56572,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13762,,,,,4.34,0,0,0,0,0,140870,0,90,2,0,90. 909,9.09,0,,0,1929," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 21fa852f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T08:46:56-0500	1590587216,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3439,4650,123714,106505,55555,100000,100000,100000,100000,0,100000, 100000,1298,0,0,42,0,0,0,,,,,,0,,,0,,,64.58.61.20,13794,,,,,4.34,0,0,0,0,0,119064,0,90,2,0,90. 909,9.09,0,,0,604," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= f867f8e6,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T08:39:56-0500	1590586796,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3477,4684,135604,104442,56010,100000,100000,100000,100000,0,100000, 100000,1298,0,0,55,0,0,0,,,,,,0,,,0,,,64.58.61.20,13700,,,,,4.34,0,0,0,0,0,130920,0,90,2,0,90. 909,9.09,0,,0,635," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= abec28f5,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T08:32:56-0500	1590586376,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3436,4645,142493,107460,56566,100000,100000,100000,100000,0,100000, 100000,1298,0,0,60,0,0,0,,,,,,0,,,0,,,64.58.61.20,13746,,,,,4.34,0,0,0,0,0,137848,0,90,2,0,90. 909,9.09,0,,0,793," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 29543a59,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T08:25:56-0500	1590585956,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3603,4835,139409,105597,55549,100000,100000,100000,100000,0,100000, 100000,1298,0,0,51,0,0,0,,,,,,0,,,0,,,64.58.61.20,13754,,,,,4.34,0,0,0,0,0,134574,0,90,2,0,90. 909,9.09,0,,0,5568," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 3ad0cf5c,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T08:18:56-0500	1590585536,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3408,4894,139017,102835,59344,100000,100000,100000,100000,0,100000, 100000,1298,0,0,38,0,0,0,,,,,,0,,,0,,,64.58.61.20,13768,,,,,4.34,0,0,0,0,0,134123,0,90,2,0,90. 909,9.09,0,,0,3672," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5a6f65c3,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T08:11:56-0500	1590585116,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3488,4700,140718,107197,55853,100000,100000,100000,100000,0,100000, 100000,1298,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13742,,,,,4.34,0,0,0,0,0,136018,0,90,2,0,90. 909,9.09,0,,0,1389," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 423ae8d7,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T08:04:56-0500	1590584696,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3432,4646,142831,101168,56724,100000,100000,100000,100000,0,100000, 100000,1298,0,0,46,0,0,0,,,,,,0,,,0,,,64.58.61.20,13714,,,,,4.34,0,0,0,0,0,138185,0,90,2,0,90. 909,9.09,0,,0,2306," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 4c9af784,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T07:57:56-0500	1590584276,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3335,4832,141549,102399,56100,100000,100000,100000,100000,0,100000, 100000,1298,0,0,39,0,0,0,,,,,,0,,,0,,,64.58.61.20,13722,,,,,4.34,0,0,0,0,0,136717,0,90,2,0,90. 909,9.09,0,,0,536," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= a0c58634,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T07:50:56-0500	1590583856,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3417,4639,123867,105250,54799,100000,100000,100000,100000,0,100000, 100000,1299,0,0,44,0,0,0,,,,,,0,,,0,,,64.58.61.20,13726,,,,,4.34,0,0,0,0,0,119228,0,90,2,0,90. 909,9.09,0,,0,1166," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 45cb029f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-27T07:43:56-0500	1590583436,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3479,4703,125581,104653,55417,100000,100000,100000,100000,0,100000, 100000,1299,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13788,,,,,4.34,0,0,0,0,0,120878,0,90,2,0,90. 909,9.09,0,,0,3587," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= baa8296f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-27T07:36:56-0500	1590583016,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3405,4727,140688,102246,57610,100000,100000,100000,100000,0,100000, 100000,1298,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13774,,,,,4.34,0,0,0,0,0,135961,0,90,2,0,90. 909,9.09,0,,0,601," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 69396596,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T07:29:56-0500	1590582596,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3398,4612,142226,106768,56126,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13744,,,,,4.34,0,0,0,0,0,137614,0,90,2,0,90. 909,9.09,0,,0,807," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 6d25125e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T07:22:56-0500	1590582176,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3453,4672,140113,108771,54579,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13740,,,,,4.34,0,0,0,0,0,135441,0,90,2,0,90. 909,9.09,0,,0,2590," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 3a976dad,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T07:15:56-0500	1590581756,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3412,4637,133341,106647,58956,100000,100000,100000,100000,0,100000, 100000,1298,0,0,42,0,0,0,,,,,,0,,,0,,,64.58.61.20,13736,,,,,4.34,0,0,0,0,0,128704,0,90,2,0,90. 909,9.09,0,,0,2047," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 0d59feb5,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T07:08:56-0500	1590581336,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3353,4677,145213,101675,59848,100000,100000,100000,100000,0,100000, 100000,1298,0,0,70,0,0,0,,,,,,0,,,0,,,64.58.61.20,13706,,,,,4.34,0,0,0,0,0,140536,0,90,2,0,90. 909,9.09,0,,0,1211," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 7e35f033,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T07:01:56-0500	1590580916,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3429,4637,140313,107408,58952,100000,100000,100000,100000,0,100000, 100000,1298,0,0,40,0,0,0,,,,,,0,,,0,,,64.58.61.20,13704,,,,,4.34,0,0,0,0,0,135676,0,90,2,0,90. 909,9.09,0,,0,634," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 18dee807,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T06:54:56-0500	1590580496,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3371,4575,140087,105883,59844,100000,100000,100000,100000,0,100000, 100000,1298,0,0,69,0,0,0,,,,,,0,,,0,,,64.58.61.20,13710,,,,,4.34,0,0,0,0,0,135512,0,90,2,0,90. 909,9.09,0,,0,3264," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 47f24ad0,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T06:47:56-0500	1590580076,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3433,4647,138759,106063,57056,100000,100000,100000,100000,0,100000, 100000,1298,0,0,48,0,0,0,,,,,,0,,,0,,,64.58.61.20,13756,,,,,4.34,0,0,0,0,0,134112,0,90,2,0,90. 909,9.09,0,,0,2346," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ea9142a4,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T06:40:56-0500	1590579656,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3359,4666,139824,103262,59840,100000,100000,100000,100000,0,100000, 100000,1298,0,0,57,0,0,0,,,,,,0,,,0,,,64.58.61.20,13794,,,,,4.34,0,0,0,0,0,135158,0,90,2,0,90. 909,9.09,0,,0,739," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 2dad91d0,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T06:33:56-0500	1590579236,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3476,4687,134277,106541,57112,100000,100000,100000,100000,0,100000, 100000,1298,0,0,42,0,0,0,,,,,,0,,,0,,,64.58.61.20,13772,,,,,4.34,0,0,0,0,0,129590,0,90,2,0,90. 909,9.09,0,,0,320," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 7977925d,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T06:26:56-0500	1590578816,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3472,4690,137792,108171,57590,100000,100000,100000,100000,0,100000, 100000,1298,0,0,64,0,0,0,,,,,,0,,,0,,,64.58.61.20,13738,,,,,4.34,0,0,0,0,0,133102,0,90,2,0,90. 909,9.09,0,,0,566," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= e7bb3132,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T06:19:56-0500	1590578396,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3435,4644,141392,105665,59834,100000,100000,100000,100000,0,100000, 100000,1298,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13760,,,,,4.34,0,0,0,0,0,136748,0,90,2,0,90. 909,9.09,0,,0,589," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 64e9b3b9,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T06:12:56-0500	1590577976,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3401,4696,124457,106598,57106,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13754,,,,,4.34,0,0,0,0,0,119761,0,90,2,0,90. 909,9.09,0,,0,352," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c86bc97c,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T06:05:56-0500	1590577556,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3426,4633,124642,101521,59830,100000,100000,100000,100000,0,100000, 100000,1299,0,0,40,0,0,0,,,,,,0,,,0,,,64.58.61.20,13728,,,,,4.34,0,0,0,0,0,120009,0,90,2,0,90. 909,9.09,0,,0,995," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 50531099,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-27T05:58:56-0500	1590577136,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3438,4661,137062,105970,57974,100000,100000,100000,100000,0,100000, 100000,1298,0,0,46,0,0,0,,,,,,0,,,0,,,64.58.61.20,13716,,,,,4.34,0,0,0,0,0,132401,0,90,2,0,90. 909,9.09,0,,0,1088," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c55b30b6,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T05:51:56-0500	1590576716,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3532,4745,141731,107298,56352,100000,100000,100000,100000,0,100000, 100000,1298,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13718,,,,,4.34,0,0,0,0,0,136986,0,90,2,0,90. 909,9.09,0,,0,1153," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 9591c515,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T05:44:56-0500	1590576296,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3620,4845,142990,107013,57050,100000,100000,100000,100000,0,100000, 100000,1298,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13724,,,,,4.34,0,0,0,0,0,138145,0,90,2,0,90. 909,9.09,0,,0,444," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= d9095a3a,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T05:37:56-0500	1590575876,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3458,4659,135785,105053,57096,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13714,,,,,4.34,0,0,0,0,0,131126,0,90,2,0,90. 909,9.09,0,,0,1865," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 1ae1c440,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T05:30:56-0500	1590575456,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3382,4591,138320,109807,56830,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13722,,,,,4.34,0,0,0,0,0,133729,0,90,2,0,90. 909,9.09,0,,0,1208," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 7c2054b6,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T05:23:56-0500	1590575036,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3488,4700,153402,107560,57964,100000,100000,100000,100000,0,100000, 100000,1298,0,0,37,0,0,0,,,,,,0,,,0,,,64.58.61.20,13770,,,,,4.34,0,0,0,0,0,148702,0,90,2,0,90. 909,9.09,0,,0,259," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 49eb35c6,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T05:16:56-0500	1590574616,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3483,4695,139723,101494,55459,100000,100000,100000,100000,0,100000, 100000,1298,0,0,42,0,0,0,,,,,,0,,,0,,,64.58.61.20,13780,,,,,4.34,0,0,0,0,0,135028,0,90,2,0,90. 909,9.09,0,,0,369," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 8b0ee631,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T05:09:56-0500	1590574196,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3449,4750,138395,104699,56052,100000,100000,100000,100000,0,100000, 100000,1298,0,0,67,0,0,0,,,,,,0,,,0,,,64.58.61.20,13788,,,,,4.34,0,0,0,0,0,133645,0,90,2,0,90. 909,9.09,0,,0,1112," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= e96ec76e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T05:02:56-0500	1590573776,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3469,4684,141718,105218,57176,100000,100000,100000,100000,0,100000, 100000,1298,0,0,38,0,0,0,,,,,,0,,,0,,,64.58.61.20,13798,,,,,4.34,0,0,0,0,0,137034,0,90,2,0,90. 909,9.09,0,,0,2016," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= cd8917f1,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T04:55:56-0500	1590573356,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3437,4739,141786,103239,58040,100000,100000,100000,100000,0,100000, 100000,1298,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13730,,,,,4.34,0,0,0,0,0,137047,0,90,2,0,90. 909,9.09,0,,0,1577," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ccc692e5,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T04:48:56-0500	1590572936,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3443,4655,140971,106851,57562,100000,100000,100000,100000,0,100000, 100000,1298,0,0,190,0,0,0,,,,,,0,,,0,,,64.58.61.20,13796,,,,,4.34,0,0,0,0,0,136316,0,90,2,0,90 .909,9.09,0,,0,1297," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= bf214826,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T04:41:56-0500	1590572516,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3411,4614,141783,106092,59778,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13736,,,,,4.34,0,0,0,0,0,137169,0,90,2,0,90. 909,9.09,0,,0,205," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 41899f97,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T04:34:56-0500	1590572096,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3488,4710,121586,104469,57558,100000,100000,100000,100000,0,100000, 100000,1298,0,0,40,0,0,0,,,,,,0,,,0,,,64.58.61.20,13712,,,,,4.34,0,0,0,0,0,116876,0,90,2,0,90. 909,9.09,0,,0,1153," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 9784ca75,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T04:27:56-0500	1590571676,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,6439,8141,138839,103158,58424,100000,100000,100000,100000,0,100000, 100000,1298,0,0,64,0,0,0,,,,,,0,,,0,,,64.58.61.20,13708,,,,,4.34,0,0,0,0,0,130698,0,90,2,0,90. 909,9.09,0,,0,607," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 1950919e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T04:20:56-0500	1590571256,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3438,4644,129162,101524,58604,100000,100000,100000,100000,0,100000, 100000,1298,0,0,44,0,0,0,,,,,,0,,,0,,,64.58.61.20,13710,,,,,4.34,0,0,0,0,0,124518,0,90,2,0,90. 909,9.09,0,,0,357," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 3bba869e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T04:13:56-0500	1590570836,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3445,4650,160061,104840,57552,100000,100000,100000,100000,0,100000, 100000,1298,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13762,,,,,4.34,0,0,0,0,0,155411,0,90,2,0,90. 909,9.09,0,,0,3140," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 15b0b29c,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T04:06:56-0500	1590570416,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3326,4810,143096,109946,58138,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13702,,,,,4.34,0,0,0,0,0,138286,0,90,2,0,90. 909,9.09,0,,0,618," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 95bc2729,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T03:59:56-0500	1590569996,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3486,4689,142208,108601,57548,100000,100000,100000,100000,0,100000, 100000,1298,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13764,,,,,4.34,0,0,0,0,0,137519,0,90,2,0,90. 909,9.09,0,,0,1208," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 9d6d0bd2,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T03:52:56-0500	1590569576,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3480,4694,141427,107573,55667,100000,100000,100000,100000,0,100000, 100000,1298,0,0,37,0,0,0,,,,,,0,,,0,,,64.58.61.20,13738,,,,,4.34,0,0,0,0,0,136733,0,90,2,0,90. 909,9.09,0,,0,738," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 27c2646d,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T03:45:56-0500	1590569156,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3356,4668,140899,108066,57002,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13720,,,,,4.34,0,0,0,0,0,136231,0,90,2,0,90. 909,9.09,0,,0,2433," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= f804cffa,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-27T03:38:56-0500	1590568736,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3416,4728,138464,106433,58130,100000,100000,100000,100000,0,100000, 100000,1298,0,0,69,0,0,0,,,,,,0,,,0,,,64.58.61.20,13790,,,,,4.34,0,0,0,0,0,133736,0,90,2,0,90. 909,9.09,0,,0,3148," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= e2a1e8e6,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-27T03:31:56-0500	1590568316,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3457,4698,139798,101260,58144,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13768,,,,,4.34,0,0,0,0,0,135100,0,90,2,0,90. 909,9.09,0,,0,3158," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 82021d1e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-27T03:24:56-0500	1590567896,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3403,4708,121711,101210,56568,100000,100000,100000,100000,0,100000, 100000,1299,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13742,,,,,4.34,0,0,0,0,0,117003,0,90,2,0,90. 909,9.09,0,,0,959," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 20d38ee0,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,fixed
2020-05-27T03:17:56-0500	1590567476,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3388,4694,124250,106973,57536,100000,100000,100000,100000,0,100000, 100000,1299,0,0,44,0,0,0,,,,,,0,,,0,,,64.58.61.20,13766,,,,,4.34,0,0,0,0,0,119556,0,90,2,0,90. 909,9.09,0,,0,1514," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= a5c10cac,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,fixed
2020-05-27T03:10:56-0500	1590567056,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3432,4648,139978,107018,56564,100000,100000,100000,100000,0,100000, 100000,1298,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13732,,,,,4.34,0,0,0,0,0,135330,0,90,2,0,90. 909,9.09,0,,0,1175," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 6298b740,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-27T03:03:56-0500	1590566636,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3451,4671,138275,102611,54445,100000,100000,100000,100000,0,100000, 100000,1298,0,0,44,0,0,0,,,,,,0,,,0,,,64.58.61.20,13770,,,,,4.34,0,0,0,0,0,133604,0,90,2,0,90. 909,9.09,0,,0,911," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5b3dc4ca,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-27T02:56:56-0500	1590566216,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3442,4661,143308,104772,57530,100000,100000,100000,100000,0,100000, 100000,1298,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13780,,,,,4.34,0,0,0,0,0,138647,0,90,2,0,90. 909,9.09,0,,0,361," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 18505c0f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed

Time	Event
2020-05-27T02:49:56-0500	1590565796,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3444,4662,140791,104287,59930,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13730,,,,,4.34,0,0,0,0,0,136129,0,90,2,0,90. 909,9.09,0,,0,360," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 3bfe0401,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T02:42:56-0500	1590565376,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3338,4655,138974,103002,58394,100000,100000,100000,100000,0,100000, 100000,1298,0,0,58,0,0,0,,,,,,0,,,0,,,64.58.61.20,13750,,,,,4.34,0,0,0,0,0,134319,0,90,2,0,90. 909,9.09,0,,0,522," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= bbe4b3f0,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T02:35:56-0500	1590564956,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3431,4648,123542,102103,59926,100000,100000,100000,100000,0,100000, 100000,1299,0,0,52,0,0,0,,,,,,0,,,0,,,64.58.61.20,13740,,,,,4.34,0,0,0,0,0,118894,0,90,2,0,90. 909,9.09,0,,0,5134," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 6a9e4189,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-27T02:28:56-0500	1590564536,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3429,4639,138525,106597,56336,100000,100000,100000,100000,0,100000, 100000,1298,0,0,38,0,0,0,,,,,,0,,,0,,,64.58.61.20,13710,,,,,4.34,0,0,0,0,0,133886,0,90,2,0,90. 909,9.09,0,,0,368," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 1653bd1b,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T02:21:56-0500	1590564116,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3341,4658,123734,107410,57520,100000,100000,100000,100000,0,100000, 100000,1298,0,0,51,0,0,0,,,,,,0,,,0,,,64.58.61.20,13762,,,,,4.34,0,0,0,0,0,119076,0,90,2,0,90. 909,9.09,0,,0,3041," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 252d956b,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T02:14:56-0500	1590563696,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3376,4731,122641,107774,56774,100000,100000,100000,100000,0,100000, 100000,1299,0,0,62,0,0,0,,,,,,0,,,0,,,64.58.61.20,13704,,,,,4.34,0,0,0,0,0,117910,0,90,2,0,90. 909,9.09,0,,0,503," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 7fc0b891,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-27T02:07:56-0500	1590563276,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3429,4680,142269,106752,58588,100000,100000,100000,100000,0,100000, 100000,1298,0,0,39,0,0,0,,,,,,0,,,0,,,64.58.61.20,13772,,,,,4.34,0,0,0,0,0,137589,0,90,2,0,90. 909,9.09,0,,0,314," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ca56eadf,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T02:00:56-0500	1590562856,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3440,4733,139307,106715,57514,100000,100000,100000,100000,0,100000, 100000,1298,0,0,51,0,0,0,,,,,,0,,,0,,,64.58.61.20,13760,,,,,4.34,0,0,0,0,0,134574,0,90,2,0,90. 909,9.09,0,,0,3042," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 4958425a,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T01:53:56-0500	1590562436,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3449,4700,138162,104293,54425,100000,100000,100000,100000,0,100000, 100000,1298,0,0,60,0,0,0,,,,,,0,,,0,,,64.58.61.20,13792,,,,,4.34,0,0,0,0,0,133462,0,90,2,0,90. 909,9.09,0,,0,1597," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= e4309ba1,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T01:46:56-0500	1590562016,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3410,4722,123626,106020,56282,100000,100000,100000,100000,0,100000, 100000,1299,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13716,,,,,4.34,0,0,0,0,0,118904,0,90,2,0,90. 909,9.09,0,,0,1145," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= f83866c0,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,fixed
2020-05-27T01:39:56-0500	1590561596,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3445,4667,143211,102828,59298,100000,100000,100000,100000,0,100000, 100000,1298,0,0,44,0,0,0,,,,,,0,,,0,,,64.58.61.20,13742,,,,,4.34,0,0,0,0,0,138544,0,90,2,0,90. 909,9.09,0,,0,1650," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 6b8f99f4,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-27T01:32:56-0500	1590561176,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3370,4693,134526,104356,57506,100000,100000,100000,100000,0,100000, 100000,1298,0,0,51,0,0,0,,,,,,0,,,0,,,64.58.61.20,13766,,,,,4.34,0,0,0,0,0,129833,0,90,2,0,90. 909,9.09,0,,0,2304," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ad968523,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-27T01:25:56-0500	1590560756,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3620,4861,134617,109411,57304,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13722,,,,,4.34,0,0,0,0,0,129756,0,90,2,0,90. 909,9.09,0,,0,513," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= bda364f5,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-27T01:18:56-0500	1590560336,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3397,4612,136598,429709,57022,100000,100000,100000,100000,0,100000, 100000,1298,0,0,88,0,0,0,,,,,,0,,,0,,,64.58.61.20,13748,,,,,4.34,0,0,0,0,0,131986,0,90,2,0,90. 909,9.09,0,,0,2181," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 65cfe70e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-27T01:11:56-0500	1590559916,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3424,4645,139116,106806,56742,100000,100000,100000,100000,0,100000, 100000,1298,0,0,121,0,0,0,,,,,,0,,,0,,,64.58.61.20,13782,,,,,4.34,0,0,0,0,0,134471,0,90,2,0,90 .909,9.09,0,,0,1627," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c8fc0b83,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-27T01:04:56-0500	1590559496,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3662,4887,139111,105864,58110,100000,100000,100000,100000,0,100000, 100000,1298,0,0,62,0,0,0,,,,,,0,,,0,,,64.58.61.20,13796,,,,,4.34,0,0,0,0,0,134224,0,90,2,0,90. 909,9.09,0,,0,2068," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c73f3b90,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed

Time	Event
2020-05-27T00:57:56-0500	1590559076,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3398,4870,141897,102010,56738,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13712,,,,,4.34,0,0,0,0,0,137027,0,90,2,0,90. 909,9.09,0,,0,2157," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 913ea58e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T00:50:56-0500	1590558656,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3459,4714,122180,106071,57494,100000,100000,100000,100000,0,100000, 100000,1299,0,0,35,0,0,0,,,,,,0,,,0,,,64.58.61.20,13708,,,,,4.34,0,0,0,0,0,117466,0,90,2,0,90. 909,9.09,0,,0,303," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ac033a5a,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-27T00:43:56-0500	1590558236,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3425,4639,140528,106314,54405,100000,100000,100000,100000,0,100000, 100000,1298,0,0,64,0,0,0,,,,,,0,,,0,,,64.58.61.20,13794,,,,,4.34,0,0,0,0,0,135889,0,90,2,0,90. 909,9.09,0,,0,845," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 2abd662e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T00:36:56-0500	1590557816,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3424,4641,123745,99452,57490,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13776,,,,,4.34,0,0,0,0,0,119104,0,90,2,0,90. 909,9.09,0,,0,5981," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 6279fcac,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T00:29:56-0500	1590557396,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3748,5119,125449,107788,55806,100000,100000,100000,100000,0,100000, 100000,1298,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13764,,,,,4.34,0,0,0,0,0,120330,0,90,2,0,90. 909,9.09,0,,0,998," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 8502c6ea,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T00:22:56-0500	1590556976,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3475,4707,142603,106136,57006,100000,100000,100000,100000,0,100000, 100000,1298,0,0,37,0,0,0,,,,,,0,,,0,,,64.58.61.20,13760,,,,,4.34,0,0,0,0,0,137896,0,90,2,0,90. 909,9.09,0,,0,575," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= a9951d66,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T00:15:56-0500	1590556556,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3397,4705,137797,104180,57484,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13720,,,,,4.34,0,0,0,0,0,133092,0,90,2,0,90. 909,9.09,0,,0,1848," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 6eeedd36,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-27T00:08:56-0500	1590556136,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3442,4657,152856,106025,56562,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13752,,,,,4.34,0,0,0,0,0,148199,0,90,2,0,90. 909,9.09,0,,0,1686," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= bc068117,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-27T00:01:56-0500	1590555716,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3444,4742,138385,101981,57000,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13732,,,,,4.34,0,0,0,0,0,133643,0,90,2,0,90. 909,9.09,0,,0,672," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 42036771,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T23:54:56-0500	1590555296,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3379,4701,123509,100678,55703,100000,100000,100000,100000,0,100000, 100000,1298,0,0,52,0,0,0,,,,,,0,,,0,,,64.58.61.20,13782,,,,,4.34,0,0,0,0,0,118808,0,90,2,0,90. 909,9.09,0,,0,464," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 98134e2f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T23:47:56-0500	1590554876,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3454,4675,137809,106072,56248,100000,100000,100000,100000,0,100000, 100000,1298,0,0,42,0,0,0,,,,,,0,,,0,,,64.58.61.20,13730,,,,,4.34,0,0,0,0,0,133134,0,90,2,0,90. 909,9.09,0,,0,3055," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 90063825,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T23:40:56-0500	1590554456,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3444,4679,138945,106012,58336,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13744,,,,,4.34,0,0,0,0,0,134266,0,90,2,0,90. 909,9.09,0,,0,918," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 3d1f53f1,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T23:33:56-0500	1590554036,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3447,4670,141112,101648,59262,100000,100000,100000,100000,0,100000, 100000,1298,0,0,51,0,0,0,,,,,,0,,,0,,,64.58.61.20,13740,,,,,4.34,0,0,0,0,0,136442,0,90,2,0,90. 909,9.09,0,,0,613," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 1d4f9bcb,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T23:26:56-0500	1590553616,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3434,4642,140250,107714,57470,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13710,,,,,4.34,0,0,0,0,0,135608,0,90,2,0,90. 909,9.09,0,,0,746," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 3a854e86,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T23:19:56-0500	1590553196,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3524,4769,143554,102424,59258,100000,100000,100000,100000,0,100000, 100000,1298,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13702,,,,,4.34,0,0,0,0,0,138785,0,90,2,0,90. 909,9.09,0,,0,1012," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ddd363bf,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T23:12:56-0500	1590552776,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3401,4715,122877,102528,56986,100000,100000,100000,100000,0,100000, 100000,1299,0,0,77,0,0,0,,,,,,0,,,0,,,64.58.61.20,13738,,,,,4.34,0,0,0,0,0,118162,0,90,2,0,90. 909,9.09,0,,0,1857," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 488eec34,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed

Time	Event
2020-05-26T23:05:56-0500	1590552356,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3603,4933,139955,102376,55874,100000,100000,100000,100000,0,100000, 100000,1298,0,0,71,0,0,0,,,,,,0,,,0,,,64.58.61.20,13754,,,,,4.34,0,0,0,0,0,135022,0,90,2,0,90. 909,9.09,0,,0,632," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 45030bde,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T22:58:56-0500	1590551936,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3455,4707,140376,104542,57462,100000,100000,100000,100000,0,100000, 100000,1298,0,0,44,0,0,0,,,,,,0,,,0,,,64.58.61.20,13724,,,,,4.34,0,0,0,0,0,135669,0,90,2,0,90. 909,9.09,0,,0,1556," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= b0bf8af7,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T22:51:56-0500	1590551516,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3402,4712,124361,108785,58072,100000,100000,100000,100000,0,100000, 100000,1298,0,0,55,0,0,0,,,,,,0,,,0,,,64.58.61.20,13722,,,,,4.34,0,0,0,0,0,119649,0,90,2,0,90. 909,9.09,0,,0,1148," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 173177d9,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T22:44:56-0500	1590551096,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3456,4681,140080,103403,59704,100000,100000,100000,100000,0,100000, 100000,1298,0,0,59,0,0,0,,,,,,0,,,0,,,64.58.61.20,13730,,,,,4.34,0,0,0,0,0,135399,0,90,2,0,90. 909,9.09,0,,0,3746," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= adceb4a9,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T22:37:56-0500	1590550676,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3478,4720,140270,103707,57456,100000,100000,100000,100000,0,100000, 100000,1298,0,0,61,0,0,0,,,,,,0,,,0,,,64.58.61.20,13708,,,,,4.34,0,0,0,0,0,135550,0,90,2,0,90. 909,9.09,0,,0,750," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 40ff9269,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T22:30:56-0500	1590550256,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3343,4647,140108,106888,56560,100000,100000,100000,100000,0,100000, 100000,1298,0,0,71,0,0,0,,,,,,0,,,0,,,64.58.61.20,13762,,,,,4.34,0,0,0,0,0,135461,0,90,2,0,90. 909,9.09,0,,0,1131," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 68a9be80,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T22:23:56-0500	1590549836,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3340,4657,345617,104579,57452,100000,100000,100000,100000,0,100000, 100000,1298,0,0,58,0,0,0,,,,,,0,,,0,,,64.58.61.20,13738,,,,,4.34,0,0,0,0,0,340960,0,90,2,0,90. 909,9.09,0,,0,1388," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 8cbab5d1,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T22:16:56-0500	1590549416,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3439,4655,123955,101226,59268,100000,100000,100000,100000,0,100000, 100000,1298,0,0,66,0,0,0,,,,,,0,,,0,,,64.58.61.20,13704,,,,,4.34,0,0,0,0,0,119300,0,90,2,0,90. 909,9.09,0,,0,1733," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 18a862ad,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-26T22:09:56-0500	1590548996,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3413,4720,138301,106704,58316,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13720,,,,,4.34,0,0,0,0,0,133581,0,90,2,0,90. 909,9.09,0,,0,497," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 1e20bef9,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-26T22:02:56-0500	1590548576,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3415,4645,140874,103036,59264,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13768,,,,,4.34,0,0,0,0,0,136229,0,90,2,0,90. 909,9.09,0,,0,1104," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 736af3ed,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-26T21:55:56-0500	1590548156,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3338,4646,124569,107581,55669,100000,100000,100000,100000,0,100000, 100000,1298,0,0,61,0,0,0,,,,,,0,,,0,,,64.58.61.20,13782,,,,,4.34,0,0,0,0,0,119923,0,90,2,0,90. 909,9.09,0,,0,850," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 079971eb,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-26T21:48:56-0500	1590547736,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3442,4658,156903,105911,55926,100000,100000,100000,100000,0,100000, 100000,1298,0,0,59,0,0,0,,,,,,0,,,0,,,64.58.61.20,13796,,,,,4.34,0,0,0,0,0,152245,0,90,2,0,90. 909,9.09,0,,0,518," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= e48693f9,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-26T21:41:56-0500	1590547316,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3560,4980,122278,110776,55665,100000,100000,100000,100000,0,100000, 100000,1299,0,0,46,0,0,0,,,,,,0,,,0,,,64.58.61.20,13734,,,,,4.34,0,0,0,0,0,117298,0,90,2,0,90. 909,9.09,0,,0,1413," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= de02865d,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,,fixed
2020-05-26T21:34:56-0500	1590546896,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3352,4699,121574,105775,56210,100000,100000,100000,100000,0,100000, 100000,1299,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13710,,,,,4.34,0,0,0,0,0,116875,0,90,2,0,90. 909,9.09,0,,0,614," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 81335694,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,,fixed
2020-05-26T21:27:56-0500	1590546476,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3457,4700,123849,106165,59226,100000,100000,100000,100000,0,100000, 100000,1299,0,0,72,0,0,0,,,,,,0,,,0,,,64.58.61.20,13756,,,,,4.34,0,0,0,0,0,119149,0,90,2,0,90. 909,9.09,0,,0,1208," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ce8f106e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,,fixed
2020-05-26T21:20:56-0500	1590546056,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3440,4667,122675,100980,56206,100000,100000,100000,100000,0,100000, 100000,1299,0,0,121,0,0,0,,,,,,0,,,0,,,64.58.61.20,13764,,,,,4.34,0,0,0,0,0,118008,0,90,2,0,90 .909,9.09,0,,0,3660," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 92ecd19c,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,,fixed

Time	Event
2020-05-26T21:13:56-0500	1590545636,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3398,4702,219144,102887,58482,100000,100000,100000,100000,0,100000, 100000,1298,0,0,50,0,0,0,,,,,,0,,,0,,,64.58.61.20,13792,,,,,4.34,0,0,0,0,0,214442,0,90,2,0,90. 909,9.09,0,,0,1258," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c2a5aba1,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T21:06:56-0500	1590545216,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3436,4653,141855,108111,55655,100000,100000,100000,100000,0,100000, 100000,1298,0,0,54,0,0,0,,,,,,0,,,0,,,64.58.61.20,13724,,,,,4.34,0,0,0,0,0,137202,0,90,2,0,90. 909,9.09,0,,0,3245," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= b63abae2,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T20:59:56-0500	1590544796,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3440,4668,135592,104394,58016,100000,100000,100000,100000,0,100000, 100000,1298,0,0,50,0,0,0,,,,,,0,,,0,,,64.58.61.20,13746,,,,,4.34,0,0,0,0,0,130924,0,90,2,0,90. 909,9.09,0,,0,1324," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= fec41ebc,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T20:52:56-0500	1590544376,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3348,4666,124726,106484,55651,100000,100000,100000,100000,0,100000, 100000,1299,0,0,83,0,0,0,,,,,,0,,,0,,,64.58.61.20,13718,,,,,4.34,0,0,0,0,0,120060,0,90,2,0,90. 909,9.09,0,,0,3760," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c1725e9b,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-26T20:45:56-0500	1590543956,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3454,4677,122636,106993,58012,100000,100000,100000,100000,0,100000, 100000,1299,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13796,,,,,4.34,0,0,0,0,0,117959,0,90,2,0,90. 909,9.09,0,,0,795," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 3c180e02,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-26T20:38:56-0500	1590543536,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3468,4693,142008,103323,58000,100000,100000,100000,100000,0,100000, 100000,1298,0,0,91,0,0,0,,,,,,0,,,0,,,64.58.61.20,13734,,,,,4.34,0,0,0,0,0,137315,0,90,2,0,90. 909,9.09,0,,0,993," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 0c702b44,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T20:31:56-0500	1590543116,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3410,4612,139624,104421,58008,100000,100000,100000,100000,0,100000, 100000,1298,0,0,52,0,0,0,,,,,,0,,,0,,,64.58.61.20,13786,,,,,4.34,0,0,0,0,0,135012,0,90,2,0,90. 909,9.09,0,,0,819," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 140e0c6f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T20:24:56-0500	1590542696,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3408,4725,120615,103631,55643,100000,100000,100000,100000,0,100000, 100000,1298,0,0,54,0,0,0,,,,,,0,,,0,,,64.58.61.20,13772,,,,,4.34,0,0,0,0,0,115890,0,90,2,0,90. 909,9.09,0,,0,2607," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5d78c6d5,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-26T20:17:56-0500	1590542276,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3349,4651,137029,101587,56184,100000,100000,100000,100000,0,100000, 100000,1298,0,0,215,0,0,0,,,,,,0,,,0,,,64.58.61.20,13728,,,,,4.34,0,0,0,0,0,132378,0,90,2,0,90 .909,9.09,0,,0,1742," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ece6f5f1,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T20:10:56-0500	1590541856,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3445,4653,141748,107077,59632,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13724,,,,,4.34,0,0,0,0,0,137095,0,90,2,0,90. 909,9.09,0,,0,632," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= bb1f7106,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T20:03:56-0500	1590541436,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3353,4658,140176,103753,57412,100000,100000,100000,100000,0,100000, 100000,1298,0,0,48,0,0,0,,,,,,0,,,0,,,64.58.61.20,13732,,,,,4.34,0,0,0,0,0,135518,0,90,2,0,90. 909,9.09,0,,0,1066," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5a12c0cd,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T19:56:56-0500	1590541016,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3490,4777,137570,101546,57802,100000,100000,100000,100000,0,100000, 100000,1298,0,0,48,0,0,0,,,,,,0,,,0,,,64.58.61.20,13766,,,,,4.34,0,0,0,0,0,132793,0,90,2,0,90. 909,9.09,0,,0,2685," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5fe4d47e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T19:49:56-0500	1590540596,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3419,4708,136835,104093,56880,100000,100000,100000,100000,0,100000, 100000,1298,0,0,58,0,0,0,,,,,,0,,,0,,,64.58.61.20,13712,,,,,4.34,0,0,0,0,0,132127,0,90,2,0,90. 909,9.09,0,,0,7090," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 2f0df344,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T19:42:56-0500	1590540176,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3418,4632,137884,106948,55175,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13734,,,,,4.34,0,0,0,0,0,133252,0,90,2,0,90. 909,9.09,0,,0,1166," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 8f1524dd,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T19:35:56-0500	1590539756,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3393,4701,135426,107622,55605,100000,100000,100000,100000,0,100000, 100000,1298,0,0,44,0,0,0,,,,,,0,,,0,,,64.58.61.20,13794,,,,,4.34,0,0,0,0,0,130725,0,90,2,0,90. 909,9.09,0,,0,303," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ab556630,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T19:28:56-0500	1590539336,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3417,4739,135431,104481,57174,100000,100000,100000,100000,0,100000, 100000,1298,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13756,,,,,4.34,0,0,0,0,0,130692,0,90,2,0,90. 909,9.09,0,,0,835," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c0ecc037,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed

Time	Event
2020-05-26T19:21:56-0500	1590538916,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3441,4662,135861,103180,57400,100000,100000,100000,100000,0,100000, 100000,1298,0,0,59,0,0,0,,,,,,0,,,0,,,64.58.61.20,13724,,,,,4.34,0,0,0,0,0,131199,0,90,2,0,90. 909,9.09,0,,0,927," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 0e88f1f2,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T19:14:56-0500	1590538496,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3442,4673,139318,109764,55167,100000,100000,100000,100000,0,100000, 100000,1298,0,0,55,0,0,0,,,,,,0,,,0,,,64.58.61.20,13782,,,,,4.34,0,0,0,0,0,134645,0,90,2,0,90. 909,9.09,0,,0,962," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 48bd87ed,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T19:07:56-0500	1590538076,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3328,4634,139865,103131,57396,100000,100000,100000,100000,0,100000, 100000,1298,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13718,,,,,4.34,0,0,0,0,0,135231,0,90,2,0,90. 909,9.09,0,,0,1355," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 943928b0,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T19:00:56-0500	1590537656,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3340,4658,137732,106233,55163,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13760,,,,,4.34,0,0,0,0,0,133074,0,90,2,0,90. 909,9.09,0,,0,976," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= aebf5368,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T18:53:56-0500	1590537236,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3442,4654,132311,103946,54493,100000,100000,100000,100000,0,100000, 100000,1298,0,0,46,0,0,0,,,,,,0,,,0,,,64.58.61.20,13780,,,,,4.34,0,0,0,0,0,127657,0,90,2,0,90. 909,9.09,0,,0,1564," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 628ff66d,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T18:46:56-0500	1590536816,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3404,4725,139299,105697,56420,100000,100000,100000,100000,0,100000, 100000,1298,0,0,52,0,0,0,,,,,,0,,,0,,,64.58.61.20,13708,,,,,4.34,0,0,0,0,0,134574,0,90,2,0,90. 909,9.09,0,,0,587," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 3dbbe4d3,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T18:39:56-0500	1590536396,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3406,4720,136126,101441,59178,100000,100000,100000,100000,0,100000, 100000,1298,0,0,58,0,0,0,,,,,,0,,,0,,,64.58.61.20,13762,,,,,4.34,0,0,0,0,0,131406,0,90,2,0,90. 909,9.09,0,,0,4184," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 0cf845e1,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T18:32:56-0500	1590535976,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3437,4647,124618,103003,55704,100000,100000,100000,100000,0,100000, 100000,1299,0,0,83,0,0,0,,,,,,0,,,0,,,64.58.61.20,13792,,,,,4.34,0,0,0,0,0,119971,0,90,2,0,90. 909,9.09,0,,0,849," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 4931ae5a,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,fixed

Time	Event
2020-05-26T18:25:56-0500	1590535556,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3439,4749,139492,105291,59174,100000,100000,100000,100000,0,100000, 100000,1298,0,0,63,0,0,0,,,,,,0,,,0,,,64.58.61.20,13714,,,,,4.34,0,0,0,0,0,134743,0,90,2,0,90. 909,9.09,0,,0,4660," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= b20bd2d9,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T18:18:56-0500	1590535136,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3345,4659,122625,106922,57382,100000,100000,100000,100000,0,100000, 100000,1299,0,0,81,0,0,0,,,,,,0,,,0,,,64.58.61.20,13746,,,,,4.34,0,0,0,0,0,117966,0,90,2,0,90. 909,9.09,0,,0,1454," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= d6085d62,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,fixed
2020-05-26T18:11:56-0500	1590534716,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3616,4828,140223,105355,55149,100000,100000,100000,100000,0,100000, 100000,1298,0,0,55,0,0,0,,,,,,0,,,0,,,64.58.61.20,13726,,,,,4.34,0,0,0,0,0,135395,0,90,2,0,90. 909,9.09,0,,0,3510," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 8644d208,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T18:04:56-0500	1590534296,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3346,4646,140273,109660,56664,100000,100000,100000,100000,0,100000, 100000,1298,0,0,55,0,0,0,,,,,,0,,,0,,,64.58.61.20,13780,,,,,4.34,0,0,0,0,0,135627,0,90,2,0,90. 909,9.09,0,,0,2816," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 96ffca16,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T17:57:56-0500	1590533876,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3317,4620,138625,107224,55145,100000,100000,100000,100000,0,100000, 100000,1298,0,0,57,0,0,0,,,,,,0,,,0,,,64.58.61.20,13798,,,,,4.34,0,0,0,0,0,134005,0,90,2,0,90. 909,9.09,0,,0,4346," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 643a16ab,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T17:50:56-0500	1590533456,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3410,4633,140717,105180,56894,100000,100000,100000,100000,0,100000, 100000,1298,0,0,95,0,0,0,,,,,,0,,,0,,,64.58.61.20,13756,,,,,4.34,0,0,0,0,0,136084,0,90,2,0,90. 909,9.09,0,,0,1078," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 35a0707c,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T17:43:56-0500	1590533036,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3454,4676,139460,105499,55141,100000,100000,100000,100000,0,100000, 100000,1298,0,0,48,0,0,0,,,,,,0,,,0,,,64.58.61.20,13702,,,,,4.34,0,0,0,0,0,134784,0,90,2,0,90. 909,9.09,0,,0,2402," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= edc5d3c6,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T17:36:56-0500	1590532616,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3406,4694,143028,106992,56142,100000,100000,100000,100000,0,100000, 100000,1298,0,0,50,0,0,0,,,,,,0,,,0,,,64.58.61.20,13792,,,,,4.34,0,0,0,0,0,138334,0,90,2,0,90. 909,9.09,0,,0,759," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5cae3190,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed

Time	Event
2020-05-26T17:29:56-0500	1590532196,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3543,4752,123552,101775,59040,100000,100000,100000,100000,0,100000, 100000,1296,0,0,272,0,2,0,,,,,,2,,,.153,,,64.58.61.20,13714,,,,,4.28,2,1,1,1,0,118800,0,87,2, 40,83.333,9.727,6.939,,0,1673," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61 .21;tag=9308a536,4.34,90,1,,,,,,,,,,,,,,,,,,,,,,,,1298,1297,,,,,,,,,,,,fixed
2020-05-26T17:22:56-0500	1590531776,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3460,4671,124605,102813,56886,100000,100000,100000,100000,0,100000, 100000,1298,0,0,317,0,1,0,,,,,,1,,,.076,,,64.58.61.20,13716,,,,,4.3,1,1,1,1,0,119934,0,88,2,20 ,85.714,9.75,4.534,,0,4233," sip:wlssuser@64.58.61.21:5060",BYE;OK,1,sip:442009130999@64.58.61.21 ;tag=5f09a710,4.36,91,1,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-26T17:15:56-0500	1590531356,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3379,4752,142040,109309,58232,100000,100000,100000,100000,0,100000, 100000,1296,0,0,195,0,2,0,,,,,,2,,,.153,,,64.58.61.20,13722,,,,,4.28,2,1,1,1,0,137288,0,87,2, 40,83.333,9.727,6.939,,0,1146," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61 .21;tag=6c4b65ec,4.34,90,1,,,,,,,,,,,,,,,,,,,,,,,,1298,1297,,,,,,,,,,,,fixed
2020-05-26T17:08:56-0500	1590530936,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3412,4620,140454,105107,56882,100000,100000,100000,100000,0,100000, 100000,1298,0,0,57,0,0,0,,,,,,0,,,0,,,64.58.61.20,13708,,,,,4.34,0,0,0,0,0,135834,0,90,2,0,90. 909,9.09,0,,0,631," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 2a2c9ee4,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-26T17:01:56-0500	1590530516,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3403,4616,142810,104190,57360,100000,100000,100000,100000,0,100000, 100000,1298,0,0,48,0,0,0,,,,,,0,,,0,,,64.58.61.20,13706,,,,,4.34,0,0,0,0,0,138194,0,90,2,0,90. 909,9.09,0,,0,2638," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 4ec32827,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-26T16:54:56-0500	1590530096,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3434,4645,121533,102687,57750,100000,100000,100000,100000,0,100000, 100000,1299,0,0,58,0,0,0,,,,,,0,,,0,,,64.58.61.20,13728,,,,,4.34,0,0,0,0,0,116888,0,90,2,0,90. 909,9.09,0,,0,5554," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 59898648,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,,fixed
2020-05-26T16:47:56-0500	1590529676,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3434,4642,122695,105197,56876,100000,100000,100000,100000,0,100000, 100000,1299,0,0,60,0,0,0,,,,,,0,,,0,,,64.58.61.20,13750,,,,,4.34,0,0,0,0,0,118053,0,90,2,0,90. 909,9.09,0,,0,1105," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 147cd507,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,,fixed
2020-05-26T16:40:56-0500	1590529256,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3341,4729,122856,105306,55838,100000,100000,100000,100000,0,100000, 100000,1298,0,0,67,0,0,0,,,,,,0,,,0,,,64.58.61.20,13772,,,,,4.34,0,0,0,0,0,118127,0,90,2,0,90. 909,9.09,0,,0,4275," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 1d86845f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed

Time	Event
2020-05-26T16:33:56-0500	1590528836,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3640,5062,136700,103337,56872,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13732,,,,,4.34,0,0,0,0,0,131638,0,90,2,0,90. 909,9.09,0,,0,403," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c559ae47,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T16:26:56-0500	1590528416,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3568,5017,139770,105030,56122,100000,100000,100000,100000,0,100000, 100000,1298,0,0,54,0,0,0,,,,,,0,,,0,,,64.58.61.20,13718,,,,,4.34,0,0,0,0,0,134753,0,90,2,0,90. 909,9.09,0,,0,824," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= d5c319a7,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T16:19:56-0500	1590527996,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3463,4670,138088,102152,54497,100000,100000,100000,100000,0,100000, 100000,1298,0,0,64,0,0,0,,,,,,0,,,0,,,64.58.61.20,13774,,,,,4.34,0,0,0,0,0,133418,0,90,2,0,90. 909,9.09,0,,0,1834," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 29a84f45,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T16:12:56-0500	1590527576,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3424,4626,136112,102211,56118,100000,100000,100000,100000,0,100000, 100000,1298,0,0,40,0,0,0,,,,,,0,,,0,,,64.58.61.20,13706,,,,,4.34,0,0,0,0,0,131486,0,90,2,0,90. 909,9.09,0,,0,329," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 845838e0,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T16:05:56-0500	1590527156,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3415,4623,140936,103877,54493,100000,100000,100000,100000,0,100000, 100000,1298,0,0,50,0,0,0,,,,,,0,,,0,,,64.58.61.20,13788,,,,,4.34,0,0,0,0,0,136313,0,90,2,0,90. 909,9.09,0,,0,393," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 295493bf,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T15:58:56-0500	1590526736,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3451,4698,140140,106780,56454,100000,100000,100000,100000,0,100000, 100000,1298,0,0,51,0,0,0,,,,,,0,,,0,,,64.58.61.20,13700,,,,,4.34,0,0,0,0,0,135442,0,90,2,0,90. 909,9.09,0,,0,3427," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 9e0286f3,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T15:51:56-0500	1590526316,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3405,4706,122672,106483,57340,100000,100000,100000,100000,0,100000, 100000,1298,0,0,81,0,0,0,,,,,,0,,,0,,,64.58.61.20,13724,,,,,4.34,0,0,0,0,0,117966,0,90,2,0,90. 909,9.09,0,,0,4368," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 7843d3e4,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T15:44:56-0500	1590525896,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3443,4670,123748,103332,56450,100000,100000,100000,100000,0,100000, 100000,1298,0,0,43,0,0,0,,,,,,0,,,0,,,64.58.61.20,13758,,,,,4.34,0,0,0,0,0,119078,0,90,2,0,90. 909,9.09,0,,0,670," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 4fcb761d,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-26T15:37:56-0500	1590525476,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3407,4711,135542,100461,56276,100000,100000,100000,100000,0,100000, 100000,1298,0,0,34,0,0,0,,,,,,0,,,0,,,64.58.61.20,13782,,,,,4.34,0,0,0,0,0,130831,0,90,2,0,90. 909,9.09,0,,0,661," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c0e46373,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T15:30:56-0500	1590525056,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3393,4705,138129,102873,56446,100000,100000,100000,100000,0,100000, 100000,1298,0,0,45,0,0,0,,,,,,0,,,0,,,64.58.61.20,13718,,,,,4.34,0,0,0,0,0,133424,0,90,2,0,90. 909,9.09,0,,0,1061," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ff571a0f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T15:23:56-0500	1590524636,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3414,4621,139999,100936,55768,100000,100000,100000,100000,0,100000, 100000,1298,0,0,120,0,0,0,,,,,,0,,,0,,,64.58.61.20,13774,,,,,4.34,0,0,0,0,0,135378,0,90,2,0,90 .909,9.09,0,,0,3147," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 8ce3e524,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T15:16:56-0500	1590524216,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3390,4733,138418,106462,56850,100000,100000,100000,100000,0,100000, 100000,1298,0,0,50,0,0,0,,,,,,0,,,0,,,64.58.61.20,13706,,,,,4.34,0,0,0,0,0,133685,0,90,2,0,90. 909,9.09,0,,0,580," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 0dc3cba9,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T15:09:56-0500	1590523796,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3402,4616,140735,101150,58938,100000,100000,100000,100000,0,100000, 100000,1298,0,0,52,0,0,0,,,,,,0,,,0,,,64.58.61.20,13756,,,,,4.34,0,0,0,0,0,136119,0,90,2,0,90. 909,9.09,0,,0,1090," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ddd61899,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T15:02:56-0500	1590523376,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3335,4650,199026,105873,56846,100000,100000,100000,100000,0,100000, 100000,1298,0,0,40,0,0,0,,,,,,0,,,0,,,64.58.61.20,13772,,,,,4.34,0,0,0,0,0,194376,0,90,2,0,90. 909,9.09,0,,0,1301," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 03c56289,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T14:55:56-0500	1590522956,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3389,4601,140397,106298,55549,100000,100000,100000,100000,0,100000, 100000,1298,0,0,103,0,0,0,,,,,,0,,,0,,,64.58.61.20,13790,,,,,4.34,0,0,0,0,0,135796,0,90,2,0,90 .909,9.09,0,,0,2808," sip:wlssuser@64.58.61.21:5060",BYE;OK,1,sip:442009130999@64.58.61.21;tag= 3969dfbb,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T14:48:56-0500	1590522536,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3776,4984,141030,100663,56842,100000,100000,100000,100000,0,100000, 100000,1298,0,0,53,0,0,0,,,,,,0,,,0,,,64.58.61.20,13718,,,,,4.34,0,0,0,0,0,136046,0,90,2,0,90. 909,9.09,0,,0,507," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5660a314,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Time	Event
2020-05-26T14:41:56-0500	1590522116,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3457,4654,140876,104913,57320,100000,100000,100000,100000,0,100000, 100000,1298,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13726,,,,,4.34,0,0,0,0,0,136222,0,90,2,0,90. 909,9.09,0,,0,4543," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= daf106ae,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,,fixed
2020-05-26T14:34:56-0500	1590521696,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3403,4610,123606,100668,55543,100000,100000,100000,100000,0,100000, 100000,1299,0,0,51,0,0,0,,,,,,0,,,0,,,64.58.61.20,13788,,,,,4.34,0,0,0,0,0,118996,0,90,2,0,90. 909,9.09,0,,0,3113," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 6c780e4a,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,fixed
2020-05-26T14:27:56-0500	1590521276,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3423,4646,134159,99782,57316,100000,100000,100000,100000,0,100000, 100000,1298,0,0,82,0,0,0,,,,,,0,,,0,,,64.58.61.20,13728,,,,,4.34,0,0,0,0,0,129513,0,90,2,0,90. 909,9.09,0,,0,2282," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 814ab4ab,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T14:20:56-0500	1590520856,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,4469,5990,137066,100541,55547,100000,100000,100000,100000,0,100000, 100000,1298,0,0,62,0,0,0,,,,,,0,,,0,,,64.58.61.20,13714,,,,,4.34,0,0,0,0,0,131076,0,90,2,0,90. 909,9.09,0,,0,2348," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= b6fae328,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T14:13:56-0500	1590520436,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3427,4638,141576,102052,57312,100000,100000,100000,100000,0,100000, 100000,1298,0,0,54,0,0,0,,,,,,0,,,0,,,64.58.61.20,13722,,,,,4.34,0,0,0,0,0,136938,0,90,2,0,90. 909,9.09,0,,0,1615," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= ec1440f6,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T14:06:56-0500	1590520016,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3332,4700,140654,103266,55543,100000,100000,100000,100000,0,100000, 100000,1298,0,0,61,0,0,0,,,,,,0,,,0,,,64.58.61.20,13784,,,,,4.34,0,0,0,0,0,135954,0,90,2,0,90. 909,9.09,0,,0,640," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= b635faf2,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T13:59:56-0500	1590519596,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3350,4661,124386,106689,57132,100000,100000,100000,100000,0,100000, 100000,1298,0,0,39,0,0,0,,,,,,0,,,0,,,64.58.61.20,13708,,,,,4.34,0,0,0,0,0,119725,0,90,2,0,90. 909,9.09,0,,0,244," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 06ac8e71,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed
2020-05-26T13:52:56-0500	1590519176,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3473,4674,136188,104772,55531,100000,100000,100000,100000,0,100000, 100000,1298,0,0,50,0,0,0,,,,,,0,,,0,,,64.58.61.20,13794,,,,,4.34,0,0,0,0,0,131514,0,90,2,0,90. 909,9.09,0,,0,1614," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 7ffa9ab3,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,fixed

Time	Event
2020-05-26T13:45:56-0500	1590518756,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3464,4662,122681,103424,56410,100000,100000,100000,100000,0,100000, 100000,1299,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13776,,,,,4.34,0,0,0,0,0,118019,0,90,2,0,90. 909,9.09,0,,0,980," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= e3a62c2d,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-26T13:38:56-0500	1590518336,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3346,4660,137721,107172,55527,100000,100000,100000,100000,0,100000, 100000,1298,0,0,52,0,0,0,,,,,,0,,,0,,,64.58.61.20,13792,,,,,4.34,0,0,0,0,0,133061,0,90,2,0,90. 909,9.09,0,,0,482," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 8d1d3bd6,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T13:31:56-0500	1590517916,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3436,4645,133538,105492,57300,100000,100000,100000,100000,0,100000, 100000,1298,0,0,44,0,0,0,,,,,,0,,,0,,,64.58.61.20,13798,,,,,4.34,0,0,0,0,0,128893,0,90,2,0,90. 909,9.09,0,,0,383," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 20a06916,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T13:24:56-0500	1590517496,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3391,4693,122649,105501,55782,100000,100000,100000,100000,0,100000, 100000,1298,0,0,52,0,0,0,,,,,,0,,,0,,,64.58.61.20,13722,,,,,4.34,0,0,0,0,0,117956,0,90,2,0,90. 909,9.09,0,,0,3370," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 83daf345,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T13:17:56-0500	1590517076,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3424,4634,143851,104182,57296,100000,100000,100000,100000,0,100000, 100000,1298,0,0,36,0,0,0,,,,,,0,,,0,,,64.58.61.20,13780,,,,,4.34,0,0,0,0,0,139217,0,90,2,0,90. 909,9.09,0,,0,523," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 46569812,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T13:10:56-0500	1590516656,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3452,4652,123744,106064,57244,100000,100000,100000,100000,0,100000, 100000,1299,0,0,40,0,0,0,,,,,,0,,,0,,,64.58.61.20,13712,,,,,4.34,0,0,0,0,0,119092,0,90,2,0,90. 909,9.09,0,,0,960," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 84745a02,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-26T13:03:56-0500	1590516236,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3415,4616,123675,102341,55517,100000,100000,100000,100000,0,100000, 100000,1298,0,0,55,0,0,0,,,,,,0,,,0,,,64.58.61.20,13702,,,,,4.34,0,0,0,0,0,119059,0,90,2,0,90. 909,9.09,0,,0,3397," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= a098d35f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T12:56:56-0500	1590515816,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3425,4630,122636,102485,56810,100000,100000,100000,100000,0,100000, 100000,1299,0,0,66,0,0,0,,,,,,0,,,0,,,64.58.61.20,13772,,,,,4.34,0,0,0,0,0,118006,0,90,2,0,90. 909,9.09,0,,0,2500," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 4c9a12d3,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed

Time	Event
2020-05-26T12:49:56-0500	1590515396,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3413,4627,134580,106533,59694,100000,100000,100000,100000,0,100000, 100000,1298,0,0,61,0,0,0,,,,,,0,,,0,,,64.58.61.20,13724,,,,,4.34,0,0,0,0,0,129953,0,90,2,0,90. 909,9.09,0,,0,593," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 36666c0e,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T12:42:56-0500	1590514976,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3600,4968,136854,103745,55511,100000,100000,100000,100000,0,100000, 100000,1298,0,0,36,0,0,0,,,,,,0,,,0,,,64.58.61.20,13704,,,,,4.34,0,0,0,0,0,131886,0,90,2,0,90. 909,9.09,0,,0,561," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 1e9b993f,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T12:35:56-0500	1590514556,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3403,4610,137663,102474,57284,100000,100000,100000,100000,0,100000, 100000,1298,0,0,47,0,0,0,,,,,,0,,,0,,,64.58.61.20,13798,,,,,4.34,0,0,0,0,0,133053,0,90,2,0,90. 909,9.09,0,,0,392," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 97b7af53,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T12:28:56-0500	1590514136,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3420,4639,137074,104831,56802,100000,100000,100000,100000,0,100000, 100000,1298,0,0,60,0,0,0,,,,,,0,,,0,,,64.58.61.20,13766,,,,,4.34,0,0,0,0,0,132435,0,90,2,0,90. 909,9.09,0,,0,798," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 09e5b969,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T12:21:56-0500	1590513716,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3467,4683,124643,105601,55505,100000,100000,100000,100000,0,100000, 100000,1299,0,0,46,0,0,0,,,,,,0,,,0,,,64.58.61.20,13720,,,,,4.34,0,0,0,0,0,119960,0,90,2,0,90. 909,9.09,0,,0,1413," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 00ac29e0,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1300,,,,,,,,,,,fixed
2020-05-26T12:14:56-0500	1590513296,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3450,4653,129515,101537,56798,100000,100000,100000,100000,0,100000, 100000,1298,0,0,42,0,0,0,,,,,,0,,,0,,,64.58.61.20,13716,,,,,4.34,0,0,0,0,0,124862,0,90,2,0,90. 909,9.09,0,,0,224," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= 5a0b21c8,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T12:07:56-0500	1590512876,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3420,4634,139001,104145,55501,100000,100000,100000,100000,0,100000, 100000,1298,0,0,41,0,0,0,,,,,,0,,,0,,,64.58.61.20,13768,,,,,4.34,0,0,0,0,0,134367,0,90,2,0,90. 909,9.09,0,,0,489," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c8762d14,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed
2020-05-26T12:00:56-0500	1590512456,42610,CO326-DENVPD-NG911PRB-2009130100,,,,"State of Colorado SIP Responders","SIP Responder NG911 Template","Denver City#RCL:511 Bldg ECMC:Denver",com.brixnet.swv.sipservicetest.4.9000,60,,addr, USEPORTRANGE,"G.711 at 20ms",RESPONDER,1,com.brixnet.defaultaudio.1.6071,"G.711 at 20ms",0,0,60,,1 ,100,0,DISABLED,0,0,1,0,0,50000,2,1,0,0,50000,,,16,0,0,0,5060,195@100.73.8.249,SOURCE,NONE, 25000,100000,0,0,10,AUDIOPRFL,,,,10000,,0,250,,75,25,,,60000,50000,,,3600,,,,1,30000,,,,,,500, CALL,CALL,20,0,UDP,,0,200,,,,,3476,4693,131032,106087,57274,100000,100000,100000,100000,0,100000, 100000,1298,0,0,49,0,0,0,,,,,,0,,,0,,,64.58.61.20,13780,,,,,4.34,0,0,0,0,0,126339,0,90,2,0,90. 909,9.09,0,,0,1745," sip:wlssuser@64.58.61.21:5060",BYE;OK,0,sip:442009130999@64.58.61.21;tag= c11f2822,4.4,92,0,,,,,,,,,,,,,,,,,,,,,,,,1298,1299,,,,,,,,,,,fixed

Verifier Health Data

Time	Event
2020-05-27T12:44:15-0500	1590601455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1257717,6,,,,,,,199,1,19999,3,1,900,21229,21643 ,2254415,882399,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C16_7443_a0116c71,C6_7443_1ac13cee,99,12140544, 41484288,973111296,0,0
2020-05-27T12:39:15-0500	1590601155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1257417,6,,,,,,,199,1,19999,3,1,900,21218,21626 ,2252969,878655,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41881600,973111296,0,0
2020-05-27T12:34:15-0500	1590600855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1257117,6,,,,,,,199,1,19999,3,1,900,21213,21621 ,2252329,878480,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41754624,973111296,0,0
2020-05-27T12:29:15-0500	1590600555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1256817,6,,,,,,,199,1,19999,3,1,900,21208,21616 ,2251689,878305,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41508864,973111296,0,0
2020-05-27T12:24:15-0500	1590600255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1256517,6,,,,,,,199,1,19999,3,1,900,21203,21611 ,2251424,878130,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41897984,973111296,0,0
2020-05-27T12:19:15-0500	1590599955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1256217,6,,,,,,,199,1,19999,3,1,900,21198,21606 ,2250784,877955,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41648128,973111296,0,0
2020-05-27T12:14:15-0500	1590599655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1255917,6,,,,,,,199,1,19999,3,1,900,21193,21601 ,2250144,877780,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41668608,973111296,0,0
2020-05-27T12:09:15-0500	1590599355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1255617,6,,,,,,,199,1,19999,3,1,900,21188,21596 ,2249504,877605,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41418752,973111296,0,0
2020-05-27T12:04:15-0500	1590599055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1255317,6,,,,,,,199,1,19999,3,1,900,21183,21591 ,2249239,877430,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41558016,973111296,0,0
2020-05-27T11:59:15-0500	1590598755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1255017,6,,,,,,,199,1,19999,3,1,900,21178,21586 ,2248599,877255,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41684992,973111296,0,0
2020-05-27T11:54:15-0500	1590598455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1254717,6,,,,,,,199,1,19999,3,1,900,21173,21581 ,2247959,877080,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41848832,973111296,0,0
2020-05-27T11:49:15-0500	1590598155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1254417,6,,,,,,,199,1,19999,3,1,900,21168,21576 ,2247694,876905,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41619456,973111296,0,0
2020-05-27T11:44:15-0500	1590597855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1254117,6,,,,,,,199,1,19999,3,1,900,21163,21571 ,2247054,876730,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41598976,973111296,0,0
2020-05-27T11:39:15-0500	1590597555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1253817,6,,,,,,,199,1,19999,3,1,900,21157,21564 ,2246238,876499,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41607168,973111296,0,0
2020-05-27T11:34:15-0500	1590597255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1253517,6,,,,,,,199,1,19999,3,1,900,21152,21559 ,2245598,876324,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41611264,973111296,0,0
2020-05-27T11:29:15-0500	1590596955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1253217,6,,,,,,,199,1,19999,3,1,900,21147,21554 ,2245333,876149,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41639936,973111296,0,0
2020-05-27T11:24:15-0500	1590596655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1252917,6,,,,,,,199,1,19999,3,1,900,21142,21549 ,2244693,875974,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41644032,973111296,0,0
2020-05-27T11:19:15-0500	1590596355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1252617,6,,,,,,,199,1,19999,3,1,900,21137,21544 ,2244053,875799,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41820160,973111296,0,0
2020-05-27T11:14:15-0500	1590596055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1252317,6,,,,,,,199,1,19999,3,1,900,21132,21539 ,2243788,875624,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 42008576,973111296,0,0
2020-05-27T11:09:15-0500	1590595755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1252017,6,,,,,,,199,1,19999,3,1,900,21127,21534 ,2243148,875449,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41545728,973111296,0,0
2020-05-27T11:04:15-0500	1590595455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1251717,6,,,,,,,199,1,19999,3,1,900,21122,21529 ,2242508,875274,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41435136,973111296,0,0

Time	Event
2020-05-27T10:59:15-0500	1590595155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1251417,6,,,,,,,199,1,19999,3,1,900,21117,21524 ,2241868,875099,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41787392,973111296,0,0
2020-05-27T10:54:15-0500	1590594855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1251117,6,,,,,,,199,1,19999,3,1,900,21112,21519 ,2241603,874924,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41537536,973111296,0,0
2020-05-27T10:49:15-0500	1590594555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1250817,6,,,,,,,199,1,19999,3,1,900,21107,21514 ,2240963,874749,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41299968,973111296,0,0
2020-05-27T10:44:15-0500	1590594255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1250517,6,,,,,,,199,1,19999,3,1,900,21102,21509 ,2240323,874574,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41701376,973111296,0,0
2020-05-27T10:39:15-0500	1590593955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1250217,6,,,,,,,199,1,19999,3,1,900,21097,21504 ,2240058,874399,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41332736,973111296,0,0
2020-05-27T10:34:15-0500	1590593655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1249917,6,,,,,,,199,1,19999,3,1,900,21092,21499 ,2239418,874224,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41467904,973111296,0,0
2020-05-27T10:29:15-0500	1590593355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1249617,6,,,,,,,199,1,19999,3,1,900,21087,21494 ,2238778,874049,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41635840,973111296,0,0
2020-05-27T10:24:15-0500	1590593055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1249317,6,,,,,,,199,1,19999,3,1,900,21082,21489 ,2238138,873874,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41877504,973111296,0,0
2020-05-27T10:19:15-0500	1590592755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1249017,6,,,,,,,199,1,19999,3,1,900,21077,21484 ,2237873,873699,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41644032,973111296,0,0
2020-05-27T10:14:15-0500	1590592455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1248717,6,,,,,,,199,1,19999,3,1,900,21072,21479 ,2237233,873524,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41582592,973111296,0,0
2020-05-27T10:09:15-0500	1590592155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1248417,6,,,,,,,199,1,19999,3,1,900,21067,21474 ,2236593,873349,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41873408,973111296,0,0
2020-05-27T10:04:15-0500	1590591855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1248117,6,,,,,,,199,1,19999,3,1,900,21062,21469 ,2236328,873174,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41746432,973111296,0,0
2020-05-27T09:59:15-0500	1590591555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1247817,6,,,,,,,199,1,19999,3,1,900,21057,21464 ,2235688,872999,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41631744,973111296,0,0
2020-05-27T09:54:15-0500	1590591255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1247517,6,,,,,,,199,1,19999,3,1,900,21052,21459 ,2235048,872824,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41893888,973111296,0,0
2020-05-27T09:49:15-0500	1590590955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1247217,6,,,,,,,199,1,19999,3,1,900,21047,21454 ,2234408,872649,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41562112,973111296,0,0
2020-05-27T09:44:15-0500	1590590655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1246917,6,,,,,,,199,1,19999,3,1,900,21042,21449 ,2234143,872474,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41455616,973111296,0,0
2020-05-27T09:39:15-0500	1590590355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1246617,6,,,,,,,199,1,19999,3,1,900,21037,21444 ,2233503,872299,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41676800,973111296,0,0
2020-05-27T09:34:15-0500	1590590055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1246317,6,,,,,,,199,1,19999,3,1,900,21032,21439 ,2232863,872124,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41803776,973111296,0,0
2020-05-27T09:29:15-0500	1590589755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1246017,6,,,,,,,199,1,19999,3,1,900,21027,21434 ,2232598,871949,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41549824,973111296,0,0
2020-05-27T09:24:15-0500	1590589455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1245717,6,,,,,,,199,1,19999,3,1,900,21022,21429 ,2231958,871774,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41680896,973111296,0,0
2020-05-27T09:19:15-0500	1590589155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1245417,6,,,,,,,199,1,19999,3,1,900,21017,21424 ,2231318,871599,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41558016,973111296,0,0
2020-05-27T09:14:15-0500	1590588855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1245117,6,,,,,,,199,1,19999,3,1,900,21012,21419 ,2230678,871424,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41574400,973111296,0,0

Time	Event
2020-05-27T09:09:15-0500	1590588555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1244817,6,,,,,,,199,1,19999,3,1,900,21007,21414 ,2230413,871249,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41422848,973111296,0,0
2020-05-27T09:04:15-0500	1590588255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1244517,6,,,,,,,199,1,19999,3,1,900,21002,21409 ,2229773,871074,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41693184,973111296,0,0
2020-05-27T08:59:15-0500	1590587955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1244217,6,,,,,,,199,1,19999,3,1,900,20997,21404 ,2229133,870899,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41570304,973111296,0,0
2020-05-27T08:54:15-0500	1590587655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1243917,6,,,,,,,199,1,19999,3,1,900,20992,21399 ,2228868,870724,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41697280,973111296,0,0
2020-05-27T08:49:15-0500	1590587355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1243617,6,,,,,,,199,1,19999,3,1,900,20987,21394 ,2228228,870549,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41832448,973111296,0,0
2020-05-27T08:44:15-0500	1590587055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1243317,6,,,,,,,199,1,19999,3,1,900,20982,21389 ,2227588,870374,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41996288,973111296,0,0
2020-05-27T08:39:15-0500	1590586755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1243017,6,,,,,,,199,1,19999,3,1,900,20977,21384 ,2226948,870199,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41750528,973111296,0,0
2020-05-27T08:34:15-0500	1590586455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1242717,6,,,,,,,199,1,19999,3,1,900,20972,21379 ,2226683,870024,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41500672,973111296,0,0
2020-05-27T08:29:15-0500	1590586155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1242417,6,,,,,,,199,1,19999,3,1,900,20967,21374 ,2226043,869849,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41885696,973111296,0,0
2020-05-27T08:24:15-0500	1590585855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1242117,6,,,,,,,199,1,19999,3,1,900,20962,21369 ,2225403,869674,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41639936,973111296,0,0
2020-05-27T08:19:15-0500	1590585555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1241817,6,,,,,,,199,1,19999,3,1,900,20957,21364 ,2225138,869499,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41771008,973111296,0,0
2020-05-27T08:14:15-0500	1590585255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1241517,6,,,,,,,199,1,19999,3,1,900,20952,21359 ,2224498,869324,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41771008,973111296,0,0
2020-05-27T08:09:15-0500	1590584955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1241217,6,,,,,,,199,1,19999,3,1,900,20947,21354 ,2223858,869149,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41922560,973111296,0,0
2020-05-27T08:04:15-0500	1590584655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1240917,6,,,,,,,199,1,19999,3,1,900,20942,21349 ,2223218,868974,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41705472,973111296,0,0
2020-05-27T07:59:15-0500	1590584355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1240617,6,,,,,,,199,1,19999,3,1,900,20937,21344 ,2222953,868799,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41832448,973111296,0,0
2020-05-27T07:54:15-0500	1590584055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1240317,6,,,,,,,199,1,19999,3,1,900,20932,21339 ,2222313,868624,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41963520,973111296,0,0
2020-05-27T07:49:15-0500	1590583755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1240017,6,,,,,,,199,1,19999,3,1,900,20927,21334 ,2221673,868449,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41435136,973111296,0,0
2020-05-27T07:44:15-0500	1590583455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1239717,6,,,,,,,199,1,19999,3,1,900,20923,21329 ,2221408,868274,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41947136,973111296,0,0
2020-05-27T07:39:15-0500	1590583155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1239417,6,,,,,,,199,1,19999,3,1,900,20913,21315 ,2220592,867881,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41594880,973111296,0,0
2020-05-27T07:34:15-0500	1590582855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1239117,6,,,,,,,199,1,19999,3,1,900,20908,21310 ,2219952,867706,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41721856,973111296,0,0
2020-05-27T07:29:15-0500	1590582555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1238817,6,,,,,,,199,1,19999,3,1,900,20903,21305 ,2219312,867531,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41725952,973111296,0,0
2020-05-27T07:24:15-0500	1590582255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1238517,6,,,,,,,199,1,19999,3,1,900,20898,21300 ,2219047,867356,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41607168,973111296,0,0

Time	Event
2020-05-27T07:19:15-0500	1590581955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1238217,6,,,,,,,199,1,19999,3,1,900,20893,21295 ,2218407,867181,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41988096,973111296,0,0
2020-05-27T07:14:15-0500	1590581655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1237917,6,,,,,,,199,1,19999,3,1,900,20888,21290 ,2217767,867006,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41705472,973111296,0,0
2020-05-27T07:09:15-0500	1590581355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1237617,6,,,,,,,199,1,19999,3,1,900,20883,21285 ,2217502,866831,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41582592,973111296,0,0
2020-05-27T07:04:15-0500	1590581055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1237317,6,,,,,,,199,1,19999,3,1,900,20878,21280 ,2216862,866656,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41844736,973111296,0,0
2020-05-27T06:59:15-0500	1590580755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1237017,6,,,,,,,199,1,19999,3,1,900,20873,21275 ,2216222,866481,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41480192,973111296,0,0
2020-05-27T06:54:15-0500	1590580455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1236717,6,,,,,,,199,1,19999,3,1,900,20868,21270 ,2215582,866306,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41504768,973111296,0,0
2020-05-27T06:49:15-0500	1590580155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1236417,6,,,,,,,199,1,19999,3,1,900,20863,21265 ,2215317,866131,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41766912,973111296,0,0
2020-05-27T06:44:15-0500	1590579855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1236117,6,,,,,,,199,1,19999,3,1,900,20858,21260 ,2214677,865956,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41533440,973111296,0,0
2020-05-27T06:39:15-0500	1590579555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1235817,6,,,,,,,199,1,19999,3,1,900,20853,21255 ,2214037,865781,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41639936,973111296,0,0
2020-05-27T06:34:15-0500	1590579255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1235517,6,,,,,,,199,1,19999,3,1,900,20848,21250 ,2213772,865606,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41771008,973111296,0,0
2020-05-27T06:29:15-0500	1590578955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1235217,6,,,,,,,199,1,19999,3,1,900,20843,21245 ,2213132,865431,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41906176,973111296,0,0
2020-05-27T06:24:15-0500	1590578655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1234917,6,,,,,,,199,1,19999,3,1,900,20838,21240 ,2212492,865256,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41783296,973111296,0,0
2020-05-27T06:19:15-0500	1590578355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1234617,6,,,,,,,199,1,19999,3,1,900,20833,21235 ,2211852,865081,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41656320,973111296,0,0
2020-05-27T06:14:15-0500	1590578055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1234317,6,,,,,,,199,1,19999,3,1,900,20828,21230 ,2211587,864906,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41783296,973111296,0,0
2020-05-27T06:09:15-0500	1590577755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1234017,6,,,,,,,199,1,19999,3,1,900,20823,21225 ,2210947,864731,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41414656,973111296,0,0
2020-05-27T06:04:15-0500	1590577455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1233717,6,,,,,,,199,1,19999,3,1,900,20818,21220 ,2210307,864556,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41418752,973111296,0,0
2020-05-27T05:59:15-0500	1590577155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1233417,6,,,,,,,199,1,19999,3,1,900,20813,21215 ,2210042,864381,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41807872,973111296,0,0
2020-05-27T05:54:15-0500	1590576855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1233117,6,,,,,,,199,1,19999,3,1,900,20808,21210 ,2209402,864206,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41525248,973111296,0,0
2020-05-27T05:49:15-0500	1590576555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1232817,6,,,,,,,199,1,19999,3,1,900,20803,21205 ,2208762,864031,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41328640,973111296,0,0
2020-05-27T05:44:15-0500	1590576255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1232517,6,,,,,,,199,1,19999,3,1,900,20798,21200 ,2208122,863856,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41873408,973111296,0,0
2020-05-27T05:39:15-0500	1590575955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1232217,6,,,,,,,199,1,19999,3,1,900,20793,21195 ,2207857,863681,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41750528,973111296,0,0
2020-05-27T05:34:15-0500	1590575655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1231917,6,,,,,,,199,1,19999,3,1,900,20788,21190 ,2207217,863506,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41652224,973111296,0,0

Time	Event
2020-05-27T05:29:15-0500	1590575355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1231617,6,,,,,,,199,1,19999,3,1,900,20783,21185 ,2206577,863331,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41787392,973111296,0,0
2020-05-27T05:24:15-0500	1590575055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1231317,6,,,,,,,199,1,19999,3,1,900,20778,21180 ,2206312,863156,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41664512,973111296,0,0
2020-05-27T05:19:15-0500	1590574755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1231017,6,,,,,,,199,1,19999,3,1,900,20773,21175 ,2205672,862981,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41771008,973111296,0,0
2020-05-27T05:14:15-0500	1590574455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1230717,6,,,,,,,199,1,19999,3,1,900,20768,21170 ,2205032,862806,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41422848,973111296,0,0
2020-05-27T05:09:15-0500	1590574155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1230417,6,,,,,,,199,1,19999,3,1,900,20763,21165 ,2204392,862631,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41820160,973111296,0,0
2020-05-27T05:04:15-0500	1590573855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1230117,6,,,,,,,199,1,19999,3,1,900,20758,21160 ,2204127,862456,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41574400,973111296,0,0
2020-05-27T04:59:15-0500	1590573555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1229817,6,,,,,,,199,1,19999,3,1,900,20753,21155 ,2203487,862281,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41709568,973111296,0,0
2020-05-27T04:54:15-0500	1590573255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1229517,6,,,,,,,199,1,19999,3,1,900,20748,21150 ,2202847,862106,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41459712,973111296,0,0
2020-05-27T04:49:15-0500	1590572955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1229217,6,,,,,,,199,1,19999,3,1,900,20743,21145 ,2202582,861931,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41713664,973111296,0,0
2020-05-27T04:44:15-0500	1590572655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1228917,6,,,,,,,199,1,19999,3,1,900,20738,21140 ,2201942,861756,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41570304,973111296,0,0
2020-05-27T04:39:15-0500	1590572355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1228617,6,,,,,,,199,1,19999,3,1,900,20733,21135 ,2201302,861581,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41705472,973111296,0,0
2020-05-27T04:34:15-0500	1590572055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1228317,6,,,,,,,199,1,19999,3,1,900,20728,21130 ,2200662,861406,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41717760,973111296,0,0
2020-05-27T04:29:15-0500	1590571755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1228017,6,,,,,,,199,1,19999,3,1,900,20723,21125 ,2200397,861231,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41398272,973111296,0,0
2020-05-27T04:24:15-0500	1590571455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1227717,6,,,,,,,199,1,19999,3,1,900,20718,21120 ,2199757,861056,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41615360,973111296,0,0
2020-05-27T04:19:15-0500	1590571155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1227417,6,,,,,,,199,1,19999,3,1,900,20713,21115 ,2199117,860881,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41492480,973111296,0,0
2020-05-27T04:14:15-0500	1590570855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1227117,6,,,,,,,199,1,19999,3,1,900,20708,21110 ,2198852,860706,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 42004480,973111296,0,0
2020-05-27T04:09:15-0500	1590570555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1226817,6,,,,,,,199,1,19999,3,1,900,20703,21105 ,2198212,860531,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41467904,973111296,0,0
2020-05-27T04:04:15-0500	1590570255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1226517,6,,,,,,,199,1,19999,3,1,900,20698,21100 ,2197572,860356,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41598976,973111296,0,0
2020-05-27T03:59:15-0500	1590569955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1226217,6,,,,,,,199,1,19999,3,1,900,20693,21095 ,2196932,860181,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41742336,973111296,0,0
2020-05-27T03:54:15-0500	1590569655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1225917,6,,,,,,,199,1,19999,3,1,900,20688,21090 ,2196667,860006,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41742336,973111296,0,0
2020-05-27T03:49:15-0500	1590569355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1225617,6,,,,,,,199,1,19999,3,1,900,20683,21085 ,2196027,859831,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41381888,973111296,0,0
2020-05-27T03:44:15-0500	1590569055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1225317,6,,,,,,,199,1,19999,3,1,900,20678,21080 ,2195387,859656,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41689088,973111296,0,0

Time	Event
2020-05-27T03:39:15-0500	1590568755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1225017,6,,,,,,,199,1,19999,3,1,900,20672,21073 ,2194946,859425,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41562112,973111296,0,0
2020-05-27T03:34:15-0500	1590568455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1224717,6,,,,,,,199,1,19999,3,1,900,20667,21068 ,2194306,859250,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41443328,973111296,0,0
2020-05-27T03:29:15-0500	1590568155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1224417,6,,,,,,,199,1,19999,3,1,900,20662,21063 ,2193666,859075,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41672704,973111296,0,0
2020-05-27T03:24:15-0500	1590567855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1224117,6,,,,,,,199,1,19999,3,1,900,20657,21058 ,2193026,858900,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41803776,973111296,0,0
2020-05-27T03:19:15-0500	1590567555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1223817,6,,,,,,,199,1,19999,3,1,900,20652,21053 ,2192761,858725,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41676800,973111296,0,0
2020-05-27T03:14:15-0500	1590567255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1223517,6,,,,,,,199,1,19999,3,1,900,20647,21048 ,2192121,858550,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41803776,973111296,0,0
2020-05-27T03:09:15-0500	1590566955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1223217,6,,,,,,,199,1,19999,3,1,900,20642,21043 ,2191481,858375,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41680896,973111296,0,0
2020-05-27T03:04:15-0500	1590566655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1222917,6,,,,,,,199,1,19999,3,1,900,20637,21038 ,2191216,858200,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41553920,973111296,0,0
2020-05-27T02:59:15-0500	1590566355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1222617,6,,,,,,,199,1,19999,3,1,900,20632,21033 ,2190576,858025,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41381888,973111296,0,0
2020-05-27T02:54:15-0500	1590566055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1222317,6,,,,,,,199,1,19999,3,1,900,20627,21028 ,2189936,857850,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41504768,973111296,0,0
2020-05-27T02:49:15-0500	1590565755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1222017,6,,,,,,,199,1,19999,3,1,900,20622,21023 ,2189296,857675,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 42033152,973111296,0,0
2020-05-27T02:44:15-0500	1590565455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1221717,6,,,,,,,199,1,19999,3,1,900,20617,21018 ,2189031,857500,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41635840,973111296,0,0
2020-05-27T02:39:15-0500	1590565155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1221417,6,,,,,,,199,1,19999,3,1,900,20612,21013 ,2188391,857325,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41660416,973111296,0,0
2020-05-27T02:34:15-0500	1590564855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1221117,6,,,,,,,199,1,19999,3,1,900,20607,21008 ,2187751,857150,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41807872,973111296,0,0
2020-05-27T02:29:15-0500	1590564555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1220817,6,,,,,,,199,1,19999,3,1,900,20602,21003 ,2187486,856975,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41422848,973111296,0,0
2020-05-27T02:24:15-0500	1590564255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1220517,6,,,,,,,199,1,19999,3,1,900,20597,20998 ,2186846,856800,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41811968,973111296,0,0
2020-05-27T02:19:15-0500	1590563955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1220217,6,,,,,,,199,1,19999,3,1,900,20592,20993 ,2186206,856625,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41656320,973111296,0,0
2020-05-27T02:14:15-0500	1590563655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1219917,6,,,,,,,199,1,19999,3,1,900,20587,20988 ,2185566,856450,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41541632,973111296,0,0
2020-05-27T02:09:15-0500	1590563355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1219617,6,,,,,,,199,1,19999,3,1,900,20582,20983 ,2185301,856275,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41672704,973111296,0,0
2020-05-27T02:04:15-0500	1590563055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1219317,6,,,,,,,199,1,19999,3,1,900,20577,20978 ,2184661,856100,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41799680,973111296,0,0
2020-05-27T01:59:15-0500	1590562755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1219017,6,,,,,,,199,1,19999,3,1,900,20572,20973 ,2184021,855925,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41684992,973111296,0,0
2020-05-27T01:54:15-0500	1590562455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1218717,6,,,,,,,199,1,19999,3,1,900,20567,20968 ,2183756,855750,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41553920,973111296,0,0

Time	Event
2020-05-27T01:49:15-0500	1590562155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1218417,6,,,,,,,199,1,19999,3,1,900,20562,20963 ,2183116,855575,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41308160,973111296,0,0
2020-05-27T01:44:15-0500	1590561855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1218117,6,,,,,,,199,1,19999,3,1,900,20557,20958 ,2182476,855400,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41566208,973111296,0,0
2020-05-27T01:39:15-0500	1590561555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1217817,6,,,,,,,199,1,19999,3,1,900,20552,20953 ,2181836,855225,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41660416,973111296,0,0
2020-05-27T01:34:15-0500	1590561255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1217517,6,,,,,,,199,1,19999,3,1,900,20547,20948 ,2181571,855050,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41418752,973111296,0,0
2020-05-27T01:29:15-0500	1590560955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1217217,6,,,,,,,199,1,19999,3,1,900,20542,20943 ,2180931,854875,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41672704,973111296,0,0
2020-05-27T01:24:15-0500	1590560655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1216917,6,,,,,,,199,1,19999,3,1,900,20537,20938 ,2180291,854700,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41578496,973111296,0,0
2020-05-27T01:19:15-0500	1590560355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1216617,6,,,,,,,199,1,19999,3,1,900,20532,20933 ,2180026,854525,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41676800,973111296,0,0
2020-05-27T01:14:15-0500	1590560055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1216317,6,,,,,,,199,1,19999,3,1,900,20527,20928 ,2179386,854350,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41680896,973111296,0,0
2020-05-27T01:09:15-0500	1590559755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1216017,6,,,,,,,199,1,19999,3,1,900,20522,20923 ,2178746,854175,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41807872,973111296,0,0
2020-05-27T01:04:15-0500	1590559455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1215717,6,,,,,,,199,1,19999,3,1,900,20517,20918 ,2178106,854000,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41656320,973111296,0,0
2020-05-27T00:59:15-0500	1590559155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1215417,6,,,,,,,199,1,19999,3,1,900,20512,20913 ,2177841,853825,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41689088,973111296,0,0
2020-05-27T00:54:15-0500	1590558855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1215117,6,,,,,,,199,1,19999,3,1,900,20507,20908 ,2177201,853650,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41664512,973111296,0,0
2020-05-27T00:49:15-0500	1590558555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1214817,6,,,,,,,199,1,19999,3,1,900,20502,20903 ,2176561,853475,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41668608,973111296,0,0
2020-05-27T00:44:15-0500	1590558255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1214517,6,,,,,,,199,1,19999,3,1,900,20497,20898 ,2176296,853300,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41558016,973111296,0,0
2020-05-27T00:39:15-0500	1590557955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1214217,6,,,,,,,199,1,19999,3,1,900,20492,20893 ,2175656,853125,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41717760,973111296,0,0
2020-05-27T00:34:15-0500	1590557655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1213917,6,,,,,,,199,1,19999,3,1,900,20487,20888 ,2175016,852950,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41594880,973111296,0,0
2020-05-27T00:29:15-0500	1590557355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1213617,6,,,,,,,199,1,19999,3,1,900,20482,20883 ,2174376,852775,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41472000,973111296,0,0
2020-05-27T00:24:15-0500	1590557055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1213317,6,,,,,,,199,1,19999,3,1,900,20477,20878 ,2174111,852600,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41725952,973111296,0,0
2020-05-27T00:19:15-0500	1590556755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1213017,6,,,,,,,199,1,19999,3,1,900,20472,20873 ,2173471,852425,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41762816,973111296,0,0
2020-05-27T00:14:15-0500	1590556455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1212717,6,,,,,,,199,1,19999,3,1,900,20467,20868 ,2172831,852250,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41381888,973111296,0,0
2020-05-27T00:09:15-0500	1590556155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1212417,6,,,,,,,199,1,19999,3,1,900,20462,20863 ,2172566,852075,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41275392,973111296,0,0
2020-05-27T00:04:15-0500	1590555855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1212117,6,,,,,,,199,1,19999,3,1,900,20457,20858 ,2171926,851900,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41664512,973111296,0,0

Time	Event
2020-05-26T23:59:15-0500	1590555555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1211817,6,,,,,,,199,1,19999,3,1,900,20452,20853 ,2171286,851725,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41541632,973111296,0,0
2020-05-26T23:54:15-0500	1590555255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1211517,6,,,,,,,199,1,19999,3,1,900,20447,20848 ,2170646,851550,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41680896,973111296,0,0
2020-05-26T23:49:15-0500	1590554955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1211217,6,,,,,,,199,1,19999,3,1,900,20442,20843 ,2170381,851375,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41807872,973111296,0,0
2020-05-26T23:44:15-0500	1590554655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1210917,6,,,,,,,199,1,19999,3,1,900,20437,20838 ,2169741,851200,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41861120,973111296,0,0
2020-05-26T23:39:15-0500	1590554355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1210617,6,,,,,,,199,1,19999,3,1,900,20427,20823 ,2168925,850772,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41406464,973111296,0,0
2020-05-26T23:34:15-0500	1590554055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1210317,6,,,,,,,199,1,19999,3,1,900,20422,20818 ,2168660,850597,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41664512,973111296,0,0
2020-05-26T23:29:15-0500	1590553755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1210017,6,,,,,,,199,1,19999,3,1,900,20417,20813 ,2168020,850422,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41803776,973111296,0,0
2020-05-26T23:24:15-0500	1590553455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1209717,6,,,,,,,199,1,19999,3,1,900,20412,20808 ,2167380,850247,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41361408,973111296,0,0
2020-05-26T23:19:15-0500	1590553155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1209417,6,,,,,,,199,1,19999,3,1,900,20407,20803 ,2166740,850072,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41488384,973111296,0,0
2020-05-26T23:14:15-0500	1590552855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1209117,6,,,,,,,199,1,19999,3,1,900,20402,20798 ,2166475,849897,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41639936,973111296,0,0
2020-05-26T23:09:15-0500	1590552555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1208817,6,,,,,,,199,1,19999,3,1,900,20397,20793 ,2165835,849722,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41607168,973111296,0,0
2020-05-26T23:04:15-0500	1590552255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1208517,6,,,,,,,199,1,19999,3,1,900,20392,20788 ,2165195,849547,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41619456,973111296,0,0
2020-05-26T22:59:15-0500	1590551955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1208217,6,,,,,,,199,1,19999,3,1,900,20387,20783 ,2164930,849372,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41365504,973111296,0,0
2020-05-26T22:54:15-0500	1590551655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1207917,6,,,,,,,199,1,19999,3,1,900,20382,20778 ,2164290,849197,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41873408,973111296,0,0
2020-05-26T22:49:15-0500	1590551355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1207617,6,,,,,,,199,1,19999,3,1,900,20377,20773 ,2163650,849022,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41627648,973111296,0,0
2020-05-26T22:44:15-0500	1590551055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1207317,6,,,,,,,199,1,19999,3,1,900,20372,20768 ,2163010,848847,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41631744,973111296,0,0
2020-05-26T22:39:15-0500	1590550755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1207017,6,,,,,,,199,1,19999,3,1,900,20367,20763 ,2162745,848672,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41771008,973111296,0,0
2020-05-26T22:34:15-0500	1590550455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1206717,6,,,,,,,199,1,19999,3,1,900,20362,20758 ,2162105,848497,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41615360,973111296,0,0
2020-05-26T22:29:15-0500	1590550155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1206417,6,,,,,,,199,1,19999,3,1,900,20357,20753 ,2161465,848322,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41529344,973111296,0,0
2020-05-26T22:24:15-0500	1590549855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1206117,6,,,,,,,199,1,19999,3,1,900,20352,20748 ,2161200,848147,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41406464,973111296,0,0
2020-05-26T22:19:15-0500	1590549555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1205817,6,,,,,,,199,1,19999,3,1,900,20347,20743 ,2160560,847972,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41455616,973111296,0,0
2020-05-26T22:14:15-0500	1590549255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1205517,6,,,,,,,199,1,19999,3,1,900,20342,20738 ,2159920,847797,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41750528,973111296,0,0

Time	Event
2020-05-26T22:09:15-0500	1590548955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1205217,6,,,,,,,199,1,19999,3,1,900,20337,20733 ,2159280,847622,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41848832,973111296,0,0
2020-05-26T22:04:15-0500	1590548655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1204917,6,,,,,,,199,1,19999,3,1,900,20332,20728 ,2159015,847447,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41861120,973111296,0,0
2020-05-26T21:59:15-0500	1590548355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1204617,6,,,,,,,199,1,19999,3,1,900,20327,20723 ,2158375,847272,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41738240,973111296,0,0
2020-05-26T21:54:15-0500	1590548055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1204317,6,,,,,,,199,1,19999,3,1,900,20322,20718 ,2157735,847097,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41451520,973111296,0,0
2020-05-26T21:49:15-0500	1590547755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1204017,6,,,,,,,199,1,19999,3,1,900,20317,20713 ,2157470,846922,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41852928,973111296,0,0
2020-05-26T21:44:15-0500	1590547455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1203717,6,,,,,,,199,1,19999,3,1,900,20312,20708 ,2156830,846747,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41730048,973111296,0,0
2020-05-26T21:39:15-0500	1590547155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1203417,6,,,,,,,199,1,19999,3,1,900,20307,20703 ,2156190,846572,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41742336,973111296,0,0
2020-05-26T21:34:15-0500	1590546855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1203117,6,,,,,,,199,1,19999,3,1,900,20302,20698 ,2155550,846397,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41742336,973111296,0,0
2020-05-26T21:29:15-0500	1590546555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1202817,6,,,,,,,199,1,19999,3,1,900,20297,20693 ,2155285,846222,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41746432,973111296,0,0
2020-05-26T21:24:15-0500	1590546255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1202517,6,,,,,,,199,1,19999,3,1,900,20292,20688 ,2154645,846047,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41631744,973111296,0,0
2020-05-26T21:19:15-0500	1590545955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1202217,6,,,,,,,199,1,19999,3,1,900,20287,20683 ,2154005,845872,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41758720,973111296,0,0
2020-05-26T21:14:15-0500	1590545655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1201917,6,,,,,,,199,1,19999,3,1,900,20282,20678 ,2153740,845697,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41607168,973111296,0,0
2020-05-26T21:09:15-0500	1590545355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1201617,6,,,,,,,199,1,19999,3,1,900,20277,20673 ,2153100,845522,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41480192,973111296,0,0
2020-05-26T21:04:15-0500	1590545055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1201317,6,,,,,,,199,1,19999,3,1,900,20272,20668 ,2152460,845347,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41484288,973111296,0,0
2020-05-26T20:59:15-0500	1590544755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1201017,6,,,,,,,199,1,19999,3,1,900,20267,20663 ,2151820,845172,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41832448,973111296,0,0
2020-05-26T20:54:15-0500	1590544455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1200717,6,,,,,,,199,1,19999,3,1,900,20262,20658 ,2151555,844997,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41488384,973111296,0,0
2020-05-26T20:49:15-0500	1590544155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1200417,6,,,,,,,199,1,19999,3,1,900,20257,20653 ,2150915,844822,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41746432,973111296,0,0
2020-05-26T20:44:15-0500	1590543855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1200117,6,,,,,,,199,1,19999,3,1,900,20252,20648 ,2150275,844647,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41713664,973111296,0,0
2020-05-26T20:39:15-0500	1590543555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1199817,6,,,,,,,199,1,19999,3,1,900,20247,20643 ,2150010,844472,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41844736,973111296,0,0
2020-05-26T20:34:15-0500	1590543255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1199517,6,,,,,,,199,1,19999,3,1,900,20242,20638 ,2149370,844297,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41598976,973111296,0,0
2020-05-26T20:29:15-0500	1590542955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1199217,6,,,,,,,199,1,19999,3,1,900,20237,20633 ,2148730,844122,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41603072,973111296,0,0
2020-05-26T20:24:15-0500	1590542655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1198917,6,,,,,,,199,1,19999,3,1,900,20232,20628 ,2148090,843947,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41750528,973111296,0,0

Time	Event
2020-05-26T20:19:15-0500	1590542355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1198617,6,,,,,,,199,1,19999,3,1,900,20227,20623 ,2147825,843772,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41504768,973111296,0,0
2020-05-26T20:14:15-0500	1590542055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1198317,6,,,,,,,199,1,19999,3,1,900,20222,20618 ,2147185,843597,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41140224,973111296,0,0
2020-05-26T20:09:15-0500	1590541755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1198017,6,,,,,,,199,1,19999,3,1,900,20217,20613 ,2146545,843422,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41553920,973111296,0,0
2020-05-26T20:04:15-0500	1590541455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1197717,6,,,,,,,199,1,19999,3,1,900,20212,20608 ,2146280,843247,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41549824,973111296,0,0
2020-05-26T19:59:15-0500	1590541155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1197417,6,,,,,,,199,1,19999,3,1,900,20207,20603 ,2145640,843072,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41533440,973111296,0,0
2020-05-26T19:54:15-0500	1590540855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1197117,6,,,,,,,199,1,19999,3,1,900,20202,20598 ,2145000,842897,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41693184,973111296,0,0
2020-05-26T19:49:15-0500	1590540555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1196817,6,,,,,,,199,1,19999,3,1,900,20197,20593 ,2144360,842722,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41955328,973111296,0,0
2020-05-26T19:44:15-0500	1590540255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1196517,6,,,,,,,199,1,19999,3,1,900,20192,20588 ,2144095,842547,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41705472,973111296,0,0
2020-05-26T19:39:15-0500	1590539955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1196217,6,,,,,,,199,1,19999,3,1,900,20186,20581 ,2143279,842316,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41607168,973111296,0,0
2020-05-26T19:34:15-0500	1590539655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1195917,6,,,,,,,199,1,19999,3,1,900,20181,20576 ,2142639,842141,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41738240,973111296,0,0
2020-05-26T19:29:15-0500	1590539355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1195617,6,,,,,,,199,1,19999,3,1,900,20176,20571 ,2142374,841966,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41607168,973111296,0,0
2020-05-26T19:24:15-0500	1590539055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1195317,6,,,,,,,199,1,19999,3,1,900,20171,20566 ,2141734,841791,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41488384,973111296,0,0
2020-05-26T19:19:15-0500	1590538755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1195017,6,,,,,,,199,1,19999,3,1,900,20166,20561 ,2141094,841616,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41742336,973111296,0,0
2020-05-26T19:14:15-0500	1590538455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1194717,6,,,,,,,199,1,19999,3,1,900,20161,20556 ,2140454,841441,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41639936,973111296,0,0
2020-05-26T19:09:15-0500	1590538155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1194417,6,,,,,,,199,1,19999,3,1,900,20156,20551 ,2140189,841266,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41644032,973111296,0,0
2020-05-26T19:04:15-0500	1590537855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1194117,6,,,,,,,199,1,19999,3,1,900,20151,20546 ,2139549,841091,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41406464,973111296,0,0
2020-05-26T18:59:15-0500	1590537555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1193817,6,,,,,,,199,1,19999,3,1,900,20146,20541 ,2138909,840916,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41549824,973111296,0,0
2020-05-26T18:54:15-0500	1590537255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1193517,6,,,,,,,199,1,19999,3,1,900,20141,20536 ,2138644,840741,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41545728,973111296,0,0
2020-05-26T18:49:15-0500	1590536955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1193217,6,,,,,,,199,1,19999,3,1,900,20136,20531 ,2138004,840566,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41525248,973111296,0,0
2020-05-26T18:44:15-0500	1590536655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1192917,6,,,,,,,199,1,19999,3,1,900,20131,20526 ,2137364,840391,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41451520,973111296,0,0
2020-05-26T18:39:15-0500	1590536355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1192617,6,,,,,,,199,1,19999,3,1,900,20126,20521 ,2136724,840216,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41332736,973111296,0,0
2020-05-26T18:34:15-0500	1590536055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1192317,6,,,,,,,199,1,19999,3,1,900,20121,20516 ,2136459,840041,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41717760,973111296,0,0

Time	Event
2020-05-26T18:29:15-0500	1590535755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1192017,6,,,,,,,199,1,19999,3,1,900,20116,20511 ,2135819,839866,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41590784,973111296,0,0
2020-05-26T18:24:15-0500	1590535455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1191717,6,,,,,,,199,1,19999,3,1,900,20111,20506 ,2135179,839691,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41594880,973111296,0,0
2020-05-26T18:19:15-0500	1590535155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1191417,6,,,,,,,199,1,19999,3,1,900,20106,20501 ,2134914,839516,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41590784,973111296,0,0
2020-05-26T18:14:15-0500	1590534855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1191117,6,,,,,,,199,1,19999,3,1,900,20101,20496 ,2134274,839341,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41607168,973111296,0,0
2020-05-26T18:09:15-0500	1590534555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1190817,6,,,,,,,199,1,19999,3,1,900,20096,20491 ,2133634,839166,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41832448,973111296,0,0
2020-05-26T18:04:15-0500	1590534255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1190517,6,,,,,,,199,1,19999,3,1,900,20091,20486 ,2132994,838991,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41578496,973111296,0,0
2020-05-26T17:59:15-0500	1590533955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1190217,6,,,,,,,199,1,19999,3,1,900,20086,20481 ,2132729,838816,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41209856,973111296,0,0
2020-05-26T17:54:15-0500	1590533655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1189917,6,,,,,,,199,1,19999,3,1,900,20081,20476 ,2132089,838641,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41598976,973111296,0,0
2020-05-26T17:49:15-0500	1590533355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1189617,6,,,,,,,199,1,19999,3,1,900,20076,20471 ,2131449,838466,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41332736,973111296,0,0
2020-05-26T17:44:15-0500	1590533055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1189317,6,,,,,,,199,1,19999,3,1,900,20071,20466 ,2131184,838291,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41496576,973111296,0,0
2020-05-26T17:39:15-0500	1590532755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1189017,6,,,,,,,199,1,19999,3,1,900,20066,20461 ,2130544,838116,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41250816,973111296,0,0
2020-05-26T17:34:15-0500	1590532455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1188717,6,,,,,,,199,1,19999,3,1,900,20061,20456 ,2129904,837941,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41603072,973111296,0,0
2020-05-26T17:29:15-0500	1590532155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1188417,6,,,,,,,199,1,19999,3,1,900,20056,20451 ,2129264,837766,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41607168,973111296,0,0
2020-05-26T17:24:15-0500	1590531855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1188117,6,,,,,,,199,1,19999,3,1,900,20051,20446 ,2128999,837591,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41611264,973111296,0,0
2020-05-26T17:19:15-0500	1590531555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1187817,6,,,,,,,199,1,19999,3,1,900,20046,20441 ,2128359,837416,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41742336,973111296,0,0
2020-05-26T17:14:15-0500	1590531255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1187517,6,,,,,,,199,1,19999,3,1,900,20041,20436 ,2127719,837241,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41496576,973111296,0,0
2020-05-26T17:09:15-0500	1590530955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1187217,6,,,,,,,199,1,19999,3,1,900,20036,20431 ,2127454,837066,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41512960,973111296,0,0
2020-05-26T17:04:15-0500	1590530655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1186917,6,,,,,,,199,1,19999,3,1,900,20031,20426 ,2126814,836891,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41517056,973111296,0,0
2020-05-26T16:59:15-0500	1590530355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1186617,6,,,,,,,199,1,19999,3,1,900,20026,20421 ,2126174,836716,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41377792,973111296,0,0
2020-05-26T16:54:15-0500	1590530055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1186317,6,,,,,,,199,1,19999,3,1,900,20021,20416 ,2125534,836541,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41631744,973111296,0,0
2020-05-26T16:49:15-0500	1590529755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1186017,6,,,,,,,199,1,19999,3,1,900,20016,20411 ,2125269,836366,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41521152,973111296,0,0
2020-05-26T16:44:15-0500	1590529455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1185717,6,,,,,,,199,1,19999,3,1,900,20011,20406 ,2124629,836191,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41529344,973111296,0,0

Time	Event
2020-05-26T16:39:15-0500	1590529155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1185417,6,,,,,,,199,1,19999,3,1,900,20006,20401 ,2123989,836016,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41312256,973111296,0,0
2020-05-26T16:34:15-0500	1590528855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1185117,6,,,,,,,199,1,19999,3,1,900,20001,20396 ,2123724,835841,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41574400,973111296,0,0
2020-05-26T16:29:15-0500	1590528555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1184817,6,,,,,,,199,1,19999,3,1,900,19996,20391 ,2123084,835666,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41701376,973111296,0,0
2020-05-26T16:24:15-0500	1590528255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1184517,6,,,,,,,199,1,19999,3,1,900,19991,20386 ,2122444,835491,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41324544,973111296,0,0
2020-05-26T16:19:15-0500	1590527955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1184217,6,,,,,,,199,1,19999,3,1,900,19986,20381 ,2121804,835316,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41291776,973111296,0,0
2020-05-26T16:14:15-0500	1590527655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1183917,6,,,,,,,199,1,19999,3,1,900,19981,20376 ,2121539,835141,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41422848,973111296,0,0
2020-05-26T16:09:15-0500	1590527355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1183617,6,,,,,,,199,1,19999,3,1,900,19976,20371 ,2120899,834966,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41459712,973111296,0,0
2020-05-26T16:04:15-0500	1590527055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1183317,6,,,,,,,199,1,19999,3,1,900,19971,20366 ,2120259,834791,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41492480,973111296,0,0
2020-05-26T15:59:15-0500	1590526755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1183017,6,,,,,,,199,1,19999,3,1,900,19966,20361 ,2119994,834616,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41369600,973111296,0,0
2020-05-26T15:54:15-0500	1590526455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1182717,6,,,,,,,199,1,19999,3,1,900,19961,20356 ,2119354,834441,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41754624,973111296,0,0
2020-05-26T15:49:15-0500	1590526155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1182417,6,,,,,,,199,1,19999,3,1,900,19956,20351 ,2118714,834266,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41406464,973111296,0,0
2020-05-26T15:44:15-0500	1590525855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1182117,6,,,,,,,199,1,19999,3,1,900,19951,20346 ,2118074,834091,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41512960,973111296,0,0
2020-05-26T15:39:15-0500	1590525555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1181817,6,,,,,,,199,1,19999,3,1,900,19941,20331 ,2117633,833663,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41660416,973111296,0,0
2020-05-26T15:34:15-0500	1590525255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1181517,6,,,,,,,199,1,19999,3,1,900,19936,20326 ,2116993,833488,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41541632,973111296,0,0
2020-05-26T15:29:15-0500	1590524955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1181217,6,,,,,,,199,1,19999,3,1,900,19931,20321 ,2116353,833313,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41291776,973111296,0,0
2020-05-26T15:24:15-0500	1590524655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1180917,6,,,,,,,199,1,19999,3,1,900,19926,20316 ,2116088,833138,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41545728,973111296,0,0
2020-05-26T15:19:15-0500	1590524355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1180617,6,,,,,,,199,1,19999,3,1,900,19921,20311 ,2115448,832963,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41840640,973111296,0,0
2020-05-26T15:14:15-0500	1590524055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1180317,6,,,,,,,199,1,19999,3,1,900,19916,20306 ,2114808,832788,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41562112,973111296,0,0
2020-05-26T15:09:15-0500	1590523755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1180017,6,,,,,,,199,1,19999,3,1,900,19911,20301 ,2114168,832613,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41275392,973111296,0,0
2020-05-26T15:04:15-0500	1590523455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1179717,6,,,,,,,199,1,19999,3,1,900,19906,20296 ,2113903,832438,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41664512,973111296,0,0
2020-05-26T14:59:15-0500	1590523155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1179417,6,,,,,,,199,1,19999,3,1,900,19901,20291 ,2113263,832263,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41414656,973111296,0,0
2020-05-26T14:54:15-0500	1590522855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1179117,6,,,,,,,199,1,19999,3,1,900,19896,20286 ,2112623,832088,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41558016,973111296,0,0

Time	Event
2020-05-26T14:49:15-0500	1590522555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1178817,6,,,,,,,199,1,19999,3,1,900,19891,20281 ,2112358,831913,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41562112,973111296,0,0
2020-05-26T14:44:15-0500	1590522255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1178517,6,,,,,,,199,1,19999,3,1,900,19886,20276 ,2111718,831738,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41439232,973111296,0,0
2020-05-26T14:39:15-0500	1590521955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1178217,6,,,,,,,199,1,19999,3,1,900,19881,20271 ,2111078,831563,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41443328,973111296,0,0
2020-05-26T14:34:15-0500	1590521655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1177917,6,,,,,,,199,1,19999,3,1,900,19876,20266 ,2110438,831388,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41443328,973111296,0,0
2020-05-26T14:29:15-0500	1590521355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1177617,6,,,,,,,199,1,19999,3,1,900,19871,20261 ,2110173,831213,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41472000,973111296,0,0
2020-05-26T14:24:15-0500	1590521055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1177317,6,,,,,,,199,1,19999,3,1,900,19866,20256 ,2109533,831038,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41414656,973111296,0,0
2020-05-26T14:19:15-0500	1590520755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1177017,6,,,,,,,199,1,19999,3,1,900,19861,20251 ,2108893,830863,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41431040,973111296,0,0
2020-05-26T14:14:15-0500	1590520455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1176717,6,,,,,,,199,1,19999,3,1,900,19856,20246 ,2108628,830688,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41689088,973111296,0,0
2020-05-26T14:09:15-0500	1590520155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1176417,6,,,,,,,199,1,19999,3,1,900,19851,20241 ,2107988,830513,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41451520,973111296,0,0
2020-05-26T14:04:15-0500	1590519855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1176117,6,,,,,,,199,1,19999,3,1,900,19847,20237 ,2107348,830373,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41312256,973111296,0,0
2020-05-26T13:59:15-0500	1590519555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1175817,6,,,,,,,199,1,19999,3,1,900,19842,20232 ,2106708,830198,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41439232,973111296,0,0
2020-05-26T13:54:15-0500	1590519255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1175517,6,,,,,,,199,1,19999,3,1,900,19837,20227 ,2106443,830023,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41189376,973111296,0,0
2020-05-26T13:49:15-0500	1590518955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1175217,6,,,,,,,199,1,19999,3,1,900,19832,20222 ,2105803,829848,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41304064,973111296,0,0
2020-05-26T13:44:15-0500	1590518655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1174917,6,,,,,,,199,1,19999,3,1,900,19827,20217 ,2105163,829673,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41553920,973111296,0,0
2020-05-26T13:39:15-0500	1590518355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1174617,6,,,,,,,199,1,19999,3,1,900,19822,20212 ,2104898,829498,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41684992,973111296,0,0
2020-05-26T13:34:15-0500	1590518055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1174317,6,,,,,,,199,1,19999,3,1,900,19817,20207 ,2104258,829323,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41558016,973111296,0,0
2020-05-26T13:29:15-0500	1590517755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1174017,6,,,,,,,199,1,19999,3,1,900,19812,20202 ,2103618,829148,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41218048,973111296,0,0
2020-05-26T13:24:15-0500	1590517455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1173717,6,,,,,,,199,1,19999,3,1,900,19807,20197 ,2102978,828973,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41598976,973111296,0,0
2020-05-26T13:19:15-0500	1590517155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1173417,6,,,,,,,199,1,19999,3,1,900,19802,20192 ,2102713,828798,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41476096,973111296,0,0
2020-05-26T13:14:15-0500	1590516855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1173117,6,,,,,,,199,1,19999,3,1,900,19797,20187 ,2102073,828623,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41324544,973111296,0,0
2020-05-26T13:09:15-0500	1590516555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1172817,6,,,,,,,199,1,19999,3,1,900,19792,20182 ,2101433,828448,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41488384,973111296,0,0
2020-05-26T13:04:15-0500	1590516255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1172517,6,,,,,,,199,1,19999,3,1,900,19787,20177 ,2101168,828273,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41242624,973111296,0,0


Time	Event
2020-05-26T12:59:15-0500	1590515955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1172217,6,,,,,,,199,1,19999,3,1,900,19782,20172 ,2100528,828098,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41406464,973111296,0,0
2020-05-26T12:54:15-0500	1590515655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1171917,6,,,,,,,199,1,19999,3,1,900,19777,20167 ,2099888,827923,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41410560,973111296,0,0
2020-05-26T12:49:15-0500	1590515355,42086,CO326-DENVPD-NG911PRB-2009130100,0,1171617,6,,,,,,,199,1,19999,3,1,900,19772,20162 ,2099248,827748,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41803776,973111296,0,0
2020-05-26T12:44:15-0500	1590515055,42086,CO326-DENVPD-NG911PRB-2009130100,0,1171317,6,,,,,,,199,1,19999,3,1,900,19767,20157 ,2098983,827573,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41299968,973111296,0,0
2020-05-26T12:39:15-0500	1590514755,42086,CO326-DENVPD-NG911PRB-2009130100,0,1171017,6,,,,,,,199,1,19999,3,1,900,19762,20152 ,2098343,827398,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41562112,973111296,0,0
2020-05-26T12:34:15-0500	1590514455,42086,CO326-DENVPD-NG911PRB-2009130100,0,1170717,6,,,,,,,199,1,19999,3,1,900,19757,20147 ,2097703,827223,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41664512,973111296,0,0
2020-05-26T12:29:15-0500	1590514155,42086,CO326-DENVPD-NG911PRB-2009130100,0,1170417,6,,,,,,,199,1,19999,3,1,900,19752,20142 ,2097438,827048,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41422848,973111296,0,0
2020-05-26T12:24:15-0500	1590513855,42086,CO326-DENVPD-NG911PRB-2009130100,0,1170117,6,,,,,,,199,1,19999,3,1,900,19747,20137 ,2096798,826873,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41590784,973111296,0,0
2020-05-26T12:19:15-0500	1590513555,42086,CO326-DENVPD-NG911PRB-2009130100,0,1169817,6,,,,,,,199,1,19999,3,1,900,19742,20132 ,2096158,826698,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41218048,973111296,0,0
2020-05-26T12:14:15-0500	1590513255,42086,CO326-DENVPD-NG911PRB-2009130100,0,1169517,6,,,,,,,199,1,19999,3,1,900,19737,20127 ,2095518,826523,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41730048,973111296,0,0
2020-05-26T12:09:15-0500	1590512955,42086,CO326-DENVPD-NG911PRB-2009130100,0,1169217,6,,,,,,,199,1,19999,3,1,900,19732,20122 ,2095253,826348,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,99,12140544, 41230336,973111296,0,0
2020-05-26T12:04:15-0500	1590512655,42086,CO326-DENVPD-NG911PRB-2009130100,0,1168917,6,,,,,,,199,1,19999,3,1,900,19727,20117 ,2094613,826173,0,eva-aarch64-monolith-12Dec2018.1.1530.eva,C15_7443_fd26f7ec,C6_7443_1ac13cee,98,12140544, 41488384,973111296,0,0

Initiate On Demand Active Test


activetestlink

https://63.150.170.73/cgi-bin/all-mina-od.cgi


Test Completion Codes

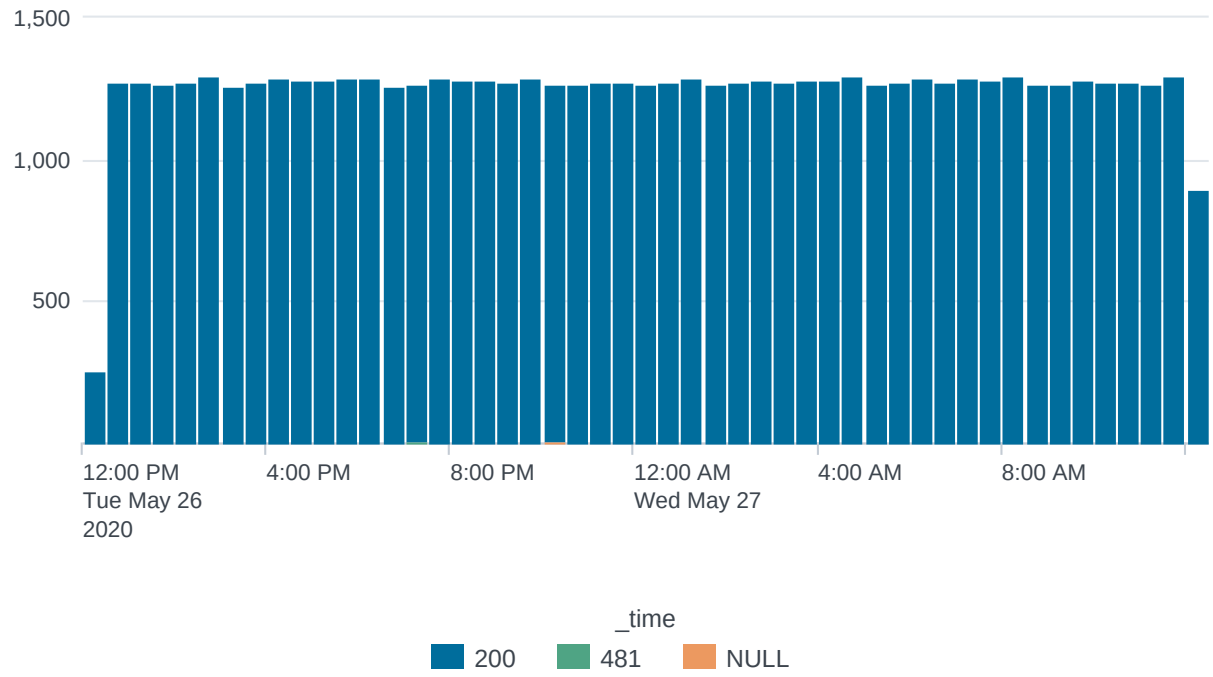


VQES MOS by PSAP

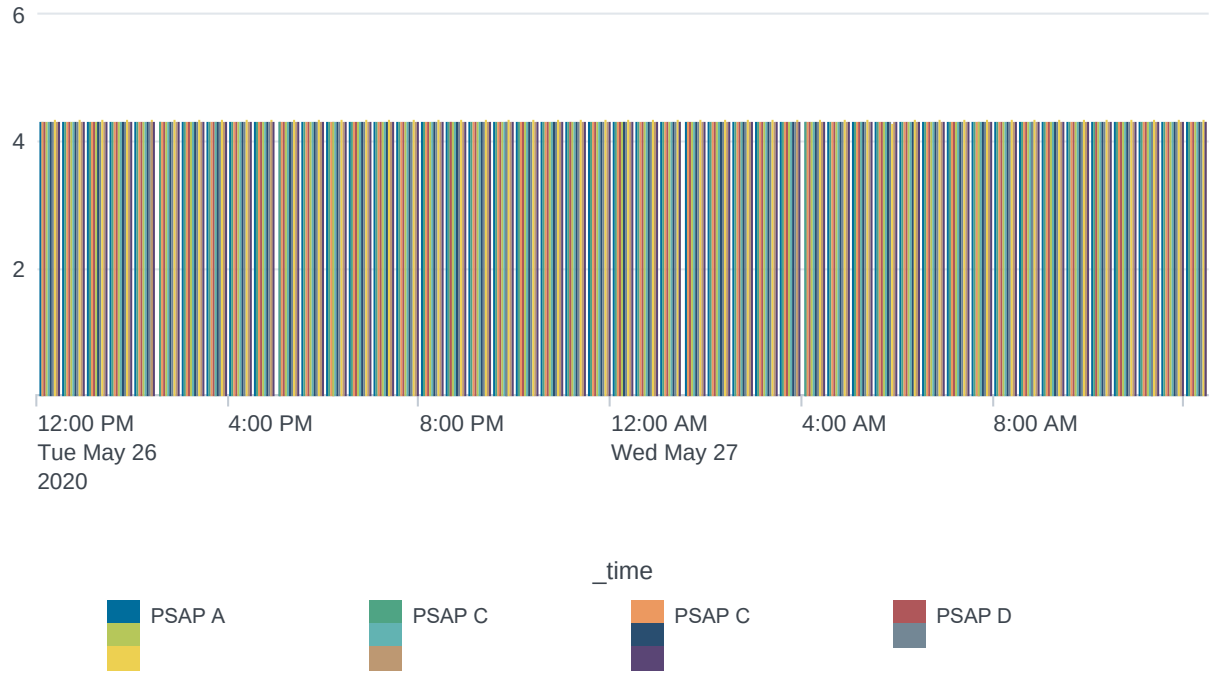


VQES MOS by ECMC Route

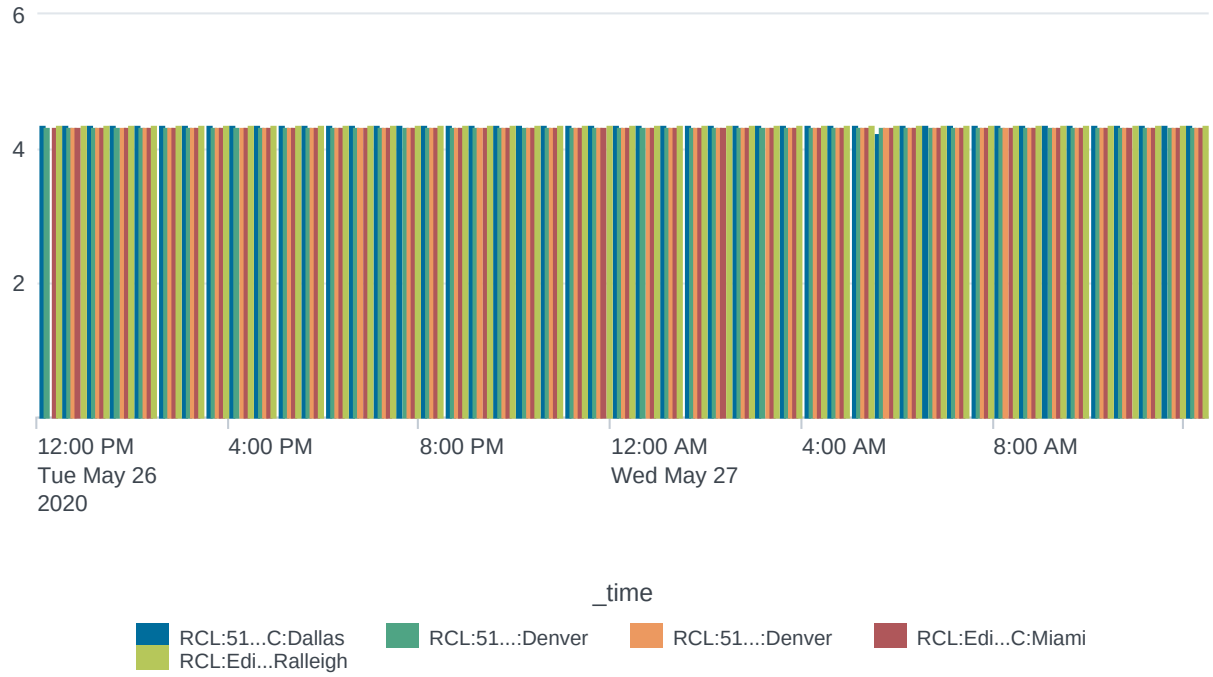

Packet Loss Percentage by ECMC Route

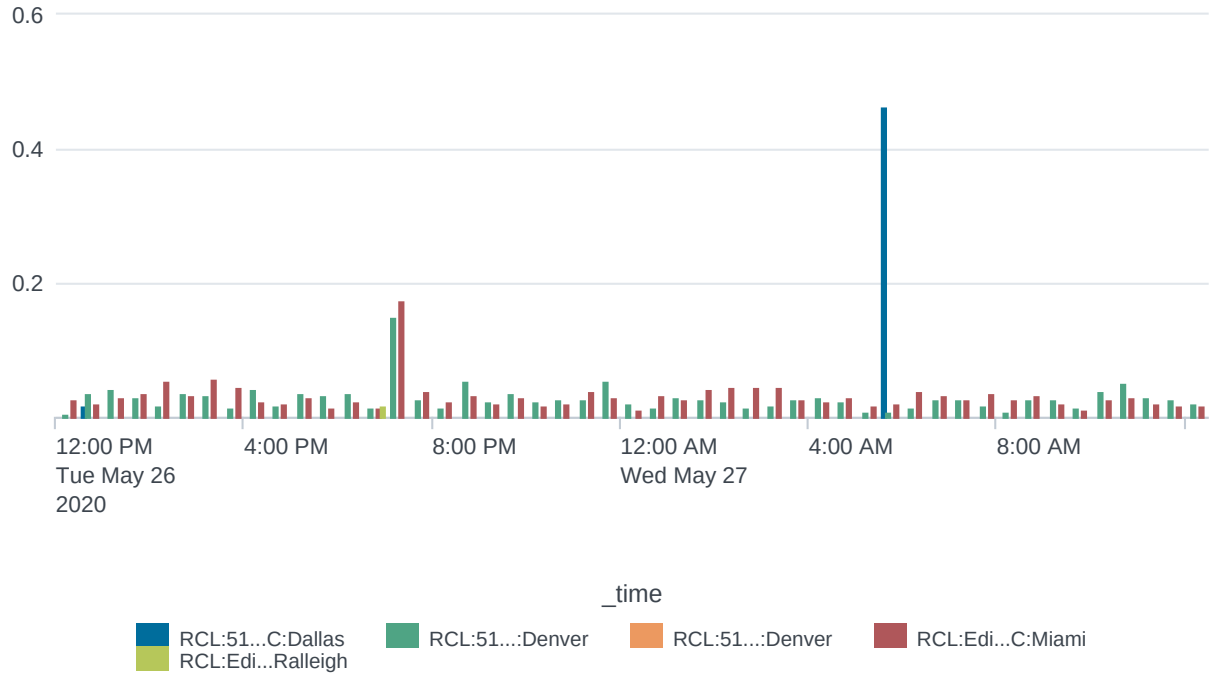

Delay Variation (Jitter) by ECMC Route

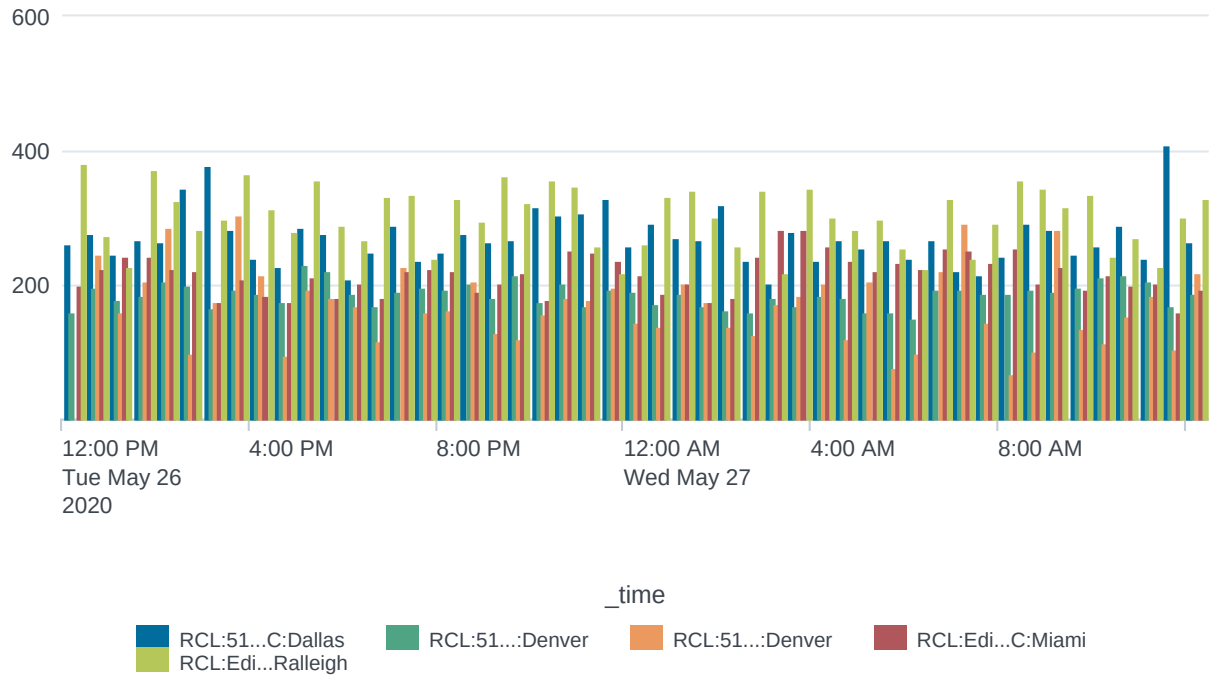

RTD by ECMC Route

No results found.

Speech Distortion by ECMC Route

No results found.

Signal/Noise by ECMC Route

No results found.

Speech Power by ECMC Route

No results found.

Agreement Document from CenturyLink

Final Audit Report 2020-06-03

Created:	2020-06-03
By:	Bjorn Johnson (bjorn.johnson@centurylink.com)
Status:	Signed
Transaction ID:	CBJCHBCAABAAiPqjx9RWQ8jbSNqR49nP3AyZfMqQsbOS

"Agreement Document from CenturyLink" History

Document created by Bjorn Johnson (bjorn.johnson@centurylink.com)
2020-06-03 - 3:36:27 PM GMT- IP address: 13.108.254.8

Document emailed to Susan Baker (sue.baker@centurylink.com) for signature
2020-06-03 - 3:38:19 PM GMT

Email viewed by Susan Baker (sue.baker@centurylink.com)
2020-06-03 - 3:43:31 PM GMT- IP address: 155.70.104.122

Document e-signed by Susan Baker (sue.baker@centurylink.com)
Signature Date: 2020-06-03 - 3:43:46 PM GMT - Time Source: server- IP address: 155.70.104.122

Signed document emailed to all eligible parties.
2020-06-03 - 3:43:46 PM GMT

Instructions To Bidders

General

- All cells are locked except those allowing input (shaded green).
- **Do not attempt to edit formula cells**. Any attempt to edit a formula may cause bidder's entire response to be rejected.
- Tabs will contain cells for Non-Recurring Costs (NRC) and Monthly Recurring Charges (MRC).
- Follow the instructions for each Tab.
- Save as an Excel file and give it a unique name, using the following format: "**Company XYZ XXXX Z1 Cost Proposal Option C ESInet and NGCS**".
- Print the workbook (not just the worksheets) to verify content of each tab. Also, verify that all data can be seen in each cell.
- Include the saved Excel file when submitting the RFP response package to the Nebraska State Purchasing Bureau.
- If more rows are needed in each region, you can insert additional rows.
- Each sheet is divided into the 7 regions. Enter pricing information for each region based on bidders implementation plan.
- All PSAPs and regions may not be ready for geospatial routing on day one of operations and Bidder shall provide tabular routing services, also known as Internet Protocol Selective Routing (IPSR), until such time as PSAPs and regions are ready for geospatial routing. Be sure the cost proposal response indicates the pricing difference between tabular and geospatial routing.
- Include pricing for Optional NGCS services on the Optional Svc tab.

NRC Milestones

- Milestone Payments - NRC payments will be made as structured on the NRC Milestones Tab.As each region is completed on each tab, it is calculated into the total milestone. **Bidders should prepare their cost proposal to reflect the timeline submitted with Bidder's Implementation Plan.**

Summary Tab

- As the name implies, this tab contains the totals from the ESInet, **Legacy Network Gateway (LNG)**, **Border Control Function (BCF)**, **Emergency Services Routing Proxy and Policy Routing Function (ESRP & PRF)**, **Emergency Call Routing Function and Location Validation Function (ECRF & LVF)**, **Spatial Interface (SI)**, **Location Database (LDB)** and **Miscellaneous (MISC) tabs.**
- Enter the Bidder name and date in the designated cells. This information automatically populates the other tabs.
- All other cells are locked.

ESInet Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Emergency Services IP Network services (hardware, software, connectivity, training, maintenance, etc.) for each region. Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly per person amounts in cents**. The monthly amounts are automatically multiplied by the population of the region and by 12 months.

LNG Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Legacy Network Gateway services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the region's population.

BCF Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Border Control Function services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

ESRP & PRF Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Emergency Services Routing Proxy and Policy Routing Function services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

ECRF & LVF Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Emergency Call Routing Function and Location Validation Function services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

SI Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information for Spatial Interface services (hardware, software, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

LDB Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Location Database services (hardware, software, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

MISC Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Miscellaneous services that are not part of one of the above functional elements or that may not have been covered in the RFP but are required in order to complete the project. Add rows for each region as needed.

ESInet Milestones	
Milestone 1: **Region 1** regional host connection and testing acceptance	0.00
Milestone 2: **Region 2** regional host connection and testing acceptance	0.00
Milestone 3: **Region 3** regional host connection and testing acceptance	0.00
Milestone 4: **Region 4** regional host connection and testing acceptance	0.00
Milestone 5: **Region 5** regional host connection and testing acceptance	0.00
Milestone 6: **Region 6** regional host connection and testing acceptance	0.00
Milestone 7: **Region 7** regional host connection and testing acceptance	0.00
TOTAL	0.00

NGCS Milestones	
Milestone 1: **Region 1** deployments complete	8,770.29
Milestone 2: **Region 2** deployments complete	8,770.29
Milestone 3: **Region 3** deployments complete	8,770.29
Milestone 4: **Region 4** deployments complete	8,770.29
Milestone 5: **Region 5** deployments complete	8,770.29
Milestone 6: **Region 6** deployments complete	8,770.29
Milestone 7: **Region 7** deployments complete	8,770.29
TOTAL	61392.03

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name	Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	6/3/2020														
Next Generation Core Services	**INITIAL CONTRACT PERIOD**														
	YEAR 1		**YEAR 2**		**YEAR 3**		**YEAR 4**		**YEAR 5**		**YEAR 6**	**YEAR 7**	**YEAR 8**	**YEAR 9**	**YEAR 10**
	NRC	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**
ESInet	0.00	199,656.00	0.00	465,864.00	0.00	465,864.00	0.00	465,864.00	0.00	465,864.00	465,864.00	465,864.00	465,864.00	465,864.00	465,864.00
LNG	7,212.87	92,571.51	9,617.16	215,999.69	0.00	215,999.69	0.00	215,999.69	0.00	215,999.69	215,999.69	215,999.69	215,999.69	215,999.69	215,999.69
BCF	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ESRP & PRF	0.00	374,996.58	0.00	874,992.00	0.00	874,992.00	0.00	874,992.00	0.00	874,992.00	874,992.00	874,992.00	874,992.00	874,992.00	874,992.00
ECRF & LVF	0.00	200,890.28	0.00	468,744.00	0.00	468,744.00	0.00	468,744.00	0.00	468,744.00	468,744.00	468,744.00	468,744.00	468,744.00	468,744.00
SI	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LDB	0.00	101,838.86	0.00	237,624.00	0.00	237,624.00	0.00	237,624.00	0.00	237,624.00	237,624.00	237,624.00	237,624.00	237,624.00	237,624.00
MISC	19,098.00	7,560.00	25,464.00	17,640.00	0.00	17,640.00	0.00	17,640.00	0.00	17,640.00	17,640.00	17,640.00	17,640.00	17,640.00	17,640.00
Total	26,310.87	977,513.23	35,081.16	2,280,863.69	0.00	2,280,863.69	0.00	2,280,863.69	0.00	2,280,863.69	2,280,863.69	2,280,863.69	2,280,863.69	2,280,863.69	2,280,863.69

Project Totals	**Year 1**	**Year 2**	**Year 3**	**Year 4**	**Year 5**	**Year 6**	**Year 7**	**Year 8**	**Year 9**	**Year 10**
Yearly Totals (NRC+MRC)	1,003,824.10	2,315,944.85	2,280,863.69	2,280,863.69	2,280,863.69	2,280,863.69	2,280,863.69	2,280,863.69	2,280,863.69	2,280,863.69
Initial Contract (5 Year NRC+MRC)	10,162,360.00									
+ Optional Year 6 (6 Year NRC+MRC)	12,443,223.68									
+ Optional Years 7 (7 Year NRC+MRC)	14,724,087.37									
+ Optional Years 8 (8 Year NRC+MRC)	17,004,951.05									
+ Optional Years 9 (9 Year NRC+MRC)	19,285,814.74									
+ Optional Years 10 (10 Year NRC+MRC)	21,566,678.43									

State Population	
	2019 Estimates
Region One - ~~SE~~ SC	259,183
Region Two - ~~SC~~ SE	512,126
Region Three - Metro	772,006
Region Four - NC	28,227
Region Five - EC	180,423
Region Six - NE	114,203
Region Seven - Metro West	63,100
Total Population	1,929,268

Bidder Name:	0
Date (MM/DD/YYYY):	1/0/1900

Emergency Services IP Network	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL - (4 Circuits /2 per host)	0.0000	0.0214	0.0000	0.0214	0.0000	0.0214	0.0000	0.0214	0.0000	0.0214	0.0214	0.0214	0.0214	0.0214	0.0214
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 1 TOTAL	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001
Region Two Milestone															
SOUTH EAST - (4 Circuits /2 per host)	0.0000	0.0108	0.0000	0.0108	0.0000	0.0108	0.0000	0.0108	0.0000	0.0108	0.0108	0.0108	0.0108	0.0108	0.0108
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 2 TOTAL	0.0000	66,551.9999	0.0000	66,551.9999	0.0000	66,551.9999	0.0000	66,551.9999	0.0000	66,551.9999	66,551.9999	66,551.9999	66,551.9999	66,551.9999	66,551.9999
Region Three Milestone															
METRO - (4 Circuits /2 per host)			0.0000	0.0072	0.0000	0.0072	0.0000	0.0072	0.0000	0.0072	0.0072	0.0072	0.0072	0.0072	0.0072
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 3 TOTAL	0.0000	0.0000	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001
Region Four Milestone															
NORTH CENTRAL - (4 Circuits /2 per host)			0.0000	0.1965	0.0000	0.1965	0.0000	0.1965	0.0000	0.1965	0.1965	0.1965	0.1965	0.1965	0.1965
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 4 TOTAL	0.0000	0.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000
Region Five Milestone															
EAST CENTRAL - (4 Circuits /2 per host)	0.0000	0.0307	0.0000	0.0307	0.0000	0.0307	0.0000	0.0307	0.0000	0.0307	0.0307	0.0307	0.0307	0.0307	0.0307
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 5 TOTAL	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	0.0000	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001	66,552.0001
Region Six Milestone															
NORTH EAST - (4 Circuits /2 per host)			0.0000	0.0486	0.0000	0.0486	0.0000	0.0486	0.0000	0.0486	0.0486	0.0486	0.0486	0.0486	0.0486
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 6 TOTAL	0.0000	0.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000
Region Seven Milestone															
METRO WEST - (4 Circuits /2 per host)			0.0000	0.0879	0.0000	0.0879	0.0000	0.0879	0.0000	0.0879	0.0879	0.0879	0.0879	0.0879	0.0879
IQ NETWORKING PRIVATE PORTS															
100 MB Bandwidth/1GB Port															
LOCAL ACCESS/100MB															
NETWORK DIVERSITY - IP POP															
NETWORK DIVERSITY - LOOP															
NRC/MRC REGION 7 TOTAL	0.0000	0.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	0.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000	66,552.0000
ESInet Total	0.0000	199,656.0002	0.0000	465,864.0002	0.0000	465,864.0002	0.0000	465,864.0002	0.0000	465,864.0002	465,864.0002	465,864.0002	465,864.0002	465,864.0002	465,864.0002

Bidder Name:	Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	6/3/2020														
	INITIAL CONTRACT PERIOD														
Legacy Network Gateway	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL															
CCS Default Routes	2,404.2900														
SIP Ingress to Cores, per CCS		0.0099		0.0099		0.0099		0.0099		0.0099	0.0099	0.0099	0.0099	0.0099	0.0099
NRC/MRC Region 1 Total	2,404.2900	30,857.1876	0.0000	30,857.1876	0.0000	30,857.1876	0.0000	30,857.1876	0.0000	30,857.1876	30,857.1876	30,857.1876	30,857.1876	30,857.1876	30,857.1876
Region Two Milestone															
SOUTH EAST															
CCS Default Routes	2,404.2900														
SIP Ingress to Cores, per CCS		0.0050		0.0050		0.0050		0.0050		0.0050	0.0050	0.0050	0.0050	0.0050	0.0050
NRC/MRC Region 2 Total	2,404.2900	30,857.2303	0.0000	30,857.2303	0.0000	30,857.2303	0.0000	30,857.2303	0.0000	30,857.2303	30,857.2303	30,857.2303	30,857.2303	30,857.2303	30,857.2303
Region Three Milestone															
METRO															
CCS Default Routes			2,404.2900												
SIP Ingress to Cores, per CCS				0.0033		0.0033		0.0033		0.0033	0.0033	0.0033	0.0033	0.0033	0.0033
NRC/MRC Region 3 Total	0.0000	0.0000	2,404.2900	30,856.7710	0.0000	30,856.7710	0.0000	30,856.7710	0.0000	30,856.7710	30,856.7710	30,856.7710	30,856.7710	30,856.7710	30,856.7710
Region Four Milestone															
NORTH CENTRAL															
CCS Default Routes			2,404.2900												
SIP Ingress to Cores, per CCS				0.0911		0.0911		0.0911		0.0911	0.0911	0.0911	0.0911	0.0911	0.0911
NRC/MRC Region 4 Total	0.0000	0.0000	2,404.2900	30,857.1467	0.0000	30,857.1467	0.0000	30,857.1467	0.0000	30,857.1467	30,857.1467	30,857.1467	30,857.1467	30,857.1467	30,857.1467
Region Five Milestone															
EAST CENTRAL															
CCS Default Routes	2,404.2900														
SIP Ingress to Cores, per CCS		0.0143		0.0143		0.0143		0.0143		0.0143	0.0143	0.0143	0.0143	0.0143	0.0143
NRC/MRC Region 5 Total	2,404.2900	30,857.0962	0.0000	30,857.0962	0.0000	30,857.0962	0.0000	30,857.0962	0.0000	30,857.0962	30,857.0962	30,857.0962	30,857.0962	30,857.0962	30,857.0962
Region Six Milestone															
NORTH EAST															
CCS Default Routes			2,404.2900												
SIP Ingress to Cores, per CCS				0.0225		0.0225		0.0225		0.0225	0.0225	0.0225	0.0225	0.0225	0.0225
NRC/MRC Region 6 Total	0.0000	0.0000	2,404.2900	30,857.1481	0.0000	30,857.1481	0.0000	30,857.1481	0.0000	30,857.1481	30,857.1481	30,857.1481	30,857.1481	30,857.1481	30,857.1481
Region Seven Milestone															
METRO WEST															
CCS Default Routes			2,404.2900												
SIP Ingress to Cores, per CCS				0.0408		0.0408		0.0408		0.0408	0.0408	0.0408	0.0408	0.0408	0.0408
NRC/MRC Region 7 Total	0.0000	0.0000	2,404.2900	30,857.1115	0.0000	30,857.1115	0.0000	30,857.1115	0.0000	30,857.1115	30,857.1115	30,857.1115	30,857.1115	30,857.1115	30,857.1115
LNG Total	**7,212.8700**	**92,571.5140**	**9,617.1600**	**215,999.6914**	**0.0000**	**215,999.6914**	**0.0000**	**215,999.6914**	**0.0000**	**215,999.6914**	**215,999.6914**	**215,999.6914**	**215,999.6914**	**215,999.6914**	**215,999.6914**

Bidder Name:	Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	6/3/2020														
	INITIAL CONTRACT PERIOD														
Border Control Function	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
INCLUDED IN ESRP/PRF - TAB															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
BCF Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name:	Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	6/3/2020														
Emergency Services Routing Proxy & Policy Routing Function	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL															
A9-1-1 Routing Services		0.0402		0.0402		0.0402		0.0402		0.0402	0.0402	0.0402	0.0402	0.0402	0.0402
Border Control Function (BCF)															
NRC/MRC Region 1 Total	0.0000	124,998.8581	0.0000	124,998.8581	0.0000	124,998.8581	0.0000	124,998.8581	0.0000	124,998.8581	124,998.8581	124,998.8581	124,998.8581	124,998.8581	124,998.8581
Region Two Milestone															
SOUTH EAST															
A9-1-1 Routing Services		0.0203		0.0203		0.0203		0.0203		0.0203	0.0203	0.0203	0.0203	0.0203	0.0203
Border Control Function (BCF)															
NRC/MRC Region 2 Total	0.0000	124,998.8599	0.0000	124,998.8599	0.0000	124,998.8599	0.0000	124,998.8599	0.0000	124,998.8599	124,998.8599	124,998.8599	124,998.8599	124,998.8599	124,998.8599
Region Three Milestone															
METRO															
A9-1-1 Routing Services				0.0135		0.0135		0.0135		0.0135	0.0135	0.0135	0.0135	0.0135	0.0135
Border Control Function (BCF)															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	124,998.8543	0.0000	124,998.8543	0.0000	124,998.8543	0.0000	124,998.8543	124,998.8543	124,998.8543	124,998.8543	124,998.8543	124,998.8543
Region Four Milestone															
NORTH CENTRAL															
A9-1-1 Routing Services				0.3690		0.3690		0.3690		0.3690	0.3690	0.3690	0.3690	0.3690	0.3690
Border Control Function (BCF)															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	124,998.8571	0.0000	124,998.8571	0.0000	124,998.8571	0.0000	124,998.8571	124,998.8571	124,998.8571	124,998.8571	124,998.8571	124,998.8571
Region Five Milestone															
EAST CENTRAL															
A9-1-1 Routing Services		0.0577		0.0577		0.0577		0.0577		0.0577	0.0577	0.0577	0.0577	0.0577	0.0577
Border Control Function (BCF)															
NRC/MRC Region 5 Total	0.0000	124,998.8572	0.0000	124,998.8572	0.0000	124,998.8572	0.0000	124,998.8572	0.0000	124,998.8572	124,998.8572	124,998.8572	124,998.8572	124,998.8572	124,998.8572
Region Six Milestone															
NORTH EAST															
A9-1-1 Routing Services				0.0912		0.0912		0.0912		0.0912	0.0912	0.0912	0.0912	0.0912	0.0912
Border Control Function (BCF)															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	124,998.8572	0.0000	124,998.8572	0.0000	124,998.8572	0.0000	124,998.8572	124,998.8572	124,998.8572	124,998.8572	124,998.8572	124,998.8572
Region Seven Milestone															
METRO WEST															
A9-1-1 Routing Services				0.1651		0.1651		0.1651		0.1651	0.1651	0.1651	0.1651	0.1651	0.1651
Border Control Function (BCF)															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	124,998.8569	0.0000	124,998.8569	0.0000	124,998.8569	0.0000	124,998.8569	124,998.8569	124,998.8569	124,998.8569	124,998.8569	124,998.8569
ESRP & PRF Total	**0.0000**	**374,996.5751**	**0.0000**	**874,992.0006**	**0.0000**	**874,992.0006**	**0.0000**	**874,992.0006**	**0.0000**	**874,992.0006**	**874,992.0006**	**874,992.0006**	**874,992.0006**	**874,992.0006**	**874,992.0006**

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name:	Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	6/3/2020														
Emergency Call Routing Function & Location Validation Function	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL															
i3 Add-on		0.0215		0.0215		0.0215		0.0215		0.0215	0.0215	0.0215	0.0215	0.0215	0.0215
NRC/MRC Region 1 Total	0.0000	66,963.4281	0.0000	66,963.4281	0.0000	66,963.4281	0.0000	66,963.4281	0.0000	66,963.4281	66,963.4281	66,963.4281	66,963.4281	66,963.4281	66,963.4281
Region Two Milestone															
SOUTH EAST															
i3 Add-on		0.0109		0.0109		0.0109		0.0109		0.0109	0.0109	0.0109	0.0109	0.0109	0.0109
NRC/MRC Region 2 Total	0.0000	66,963.4284	0.0000	66,963.4284	0.0000	66,963.4284	0.0000	66,963.4284	0.0000	66,963.4284	66,963.4284	66,963.4284	66,963.4284	66,963.4284	66,963.4284
Region Three Milestone															
METRO															
i3 Add-on				0.0072		0.0072		0.0072		0.0072	0.0072	0.0072	0.0072	0.0072	0.0072
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	66,963.4268	0.0000	66,963.4268	0.0000	66,963.4268	0.0000	66,963.4268	66,963.4268	66,963.4268	66,963.4268	66,963.4268	66,963.4268
Region Four Milestone															
NORTH CENTRAL															
i3 Add-on				0.1977		0.1977		0.1977		0.1977	0.1977	0.1977	0.1977	0.1977	0.1977
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	66,963.4284	0.0000	66,963.4284	0.0000	66,963.4284	0.0000	66,963.4284	66,963.4284	66,963.4284	66,963.4284	66,963.4284	66,963.4284
Region Five Milestone															
EAST CENTRAL															
i3 Add-on		0.0309		0.0309		0.0309		0.0309		0.0309	0.0309	0.0309	0.0309	0.0309	0.0309
NRC/MRC Region 5 Total	0.0000	66,963.4278	0.0000	66,963.4278	0.0000	66,963.4278	0.0000	66,963.4278	0.0000	66,963.4278	66,963.4278	66,963.4278	66,963.4278	66,963.4278	66,963.4278
Region Six Milestone															
NORTH EAST															
i3 Add-on				0.0489		0.0489		0.0489		0.0489	0.0489	0.0489	0.0489	0.0489	0.0489
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	66,963.4279	0.0000	66,963.4279	0.0000	66,963.4279	0.0000	66,963.4279	66,963.4279	66,963.4279	66,963.4279	66,963.4279	66,963.4279
Region Seven Milestone															
METRO WEST															
i3 Add-on				0.0884		0.0884		0.0884		0.0884	0.0884	0.0884	0.0884	0.0884	0.0884
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	66,963.4287	0.0000	66,963.4287	0.0000	66,963.4287	0.0000	66,963.4287	66,963.4287	66,963.4287	66,963.4287	66,963.4287	66,963.4287
ECRF & LVF Total	**0.0000**	**200,890.2843**	**0.0000**	**468,743.9961**	**0.0000**	**468,743.9961**	**0.0000**	**468,743.9961**	**0.0000**	**468,743.9961**	**468,743.9961**	**468,743.9961**	**468,743.9961**	**468,743.9961**	**468,743.9961**

Bidder Name:	Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	6/3/2020														
Spatial Interface	**INITIAL CONTRACT PERIOD**														
	YEAR 1		**YEAR 2**		**YEAR 3**		**YEAR 4**		**YEAR 5**		**Year 6**	**Year 7**	**Year 8**	**Year 9**	**Year 10**
	NRC	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**
Region One Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
INCLUDED IN THE ECRF/LVF TAB															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
SI Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name:	Centurylink (NGCS & ESINET Solution 2)
Date (MM/DD/YYYY):	6/3/2020

Location Database	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL															
A90101 LDB (ALI)		0.0109		0.0109		0.0109		0.0109		0.0109	0.0109	0.0109	0.0109	0.0109	0.0109
NRC/MRC Region 1 Total	0.0000	33,946.2871	0.0000	33,946.2871	0.0000	33,946.2871	0.0000	33,946.2871	0.0000	33,946.2871	33,946.2871	33,946.2871	33,946.2871	33,946.2871	33,946.2871
Region Two Milestone															
SOUTH EAST															
A90101 LDB (ALI)		0.0055		0.0055		0.0055		0.0055		0.0055	0.0055	0.0055	0.0055	0.0055	0.0055
NRC/MRC Region 2 Total	0.0000	33,946.2842	0.0000	33,946.2842	0.0000	33,946.2842	0.0000	33,946.2842	0.0000	33,946.2842	33,946.2842	33,946.2842	33,946.2842	33,946.2842	33,946.2842
Region Three Milestone															
METRO															
A90101 LDB (ALI)				0.0037		0.0037		0.0037		0.0037	0.0037	0.0037	0.0037	0.0037	0.0037
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	33,946.2834	0.0000	33,946.2834	0.0000	33,946.2834	0.0000	33,946.2834	33,946.2834	33,946.2834	33,946.2834	33,946.2834	33,946.2834
Region Four Milestone															
NORTH CENTRAL															
A90101 LDB (ALI)				0.1002		0.1002		0.1002		0.1002	0.1002	0.1002	0.1002	0.1002	0.1002
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	33,946.2859	0.0000	33,946.2859	0.0000	33,946.2859	0.0000	33,946.2859	33,946.2859	33,946.2859	33,946.2859	33,946.2859	33,946.2859
Region Five Milestone															
EAST CENTRAL															
A90101 LDB (ALI)		0.0157		0.0157		0.0157		0.0157		0.0157	0.0157	0.0157	0.0157	0.0157	0.0157
NRC/MRC Region 5 Total	0.0000	33,946.2851	0.0000	33,946.2851	0.0000	33,946.2851	0.0000	33,946.2851	0.0000	33,946.2851	33,946.2851	33,946.2851	33,946.2851	33,946.2851	33,946.2851
Region Six Milestone															
NORTH EAST															
A90101 LDB (ALI)				0.0248		0.0248		0.0248		0.0248	0.0248	0.0248	0.0248	0.0248	0.0248
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	33,946.2863	0.0000	33,946.2863	0.0000	33,946.2863	0.0000	33,946.2863	33,946.2863	33,946.2863	33,946.2863	33,946.2863	33,946.2863
Region Seven Milestone															
METRO WEST															
A90101 LDB (ALI)				0.0448		0.0448		0.0448		0.0448	0.0448	0.0448	0.0448	0.0448	0.0448
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	33,946.2853	0.0000	33,946.2853	0.0000	33,946.2853	0.0000	33,946.2853	33,946.2853	33,946.2853	33,946.2853	33,946.2853	33,946.2853
LDB Total	**0.0000**	**101,838.8564**	**0.0000**	**237,623.9973**	**0.0000**	**237,623.9973**	**0.0000**	**237,623.9973**	**0.0000**	**237,623.9973**	**237,623.9973**	**237,623.9973**	**237,623.9973**	**237,623.9973**	**237,623.9973**

Bidder Name:	Centurylink (NGCS & ESINET Solution 2)														
Date (MM/DD/YYYY):	6/3/2020														
Miscellaneous	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
SOUTH CENTRAL															
Network Monitoring (NMS)		0.0008		0.0008		0.0008		0.0008		0.0008	0.0008	0.0008	0.0008	0.0008	0.0008
UPS	2,880.0000														
LABOR	3,486.0000														
NRC/MRC Region 1 Total	6,366.0000	2,519.9990	0.0000	2,519.9990	0.0000	2,519.9990	0.0000	2,519.9990	0.0000	2,519.9990	2,519.9990	2,519.9990	2,519.9990	2,519.9990	2,519.9990
Region Two Milestone															
SOUTH EAST															
Network Monitoring (NMS)		0.0004		0.0004		0.0004		0.0004		0.0004	0.0004	0.0004	0.0004	0.0004	0.0004
UPS	2,880.0000														
LABOR	3,486.0000														
NRC/MRC Region 2 Total	6,366.0000	2,519.9979	0.0000	2,519.9979	0.0000	2,519.9979	0.0000	2,519.9979	0.0000	2,519.9979	2,519.9979	2,519.9979	2,519.9979	2,519.9979	2,519.9979
Region Three Milestone															
METRO															
Network Monitoring (NMS)				0.0003		0.0003		0.0003		0.0003	0.0003	0.0003	0.0003	0.0003	0.0003
UPS			2,880.0000												
LABOR			3,486.0000												
NRC/MRC Region 3 Total	0.0000	0.0000	6,366.0000	2,520.0036	0.0000	2,520.0036	0.0000	2,520.0036	0.0000	2,520.0036	2,520.0036	2,520.0036	2,520.0036	2,520.0036	2,520.0036
Region Four Milestone															
NORTH CENTRAL															
Network Monitoring (NMS)				0.0074		0.0074		0.0074		0.0074	0.0074	0.0074	0.0074	0.0074	0.0074
UPS			2,880.0000												
LABOR			3,486.0000												
NRC/MRC Region 4 Total	0.0000	0.0000	6,366.0000	2,519.9999	0.0000	2,519.9999	0.0000	2,519.9999	0.0000	2,519.9999	2,519.9999	2,519.9999	2,519.9999	2,519.9999	2,519.9999
Region Five Milestone															
EAST CENTRAL															
Network Monitoring (NMS)		0.0012		0.0012		0.0012		0.0012		0.0012	0.0012	0.0012	0.0012	0.0012	0.0012
UPS	2,880.0000														
LABOR	3,486.0000														
NRC/MRC Region 5 Total	6,366.0000	2,519.9991	0.0000	2,519.9991	0.0000	2,519.9991	0.0000	2,519.9991	0.0000	2,519.9991	2,519.9991	2,519.9991	2,519.9991	2,519.9991	2,519.9991
Region Six Milestone															
NORTH EAST															
Network Monitoring (NMS)				0.0018		0.0018		0.0018		0.0018	0.0018	0.0018	0.0018	0.0018	0.0018
UPS			2,880.0000												
LABOR			3,486.0000												
NRC/MRC Region 6 Total	0.0000	0.0000	6,366.0000	2,520.0002	0.0000	2,520.0002	0.0000	2,520.0002	0.0000	2,520.0002	2,520.0002	2,520.0002	2,520.0002	2,520.0002	2,520.0002
Region Seven Milestone															
METRO WEST															
Network Monitoring (NMS)				0.0033		0.0033		0.0033		0.0033	0.0033	0.0033	0.0033	0.0033	0.0033
UPS			2,880.0000												
LABOR			3,486.0000												
NRC/MRC Region 7 Total	0.0000	0.0000	6,366.0000	2,520.0002	0.0000	2,520.0002	0.0000	2,520.0002	0.0000	2,520.0002	2,520.0002	2,520.0002	2,520.0002	2,520.0002	2,520.0002
MISC Total	**19,098.0000**	**7,559.9960**	**25,464.0000**	**17,639.9999**	**0.0000**	**17,639.9999**	**0.0000**	**17,639.9999**	**0.0000**	**17,639.9999**	**17,639.9999**	**17,639.9999**	**17,639.9999**	**17,639.9999**	**17,639.9999**

Bidder Name:	Centurylink (NGCS & ESINET Solution 2)
Date (MM/DD/YYYY):	6/3/2020

Optional Svc for NGCS	**INITIAL CONTRACT PERIOD**														
	YEAR 1		**YEAR 2**		**YEAR 3**		**YEAR 4**		**YEAR 5**		**Year 6**	**Year 7**	**Year 8**	**Year 9**	**Year 10**
	NRC	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**
Region One Milestone															
SOUTH CENTRAL															
TSP Provisioning installation and/or Restoration priority	578.0000														
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 1 Total	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
SOUTH EAST															
TSP Provisioning installation and/or Restoration priority	578.0000														
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 2 Total	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
METRO															
TSP Provisioning installation and/or Restoration priority			578.0000												
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 3 Total	0.0000	0.0000	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
NORTH CENTRAL															
TSP Provisioning installation and/or Restoration priority			578.0000												
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 4 Total	0.0000	0.0000	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
EAST CENTRAL															
TSP Provisioning installation and/or Restoration priority	578.0000														
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 5 Total	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
NORTH EAST															
TSP Provisioning installation and/or Restoration priority			578.0000												
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 6 Total	0.0000	0.0000	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
METRO WEST															
TSP Provisioning installation and/or Restoration priority			578.0000												
TSP Restoration priority for Leased Access, per Local Access circuit															
TSP Priority Level Change															
TSP Administration and Maintenance															
NRC/MRC Region 7 Total	0.0000	0.0000	578.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Opt. Svc NGCS Total	**1,734.0000**	**0.0000**	**2,312.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

Bidders are instructed to complete a Matrix for Emergency Services Internet Protocol (IP) network (ESInet). Bidders are required to describe in detail how bidder's proposed solution meets the conformance specification outlined within each Requirement. The matrix is used to document and evaluate bidder's response to the requirements.

The matrix should indicate how the bidder intends to comply with the requirement and the effort required to achieve that compliance. It is not sufficient for the bidder to simply state that it intends to meet the requirements of the RFP. PSC will consider any such response to the requirements in this RFP to be non-responsive and the bid may be rejected. The narrative should provide The Public Service Commission (PSC) with sufficient information to differentiate the bidder's business solution from other bidders' solutions. Bidder shall not refer to other sections as a response. Even if the response is an exact duplicate of a previous response, the details shall be provided in the same paragraph as the requirement. Bidder shall not include pricing information in the description and shall not refer the reader to pricing.

The bidder must ensure that the original requirement identifier and requirement description are maintained in the matrix as provided by PSC. Failure to maintain these elements may render the bid non-responsive and result in for rejection of the bidder.

The bidder's response to each of the below requirements shall include an indication on the level of compliance that can be met. (Complies, Complies Partially, Complies with Future Capability, Does Not Comply) Bidder shall respond by placing an "X" in only **one** checkbox per requirement. Failure to complete this process properly will be treated the same as "Does Not Comply," and may result in the rejection of the response form.

1. Complies: Bidder's proposal complies with the RFP requirements and the products/services are included in the base price, are currently developed, generally available, and successfully deployed. Responding with "Complies" or "Complies with Future Capability" shall mean the bidder's solution meets or exceeds the requirement regardless of any comments included as additional information.

2. Complies Partially: Bidder's proposal addresses the RFP requirements through another method that currently is developed and available for implementation (i.e., shall be generally available), or the solution complies with some, but not all of the requirements. Bidder is responsible for clearly explaining how the proposed solution does not fully comply.

3. Complies with Future Capability: The RFP requirements will be met with a capability delivered at a future date. This response shall include a calendar quarter and year in which the requirement will be met with a generally available product or service at no additional cost.

4. Does Not Comply: Bidder's proposal does not/cannot meet the specific RFP requirement.

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1


Req Identifier	Requirement Description	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
GEN-1	Bidder Response: CenturyLink has a future-focused vision of NG9-1-1 that involves providing a comprehensive and innovative suite of technology products and services to the Public Safety Sector. Our NG9-1-1 solution is designed to deploy a highly scalable IP network that uses the nationwide CenturyLink fiber network combined with applications and professional services from best-in-class third-party providers. For customers such as State of Nebraska and PSAPs, CenturyLink provides a complete solution that includes professional installation, project management, training, network surveillance and more. Our robust network can support the delivery of text messages, images, video, telematics, building plans and medical information using a common closed user group network. To ensure high availability, our network uses an active-active architecture that prevents a single disaster from impacting a NG9-1-1 enabled system. CenturyLink routes emergency calls across our MPLS (Multiprotocol Label Switching) network. network ensures redundancy and resiliency using multiple routing configurations. Our MPLS network also ensures a high security posture, which is enabled through the use of closed user groups that isolate traffic. Customer data is also encrypted on the CenturyLink MPLS Virtual Private Network. To ensure high availability, the CenturyLink network is managed by personnel in our National Network Operations Center. These personnel optimize the performance of our network and monitor deviations from our 100% uptime target. For our customers' additional peace of mind, CenturyLink also provides top-tier Service Level Agreements (SLAs) that cover latency, time to repair, and packet delivery for all classes of service. We can support the State of Nebraska and NE PSAP's ESINet for data sensitive applications such as real-time video, multimedia, and voice. To ensure cost conscious NG9-1-1 migrations and services, CenturyLink partners with selected third-party hardware and software manufacturers that specialize in the design, development, maintenance and evolution of high-quality products and applications. We also partner with local companies that allow us to meet our contractual obligations and meet our commitments for prompt, courteous and professional support services. Our projects are managed by experienced project managers and every member of the CenturyLink family is made aware of our network's health. **NENA Industry Collaboration Events (ICE)** CenturyLink and our vendor are active participants in NENA's Industry Collaboration Events for system interoperability. CenturyLink and our vendor have participated in the NENA ICE 2, ICE 4, ICE 5, ICE 6, ICE 7, and ICE 8 events.				

CenturyLink NG9-1-1 Vision Statement

- NENA i3 Compliance
- A CenturyLink Managed IP Network
- Custom Designed and Expandable Public Safety Software Applications
- Expandable Data Storage Capabilities
- Highly Accurate ALI and ANI Data Sets
- The Highest Security Posture
- 24x7x365 Network Monitoring and Technical Support
- Rapid NG9-1-1 Implementation and Migration
- Cost Conscious Public Safety Services and Products

	CenturyLink and our vendor participated in the ICE 4 event, held at the CenturyLink Center for Learning in Irving, Texas in November 2011. CenturyLink and our vendor tested its solutions to demonstrate i3 interoperability in a multi-vendor NG9-1-1 environment. The areas of focus for CenturyLink's i3 interoperability testing included the following functional elements as part of its i3 solution: • Emergency Call Routing Function (ECRF) • Location Validation Function (LVF) • PSAP Call Processing Equipment (VIPER®) – PSAP CPE Other products tested include IPSR, ESRP, i3 PSAP, ECRF, LVF, and PRF. At ICE 5 during the week of October 15, 2012 CenturyLink and our vendor successfully tested our SMS Text to 9-1-1 (TXT29-1-1) solution which includes our Emergency Text Gateway product along with the Power 911 product. NENA ICE 8, which CenturyLink and our vendor participated in with the Intrado VIPER and Power 911 systems, demonstrated interaction of Logging and Recording vendors on an i3 system. The ICE 6 event was focused on comprehensive end-to-end functionality, interaction between vendor elements (external interfaces) and interoperability testing. CenturyLink and our vendor participated with its VIPER and Power 911 systems as well as with its LIS/LDB. Most recently at ICE 7, CenturyLink and our vendor tested its Additional Data Repository (ADR) and Location (LIS) server products. CenturyLink and our vendor will continue to participle in the upcoming ICE events. NENA ICE events play an important role in enabling and accelerating the transition from today's legacy 9-1-1 systems to Internet Protocol (IP)-based next-generation 9-1-1 networks. CenturyLink and our vendor are also involved with the ICE Planning Committee and the Steering Committee. At CenturyLink we are veterans of technology evolutions. We have seen them all. Our experience has taught us to move into new eras of technology by first paying attention to foundations. Foundations matter. At CenturyLink our foundation is our Public Safety Grade ESInet. • The Foundation – CenturyLink's Public Safety Grade ESInet. CenturyLink's i3 compliant, IP-based ESInet is designed to be reliable, resilient and secure and is designed to be interconnection with ESInets nationwide. Monitored 24/7/365 by our Public Safety NOC, PSAPs can confidently journey to NG9-1-1 with a partner that has decades of experience managing complex networks. Additionally, CenturyLink provides a 24/7/365 help desk and trouble reporting system. PSAPs can connect to CenturyLink's ESInet via multiple, scalable access methods that provide flexibility and diversity. • Building Block #1 - Next Generation Core Services (NGCS). CenturyLink's i3-compliant NGCS deliver the next generation of functionality promised by NG9-1-1 including Text 2 9-1-1, video/pictures, GIS-based routing and many new types of data. CenturyLink is committed to following i3 standards as they continue to evolve thus "future proofing" PSAPs for the years ahead. We provide backward compatibility to allow for legacy call routing and reporting services.

	• Building Block #2 - NG9-1-1 enabled applications. Applications power PSAPs and enable them to save lives and property every day. CenturyLink attaches a full range of Public Safety applications to its ESInet including Call Handling, CAD, Mapping and Recording. • Building Block #3 – Geospatial information. In the future, 9-1-1 calls will be routed across ESInets using geospatial information that will enhance caller location determination and provide flexibility in dealing with a range of emergency situations. This evolution from call routing based on simple, fixed information to call routing based on geospatial information will require Public Safety professional to prepare their GIS data and manage it. CenturyLink's consulting services and geospatial information tools can help prepare PSAPs for the exciting future of NG9-1-1. • Building Block #4 – Cyber security protection. CenturyLink's connected security is built into our foundation - the CenturyLink ESInet. Because security is built in, we see more intrusive activity and we stop it. Our proactive monitoring and response security solutions are designed to keep the State of Nebraska ESInet and applications online all the time. • Building Block #5 – Storage. The journey to NG9-1-1 is driving an explosion of new data that needs to be stored. Whether the data is video/pictures from a crash scene or from the body camera of a police officer, CenturyLink's cost effective and scalable solutions will ensure your data is always available. • Building Block #6 – Data Analytics. The growing set of NG9-1-1 data provides Public Safety professionals the opportunity to learn from that data. CenturyLink's data analytics solutions enable Public Safety professionals to make decisions about the future based on their data.

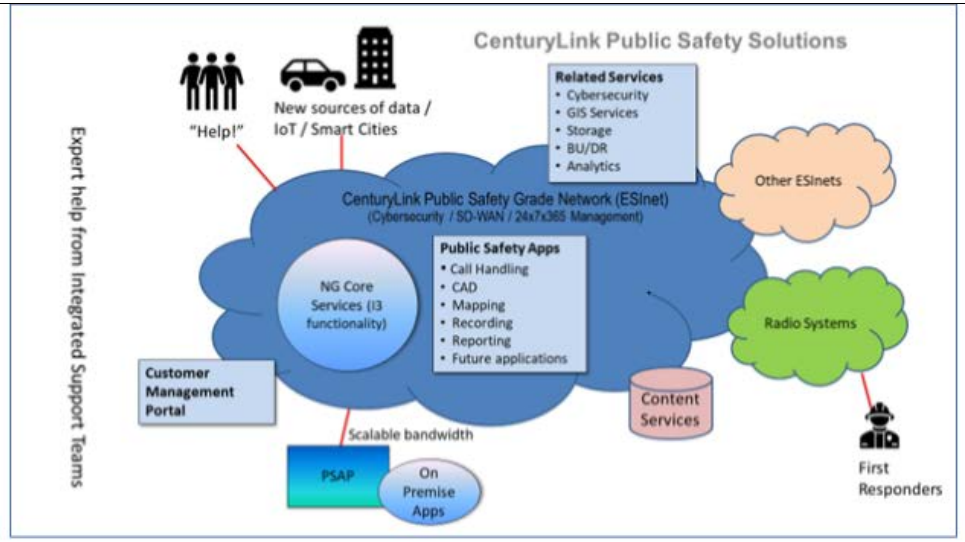

s

Gen 1 - CenturyLink's NG9-1-1 Vision: An Integrated Solution Built on a Solid Foundation

Why CenturyLink's Vision Matters

CenturyLink's public safety vision has been designed to help the State of Nebraska evolve into NG9-1-1 with the confidence that decisions made today will enable decisions that need to be made in the future. CenturyLink's foundation, our CenturyLink ESInet, has been built to integrate all elements of the NG9-1-1 journey. CenturyLink's vision provides flexibility and options. Nobody knows exactly what NG9-1-1 will look like 10 years from now. Standards will evolve. Technology will change. Given that uncertainty, beginning the journey of NG9-1-1 on a flexible foundation is essential.

It matters who you chose as your partner in Public Safety

CenturyLink clearly understands what is at stake with a journey to NG9-1-1 - Lives! Our experience delivering ESInets, NG core services, and Public Safety applications in a secure and reliable environment will provide the State of Nebraska the confidence that first responders across the state will be able to quickly respond in times of need. Decades of experience providing 9-1-1 solutions in our local communities have positioned CenturyLink to be the service provider of choice for complex NG9-1-1 implementations. You can trust CenturyLink to be your partner for the journey.

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

Together, we can save more lives.

The following information highlights the experience CenturyLink has in providing E-911 equipment and services, as well as involvement in relevant industry forums:

- Provides a variety of 9-1-1 equipment and services in 32 states
- Serves approximately 1,400 individual PSAPs representing 28,000,000 callers
- ALI database provider for 20+ years
- Currently manage over 25 million ALI database records
- Dedicated Tier 2 and Tier 3 Public Safety Services Support team providing 24/7 service
- CenturyLink has successfully implemented several statewide Next Generation 911 Solutions.
- Key established relationship with many of the major 911 Equipment and Service Providers in the United States.
- Participated in the following industry forums:
  - Displayed and presented at the 2018 RSA Cybersecurity Conference in San Francisco, CA
  - Displayed and presented at the 2018 Black Hat Cybersecurity Conference in Las Vegas, NV
  - Participated at East/South/Midwest/West and Annual National Association of State Technology Directors (NASTD) Meetings
  - Participated in Mid-Year and Annual National Association of State Chief Information Officers (NASCIO)
  - Jeff Storey is a member of the President's National Security Telecommunications Advisory Committee (NSTAC)
  - Actively participating on numerous NENA technical and operations committees in support of NG911 standard development
  - Maintains a National Public Safety division who collaborates with subject experts
  - Participated in over 20 State Digital Government Summits
  - Displayed and presented at multiple regional NENA events

The role of ensuring Public Safety is a significant resp*onsibility! We take our job serious. Human lives and property are at stake; there is no margin for error in Public Safety. PSAPs have to be able to trust their service provider/partner. Our customers can trust CenturyLink. We are financially stable, own and operate a world class network and hosting facilities and have assembled a team of experienced IT and Public Safety professionals. We have demonstrated a commitment to the communities we serve as well as the entire 911 market.*

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

<table>
<tr><td rowspan="3">GEN-2</td><td>Proprietary Solutions and Standards
1. Describe any use of proprietary standards, interfaces, or protocols in bidder's proposed solution.
2. Describe any patented technology in the proposed solution, who owns the patent and describe any licensing arrangements. Disclose any technological limitations, in the response.</td><td>Comply</td><td>Partially Comply</td><td>Complies with Future Capability</td><td>Does Not Comply</td></tr>
<tr><td></td><td>X</td><td></td><td></td><td></td></tr>
<tr><td colspan="5">Bidder Response:
1. CenturyLink's NG9-1-1 solution does not employ any proprietary standards, interfaces, or protocols in our network design. All standards, interfaces, and protocols used are industry standard.
2. CenturyLink represents that it has all intellectual property rights to provide the offered solution. There are no technical limitations based on patents or other intellectual property rights.</td></tr>
</table>

Any additional documentation can be inserted here:

<table>
<tr><td rowspan="3">GEN-3</td><td>System and Network Architecture

The Commission is seeking a Public Safety Grade Next Generation 911 System. System and network architecture, including the design and deployment of interface functions and security measures, shall comply with current NENA i3 requirements as established in NENA-STA-010.2-2016, NENA Detailed Functional and Interface Standards for the NENA i3 Solution. Describe how the solution meets or exceeds the requirements in Section V.D.1.b. of the RFP.</td><td>Comply</td><td>Partially Comply</td><td>Complies with Future Capability</td><td>Does Not Comply</td></tr>
<tr><td></td><td>X</td><td></td><td></td><td></td></tr>
<tr><td colspan="5">Bidder Response:

The solution presented within this response complies with the NENA-STA-010.2-2016 and NENA detailed functional interface standards for the NENA i3 solution. Below is a summary of how CenturyLink meets the requirements as referred to in V.D.1.b of the RFP.

Reliability

There are many contributing factors, both physical and logical, that lead to a public safety grade, reliable 9-1-1 infrastructure. The main components include, but are not limited to

• Geographic diversity of the Core and local PSAP equipment and applications
• Diverse and redundant network architecture
• Secure facilities and protected infrastructure
• Active adherence to, and participation in, industry standards
• Extensive lab integration and ongoing testing/validation

Availability

CenturyLink's NG9-1-1 solution achieves 99.999% service availability 24x7x365 for call processing and has no single point of failure that will disrupt the ability to provide on-going call processing. All functions necessary for call processing are deployed in a highly available configuration and duplicated across core sites and LNGs. Transactions or call traffic divert to available components on failure or degradation of service of a given functional component or a loss of a physical site. IP transport paths for critical service components are redundant and designed for multipath IP packet delivery so the failure of a given IP transport mechanism does not affect overall service availability.

The NGCS and ESInet components are designed and configured for continuous operation. is calculated from the time an outage begins that impacts call processing ability, until such time that the call processing ability is restored.

All network routing infrastructure is designed and deployed in an N+1 model. N+1 redundancy provides a minimum of one additional unit, module, path, or system in addition to the minimum required to satisfy the base connectivity, ensuring that a failure of any single component at a given diverse site, such as an LNG, will not render the location inoperative. All network connectivity is established via dynamic routing protocols. The use of dynamic routing protocols allows the routers to automatically discover each connected network and adapt to changes in the network topology.

CenturyLink's NG9-1-1 solution implements a design of redundancy upon redundancy. Individual processing elements are redundant at each core site and core sites are redundant to each other. The failure of any given component at a core site will not prevent that core site from processing 9-1-1 calls. If a dual failure does occur at a single core site, or a single core site somehow becomes unavailable, calls are processed at the alternate</td></tr>
</table>

	geographically diverse core site—giving the solution multiple levels of redundancy. Each core site can process any 9-1-1 call. The core sites are geographically distributed across the United States and a unique regional disaster will not remove the ability for CenturyLink's NG9-1-1 solution to process 9-1-1 calls, assuming telecommunication transport services for the impacted region are operable. The core routing and intelligence of the solution provides the State with immediate scalability in call routing and data delivery. The core network and NG9-1-1 services are designed to support very large volumes with geographic diversity of core processing centers. The end result is an infrastructure that is public safety grade with respect to capacity, reliability, scalability, and redundancy. Geographically distributed solution ensures high availability in the event of regional service impacting events or disasters. The solution consists of the following high availability components: • Geographically redundant core processing sites • Local and redundant Aggregation Sites for TDM call ingress and egress. • Flexible and redundant points of interface for IP ingress. • Ethernet Private WAN for "any-to-any" Ethernet networking between Core and Aggregation Sites. • Redundant and logically diverse connection facilities from CenturyLink's NG9-1-1 solution NGCS core sites to the Public Safety Answering Point (PSAP) for delivery 9-1-1 calls. Core Sites work in an active-active mode; calls are distributed across all core sites. The architecture is more than capable of processing all the 9-1-1 calls for the state of Nebraska; therefore, there is no need for NGCS capacity supplementation as the Nebraska PSAPs on-board to CenturyLink's NG9-1-1 solution service. CenturyLink will conduct major and minor planned and critical unplanned events for all NG9-1-1 Services, system maintenance, or upgrades that may impact any of the customer PSAPs. CenturyLink event team personnel will keep the customer informed of event progress. CenturyLink adheres to stringent, internal event plan processes and procedures to include step-by-step execution procedures with the associated time frames, back-out procedures, and baseline and validation testing. CenturyLink will include the required back-out time within the scheduled maintenance time frame. **Security** Secure communications are retained through the following measures, as recommended in NENA-INF-015.1-2016, Section 3.2: a) Rivest–Shamir–Adleman (RSA)-based public-key cryptography using X.509 certificates to authenticate elements, agencies and agents. Mutual authentication must exist between both ends of a communication. CenturyLink will manage credentialing and issuing digital certificates to help ensure protection and security as defined within section 6 of NENA-STA-010.2-2016. CenturyLink verifies credentialed devices or that carriers are authorized access in the following manner: • Client certificates are issued by a trusted Certificate Authority (CA) are required in order to access I3 services • CenturyLink validates all x.509 certificates with a trusted, key signing, CA

	All systems utilize the highest capabilities of protection and authentication available, including IPSec and SSL VPN technology for remote access from un-trusted networks, SSH for encrypted management capability, and two-factor authentication for remote access to sensitive applications along with digital certificate verification. **b) An eXtensible Access Control Markup Language (XACML)-based data rights management (DRM) system to control authorization.** CenturyLink's dual-factor Authentication, Authorization, and Accounting (AAA) System uses XAMCL to control access to all IEN Voice administrative functions based on section 6.5 of the NENA-STA-010.2-2016. **c) Advanced Encryption Standard (AES)-based encryption to provide confidentiality** The solution employs AES 256 encryption-in-transit on our own networks and on networks not under our direct control. Encryption is achieved either using SSL/TLS or IPSEC. CenturyLink uses AES encryption for data in-transit while crossing untrusted networks, e.g., outside the secure CenturyLink boundary-controlled network. AES encryption is also used to encrypt all "data at rest" inside the secure CenturyLink network, and no data is stored "at rest" in the CenturyLink DMZ network region **d) Secure Hash Algorithm (SHA)-based, digest-based digital hashing to provide integrity protection** All CenturyLink systems that participate in secure inter-machine, client-server, and user administrator transactions do so under the protection of SHA secured session control. **e) Digital Signature (Dsig)-based digital signatures to provide non-repudiation** Where applicable, we support Dsig to ensure the authenticity of data we receive from customers, as well as Dsig sign data we originate and transfer to the customer. **Network Traffic Restrictions** All data navigating CenturyLink's NG9-1-1 solution system and data access is strictly for public safety use as required in NENA-STA-010.2-2016. Commercial and non-public safety data and access is prohibited from sharing the system.

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

GEN-4	**General Requirements – Capacity- Initial Design and Deployment** The bidder's initial design and deployment of the ESInet and NGCS elements, including all components and physical network segments, shall provide capacity that will support current and planned ESInet traffic and usage that occurs as a result of data sharing in, and between, all participating PSAPs, the Commission, and designated support agencies. Additionally, the system and network design shall allow for 50 percent traffic and usage growth for the life of the contract. All current and potential core functions and applications shall be considered, e.g., call-handling systems, CAD, logging, GIS data, streaming media, real-time text (RTT), IP traffic, traffic management systems, communications systems, and incident management systems. Describe how bidder's solution will meet or exceed the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	CenturyLink's NG9-1-1 solution network is built with significantly more capacity than necessary to allow for component failures and/or maintenance that will not impact customer call processing. According to NENA 9-1-1 Statistics (http://www.nena.org/?page=911Statistics) approximately 290 million 9-1-1 calls occur annually in the United States, which equate to approximately 7.7 emergency calls originating every second. A "busy hour" call rate can be estimated at ten times the average call rate or approximately 77 calls per second. CenturyLink's NG9-1-1 solution network can successfully process all State of Nebraska 9-1-1 calls even under severe loads that may occur during unusual events such as extreme weather. CenturyLink's NG9-1-1 solution is capable of handling current and planned IP traffic and usage plus 50 percent capacity growth over the term of the contract. CenturyLink can easily scale IP capacities through simple provisioning processes, eliminating the need for additional network buildouts, and enabling customers to increase capacities within a few weeks vs. months. CenturyLink will work with the State of Nebraska for capacity planning and to mutually agree on ordering timeframes. This methodology provides the State of Nebraska with a cost-effective solution in the near term and allows for growth based on coordinated agreements.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

GEN-5	**Capacity - Scalable Deployment** As the Commission migrates toward a fully compliant NG911 environment, additional PSAP functions will transition to the systems and network. The bidder's systems and network solution shall be designed and deployed in a way that is easily scalable, with the capability to grow in both capacity and coverage without disruption in service. Describe in detail how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution provides a fully compliant, scalable environment in the existing LNG and ESInet core infrastructure. Currently the LNGs operate with redundancy at each location and are configured at 20-40mb on 100mb Ethernet circuits or 40mb on 45mb DS-3 based circuits. Future configurations will include GIGE interfaces. Therefore, the bandwidth is expandable in a short timeframe with no need for a forklift upgrade. CenturyLink's NG9-1-1 solution network is capable of bandwidth growth at each network element, existing end sites, and future end sites without sacrificing reliability of the solution. The solution is capable of interconnecting to other national- and/or state-level ESInets via open standards-based interfaces. CenturyLink's NG9-1-1 solution model is deployed from a network perspective with a 2N redundancy model – each remote site is provisioned with twice as much bandwidth as is required to serve the total number of TDM voice trunks provisioned at the site. The network has the scalability to adjust bandwidth to changing needs easily, quickly, and with minimal operational impact. The bandwidth for each data center will support the bandwidth requirements and ease of future growth of the PSAP network. IP network transport used by CenturyLink's NG9-1-1 solution will initially be sized to comply with specified network bandwidth requirements. CenturyLink's NG9-1-1 solution IP network is monitored for capacity trends that indicate the need for proactive growth of the ESInet. As the needs of the State grow, local PSAP connectivity bandwidth will be scaled up or down by a change order process or through procedures as defined in the SLA and/or contract.				

Any additional documentation can be inserted here:


Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SEC 1	**Security - Cybersecurity** For the purposes of this RFP, cybersecurity (security) is considered to be the established systems and processes focused on protecting computers, networks, programs, and data from unintended or unauthorized access, modification, or destruction. **Security Requirements and Standards** The security requirements established in applicable standards listed in Section V.D.1. Table 1 of the RFP apply equally to all elements of the system requested in this RFP, including but not limited to components located in the following building types: 1. Data centers 2. Network-housing structures 3. Regeneration sites and other buildings housing any element or device that is part of the overall system. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: We maintain a model cybersecurity plan that we adapt for every client. It is based on a frequently updated threat analysis that is used to modify a basic stance to meet the needs of each network and dataset we are charged to protect. In designing its products and services, CenturyLink employs guidance contained in NENA Technical Information Document 03-501, Network Quality Assurance; NENA 75- 001, Security for Next-Generation 9-1-1 Standard (NG-SEC) and NENA 75-502, NG-SEC Audit Checklist. **Data Center Physical Security:** All solution data is stored and backed up in CenturyLink data centers. Primary storage and backup devices are placed in CenturyLink secure cages. Access to these secure cages are limited to only authorized CenturyLink 911 support teams. All vendors must be escorted by CenturyLink technicians. **Host PSAP Physical Security:** CenturyLink requires all Host PSAP locations to provide a secure location at the Host PSAP centers for all backroom NG9-1-1 network interfacing equipment (NID). The backroom is secured at all times and only authorized personnel should have access to these backrooms. For sites that do not have a secure backroom, CenturyLink has included as part our proposal a 7-foot locking cabinet. **NG9-1-1 ESInet:** CenturyLink deploys its ESInets on our secure and private MPLS network. Our adaptive networking provides greater resiliency, control, and automation. With our Connected Security, we have built security into our network. Connected Security means the network acts as a threat sensor and a proactive defense platform. There are two basic concepts behind achieving Connected Security – the more you see, the more you can stop. With Connected Security, we are identifying threats sooner through global visibility and blocking threats to help protect our customers. Connected Security from CenturyLink begins with our ability to See More and to sense threats. Unlike other IP Service Providers, CenturyLink has made major investments over the years to instrument our global backbone to perform as a threat sensor. We have harnessed the power of our global visibility to act against malicious activity through our continued investments to enhance our Visibility and our Expertise.				

Visibility: Because of our expansive global backbone, Black Lotus Lab's, CenturyLink's threat research and operations arm, has access to the best raw data platforms for deriving our threat intelligence. This global data powers our ability to identify and monitor threats around the world.

The Black Lotus Labs team baselines the behavior of the CenturyLink global backbone by ingesting and analyzing billions of data records daily and uses this baseline to detect anomalies.

Sophisticated machine learning algorithms and big data analytics are applied to classify the anomalies that have been detected on our backbone. Through advanced automation, classified threats are validated in near real-time to help reduce noise, false positives and prioritize event response for our customers.

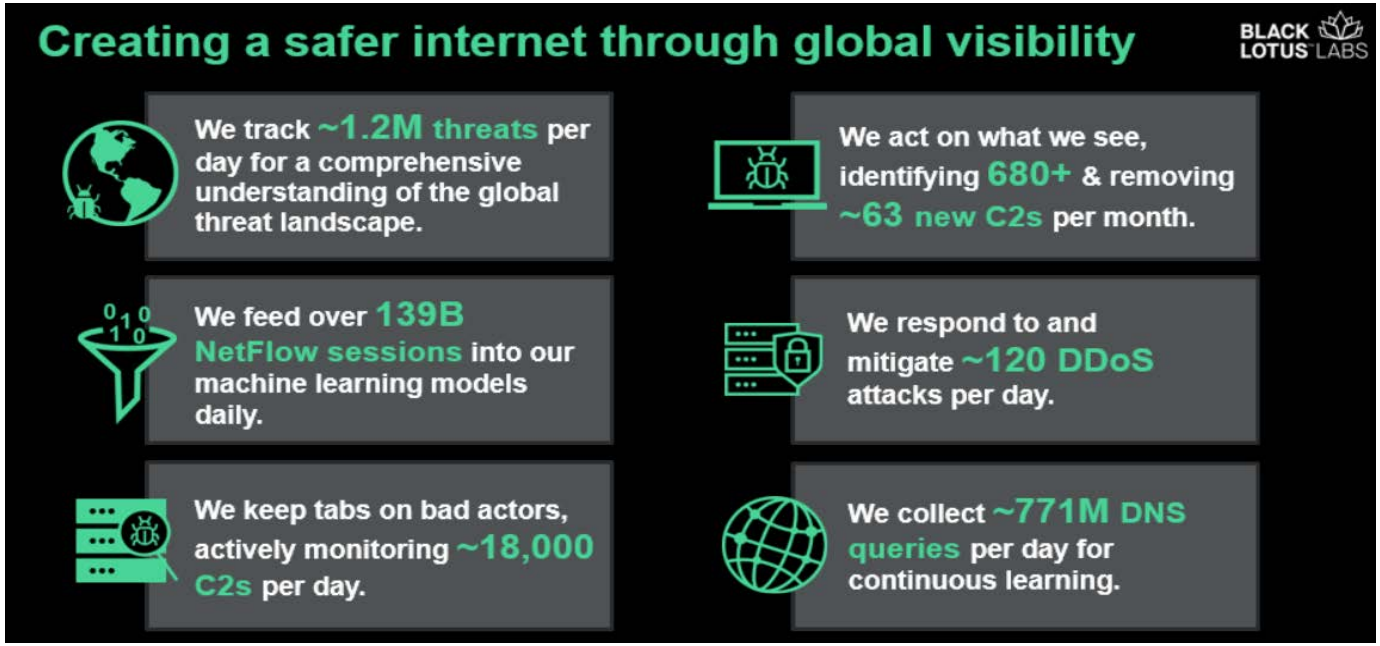

SEC 1 Cybersecurity – Visibility Drawing 1

Every day the Black Lotus Labs team of threat researchers and experts tackles the complexity of protecting one of the world's largest IP backbones 24/7. The original threat discovery and validation done by the Black Lotus Labs threat intel team drives the fidelity of our network-based intelligence. Proof Point: They discover over 680 new C2 networks per month and actively track 18,000 known C2s daily.

Black Lotus Labs leverages an extensive network of Honeypots known as a "HoneyNet". Each honeypot within the honeynet broadcasts a variety of seemingly valuable, but innocuous resources for threat actors to attack. Black Lotus Labs then logs attacker tactics, techniques and procedures (TTP) for analysis and uses advanced machine learning models to validate and produce trusted and actionable threat intelligence.

Stop More Because of our highly distributed network edge and deep peering, our backbone can sense and then block attacks closer to the source. By shifting the first line of defense upstream, our network acts a defense platform, detecting and blocking malicious activity before it impacts the customer environment




SEC 1 Cybersecurity – Visibility Drawing 2

And CenturyLink is in a unique position to defend against bandwidth-intensive volumetric DDoS attacks, as we can have the network capacity to absorb and/or drop bad traffic entering our global network at the edge and direct it to scrubbing centers only when needed, reducing latency and improving performance during attack mitigation for our customers.

Through a robust portfolio of network-integrated, cloud-delivered security solutions, we help deliver Connected Security for our customers.

See More: On the See More side, we have ATI and SLM to sense both internal and external threats. Stop More: On the Stop More side, we have DDoS Mitigation and ANS to turn the network into a proactive defense platform.

All can be supported by market-leading, managed security services if you don't want to manage your security environment on your own. Our portfolio of solutions is informed by what we see on the CenturyLink backbone, our 8 global Security Operations Centers, as well as original threat discovery from our Black Lotus Labs threat research and operations team.

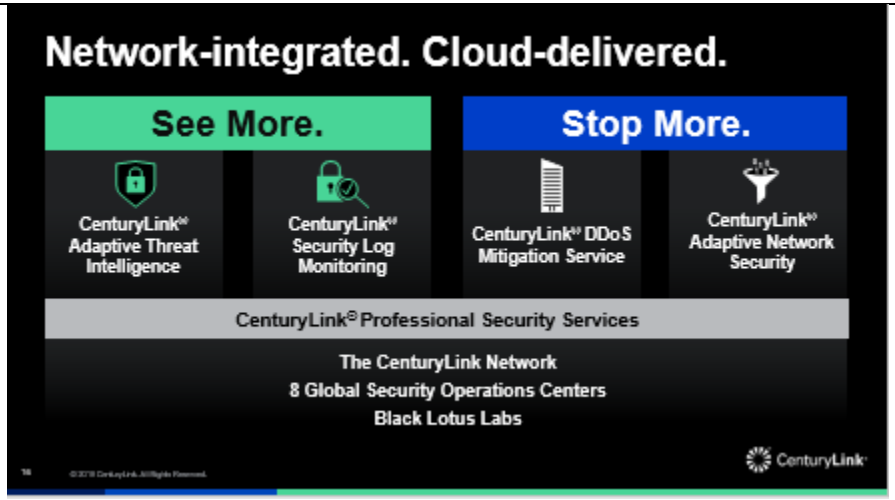


SEC 1 Cybersecurity – Visibility Drawing 3

This approach to security has made CenturyLink a leader in cybersecurity. CenturyLink provides cybersecurity services to over 40 federal government agencies and 1,500 Enterprises. We are:

2. One of only two service providers for the Defense Information System Agency (DISA) national transport backbone network
3. CenturyLink carries 100% of DoD Internet traffic
4. We are the advisors to the Department of Homeland Security, DOD, DOI, Cybersecurity Council and other multiple federal agencies
5. 1,500 Enterprise Security Clients, 250 Researchers, Testers, GIAC
6. 30 – Certified Intrusion Analysts and 30+ Security Consultants possessing 750+ combined experience
7. Over 5,000 security installations under management
8. 8 Global Cybersecurity Centers

Trusted Cybersecurity Vendor of DoD, DHS, and multiple federal agencies: If the DoD, DHS, multiple federal agencies, and over 1,500 global enterprise customers trust CenturyLink for their critical network transport and cybersecurity, The State can be assured we will apply the same practices to protect all critical data that rides the State NG9-1-1 ESInet. Security is built into the CenturyLink ESInet. CenturyLink's private MPLS network, which carries 9-1-1 traffic is isolated from CenturyLink's Internet networks. A general view of the CenturyLink 9-1-1 architecture looks like this:

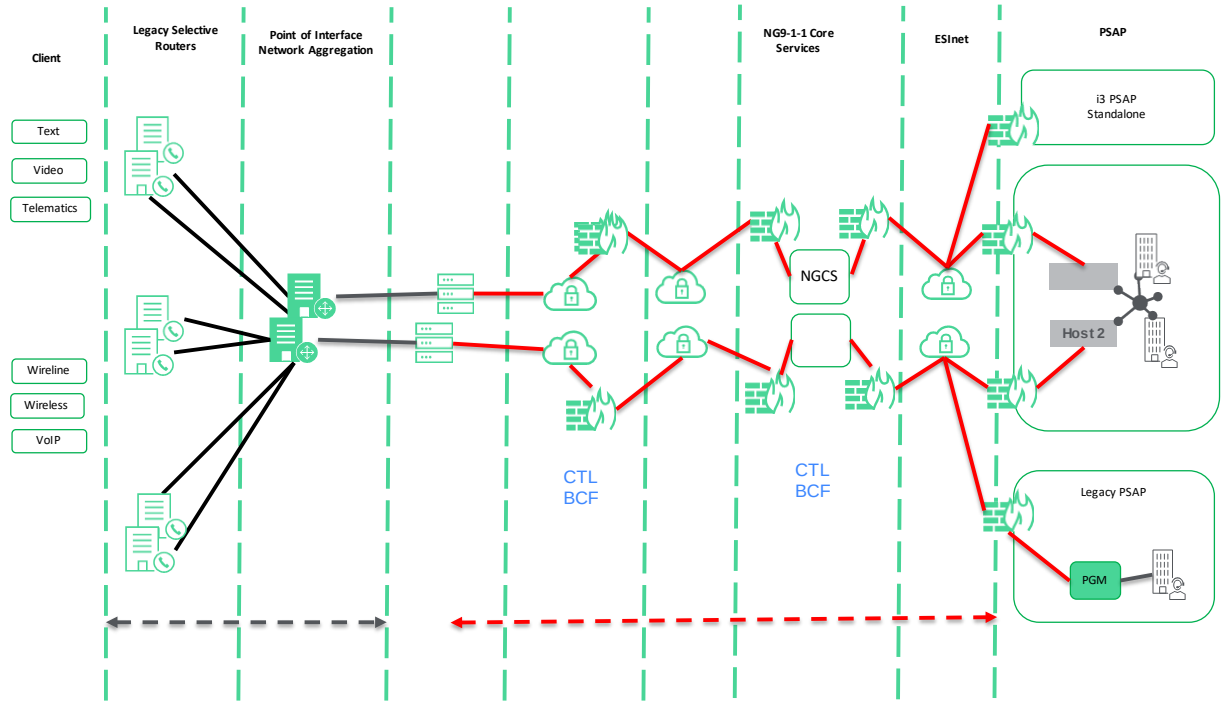

SEC 1 – Cybersecurity – NG9-1-1 Architecture

Security must be a part of every domain of this network. Physical security and application level security is imperative:

Our approach is to create isolated security domains across our solution. Each domain has built-in and evolving security, including across the NGCS and ESINets, at the Central Offices, fiber huts, data centers and up to and including the PSAPs and Host Centers.

Our CenturyLink Public Safety and Security Operations implementation team uses industry standards for our NG9-1-1, i3 and security best practices documents to warrant consistency and transparency between OSPs, Call Handling Equipment (CHE) providers and other 9-1-1 integrators. We also work with our vendor vendors to ensure global interoperability all the way to the PSAP. CenturyLink follows both the Physical Security and logical security Guidelines as outlined in the Nena" Security Document NENA Security for Next-Generation 9-1-1 Standard (NG-SEC) NENA 75-001" which includes:

- ESInet security. Our ESInet maintains an information security policy derived from the ISO 27000 suite of standards and observes practices and standards accordingly. CenturyLink has implemented controls that address the policy concerns of the NENA 75-001 NG-SEC security

	standard. CenturyLink separates physically and logically ESInet functions into separate security domains. This methodology provides a clear demarcation of NGCS functions and security requirements from Managed CPE functions and security requirements. • CenturyLink's NGCS Solution, access control is provided through the Border Control Function/Session Border Controller (BCF/SBC) at the NGCS datacenters, this secures and segments the core functions to the transport network for the PSAP and external data sources which all remain in separate security domains. All messaging transiting the network uses SIP. If not delivered in SIP natively, it must be interworked to SIP using the Protocol Interwork Function (PIF) of the Legacy Network Gateway (LNG). PSAP BCF/SBC are included part of this service as well that will terminate secure traffic to the PSAP and expect to hand off to the endpoint PSAP via customer provided call handling equipment firewall/BCF or SBC. • The CenturyLink's NGCS Solution and ESInet are provided with an array of BCFs/firewalls that inspects all traffic transiting the network edge. This device will employ both application and network layer protection and scanning capability as well as mitigates lower layer protocol attacks. The BCF provides Denial of Service (DoS) and Distributed Denial of Service (DDoS) detection and protection. Our network supports standard the use of firewall rules, access control lists ("ACLs"), virtual local area networks ("VLANs"), virtual private networks ("VPNs"), and Secure Sockets Layer ("SSL") protocols to control network traffic and access. These protective measures are supplemented with aggressive physical security for our datacenters and secure delivery of SIP traffic to the PSAP BCF. • Our network infrastructure is built to withstand sophisticated attacks (including DDOS) by means of a defense in depth strategy. We employ high availability systems with redundancy at geographical, carrier, circuit, power, application, and system levels. System/Application availability is safeguarded with clustering and load balancing techniques. Furthermore, our security architecture employs defenses that include, but are not limited to, Stateful packet inspection firewalls, IDS/IPS, multi-factor authentication, strong encryption, anti-virus/anti-malware, and vulnerability/patch management solutions. All inter-zone traffic is restricted to only the necessary protocols/destinations, both ingress and egress. • Building and Physical Access Control • Hardened defined external perimeters, hardened outer walls with no openings available for exploitation, access control lists and at least two automated ID sensors such as palm-print readers, etc. Visits by uncleared individuals must be approved in advance. All visitors are escorted. • Entity identification badges, building access cards, building keys, and/or any other form of recurring access that does not require approval at the time of access shall be sponsored by a NG9-1-1 Entity management person. Appropriate local, state and federal laws and guidelines shall be followed for allowing nonemployee access (i.e. CJIS Background Checks, etc.). • Identification Badges • Mobile Security and Security in and outside the Work Area or PSAP • Physical Access • CenturyLink network Interconnect equipment (NID) which will include routers, firewalls, audio codes, HA-SD-WAN, network probes, UPS and other similar equipment shall be installed and contained in a secure locked cabinet located at each PSAP with appropriate physical access controls. If equipment is in equipment rooms shared with non-NG9-1-1 Entity entities or in unsecured , it shall be contained in locked cabinets • All NG9-1-1 services within our ESInet that require authentication implement a Single Sign On paradigm. The mechanism used is OASIS SAML (Security Assertion Markup Language). There are two entities: An Identity Provider (IDP) which authenticates users and supplies services with a "token" that can be used in subsequent operations to refer to an authorized user and a Relying party which uses the token. SAML is used by a Relying Party to ask if an operation should be permitted by the user.

- Refer to section SEC 7 "Physical Security" for addition "Physical access security" that CenturyLink follows.
- With software developed in collaboration between our vendor Synergem; logical security, QoS, and interoperability are "baked in" to the functional element of NGCS solution.
- Rather than supporting signaling or voice encryption, we rely on the MPLS security and secured IP tunnels to provide confidentiality for signaling and voice.
- CenturyLink's NGCS solution facilities meet Tier III standards stipulated in the two main datacenter tier classifications developed by the Telecommunications Industry Association (TIA) and the Uptime Institute (UI). Physical security features include redundant commercial power (supplied from separate grids if possible), redundant backup generators, redundant uninterruptible power supplies ("UPS"), redundant heating, ventilation, and air conditioning ("HVAC") systems, fire suppression systems physical access security with separate communication service provider entry points.
- We employ the NENA 75-502.1 Audit Checklist to build our security program to include all system components and to test project compliance. We employ independent access control and auditing at the rack level for core services facilities.

Fault-zone design methodology

Configurations are automatically backed up and archived on every commit.

The CenturyLink Next Gen Core Services (NGCS) operates in an active-active configuration in each datacenter with redundant, highly available fault-tolerant critical components operating continuously in tandem. If one should fail, the redundant components continue to carry the entire load with no interruption of service. No failover time is required. All applications are deployed on virtual servers and data is shared among and within each data center. These applications leverage HA functionality within the vSphere hypervisor and associated Snapshots. vMotion, DRS and HA features are utilized to ensure backup and recovery. Within each center, data is backed up and recovered based upon global standards and best practices. All functional elements of the network architecture are N+1.

All applications are deployed on virtual servers and all applications and data are shared among and within each datacenter. The applications will be leveraging all HA functionality within the hypervisor, DRS and HA features are utilized to ensure an "always on" architecture.

CenturyLink's SBC Core - Session Border Controllers (SBC) are engineered in a dual-pair, active-standby configuration for maximum call volume. High availability pairs of SBCs are deployed in an active-hot standby configuration. SBCs handle SIP/RTP network-to-network interfaces. Every SIP/RTP ingress/egress with has a path through a pair of SBCs.

A robust strategy for identity management, and user access to web-based applications is protected through an identity management system and prevents unauthorized individuals from accessing network resources or data.

Sensitive data is housed in our data centers with logical and physical access controls. Development environments are separate from production and production data is not used in DEV or SQA. Data transits untrusted networks through applications or communication channels with encryption to safeguard confidentiality and integrity.

The ESInet employs a defense-in-depth security strategy to protect sensitive information. Such controls include, but are not limited to, stateful packet inspection firewalls (host and network based), IDS/IPS, ACLs, Role-based Access control, two-factor authentication, encryption, and AV (email and host). Furthermore, systems are protected with build standards, patch management, and regular vulnerability scans.

Multi-factor authentication and role-based access control are used to restrict user access to trusted resources. User access via the public Internet requires two-factor authentication, where one factor is provided through username and password and the second factor is provided through a

	dynamic, randomly changing secure access code from a security token. Users are configured in the identity management system and linked to a specific security token and configured for access to a defined list of applications and data.

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

<table>
<tr><td rowspan="2">SEC 2</td><td>Security Plan
A comprehensive security plan is a critical component of the Nebraska's NG911 network solution. Describe the security plan, including the
1. Mitigation
2. Monitoring
3. Alerting and incident-response processes
4. Information on specific hardware components and software systems incorporated in the proposed security plan.

The proposed solution's security plan is required to utilize the latest NENA specifications and incorporate the intentions of the Communications Security, Reliability and Interoperability Council (CSRIC) and Task Force on Optimal PSAP Architecture (TFOPA) best practices.</td><td>Comply

X</td><td>Partially Comply</td><td>Complies with Future Capability</td><td>Does Not Comply</td></tr>
<tr><td colspan="5">Bidder Response:

The physical aspects of our security plan are described in section "SEC 1" above. We rely on standards produced by NENA, SSAE-16 accreditation and Tier identification sources. However, since ours is a highly centralized, Infrastructure As A Service (IAAS) solution; our emphasis is on cybersecurity. Our plan addresses each of these elements listed above, but in a slightly different format. Here is an executive summary of our plan:

NG9-1-1 Cybersecurity must employ proactive measures to recognize, alert, log and report all security issues. This effort must be based on a comprehensive plan that establishes an Intrusion Prevention System (IPS) and strategies to deal with issues such as Distributed Denial of Service (DDoS), to avoid, limit and minimize disruptions to the network due to security incidents. CenturyLink maintains a cybersecurity posture satisfying federal, state and industry best practices, standards and regulations. Our approach stresses four security areas of emphasis:

1. Preparation
2. Detection and analysis
3. Containment, stabilization and return to a steady state.
4. Post incident activities that include a root cause analysis and corrective action.

These phases are interrelated and represent a continuous loop of preparation, analysis and improvement that continues whether an actual emergency occurs or not. Further, this approach ensures our compliance with best practices advocated by the US Department of Homeland Security, numerous other advocacy groups and the organizations cited above.</td></tr>
</table>



SEC 2 – Security Plan Preparation

A. CENTURYLINK CYBERSECURITY OBJECTIVES

9. Configure the ESInet in accordance with NENA 75-001and protect it with an array of firewalls.
10. Provide both application and network layer protection and scanning using the BCF/SBC. It will also mitigate lower layer protocol attacks and provide denial of service (DoS) and distributed denial of service (DDoS) detection and protection. The firewall component of the Oracle/Acme Packet BCF/SBC will inspect all traffic transiting the network edge.
11. In accordance with NENA-STA-010.2 (Section 6), locate call origination sources, gateways, and similar elements outside the ESInet, and ensure any connection will be through the BCF/SBC.
12. Pre-certify agents seeking access to the system through a Credentialing Agency. Once inside the system, agent privileges will be limited by policy.
13. Protect workstations and servers with access to the company network with dynamic malware applications that employ whitelisting and blacklisting with advanced static prevention in the form of deep packet inspection to block threats before endpoints are impacted.
14. Employ passwords that are complex employing a random selection of lower-case letters, capitals, symbols and numbers. Passwords will include least nine characters in length and will be routinely changed semi-annually or immediately if the account or the network is compromised.
15. Lock an account after a third unsuccessful login attempt.
16. Protect all critical networks and facilities with Multifactor authentication (MFA) and refrain from using public networks without linking them to their own VPN.
17. Meet Tier II-III standards in any company datacenters or those owned or operated as co-lo facilities.

B. STRATEGY PHASE I PLANNING

Objective: Conduct a systematic process to develop and execute a strategy to meet defined objectives.

Tasks:

B.1. Identify the critical elements in the network that require protection.

B.2. Perform a threat analysis that identifies the danger posed to these elements.

B.3. Use checklists contained in NENA 75-001, to establish current state of network physical and information security. This assessment should include cyber risk evaluations of each critical element to include vulnerability and consequence analyses that identify capability gaps, and dependence on outside agencies that may not be under CenturyLink control.

B.4. The network security manager will create a baseline that will allow anomalies to be quickly identified. That manager will then establish procedures and protocols that detect and deter a wide array of threats to include:

a. Unusual outbound network traffic.
b. Anomalies in privileged user account activity.
c. Geographical irregularities.
d. Login red flags.
e. Increases in database read volume.
f. HTML response sizes.
g. Large numbers of requests for the same file.
h. Mismatched port-application traffic.
i. Suspicious registry or system file changes.
j. DNS request anomalies.
k. Unexpected patching of systems.
l. Mobile device profile changes.
m. Data bundles in the wrong places
n. Web traffic outside the norm of human behavior.
o. Signs of DDoS activity.

B.5. Conduct an interdependency analysis to identify the impact of cascading infiltration or attack.

B.6. Identify business/service impacts that would result from the failure of one or more specific elements. See Appendix B to this plan for template.

B.7. Using a FortiSIEM platform, design a robust end-to-end network monitoring program.

B.8. Develop incident reaction plans that; (1) Identify critical recovery objectives; (2) Provide a complete and integrated picture of the escalation and (3) Outline de-escalation sequences and the timeframe in which actions must be completed.

B.9. Identify outside sources of assistance.

B.10. Formalize vendorships in memorandums of understanding or pre-negotiated contracts with sector cyber incident or emergency response individuals/agencies to assist in the triage, and collaboratively response to incidents as required.

B.11. Identify reporting requirements.

C. STRATEGY PHASE II DETECTION AND ANALYSIS

Objective:

Deploy a system and establish procedures that will assure the security, reliability, confidentiality, integrity, and availability of the CenturyLink networks, communications system and protect data from damage, unauthorized use, and exploitation.

Tasks (Supervised by the Customer of Excellence (CoE) or his/her designate):

Using results produced in Phase I, deploy physical and virtual safeguards that include limited access to critical locations and systems to authorized individuals carrying out legitimate activities.

1. Log all events throughout the network. A powerful logging pipeline gives a security team the core functionalities it needs to keep an eye on the infrastructure.
2. Implement countermeasures, technologies, and policies to protect physical and cyber assets, networks, applications, and systems.
3. Properly protect workstations with access to the company network with dynamic malware applications that employ whitelisting and blacklisting with advanced static prevention in the form of deep file inspection to block threats before they have a chance to impact endpoints. When this software detects an attack, it disables it without any need for human intervention and quickly returns the network to its last known safe status
4. Implement a password discipline that requires a change every six months with no repeat of used passwords for two years. Install an application that reminds end-users 30 days before their password expires.
5. Implement an automatic triggering mechanism that locks an account after three unsuccessful attempts to login within 60 minutes.
6. Develop a deep packet inspection protocol.
7. Institute log events and organize and implement agent credentialing to verify identity and to authorize, grant, or deny access to cyber assets, networks, applications, and systems that could be exploited are harmed.
8. Implement a dark web scanning program to identify any compromised passwords or critical information.
9. Protect data using the following procedures:
    a. Dropbox will be the principal CenturyLink repository for critical business documents. Only the System administrator will be empowered to remove documents from Dropbox.
    b. Store Technical documents including source codes using the Microsoft Team Foundation Server (TFS) service. TFS provides source code management (either with Team Foundation Version Control or Git), reporting, requirements management, project management (for both agile software development and waterfall teams), automated builds, lab management, testing and release management.
    c. Human Resource documents will be stored on the TriNet platform which is accessible through multiple Internet pathways.
    d. Employees work exclusively within their Dropbox and/or TFS accounts. No work will be stored on personal computers more than 24 hours without moving it to either Dropbox or TFS.
    e. No document may be removed from any company database except by the network administrators.
10. Implement the FortiSIEM network monitoring and the Oracle Enterprise Operations Monitor.
11. Perform audit activities to verify and validate security mechanisms are performing as intended.
12. Conduct training to ensure staff-wide adherence to access control authorizations. This training will be accomplished initially upon hiring as part of the HR process and then annually. The manager of this plan will produce a Cybersecurity handbook that will be

posted on the company website. The Center of Excellence (CoE) or his/her designate (Usually the network administrator) will monitor all password, login and access privilege programs for compliance with this plan. Annual training will be conducted by division managers or other designates using a syllabus prepared by the plan manager.

13. Using these tools and procedures, quickly identify any deviation from routine and then implement containment actions. Employ automatic triggers whenever possible.

D. STRATEGY PHASE III: CONTAINMENT

Objective:

Ensure CenturyLink is prepared to react to a range of threats and attacks with a toolbox that includes response efforts automatically triggered by threatening events and others that can be tailored to fit the incident profile. In order to ensure containment can be quickly imposed, CenturyLink must establish a baseline secure status, identify threats to that status and prepare containment.

TASKS

D.1. Verify that the network architecture is routinely functioning in N+1 mode.

D.2. Employ enhanced data backup with all applications deployed on virtual servers with data shared among and within each datacenter.

D.3. Leverage H/A functionality within the vSphere hypervisor and associated Snapshots. vMotion, Utilize DRS and H/A features to ensure backup and recovery.

D.4. Activate credentialing to verify identity to authorize, grant, or deny access to the networks, its applications, and any other systems that could be exploited to do harm; and employ NENA-defined Security Posture and logged events to help detect threats or attacks.

D.5. Verify password protocols are in use and that users are notified when passwords must be changed.

D.6. Activate deep packet inspection (DPI) and dark Internet ID efforts.

D.7. Ensure the BCF supports an automated interface that allows a downstream element to mark the source of a call as a "bad actor". This would normally occur when a call is received that appears to be part of a deliberate attack on the system.

D.8. Ensure the BCF installs a "NENA-source" parameter in the Via header that in the outgoing INVITE message associated with every call. Calls are marked by the SBC in a way that allows a recipient to identify the BCF that processed the call.

D.9. When a downstream element identifies a source as a "bad actor", ensure the responsible sender is notified by sending a "BadActorRequest" containing the source ID from the NENA-source parameter. This helps ensure that cascading impacts are minimized so as not to affect timing or invoke DoS for throughput of legitimate emergency calls.

D.10. Activate a network monitoring protocol that logs, measures and evaluates all network traffic.

18. **Recovery Tasks**:

1. Identify the incident (s): Unless event is clearly level 3 or higher, begin response with triage based on SIEM or active directory logs, apparent source of problem, severity and reporting requirements.

2. Isolate the affected device (s) or system if automatic triggers have not already done so. This may involve disconnecting or isolating network segments, creating additional firewall rules, employing active IDS/ IPS rules or simply disconnecting the infected network from the company and / or public networks.
3. Eradicate the cause. This process must include measures to not only remove the infection from the primary device, but various methods to scan every device on the affected network segment to ensure the relevant risk is addressed.
4. Recover the device, service or data. Ensure system is returned to last known safe status using software installed on every computer or server

E. STRATEGY PHASE IV: POST INCIDENT ACTIVITY

Objectives:

Ensure that the company learns any lessons that are available after an incident is contained. Report those lessons-learned and modify procedures to affect the improvements these findings suggest.

Tasks:

1. Analyze the incident. Review:
   a. Exactly what happened, at what times?
   b. How well did staff and management perform? Were documented procedures followed? Were procedures adequate?
   c. What information was needed sooner?
   d. Were any steps or actions taken that might have inhibited the recovery?
   e. What would staff and management do differently the next time a similar incident occurs?
   f. How could information sharing with other organizations have been improved?
   g. What corrective actions can prevent similar incidents in the future?
   h. What precursors or indicators should be watched for in the future to detect similar incidents?
   i. What additional tools or resources are needed to detect, analyze, and mitigate future incidents
2. Report. An important post-incident activity is creating a follow-up report for each incident. Report considerations include:
   a. Creating a formal event chronology (including time-stamped information from systems)
   b. Compiling a monetary estimate of the amount of damage the incident caused
   c. Retaining follow-up reports as specified in retention policies.
3. Perform Root Cause analysis. Focus on relevant objective assessment activities including:
   a. Review of logs, forms, reports, on other incident documentation
   b. Identify recorded precursors and indicators
   c. Determine if the incident caused damage before it was detected
   d. Determine if the actual cause of the incident was identified
   e. Determine if the incident is a recurrence of a previous incident
   f. Calculate the estimated monetary damage from the incident

g. Measure the difference between initial impact assessment and the final impact assessment
h. Identify measures, if any, that could have prevented the incident.

Satisfy local, state and federal reporting requirements. This includes SLA reporting requirements. Certain types of breaches also carry legal notification responsibilities.

CenturyLink Monitoring and Response of our NG9-1-1 ESInet Ingress and Egress Network and hardware components:

4. CenturyLink provides a complete end-to-end monitoring solution of all network transport services, network equipment, and security from call ingress to the call endpoint that will notify the PSAP/PSAP's of an outage with the prescribe time limit spelled out by the FCC.
5. The CenturyLink solution employs state-of-the-art and standards-based security measures for traffic in the ESInet and in connection to external IP networks. The proposed solution provides highly integrated security in a fully managed system. The solution includes monitoring of traffic and prevention of access to network infrastructure using session border controllers, firewalls, and other continuously monitored intrusion prevention systems
19.
6. All ingress access points are protected with security devices, such as SBCs and firewalls, and traffic is managed and monitored 24x7x365. Unauthorized external access is prevented, allowing only authorized traffic to enter the ESInet. Virtual Private Networks (VPNs) are utilized to manage bandwidth and provide additional security. Border Gateway Protocol (BGP), IPSLA, and GRE tunnels are utilized to uphold service levels and provide oversight of the network. Active monitoring and proactive testing increase the solution's ability to react to abnormal situations.
7. The CenturyLink Security Information and Event Management (SIEM) system is integrated into our ESInet network monitoring program.
8. As the cyber threat landscape continues to expand, Public Safety operational entities cannot have a false sense of security. CenturyLink provides a thorough approach to network security, one that is tied to our overall Public Safety networking strategy, enabling a comprehensive view of the overall networking architecture and threat environment. We see more, so we can stop more.
9. CenturyLink follows the NENA approach to Security for our NGCS and ESInet Solution for Nebraska. Including the NENA standards and documentation found in the following NENA standards:
    - NENA 75-001, Security for Next Generation 9-1-1 Standard (NG-SEC)
    - NENA – INF 15.1-2016, NENA NG9-1-1 Security Information Document
    - NENA 04-503, Network/System Access Security
    - NENA 75-502, Next Generation Security Audit Checklist
10. As a trusted advisor to the Department of Homeland Security (DHS), CenturyLink adheres to the TFOPA framework and helps DHS formulate best practices for securing NG9-1-1 ESInets.
11. CenturyLink's NG9-1-1 ESInet solution includes a Vulnerability Assessment Services (CVAS) Which identifies, prioritizes, and mitigates vulnerabilities across an ESInet networks, applications and systems in our NG9-1-1 ESInet solutions.

12. CenturyLink products and services are secure by proactively identifying and mitigating vulnerability risks that protect families, friends, communities, and our public safety customers.
13. Our Functional Priorities Includes:

- Critical Vulnerability Response - Analyze new, publicly disclosed vulnerabilities for critical severity threat potential to CenturyLink systems and coordinate a plan of action with the business units to mitigate the threat.
- Regulatory Compliance Support - Provide vulnerability scanning, penetration testing, and remediation oversight of findings as required to meet Payment Card Industry (PCI), Federal Information Security Management Act (FISMA), Health Insurance Portability and Accountability Act (HIPAA), and Service Organization Controls (SOC) 2 compliance standards.
- Vulnerability Scanning- Determine the scope of vulnerability scanning, perform vulnerability scanning on designated systems in scope, notify the appropriate business units of vulnerability findings, and verify remediation actions were successful.
- Penetration Testing - In collaboration with the our Public Safety team we, define the need, scope, and Rules of Engagement (ROE) for penetration testing, perform the penetration testing, notify the business unit of vulnerability findings, consult with the State of Nebraska on risks and mitigation strategies, and verify remediation actions were successful.
- Adversarial Cybersecurity Emulation (ACE) - Coordinate and execute targeted attacks using advanced malicious actor methods (ACE exercises) to determine defensive capabilities of CenturyLink and identify improvement areas. This capability is under development.
- Secure Code Guidance - In collaboration with developers within the public safety 9-1-1, we acquire access to developer code repositories, perform security analysis on the application source code, notify our vendors and public safety team including the state of Nebraska of vulnerability findings, and verify remediation actions were successful.

14. Our Security Best Practices:

- The CenturyLink ESInet network meets and exceeds the security criteria as defined in the NENA NG-SEC specifications for NG9-1-1 security. We develop security policies according to industry requirements and best practices including CSRIC, NIST, and the security policies, standards, and guidelines of the International Organization for Standardization and Control Objectives for Information and Related Technology.
- CenturyLink's NGCS solution utilizes the follow appliance/devices in it service delivery for NG9-1-1:
- Stateful firewall and IPS Services.
- Session Border Controller (SBC) for secure SIP TLS\Authentication and anchoring.
- AudioCodes for secure SIP termination if required for LPG termination converting SIP TLS traffic back to CAMA or CAS trunking at the PSAP/Host sites.

Private Port MPLS where core routers support MPLS tunnels and implement Fast ReRoute (FRR). These technologies enable CenturyLink to reliably transport private VPN traffic in service specific overlay networks, referred to "Security Domains". FRR increase backbone resiliency with rapid recovery from network failures, Hardware Components and Software Systems in the Security Plan

CenturyLink's NG9-1-1 solution NOC/SOC uses multiple tools and techniques to track performance and fault management activities. All tools are used to collect KPIs for their respective systems/servers which in turn are forwarded to HP OpenView, which is used to present a single pane of glass

	to CenturyLink's NG9-1-1 solution NOC. OpenView utilizes the HP Operations Manager (OM) module, which monitors systems and applications using agents and provides SNMP trap and syslog receiver capabilities, and the HP Network Node Manager (NNMi) network monitoring software module based on SNMP. Visual alerts are available 24x7x365 to the CenturyLink 9-1-1 NOC. These systems also provide ICMP and SNMP trending and threshold alarming. The CenturyLink's NG9-1-1 solution NOC also utilizes the following: • CIMRaN is used immediately following an incident to provide a call impact report that identifies calls, callback numbers, PSAPs, state carriers and associated CDRs in a report that can be distributed to the customer. This report is generated within minutes following an incident. • Netscout is used for network troubleshooting and analysis.

Any additional documentation can be inserted here:

SEC 3	**Security Compliance Matrix** Describe how the proposed solution addresses compliance in each of the following categories in NENA 75-502, NENA NG-SEC Audit Checklist.

Category
1. Senior Management Statement
2. Acceptable Use Policy
3. Authentication/Password Policy
4. Data Protection
5. Exception Request/Risk Assessment
6. Hiring Practices
7. Incident Response
8. Information Classification and Protection
9. Physical Security
10. Compliance Audits & Reviews
11. Network/Firewall/Remote Access
12. Security Enhancement Technical Upgrade
13. Technical Solutions Standards
14. Wireless Security

Bidder Detailed Response:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

1. **Senior Management Statement** – The CenturyLink Information Security Program Policy specifies the development, implementation, assessment, authorization, and monitoring of the IT security program.

Key Components
CenturyLink has appointed the following Information Security (InfoSec) roles:

- **Chief Information Officer (CIO):** responsible for the overall management, direction, and security of CenturyLink's information assets.
- **Vice President (VP) of Information Security:** accountable for coordinating, developing, implementing, and maintaining an enterprise Information Security Program, including engaging resources to help deliver the mission; provides management briefings to the CIO on a regular basis.
- **Information Security Steering Committee (ISSC)**: responsible for overseeing security initiatives, policies, and related documentation; assists the VP of InfoSec with successfully implementing policies and controls across the enterprise.

CenturyLink applies a risk-based approach to holistically evaluate threats and design security measures that address compliance requirements and align with business goals.

CenturyLink InfoSec defines, publishes, maintains, and disseminates security instructions in the form of policies, controls, standards, processes, procedures, and guidelines to employees and relevant external parties. These materials establish the ground rules by which CenturyLink operates and safeguards its data and information systems by reducing risk and minimizing the effect of potential incidents.

InfoSec establishes an information security workforce development and improvement program, including Annual Security Awareness Training.

2. **Acceptable Use Policy** – The CenturyLink Acceptable Use Policy requires employees, and where applicable, contractors and third-party users, to apply information security in accordance with the established policies and standards; this includes acceptable usage of technology and software approved for business purposes.

Key Components

- Practices zero tolerance for malicious activities that seek to compromise or impair the confidentiality, integrity, or availability of computers, information or communications systems, networks, physical or virtual infrastructure controlled by computers or information systems, or information resident thereon, including hacking, circumventing access controls or security controls, and creating or exploiting vulnerabilities
- Fairly applies sanctions and corrective actions to employees who are found to have violated CenturyLink InfoSec policies
- Reports employees found to have violated local, state, Federal, and/or international law(s) to the appropriate authorities.
- Revokes physical and logical access rights and associated materials and property (e.g., passwords, badges, keys) upon termination of employment or change of responsibilities

3. **Authentication/Password Policy** – The CenturyLink Access Control Policy ensures that access to CenturyLink information systems and information is controlled based on business and security requirements and is maintained and removed in a timely manner.

Key Components
CenturyLink defines access requirements and manages access according to business and security requirements. Methods include:

- Identifying account types (e.g., individual, group, systems, application, guest, and temporary)

- Enforcing standard user access profiles for common job roles
- Establishing conditions for group membership
- Identifying authorized users of information systems and specifying access privileges
- Requiring appropriate approvals for requests to establish accounts
- Establishing, activating, modifying, disabling, and removing accounts
- Authorizing, monitoring, and deactivating the use of guest and temporary accounts
- Reviewing accounts periodically
- Incorporating relevant legislation and contractual obligations

CenturyLink employs the principle of least privilege (PoLP), which is the practice of limiting access rights for users to the bare minimum permissions they need to perform their work.

CenturyLink defines requirements for passwords, including length, complexity, display, history, locking, sharing, expiration, reset, disclosure, storage, and encryption.

CenturyLink manages access identification and authentication using appropriate technology and established processes, including access control lists, session timeouts, and multi-factor authentication.

4. Data Protection – The CenturyLink Data Security and Privacy Policy defines requirements to protect data privacy at rest and in transit.

Key Components
CenturyLink searches Sensitive Personally Identifiable Information (SPII) and Personally Identifiable Information (PII) for unstructured data and addresses any anomalies prior to processing the data.

CenturyLink monitors for evidence of unauthorized exfiltration or disclosure of information.

CenturyLink specifies where information can be stored, including:

- Minimizing instances of storing data classified as "restricted" or "confidential"
- Storing data on CenturyLink systems or systems hosted by CenturyLink-approved vendors
- • Prohibiting storage of "restricted" and "confidential" data on privately-owned (non-company owned) devices or media

CenturyLink secures the technology utilized for external data transfers.

In accordance with the Applicable Laws, CenturyLink defines and enforces requirements for data retention, including Personal Information:

- CenturyLink does not retain Personal Information in a form which permits identification of data subjects for longer than is necessary for the purposes for which such Personal Information was collected or for which it is further processed.
- In some cases, CenturyLink may be required by local, state, Federal, and/or international laws to retain certain categories of Personal Information (e.g., traffic and location data) for a different period for purposes of investigation, detection, and prosecution of crime, or on general grounds of national or state public security.

5. **Exception Request/Risk Assessment** – The CenturyLink Risk Management Policy ensures that risk analysis is performed throughout the CenturyLink information system and data management life cycle, and that controls are applied commensurate with the risk, data classification, compliance requirements, and business needs.

Key Components
CenturyLink documents and implements a formal risk assessment process to identify, evaluate, and manage risks to an acceptable level. Risk assessments include the evaluation of multiple factors that may threaten security as well as the likelihood and impact from a loss of confidentiality, integrity, and availability of information and systems.

Risk management processes are monitored, reported, and reviewed across the organization at least annually or when environmental, operational, or technical changes arise that may impact the confidentiality, integrity, or availability of information resources.

6. **Hiring Practices** – The CenturyLink Information Security Human Resources Policy ensures that employees, contractors, and third-party users are suitable for the roles for which they are being considered, to reduce the risk of fraud, theft, or misuse of facilities.

Key Components
Prior to employment, CenturyLink:

- Screens individuals requiring access to organizational information and before authorizing access
- Reasonably verifies an applicant's identity and employment history
- Conducts background checks in accordance with relevant laws, regulations, and ethics; such checks may include drug screens and reviewing motor vehicle driving records, credit histories, and criminal records

During onboarding, CenturyLink:

- Requires that employees, contractors, and third-party users agree and sign the terms and conditions of their employment contracts, which shall include their responsibilities for information security appropriate to the nature and extent of access they will have to the organization's assets associated with information systems and services.
- Ensures that individuals requiring access to organizational information and information systems sign appropriate confidentiality or non-disclosure agreements (NDAs) prior to being granted access

During employment, CenturyLink:

- Provides employees with Security Awareness Training
- Requires employees, and where applicable, contractors and third-party users, to apply information security in accordance with the established policies and standards; this includes acceptable usage of technology and software approved for business purposes
- Practices zero tolerance for malicious activities that seek to compromise or impair the confidentiality, integrity, or availability of computers, information or communications systems, networks, physical or virtual infrastructure controlled by computers or information systems, or information resident thereon, including hacking, circumventing access controls or security controls, and creating or exploiting vulnerabilities
- Fairly applies sanctions and corrective actions to employees who are found to have violated CenturyLink InfoSec policies
- Reports employees found to have violated local, state, Federal, and/or international law(s) to the appropriate authorities.

- Revokes physical and logical access rights and associated materials and property (e.g., passwords, badges, keys) upon termination of employment or change of responsibilities

7. **Incident Response** – CenturyLink's Security Incident Management Policy establishes the approach for security incident response, investigation, and communications.

Key Components
CenturyLink provides incident response personnel with training on their roles and responsibilities with respect to information systems, including annual refresher training.

With respect to incident reporting, CenturyLink:

- Utilizes automated tools and logical controls where possible to identify and report on potential and known events
- Requires personnel to report known and suspected security incidents to CenturyLink incident response personnel as quickly as possible
- Communicates security incident information to external authorities and/or stakeholders in a timely manner as required
- Trains employees, contractors and partners in incident reporting expectations and requirements
- Tracks incident details involving security incidents

CenturyLink maintains an Incident Response Plan (IRP), which provides the company with a roadmap for implementing its incident response capability. CenturyLink reviews the IRP at least annually and distributes it to all incident response personnel. CenturyLink's incident response capabilities include:

- Identifying the specific system(s) involved in a security incident
- Alerting company-defined personnel of the incident using a secure method of communication
- Containing the affected information system(s)
- Identifying and containing other information systems that may have been subsequently compromised
- Collecting evidence

CenturyLink uses knowledge gained from analyzing and resolving information security incidents to reduce the likelihood or impact of future incidents

8. **Information Classification and Protection** – CenturyLink identifies and tracks information classifications and security categories at every phase of the systems development life cycle (SDLC). Data collections are assigned a classification based on data type, including but not limited to:

- Customer Proprietary Network Information (CPNI)
- Payment Card Industry (PCI) Data
- Protected Financial Information (PFI)
- Protected Health Information (PHI)
- Public Information
- SPII

9. Physical Security – The CenturyLink Physical and Environmental Security Policy minimizes risk to CenturyLink information systems and data by addressing applicable physical security and environmental concerns.

Key Components
CenturyLink controls physical access to facilities that house CenturyLink information, information systems, and/or personnel in order to prevent unauthorized physical access, damage, and interference to information and information processing facilities. This includes:

- Verifying and enforcing physical access authorizations for all physical access points not designated as publicly accessible
- Controlling entry to facilities containing information systems using physical access devices or mechanisms (e.g., badges, keys, combinations) and/or guards
- Implementing role-based physical access to buildings, facilities, secured areas, and resources
- Maintaining a list of individuals with authorized access to facilities containing information systems and issuing authorization credentials for facility access; the access list is reviewed periodically and individuals who no longer require access are removed from the list
- Ensuring that onsite personnel and visitor identification (e.g., badges) are revoked, updated when access requirements change, or terminated when expired or when access is no longer authorized, and all physical access mechanisms, such as keys, access cards and combinations, are returned, disabled, or changed
- Granting visitor access for specific and authorized purposes, providing visitors with instructions on security requirements and emergency procedures, and issuing visitor badges that are visually distinct from personnel badges
- Restricting unescorted access to personnel with required security clearances, formal access authorizations, and validated need for access

CenturyLink has designed and applied controls for protecting personnel and information systems against damage from natural disasters, civil unrest, malicious attack, or accidents. This includes:

- Conducting annual risk assessments, including the likelihood and magnitude of harm from the unauthorized access, use, disclosure, disruption, modification, or destruction of the information system and the information it processes, stores, or transmits

10. Compliance Audits & Reviews – The CenturyLink Compliance Policy ensures that the existence and communication of appropriate safeguards in order to protect sensitive business data against loss, unauthorized access, or disclosure, in accordance with applicable statutory, regulatory, and contractual compliance obligations.

Key Components CenturyLink records are required to be protected from loss, destruction, falsification, and unauthorized access, modification, or release.

CenturyLink performs periodic reviews to ensure that information security is implemented and operated in accordance with the organizational policies and procedures.

CenturyLink managers are responsible for ensuring compliance with security requirements for their functional area.

11. Network/Firewall/Remote Access – The CenturyLink Operations Security Policy safeguards the confidentiality, integrity, and availability of CenturyLink's information and information systems by ensuring the documentation, maintenance, and availability of operating procedures.

Key Components

CenturyLink has developed a Security Concept of Operations (CONOPS) for information systems; the CONOPS is reviewed and updated periodically and contains at a minimum:

- How the organization intends to operate the systems from the perspective of information security
- A description of groups, roles, and responsibilities for the logical management of information systems

CenturyLink maintains key architectural information on each critical information system that includes at a minimum:

- External interfaces, including the information being exchanged across the interfaces and the protection mechanisms associated with each interface
- User roles and the access privileges assigned to each role
- Unique security requirements
- Types of information processed, stored, or transmitted by information systems and any specific protection needs in accordance with applicable local, state, and Federal laws
- Restoration priority of information or information system services

CenturyLink segregates conflicting duties and areas of responsibility to reduce the risk of unauthorized or unintentional modification or misuse of assets. No single person shall be able to access, modify, or use assets without authorization or detection.

CenturyLink logically or physically separates development, test, and operational environments and controls those environments to reduce the risks of unauthorized access or changes to the operational system.

CenturyLink controls the installation of software on operational systems to reduce the risk of corruption to operational systems.

CenturyLink develops, documents, and maintains under configuration control a baseline configuration standard for all authorized information systems and software in the enterprise.

CenturyLink implements detection, prevention, and recovery controls to protect against malware, and provides appropriate user awareness.

CenturyLink manages and controls networks to protect information systems and information, including information in transit. CenturyLink uniquely identifies and authenticates network devices that require authentication mechanisms, before establishing a connection, that, at a minimum, use shared information (i.e., media access control [MAC] or Internet Protocol [IP] address) and access control lists to control remote network access.

All systems (excluding approved exceptions) that handle information, accept network connections, or make access control (authentication and authorization) decisions shall record, retain, and export audit-logging information to CenturyLink-approved repositories.

12. **Security Enhancement Technical Upgrade** – The CenturyLink System Development, Acquisition, and Maintenance Policy ensures that information systems (developed or purchased) incorporate security controls throughout the SDLC and defines the protection requirements for data used for testing.

Key Components
CenturyLink considers security at every stage of an information system's life cycle (e.g., feasibility, planning, development, implementation, maintenance, retirement, and disposal) in order to:

- Ensure conformance with all appropriate security requirements

- Protect enterprise data
- Facilitate efficient implementation of security controls
- Prevent the introduction of new risks when the system is modified
- Ensure proper removal of data when the system is retired

13. **Technical Solutions Standards** – The CenturyLink Vendor Security Program Policy establishes guidelines for assessing, mitigating, monitoring, and reviewing the risks associated with vendor management.

Key Components
CenturyLink InfoSec reviews vendors in relation to the services provided and the level of access granted to facilities, systems, and data. This includes vendors providing:

- Contractors (long-term or temporary)
- Services that require establishing a connection between the CenturyLink network and the third-party (vendor) network
- A technology or product that will be installed in, or connected to, the CenturyLink network
- Services that involve the transport or destruction of paper or technology containing CenturyLink data
- A technology or product that will be resold by CenturyLink

CenturyLink conducts a Vendor Business Impact Analysis, which gathers basic data about the vendor and the services being provided, and then assigns a risk ranking.

- CenturyLink performs a vendor risk analysis on all new vendors and annually on vendors with a risk ranking of "high" or "extreme."
- CenturyLink InfoSec reviews all Master Service Agreements (MSA) with vendors with a risk ranking of "high" or "extreme.

The CenturyLink Change Management Policy establishes the change management requirements and expectations for CenturyLink automated information assets and software.

Key Components
Change requests undergo a formal review and approval process, as follows:

- Requestors document and present change requests
- Resource owners approve change requests
- Programmers and end users test the change prior to implementation
- Appropriate personnel implement the change into the production environment

CenturyLink bases change management processes and decisions on assigned information classifications and security categories. CenturyLink identifies and establishes security rules and quality assurance processes for the development of software and systems.

CenturyLink examines and controls configuration changes made to the enterprise, whether code or infrastructure, to ensure all invested parties are aware of enterprise changes, all risks introduced by changes are known and mitigated, and the changes are approved at the appropriate level.

The CenturyLink network change management process ensures application service transactions are protected to prevent incomplete transmission, misrouting, unauthorized message alteration, unauthorized disclosure, and unauthorized message duplication or replay.

14. **Wireless Security** – While the core of our solutions does not incorporate direct wireless access, wireless security is covered as part of the CenturyLink Cryptography Policy, which ensures that appropriate cryptographic safeguards are in place to protect CenturyLink data against loss, unauthorized access, or disclosure.

Key Components
CenturyLink has established and documented encryption and key management strategies in compliance with applicable laws and regulations, including the encryption of:

- User passwords and credentials
- Data transmissions within and outside of the CenturyLink network, including wireless transmissions
- CDs and DVDs
- Non-console administrative access and remote access to privileged functions
- Multi-factor authentication of remote users

In addition, end user devices (e.g., laptops, workstations) are encrypted when the device is imaged or reimaged. Mobile devices shall only access CenturyLink systems through approved software.

Any additional documentation can be inserted here: . (See Proposal 1 Option C File 1 of 4 for copies of these embedded attachments)



SEC 3 Security Compliance Matrix.pd

SEC 4	**Predictive Analysis and Monitoring** Describe solution's capabilities to provide predictive analysis and modeling to combat security threats.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response CenturyLink's NG9-1-1 solution provides predictive analysis and modeling to combat security threats as described below. Security Information and Event Management (SIEM) analysis is a daily task of our Security Operations Center. Network hosts, including all call processing elements and security infrastructure, provide logging through a centralized SIEM solution, providing real-time event correlation, predictive analysis and alerts across CenturyLink's NG9-1-1 solution environment. Information Security personnel have devised profiles of common events from given systems so that they can tune detection to focus on unusual activity, avoid false positives, more rapidly identify anomalies, and prevent overwhelming analysts with insignificant alerts. We deploy heuristic analysis, a method employed to detect previously unknown computer viruses, as well as new variants of viruses. Heuristic analysis is an expert-based analysis that determines the susceptibility of a system towards particular threat/risk using various decision rules or weighing methods. In addition to performing continuous network traffic monitoring, we perform annual external and internal penetration testing of our critical systems and infrastructure. We maintain in-house tools and expertise to conduct penetration testing and work with nationally recognized penetration test providers to achieve third party assurance.				

Any additional documentation can be inserted here:

SEC 5	**Credentialing Process** Solution shall provide a process so that devices and carriers outside the IP network shall not have credentials, per NENA-STA-010.2-2016. Provide details regarding how the solution ensures that devices and carriers outside the IP network are not provided credentials.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Interactions between the ECRF and the ESRP are secured within the ESInet. Interactions with external ECRFs or the PSAP CPE will utilize digital certificate-based authentication as defined by NENA and managed by the PSAP Credentialing Agency (PCA), once available. Until that time, CenturyLink will manage credentialing and issuing digital certificates to help ensure protection and security. This mechanism will also be utilized for PSAP access to systems within CenturyLink's NG9-1-1 solution, including access to the LIS interface, ADR interface and ECRF. While it is possible to deploy ECRF/LVFs in such a manner that they assume a common public identity for devices and carriers outside the ESInet that do not have credentials, this is not a standard deployment within CenturyLink's NG9-1-1 solution. At such time that non-credentialed transactions are required, we will consider providing these capabilities as an optional service. At no time will ECRFs used for call routing or PSAP determination of responders provide un-credentialed access due to the potential for Denial of Service (DoS) attacks impacting their critical functions. Following are devices and/or protocols used to restrict access. • CenturyLink's NG9-1-1 solution uses a security border API gateway for I3 data traffic. This device controls access to its services by using client trusted certificates. • Session Border Controllers (SBC) are used for all SIP and SIP related communications. CenturyLink verifies credentialed devices or that carriers are authorized access in the following manner: • Client certificates issued by a trusted Certificate Authority (CA) are required in order to access I3 services such as LIS, ADR and ECRF. • The trusted CA is currently provided by CenturyLink, that will use the authorized NENA PCA vendor once they roll out their program • The IP address of any far end SIP endpoint must be provisioned in the SBC. – The endpoint is also required to send all traffic to a uniquely assigned IP: port combination on the SBC. – All SIP signaling is done over direct connections or VPNs. – IP connections to the ESInet are only allowed by vetted OSP's and/or data sources. – Connectivity to the ESInet is only by signed and approved agreement with data encapsulated by IPSEC MPLS VPN.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SEC 6	**Third-Party Security Audits** Bidder shall allow for annual third-party security audits at the request and cost of the Commission. Describe bidder's current process for third party security audits.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Response: Security audits are performed internally and by third-party vendors on a regular (yearly) basis. Audits specifically requested and initiated by the State shall be added to this schedule upon request.	X			

Any additional documentation can be inserted here:

<table>
<tr><td rowspan="2">SEC 7</td><td>Physical Security
All structures outside the Commission's control that will house components of the ESInet and NGCS shall have security and access-control systems that ensure that only duly authorized individuals can access the areas housing the Commission's systems and network equipment. Any workstations or other equipment connected to, or capable of accessing, the ESInet and NGCS systems shall be housed in secured, access-controlled areas. Any devices, power distribution, and cross-connect panels feeding the cages or rooms housing the Commission's systems similarly shall be protected. Identify any elements that are not under the direct control of the bidder, and a description of the building's security and access-control systems shall be provided.</td><td>Comply
X</td><td>Partially Comply</td><td>Complies with Future Capability</td><td>Does Not Comply</td></tr>
<tr><td colspan="5">Bidder Response:

We use various procedures to help ensure physical security in our data centers, including controlling, monitoring, and recording physical access to facilities where client servers and other equipment reside. We provide complete physical security for our locations, with a special emphasis on security of the data centers and other sensitive areas.

Our physical security controls include:
• Access policies and procedures
• Access control system
• Employee access procedures
• Visitor procedures
• Contractor access procedures
• Building security
• Data center security
• Global Client Support Center (GCSC) security
• Onsite 24x7 guards

Additional controls include:
• Multi-factor authentication for physical data center access
• Closed circuit TV monitoring
• Access logs
• Quarterly review of access list

Our automated access control system uses electronic badge readers, biometric hand scanners, and PIN keypads to control and monitor access to CenturyLink buildings and data centers. Security guards monitor the facilities and maintain a 24X7 physical presence at each data center, and the system logs access and sends alerts if entrances are left ajar.</td></tr>
</table>

	We limit access to the data centers to only those employees who require access to perform their job functions. We lock the data center server racks and allow access only to persons who have proper authorization. Access to other buildings, including lobby entrances, also requires an electronic access badge. As an additional measure, we use strategically located video cameras to record and monitor activity, both within and outside buildings and work s, in addition to having uniformed security personnel conducting regular rounds throughout facilities. Local and remote monitored Power and Environmental controls (built at least to an N+1 methodology) include: • HVAC • Fire detection and suppression systems • Diverse commercial power feeds – Standby generator systems – Dual Uninterruptible Power Supply (UPS) – Grounding architecture – Commercial power contingency arrangements We limit access to the data centers and Customer Support Centers to only those personnel who require access to perform their job functions. We lock the data center server racks and allow access only to personnel who have proper authorization. In addition, CenturyLink: • Ensures all Information Resources intended for use by multiple users are located in secure physical facilities with access restricted to authorized individuals only. • Monitors and records access to the physical facilities containing Information Resources intended for use by multiple users in connection with Supplier's performance of In-Scope Work. • Physically secures any area where In-Scope Information is accessible to prevent access by unauthorized persons.


Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 1	**General Requirements – Network Operations Center (NOC)/Security Operations Center (SOC)**	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Centralized NOC/SOC All services and components deployed and interconnected as part of the solution shall be monitored 24 hours a day, 7 days a week, 365 days a year (24 x 7 x 365) by a centralized Network Operations Center (NOC) and Security Operations Center (SOC). These functions may be in separate buildings or combined in a single building located in the continental United States.	X			
	NOC/SOC Interoperability Contractor shall have the ability to communicate, troubleshoot and connect with other vendors NOCs should there be a different ESInet and NGCS provider. In addition, the Contractor shall interface with the NOCs that support the regions throughout the state. This shall include ebonding of the ticket systems to support transparency throughout the troubleshooting process.	X			
	NOC/SOC Operations Model Provide documentation including organizational structure and procedures that describe bidder's 1. NOC/SOC operations model, 2. Continuity Of Operations Plan (COOP), 3. problem and change management systems, 4. reporting systems, 5. escalation plan, and 6. conformance with best practices (Information Technology Infrastructure Library (ITIL) or equivalent methodology)) for service-delivery management. The Contractor shall confirm the requirement compliance of any interconnected network utilized by the Contractor not previously identified to the Commission.	X			
	Bidder Response: Centralized U.S. NOC/SOC The CenturyLink Network Operations Center (NOC/SOC) is staffed 24 hours a day, seven days a week, 365 days a year to actively monitor and manage CenturyLink's NGCS Solution associated services and connectivity. When a potential or actual customer-affecting event or outage is defined and determined to be an incident, the NOC/SOC will engage all responsible parties to ensure swift resolution. This includes resolution, documentation of any incident, communications, and post-event review and root cause analysis. We manage incidents and provide customers with notifications and status of ongoing service affecting issues that may impact the CenturyLink NGCS Solution. Our NOC/SOC and vendor locations are strategically located within the continental US. NOC/SOC Interoperability: CenturyLink's NGCS Solution is designed to be interoperable with any NENA-compliant solution regardless of its manufacturer. We work jointly with other vendors to plan interfaces and willingly joint teaming agreements to meet customer needs. We test all interfaces in our own lab and then use a battery of testing and failover scenarios onsite for testing that occurs before going live. This is accomplished according to plans developed with the end-user to ensure no loss of operational integrity during testing or installation. CenturyLink's solution will meet the NOC/SOC criterion to meet all monitoring and reporting for notification from the Next Generation Core Services (NGCS) platform. By employing e-bonding with systems to an integrated monitoring approach that provides end to end monitoring and notification. Logging of these events are				

	captured and used for near real-time and historical reporting. System alarming for the NGCS solutions is being provided on each element from the NGCS to the Brix Probe appliance at the PSAP which will alert the NOC for appropriate triage of the issue. CenturyLink uses a proactive monitoring and notification process. The process uses platform-specific alarm thresholds to identify potential service impairments. CenturyLink network alarms are customer specific and generate trouble tickets that automatically notify customers via e-mail and telephone. Proactive Customer Notification (PCN) also gives customers with flexibility to specify certain notification parameters on a service-by-service basis. To ensure rapid resolution of network issues, CenturyLink adheres to strict escalation procedures and measurable timeframes. If active progress and meaningful status updates are not being made, CenturyLink technicians are empowered to escalate issues internally and externally as required. The State may also request escalations. CenturyLink customer service is chartered to provide world-class customer support that attempts to resolve issues on a first contact basis. With geographically diverse NOC, CenturyLink ensures high availability of technical support personnel who provide rapid problem resolution and efficient work management in the event of natural or manmade disaster. CenturyLink also maintains records (log) of all trouble tickets. Our records allow our managers to review trouble tickets on a customer-by-customer, day-by-day, and criticality basis. When an incident impacts a CenturyLink customer our response is not complete until a CenturyLink representative contacts the customer with an explanation of the problem and a discussion of the actions that CenturyLink took to resolve issues and a discussion of how CenturyLink plans to keep the problem from occurring again. Communication - Communication will be supplied to all parties provided to CenturyLink by the Customer and its entities. We provide notification by various means. In the event of an outage CenturyLink applies immediate and sustained effort, 7x24, until a final resolution is in place. We use all reasonable efforts to provide a temporary workaround within an agreed upon time frame of the issue being detected. If a temporary workaround solution is provided, we provide an action plan to be mutually agreed upon for the final resolution. We continue resolution activity until full service is restored. The primary objective of an incident is to mitigate impact. The Incident Commander and Incident Administrator can call upon whatever resources are required to identify and restore functionality. Disaster Recovery CenturyLink has established defined and reasonable business continuity and restoration plans including complex disaster and evacuation contingencies and conducts annual reviews to confirm adequacy of the plans. Adequate hardware spares are on hand to enable attainment of reliability and mean time between failure objectives. Geographically diverse engineering and redundancy provide ability to survive disaster scenarios. Power infrastructure and environmental systems are deployed so that a commercial power failure does not result in an interruption of service. The CenturyLink solution's essential processes, systems, and networks supporting 9-1-1 traffic are designed and deployed to accommodate possible disruptions and disasters to any given element or data center and support 24x7x365 continuous operation. In the event of unplanned system or network outages, this diversity allows CenturyLink systems to continue operating while Incident Management processes are engaged to identify and resolve issues. In case of a service interruption and/or outage during the 30-day period and beyond, we have instituted Event Management processes and procedures for dealing with various severity levels during an event. CenturyLink has in place a robust business and service continuity program designed to prevent or mitigate service disruptions and support rapid response to loss or impairment of crucial business functions or infrastructure. CenturyLink Program Manager (CPgmM) along with other project team resource provides a comprehensive Project Development Plan (PDP) which includes Continuity OF Operations Plan (COOP), problem and change management processes reporting systems and an escalation plan. Please refer to attachment 2.d "CenturyLink Sample Program Management Plan for Nebraska".

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

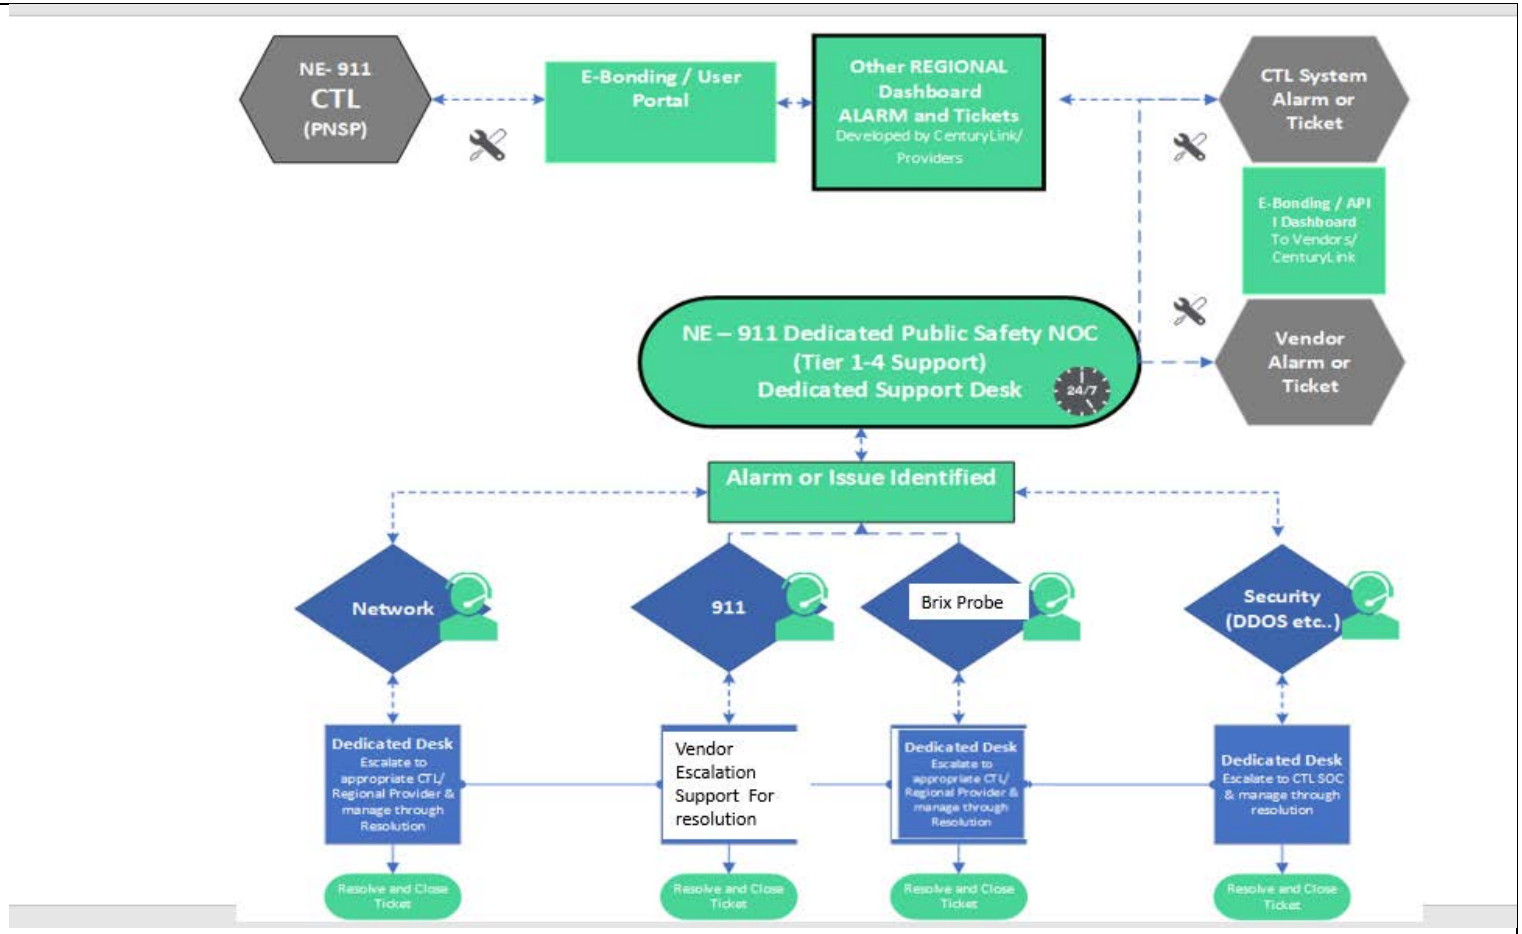

NOC/SOC 1 Diagram

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

Any additional documentation can be inserted here:

NOC/ SOC 2	**NOC/SOC - Remote Connectivity Required** Contractor shall provide any network connectivity required to support Contractor's NOC/SOC services. Describe any remote connectivity required by the solution including, but not limited to, Virtual Private Network (VPN), phone-home connection, and tech support remote access.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: Remote access to secure NGCS is limited to qualified CenturyLink personnel. We pre-certify agents seeking access to the system through a Credentialing Agency. Once inside the system, agent privileges will be limited by policy. We protect workstations and servers with access to the company network with dynamic malware applications that employ whitelisting and blacklisting with advanced static prevention in the form of deep packet inspection to block threats before endpoints are impacted. We employ passwords that are complex employing a random selection of lower-case letters, capitals, symbols and numbers. Passwords include at least nine characters in length and are routinely changed semi-annually or immediately if the account or the network is compromised. We lock any account after a third unsuccessful login attempt. Our NG9-1-1 systems utilize the highest capabilities of protection and authentication available, including IPsec and SSL VPN technology for remote access from un-trusted networks, SSH for encrypted management capability, and two-factor authentication for remote access to sensitive applications along with digital certificate verification: This includes following the "best polices" pertaining to remote access and connectivity: • Operating system and application protections are configured for segregation of duties, and strong password policies are enforced to ensure that password length and minimum change restrictions are followed. • Strict auditing controls are enforced across the enterprise. • Remote access to the CenturyLink NG9-1-1 ESInet network is permitted providing that authorized users are authenticated, and privileges are restricted. Remote access is only permitted via equipment which utilizes an approved firewall, anti-virus protection, and strong authentication. • Any connections over the Internet employ an authorized VPN client. Remote access to perform systems administration tasks is achieved over Secure Shell (SSH). • Firewalls, IDS, token-based authentication, encrypted remote access for network and service management systems/work centers. • We protect workstations and servers with access to the company network with dynamic malware applications that employ whitelisting and blacklisting with advanced static prevention in the form of deep packet inspection to block threats before endpoints are impacted. • We employ passwords that are complex employing a random selection of lower-case letters, capitals, symbols and numbers. Passwords include at least nine characters in length and are routinely changed semi-annually or immediately if the account or the network is compromised. • We lock any account after a third unsuccessful login attempt. • CenturyLink administrators follow the principle of least privilege to ensure that all user accounts only have the necessary privileges to perform the work. • Once inside the system, agent privileges will be limited by policy.				

	CenturyLink incorporates a robust strategy for identity management, and user access to CenturyLink web-based applications is protected through an identity management system. New users must complete a rigorous online registration process. Multi-factor authentication and role-based access control are used to restrict user access to CenturyLink's trusted resources. User access via the public Internet requires two factor authentications, where one factor is provided through username and password and the second factor is provided through a dynamic, randomly changing secure access code from a CenturyLink-provided security token. Users are configured in the identity management system and linked to a specific security token and configured for access to a defined list of applications. Our Network based and adaptive security NOC/SOC personnel provides all support for VPN, phone-home connections, and support for any remote tech support changes or issues. Our CenturyLink portal/Dashboard is used to request new or make changes to any remote support requests.

Any additional documentation can be inserted here:

NOC/ SOC 3	**NOC/SOC - Network Security Monitoring and Management** **Security Management Solution** The bidder's security management solution shall control access to network resources in accordance with public safety network security best practices such as NIST, NENA and the FCC to prevent sabotage, service interruption (intentional or unintentional) and the compromise of sensitive information. Security management shall comply with security- and data-integrity standards listed in Section V.D.1. Table 1 in the RFP, to monitor users logging into network resources and to refuse access to those who enter inappropriate access codes. The proposed IP network and systems shall support standard security policies that may include the use of firewall rules, Access -Control Lists (ACLs), Virtual Local-Area Networks (VLANs), VPNs, and Transport Layer Security (TLS) protocols to control network traffic and access. The systems shall support the use of software to detect and mitigate viruses, malware, and other attack vectors. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink NG9-1-1 adheres to NENA 75-001 (NENA Security for Next-Generation 9-1-1 Standard [NG-SEC]) and NENA 04-503 (PSAP Security), as applicable, and we track alignment to the NIST Cybersecurity Framework in addition to the applicable areas of the FBI CJIS Security Policy. The CenturyLink NG9-1-1 solution provides for the centralized management of user permissions, rights, and security settings by designated administrators. The system administrators can use the application to manage user roles and privileges, including granular authentication, user profiles, and other security rights. The system can be configured so that wherever an authenticated user logs in, without regard to which workstation or which PSAP, all the user's rights, permissions and configurations follow that user. The proposed system is password-protected, so only properly credentialed, authorized users can use it. Security options can be configured according to user group. Administrators can create groups of user assigned roles with associated user settings to be automatically applied when users are authenticated during log-in. All systems utilize the highest capabilities of protection and authentication available, including • Use of firewall rules, access control lists ("ACLs") • Virtual local area networks ("VLANs"), virtual private networks ("VPNs"), and Secure Sockets Layer ("SSL") protocols to control network traffic and access. These protective measures are supplemented with aggressive physical security for our datacenters and secure delivery of SIP traffic to the PSAP BCF • ("TLS") over TCP • Session Border Controller's (SBC) for secure SIP TLS\Authentication and anchoring. • IPsec and Secure Sockets Layer SSL, virtual private networks VPN technology for remote access from un-trusted networks • SSH for encrypted management capability • Two-factor authentication for remote access to sensitive applications along with digital certificate verification.				

	• Stateful packet inspection firewalls, IDS/IPS, multi-factor authentication, strong encryption, anti-virus/anti-malware, and vulnerability/patch management solutions. All inter-zone traffic is restricted to only the necessary protocols/destinations, both ingress and egress Operating system and application protections are configured for segregation of duties, and strong password policies are enforced to ensure that password length and minimum change restrictions are followed. Strict auditing controls are enforced across the enterprise. Remote access to the CenturyLink NG9-1-1 network is permitted providing that authorized users are authenticated, and privileges are restricted. Remote access is only permitted via equipment which utilizes an approved firewall, anti-virus protection, and strong authentication. Any connections over the Internet employ an authorized VPN client. Remote access to perform systems administration tasks is achieved over Secure Shell (SSH). CenturyLink administrators follow the principle of least privilege to ensure that all user accounts only have the necessary privileges to perform the work. CenturyLink incorporates a robust strategy for identity management, and user access to CenturyLink web-based applications is protected through an identity management system. New users must complete a rigorous online registration process. Multi-factor authentication and role-based access control are used to restrict user access to CenturyLink's trusted resources. User access via the public Internet requires two-factor authentication, where one factor is provided through username and password and the second factor is provided through a dynamic, randomly changing secure access code from a CenturyLink-provided security token. Users are configured in the identity management system, and linked to a specific security token and configured for access to a defined list of applications While NENA 75-502.1 is our principal guide for security, we do meet applicable US DHS, FBI and state directives where we operate. All encryption mechanisms are supported in accordance with NENA STA010 and AES256. This extends to the following protocols: Transmission Control Protocol ("TCP"), User Datagram Protocol ("UDP"), Transport Layer Security ("TLS") over TCP, and Stream Control Transmission Protocol ("SCTP"). Protocols supported are selectable for each SBC interface to external systems. These transport layer protocols are generated and terminated at each interface to external systems. **Access**: All NG9-1-1 services within the ESInet that require authentication implement a Single Sign On paradigm. The mechanism used is OASIS SAML (Security Assertion Markup Language). There are two entities: An Identity Provider (IDP) which authenticates users and supplies services with a "token" that can be used in subsequent operations to refer to an authorized user and a Relying party which uses the token. SAML is used by a Relying Party to ask if an operation should be permitted by the user. Authorization and Data Rights Management in NG9-1-1 is based on XACML 1.0 [87]. Each XACML policy defines: a "target", which describes what the policy applies to (by referring to attributes of users, roles, operations, objects, dates, and more), and one or more "rules" to permit or deny access. Access is defined to mean some combination of: • Read – the ability to retrieve a data object • Update – the ability to modify an existing data object • Create – the ability to create a new data object • Delete – the ability to remove an existing data object • Execute – the ability to execute one or more functions from a service. Rules may "permit" or "deny" access.

Any additional documentation can be inserted here:

NOC/ SOC 4	**NOC/SOC - Connected Systems Compliance** Any system that connects to an IP network shall be required to comply with listed standards in Table 1, including security standards, and demonstrate compliance through an initial and recurring audit. **Security Reports and Recommendations** Contractor shall provide, within 30 days of the end of each calendar month, security summary reports and recommended improvements on a monthly basis (at a minimum), including incidents and incident response; building, facility, and network access reports, including failed attempts; and updates or changes to security systems and software. All related data shall be retained for the period of the contract and provided to the Commission electronically at the end of the contract. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Security reports will be provided on an as needed basis. The assigned Program Manager will accommodate the required frequency for report generation. Our Network Security Dashboard—displays the landing page of the reporting application that combines important metrics from all features in distinct panels. • Traffic—displays a report of traffic allowed and denied by firewall policy. (Requires that the All Traffic option under Policy Logging be selected during service setup.) Reports show how traffic was managed in response to such policies. • CenturyLink Security Solutions Portal (powered by CenturyLink) for Dashboards and Reports including: • Rapid Threat Defense • Threat Visualization • DDoS/TDoS • Network Security reports CenturyLink program manager will collaborate with the State of Nebraska in the preparation of the customization of the monthly security reports. All reports can be viewed via our dashboard portal.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 5	**NOC/SOC – Connected Systems Compliance** **Support for Similar Solutions** Provide details concerning how bidder provides security monitoring and management for similarly deployed production solution. Provide details, including drawings, which explain how the proposed solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's security policies, standards, and guidelines are compliant with industry best practices as defined by International Organization for Standardization and Control Objectives for Information and related Technology (COBIT). CenturyLink's next generation emergency services network is a secured and private IP managed network. All inbound and outbound traffic is through well-defined and controlled access points. Call processing and real-time data delivery are implemented through specialized subnets. With over 20 years of experience in cyber security, we have been recognized by industry analysts, including Gartner Group and Forrester Research, as an innovator and leader. CenturyLink's corporate security leaders participate on several private and public boards focused on IT cyber security. CenturyLink employs a defense-in-depth security strategy to protect sensitive information. Such controls include, but are not limited to stateful packet inspection firewalls (host and network based), IDS/IPS, ACLs, Role-based Access control, two-factor authentication, encryption, and AV (email and host). Furthermore, systems are protected with build standards, patch management, and regular vulnerability scans. Sensitive data is housed in our data centers with logical and physical access controls. Development environments are separate from production and production data is not used in dev or SQA. Data transits untrusted networks (leaves CenturyLink custody) through applications or communication channels with encryption to safeguard confidentiality and integrity. CenturyLink's NG9-1-1 solution infrastructure (illustrated in the figure below) is built to withstand sophisticated attacks (including DDOS) by means of a defense in depth strategy. CenturyLink employs high availability systems with redundancy at geographical, carrier, circuit, power, application, and system levels. System/Application availability is safeguarded with clustering and load balancing techniques. Furthermore, CenturyLink's NG9-1-1 solution security architecture employs defenses that include, but are not limited to, stateful packet inspection firewalls, IDS/IPS, multi-factor authentication, strong encryption, anti-virus/anti-malware, and vulnerability/patch management solutions. All inter-zone traffic is restricted to only the necessary protocols/destinations, both ingress and egress.				

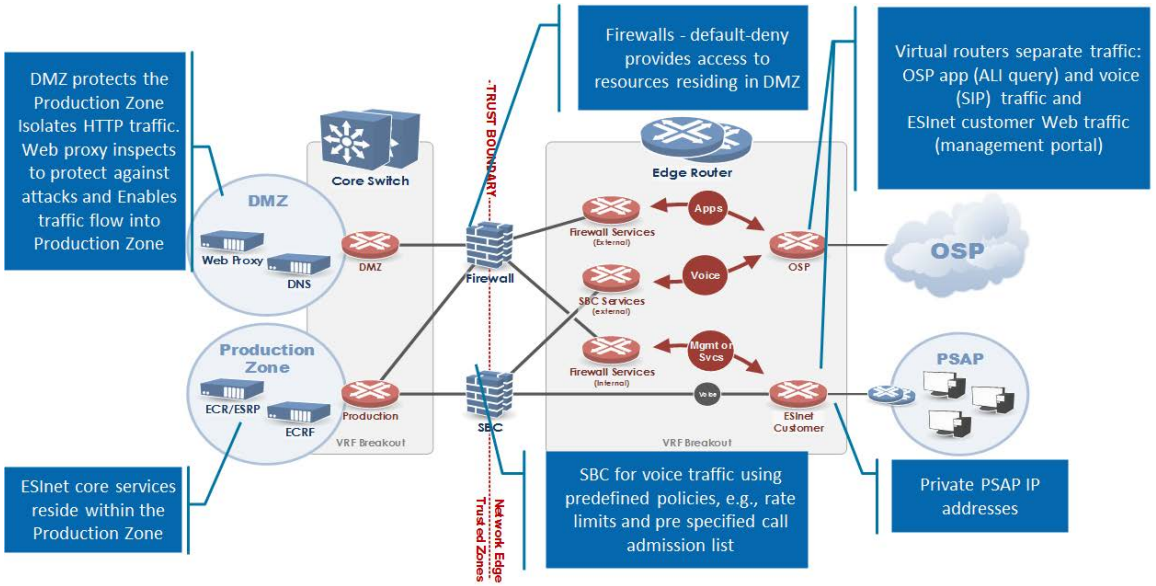


Figure 1. Defense in-depth Security Architecture

The network can process all traffic, but administratively denies protocols identified as a threat, or that otherwise fall outside of pre-defined parameters. This is partially managed via routing tables and/or Access Control Lists (ACLs). CenturyLink continually investigate and upgrade with new advances in protective technology with tools such as Intrusion Detection System (IDS).

The solution incorporates physical, network, and application security principals. Traffic between Core processing sites and distributed sites (e.g., ingress call traffic, PSAPs, management capabilities) is route- and protocol-secure. A combination of route paths, IP address recognition, limited protocols, VPNs, session border controllers, and firewalls secure the various communication elements of the proposed solution.

CenturyLink's NG9-1-1 solution deploys firewalls and other network security devices and software to protect against inbound network threats on the servers that make up the proposed ESInet. The NOC also employs a regularly scheduled patching process to protect against the effects of malware. Computing devices are subjected to thorough security scans so that there are no malware elements present. Access to processing elements is restricted to authorized personnel. Network connections from solution components are limited to those connections needed for operation and maintenance. Physical and network access to production components is restricted to those that have an operational responsibility, and all activity is audited and monitored.

All development environments are fully separate from production environments. All hardware and software elements deployed in a production environment go through stringent release management processes that incorporate thorough testing and scans.

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

Any additional documentation can be inserted here:

	NOC/SOC - Physical Access Monitoring and Management Contractor shall track and log all physical access to structures housing IP network components serving the Commission or have the capability to obtain access logs for structures not under immediate control of the bidder. Reports may be requested and shall be made available for review upon request. All related data shall be retained for the period of the contract and provided to the Commission electronically at the end of the contract. Provide a detailed explanation of bidder's processes and procedures for logging physical access to ESInet /NGCS components, and how the bidder's solution generates the required reports.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response

NOC/ SOC 6

CenturyLink uses multi-tiered security measures for logging and restricting Physical access our NGCS and ESInet components. This includes our Data Centers and any structure maintaining ESInet and NGCS components. We allow access only to authorized people and we track and log physical access. Security measures include continuous closed-circuit video monitoring, 24-hour on-premises live security, electronic key card access, individual, personal access codes, and biometric hand scans. CenturyLink actively maintains an access list. All additions to this list must be submitted in advance and in writing. Access is limited to areas designated in the access list. Only individuals identified on this list will have access. We further protect our operations and equipment by using controlled entrance and exit doors, security breach alarms, secured cage and cabinet environment, mantraps, and discrete buildings (no signage). We align with the applicable areas of the FBI CJIS Security Policy.

CenturyLink's datacenters meet Tier III standards stipulated in the two main datacenter tier classifications developed by the Telecommunications Industry Association (TIA) and the Uptime Institute (UI). Physical security includes hardened defined external perimeters, hardened outer walls with no openings available for exploitation, redundant commercial power (supplied from separate grids if possible), redundant backup generators, redundant uninterruptible power supplies ("UPS"), redundant heating, ventilation, and air conditioning ("HVAC") systems, fire suppression systems physical access security with separate communication service provider entry points. Access control lists and at least two automated ID sensors such as proximity cards and biometrics, etc. Visits by uncleared individuals must be approved in advance. All visitors are escorted. While the exact infrastructure varies slightly from one center to the next, the following chart depicts the basic layout:

Component	Type	Purpose
Badge card access system (EntraPass)	Kantech	The badge card system is utilized in conjunction with a biometric recognition access system to control entry into the greater datacenter and separately to the raised-floor production zone.
Biometric Recognition Access System (EntraPass)	Kantech	With badge control system, controls entry into the greater datacenter and separately to the raised-floor production zone.
Firewalls	Forigate Fort/OS	Corporate firewalls restrict traffic into the management network. Service delivery firewalls filter and route traffic for customer-specific environments that have borders that cannot be breached.
Management services backup servers	CommVault	Automated system software and network of servers provide backup and recovery for subscribing customers.
Routers and switches	Cisco NXOS	Route network traffic
Virtual Hypervisor	VMware vCenter	Authenticates and restricts access to customer virtual environments.

VMware hosts	VMware (ESXi 6.0)	Provide secure operation of client virtual machines
Web portal	Embotics vCommander	Customer portal system through which they manage their virtual machines which are isolated from all others.

The CenturyLink NGCS and ESInet solution provides for the centralized management of user permissions, rights, and security settings by designated administrators. The system administrators can use the application to manage user roles and privileges, including granular authentication, user profiles, and other security rights.

The system can be configured so that wherever an authenticated user logs in, without regard to which workstation or which PSAP, all the user's rights, permissions and configurations follow that user.

The proposed system is password-protected, so only properly credentialed, authorized users can use it. Security options can be configured according to user group. Administrators can create groups of user assigned roles with associated user settings to be automatically applied when users are authenticated during log-in. All systems utilize the highest capabilities of protection and authentication available, including IPsec and SSL VPN technology for remote access from un-trusted networks, SSH for encrypted management capability, and two-factor authentication for remote access to sensitive applications along with digital certificate verification.

Operating system and application protections are configured for segregation of duties, and strong password policies are enforced to ensure that password length and minimum change restrictions are followed. Strict auditing controls are enforced across the enterprise.

Remote access to the CenturyLink ESInet network is permitted providing that authorized users are authenticated, and privileges are restricted. Remote access is only permitted via equipment which utilizes an approved firewall, anti-virus protection, and strong authentication. Any connections over the Internet employ an authorized VPN client. Remote access to perform systems administration tasks is achieved over Secure Shell (SSH).

CenturyLink administrators follow the principle of least privilege to ensure that all user accounts only have the necessary privileges to perform the work. CenturyLink incorporates a robust strategy for identity management, and user access to CenturyLink web-based applications is protected through an identity management system. New users must complete a rigorous online registration process. Multi-factor authentication and role-based access control are used to restrict user access to CenturyLink's trusted resources.

User access via the public Internet requires two factor authentications, where one factor is provided through username and password and the second factor is provided through a dynamic, randomly changing secure access code from a CenturyLink-provided security token. Users are configured in the identity management system, and linked to a specific security token and configured for access to a defined list of applications.

CenturyLink ESInet cyber security policies, standards, and guidelines are compliant with industry best practices as defined by International Organization for Standardization and Control Objectives for Information and related Technology.

CenturyLink ESInet infrastructure is designed to withstand sophisticated cyber-attacks. CenturyLink ESInet is a secured and private IP managed network providing services for 9-1-1 call delivery. All inbound and outbound traffic interactions are with pre-vetted entities, utilize well defined protocols and traverse controlled access points. Call processing and real-time data delivery are implemented through specialized subnets.

Sensitive data is housed in data centers with logical and physical access controls. All hardware and software elements deployed in a production environment go through stringent release management processes that incorporate thorough vulnerability scan testing. Corporate, development, and test environments are separate from production, and live production data is not used for development or testing purposes. Inter-zone traffic is

	restricted to only authorized personnel and the necessary protocols destinations used to support the management and applications of CenturyLink ESInet with all other traffic implicitly denied by way of redundant and diverse session border controllers and firewalls. CenturyLink ESInet infrastructure is built to withstand sophisticated attacks by means of a defense-in-depth strategy. Traffic between core processing and distributed sites (e.g., ingress call traffic, PSAPs, management capabilities) are route-secure and protocol-secure. A combination of route paths, IP address recognition, limited protocols, VPNs, session border controllers, and firewalls secure the various communication elements of CenturyLink ESInet CenturyLink ESInet also employs a regularly scheduled patching process to protect against security vulnerabilities and the effects of malware. Computing devices are subjected to thorough security scans for malware elements. Physical, network, and application access to production components is restricted to personnel that have a direct operational responsibility, with all activity audited and monitored. The Network Operations Center (NOC) is staffed 24 hours a day, seven days a week, 365 days a year to actively monitor and manage CenturyLink ESInet associated services and connectivity to the network. When a potential or actual customer-affecting issue is defined and determined to be an incident, the Incident Administration team is engaged by the NOC. The team uses established processes that are ISO 9001:2015-compliant for immediate escalation, notification, resolution, and reporting. All buildings, NOC and Data Center access are monitored by 24x7 security and access control systems. Security Information and Event Management (SIEM) analysis is a daily task of our Security Operations Center. We have deployed a SIEM tool for log aggregation and consolidation from multiple machines and for log correlation and analysis. Info security personnel have devised profiles of common events from given systems so that they can tune detection to focus on unusual activity, avoid false positives, more rapidly identify anomalies, and prevent overwhelming analysts with insignificant alerts. We deploy heuristic analysis, a method employed to detect previously unknown computer viruses, as well as new variants of viruses. Heuristic analysis is an expert-based analysis that determines the susceptibility of a system towards particular threat/risk using various decision rules or weighing methods. We perform annual external and internal penetration testing of our critical systems and infrastructure. We maintain in-house tools and expertise in order to conduct penetration testing and work with nationally recognized penetration test providers to achieve third party assurance CenturyLink uses multi-tiered security measures to restrict access to our Data Centers and any structure maintaining ESInet and NGCS components. We allow access only to authorized people and we track and log physical access. Security measures include continuous closed-circuit video monitoring, 24-hour on-premises live security, electronic key card access, individual, personal access codes, and biometric hand scans. CenturyLink actively maintains an access list. All additions to this list must be submitted in advance and in writing. Access is limited to areas designated in the access list. Only individuals identified on this list will have access. We further protect our operations and equipment by using controlled entrance and exit doors, security breach alarms, secured cage and cabinet environment, mantraps, and discrete buildings (no signage). We align with the applicable areas of the FBI CJIS Security Policy. CenturyLink follows both the Physical Security and logical security Guidelines as outlined in the Nena" Security Document NENA Security for Next-Generation 9-1-1 Standard (NG-SEC) NENA 75-001" which includes: • CenturyLink separates physically and logically ESInet functions into separate security domains. This methodology provides a clear demarcation of NGCS functions and security requirements from Managed CPE functions and security requirements.


	• CenturyLink's NGCS Solution, access control is provided through the Border Control Function/Session Border Controller (BCF/SBC) at the NGCS datacenters, this secures and segments the core functions to the transport network for the PSAP and external data sources which all remain in separate security domains. • All messaging transiting the network uses SIP. If not delivered in SIP natively, it must be interworked to SIP using the Protocol Interwork Function (PIF) of the Legacy Network Gateway (LNG). PSAP BCF/SBC are included part of this service as well that will terminate secure traffic to the PSAP and expect to hand off to the endpoint PSAP via customer provided call handling equipment firewall/BCF or SBC. • The CenturyLink's NGCS Solution and ESInet are provided with an array of BCFs/firewalls that inspects all traffic transiting the network edge. This device will employ both application and network layer protection and scanning capability as well as mitigates lower layer protocol attacks. The BCF provides Denial of Service (DoS) and Distributed Denial of Service (DDoS) detection and protection. Our network supports standard the use of firewall rules, access control lists ("ACLs"), virtual local area networks ("VLANs"), virtual private networks ("VPNs"), and Secure Sockets Layer ("SSL") protocols to control network traffic and access. These protective measures are supplemented with aggressive physical security for our datacenters and secure delivery of SIP traffic to the PSAP BCF. • Our network infrastructure is built to withstand sophisticated attacks (including DDOS) by means of a defense in depth strategy. We employ high availability systems with redundancy at geographical, carrier, circuit, power, application, and system levels. System/Application availability is safeguarded with clustering and load balancing techniques. Furthermore, our security architecture employs defenses that include, but are not limited to, Stateful packet inspection firewalls, IDS/IPS, multi-factor authentication, strong encryption, anti-virus/anti-malware, and vulnerability/patch management solutions. All inter-zone traffic is restricted to only the necessary protocols/destinations, both ingress and egress. • Building and Physical Access Control • Hardened defined external perimeters, hardened outer walls with no openings available for exploitation, access control lists and at least two automated ID sensors such as palm-print readers, etc. Visits by uncleared individuals must be approved in advance. All visitors are escorted. • Entity identification badges, building access cards, building keys, and/or any other form of recurring access that does not require approval at the time of access shall be sponsored by a NG9-1-1 Entity management person. Appropriate local, state and federal laws and guidelines shall be followed for allowing nonemployee access (i.e. CJIS Background Checks, etc.). • Identification Badges • Mobile Security and Security in and outside the Work Area or PSAP • Physical Access • CenturyLink network Interconnect equipment which will include routers, firewalls, Audio Codes and other similar equipment shall be installed and contained in a secure locked cabinet located at each PSAP with appropriate physical access controls. If equipment is in equipment rooms shared with non-NG9-1-1 Entity entities or in unsecured , it shall be contained in locked cabinets • All NG9-1-1 services within our ESInet that require authentication implement a Single Sign On paradigm. The mechanism used is OASIS SAML (Security Assertion Markup Language). There are two entities: An Identity Provider (IDP) which authenticates users and supplies services with a "token" that can be used in subsequent operations to refer to an authorized user and a Relying party which uses the token. SAML is used by a Relying Party to ask if an operation should be permitted by the user. • Rather than supporting signaling or voice encryption, we rely on the MPLS security and secured IP tunnels to provide confidentiality for signaling and voice.

	We employ the NENA 75-502.1 Audit Checklist to build our security program to include all system components and to test project compliance. We employ independent access control and auditing at the rack level for core services facilities.


Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 7	**NOC/SOC - Incident Management System** The bidder's incident management system shall log all support requests, both from users and those automatically generated. 1. Provide examples of monthly reports detailing tickets opened, pending, resolved, and closed. 2. Provide a matrix outlining Service Impact Levels in a detailed response, to include notification times and response times.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: 1. CenturyLink PSAPs and the State of Nebraska stakeholders have access to an online ticketing system to open, update, view status and request ticket closure for maintenance issues. This includes Monthly reports, showing pending online Web portal. We provide a ticketing system for the NG9-1-1 network from several contributing platforms. Chief among these is the FortiSIEM event management platform. This tool gathers a comprehensive set of data about the status of the network, including device reachability, SIP endpoint behavior, predicted MOS performance, routing topology, security threats, infrastructure alarms, SLA compliance, and a host of other relevant data. This tool has a network-wide view starting at the TDM trunks at the aggregation infrastructure and all the way through the call flow to the demarcation device at each PSAP. For the manager, this dashboard provides an unprecedented level of network visibility in a variety of networks and devices. This depth of real-time visibility includes signaling messages – as they traverse through individual devices – media quality, message parameters, etc.				

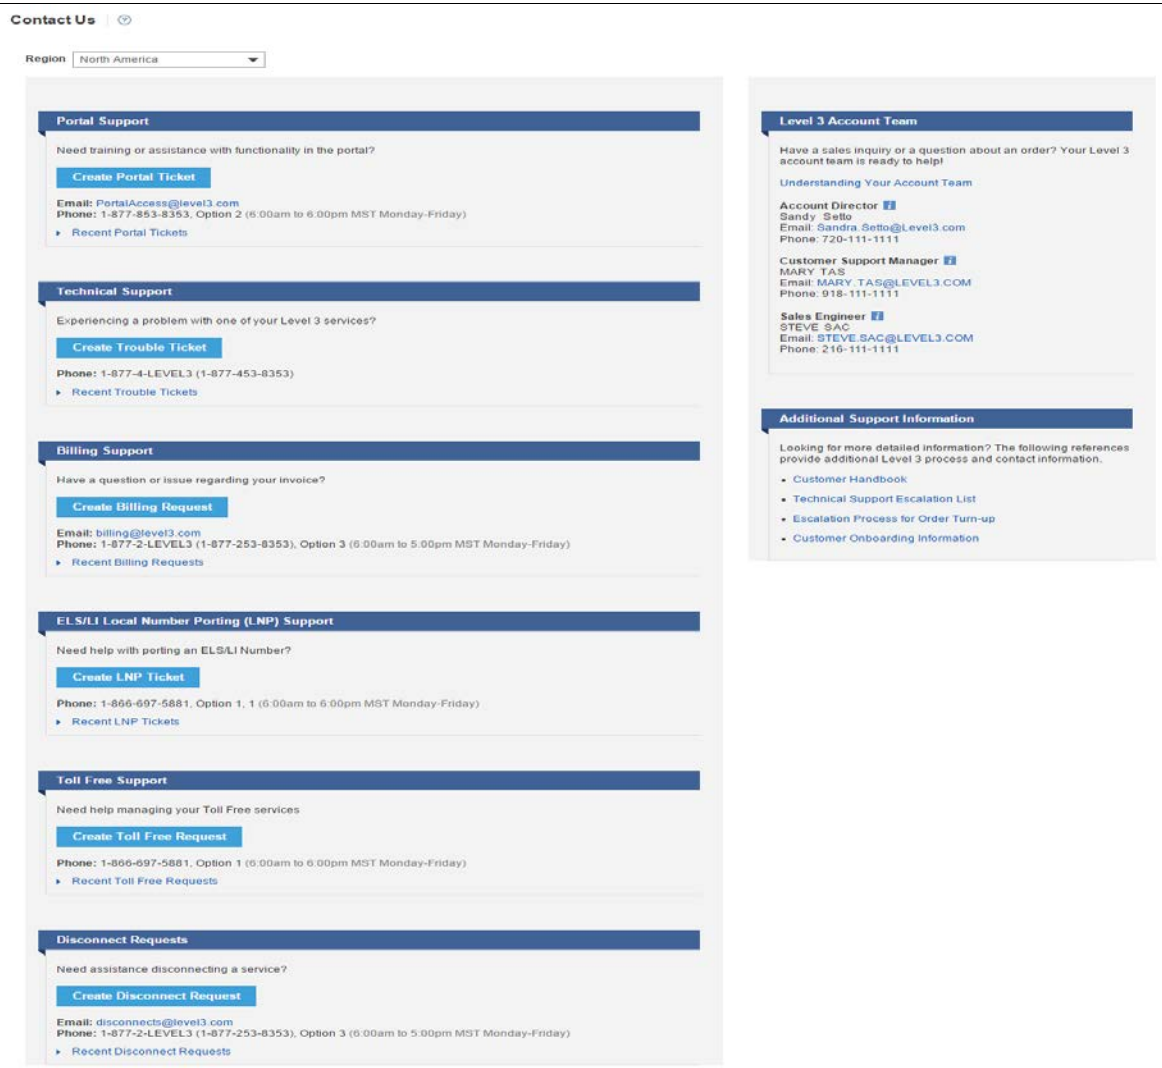

Samples of Dashboard Portal View

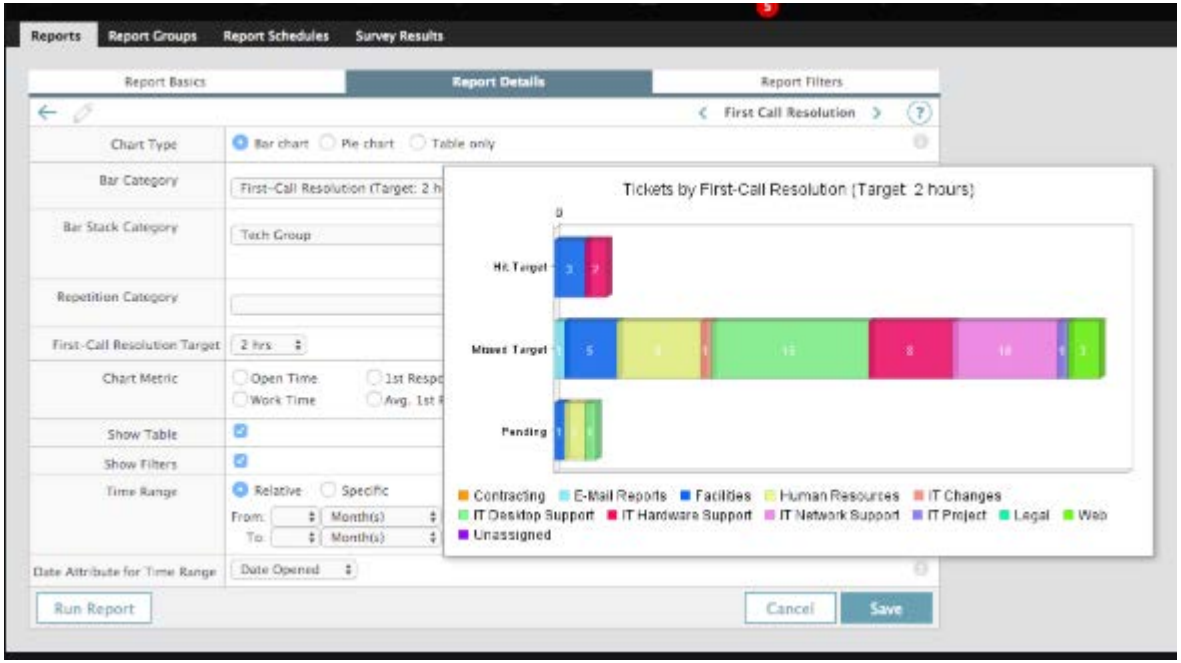

Sample of Monthly Ticket Reports

In case of a service interruption and/or outage, our team has instituted Incident Management processes and procedures for dealing with various severity levels during the course of an incident. Our incident response tools include use of the Incident Command System (ICS), which is housed within our Ticketing System. The ICS is modeled directly from the Federal Emergency Management Agency (FEMA) Emergency Management Institute for major incidents. The ICS processes include resolution, documentation of any incident, communications, and post- event analysis. Incidents overall, regardless of level of severity, are tracked within our ticketing system, which also provides broadcast messaging available for real-time updates and status of ongoing service affecting issues that may impact the NG9-1-1 solution.

Incident Management personnel are trained in incident command with courses provided by the Emergency Management Institute, a FEMA-sponsored Emergency Management Course as well as the ITIL framework. Incident Management is available 24 hours a day, 7 days a week.

CenturyLink utilizes the Incident and Problem Management modules of Remedy, which allows for tracking of break/fix issues as well as any resulting Problem Management requests. All support requests from users and those automatically generated are logged.

2.A table outlining Service Impact Levels, to including notification times and response times is below

The table below equates incident and reporting levels.

Severity[1]	Description[2]	Response
Level 5: Emergency	NGCS is no longer able to provide some critical services to any user. Prime assuming responsibilities for region. Debilitating denial of services, large amounts of data exfiltrated, inappropriate disclosure, ransomware attacks, unauthorized privilege escalation.	Immediate. Notifications made within one hour. Response partners placed in full emergency response mode. State immediately notified.
Level 4: Severe	Poses a threat to essential services or causes some subset failures that can be compensated for through active-active. May impact systems outside the CenturyLink region. Includes significant denial of services, abnormal ad-hoc requests, unauthorized access or attempted access, inappropriate disclosure, inappropriate destruction of sensitive data, etc.	Within two-hours of notification. Response partners placed on standby for immediate dispatch if needed. State immediately notified if outage occurs.
Level 3: High	Impacts ESInet reducing optimum performance but does not impact essential services nor impact SLA status significantly. Includes web defacements, denial of services, hacking activities, modification of software or systems, suspicious activities.	Within four hours. Response partners alerted. State notified per SLA
Level 2: Medium	Internal system impact that slows company work processes and may interrupt some non-essential tasks. Includes power outages, physical damage, sabotage, physical loss or theft of information.	With two workdays.
Level 1: Low	Unsubstantiated or inconsequential event including social engineering, Trojan or virus infections, harassment, elevated data disclosure, improper disposal of documents.	Within five workdays of notification that event has occurred.
Level 0	Steady state. System monitoring operating and protection in place.	Standby

This chart is modeled on USDHS threat ID levels.

Examples drawn from California Joint Cyber Incident Guide.

Any additional documentation can be inserted here:

NOC/ SOC 8	**NOC/SOC - Change Management System** **Change Management Review System** Describe bidder's change management system and the ability to provide the Commission's program manager and designated PSAP representatives with the ability to review proposed change requests and the client approval process. The Contractor shall provide monthly reports detailing change tickets opened, pending, resolved, and closed.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

A 24x7x365 NOC dedicated to 9-1-1 call delivery services supports the CenturyLink's NG9-1-1 solution network, core services, and equipment. CenturyLink utilizes industry standard processes, including adherence to Information Technology Infrastructure Library (ITIL) framework as well as best-in-class tools for Change Management, including the use of the ServiceNow Change Management Module.

CenturyLink will conduct major and minor planned and critical un-planned events for all CenturyLink's NG9-1-1 solution system maintenance or upgrades that may impact customers. CenturyLink will manage and complete changes to the service including aggregation sites, core call routing complexes, PSAP equipment maintenance, circuit maintenance, and software upgrade events, with a trained ESInet event management team facilitating the change implementation, monitoring, and communication through the length of the event. CenturyLink adheres to stringent internal event plan processes and procedures which include step-by-step execution procedures with the associated time frames, back-out procedures, and baseline and validation testing. CenturyLink includes the required back-out time within the scheduled maintenance timeframe.

Change Requests very widely in terms of scope and complexity, dependent upon the type of change. Change Requests with largest potential impact are submitted to a Change Advisory Board (CAB) for approval. The CAB is a committee that makes decisions regarding whether or not a change should be implemented. The Change Advisory Board consists of executive stakeholders or their representatives. CenturyLink manages all aspects of Change Management through the Change Management Process including availability, capacity, configuration, incident, problem, release, service-level and IT Service continuity management.

Depending on the type of change, changes are submitted to a Change Advisory Board (CAB) for approval. The CAB is a committee that makes decisions regarding whether or not a change should be implemented. The Change Advisory Board consists of executive stakeholders or their representatives. We manage all aspects of change management through the Change process including availability, capacity, configuration, incident, problem, release, service-level and IT service continuity management. Generally speaking, there are two classes of ESInet maintenance e.g., standard and emergency.

- **Standard:** CenturyLink will provide a schedule of standard maintenance windows for activities defined below as: level 4 standard and level 3 normal.
- **Emergency:** Where reasonably practicable, CenturyLink will give the Commission and any affected PSAPs 24 hour notice of the need for the maintenance and a summary of the potential impact. Emergency maintenance may occur at any time.

There are five categories of changes.

Table 1. Change Management Change Categories

Change Category	Description

STANDARD	This change indicates a low risk and repeatable change that occurs frequently. Once it is deemed appropriate (3 successful) Change plans / MOPs are in place, a template will be built so the change can be entered as a Standard Change for future usage negating the need for a normal change. This change type does not require CAB approval.
NORMAL	Normal changes are often categorized according to risk and impact to the organization. By definition, a normal change will proceed through all steps of the change management process, including the CAB for approval.
LATENT	This change should be utilized for unplanned work, resulting from a critical incident ticket &/or Major Incident.
EXPEDITED	By definition, an expedited change will proceed through all steps of the change management process and will be reviewed by the executive CAB. There is a valid business reason to bypass the 48-hour advance submittal time frame.
EMERGENCY	Utilized for a change that resolves a problem deemed critical to business continuity and for which a workaround is not sufficient. Examples are a router that could put voice delivery at risk and has a potential for an immediate threat to the production environment and /or to be a major impact to Business or Customer. Emergency changes are approved at an Emergency Executive CAB.

For a Planned or Emergent Event to receive approval there must be an event plan submitted to the CAB. The event plan must include a step-by-step guide of changes being made and clearly state the impact of the change. All event plans must also include a detailed validation plan and back-out plan in compliance with implementation plan standards and approved by the CAB Stakeholders. All event resources are clearly listed and verified ahead of time. New application code is never to be loaded without it being officially released by QA. CenturyLink will provide written notification and release content (when applicable) to the jurisdiction(s).

For Normal, Emergency, and Expedited changes, a change request is submitted to the CAB. The request must include a step-by-step explanation of the purposed changes being made and clearly state the impact of the change. These changes must also include a detailed validation plan and back-out plan in compliance with implementation plan standards. All event resources are clearly listed and verified ahead of time. New application code is never to be loaded without it being officially released by QA and validated in our test environment.

The result of each change is tracked and available for future reference in our ServiceNow Change Management Module whether it was successful or unsuccessful. If the change is closed as unsuccessful and the back-out plan was enacted, the issues that caused the event to be unsuccessful are documented. A change plan and request must be submitted for re-approval by the CAB. If the change was successful with deviation, this is also tracked with the deviations documented.

If the event is closed as unsuccessful and the back-out plan was enacted, the issues which caused the event to be unsuccessful are documented. A new event plan and subsequent change must be submitted for re-approval by the CAB.

	The CAB also documents and stores each event for tracking and reporting purposes. The CAB logs all planned and emergent event change requests on events that are both approved and declined. We also review and issue Reason for Outage (RFO) reports when outages occur. We have scheduled maintenance time frames for non-emergency events. If we have an emergency item, we will alert the Commission and affected PSAPs using a standard process. The State can choose the modality of this communication (i.e. text, email, etc.) The CenturyLink Service Manager will provide notice of maintenance events. For questions during the maintenance window, the State should contact the CenturyLink NOC. The CenturyLink's NG9-1-1 solution maintenance window is 12am-6am per time zone (Tuesday- Thursday), unless otherwise agreed to in order to resolve service impacting issues. Changes affecting multiple time zones will be completed between 12AM-6AM CT. Customer PSAPs may require maintenance at the PSAP to be done outside of this maintenance window, in which case CenturyLink will coordinate an appropriate time to perform maintenance at the PSAP. In addition to managing planned and emergent events, we maintain a problem management system for tracking and reporting trouble. CenturyLink will provide a service for opening trouble tickets, change requests, and checking status of existing items e.g., tickets opened, resolved and pending.

Any additional documentation can be inserted here:

NOC/ SOC 9	**NOC/SOC - Change Management System** **Change Management Tools** Provide detailed descriptions of any other tools bidder intends to use to provide access to the change management system, such as web portals and client software.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response Bidder Response: Access to the change management system will be available and viewed through our customized CenturyLink NG9-1-1 Public Safety web dashboard and portal. Our NG9-1-1 Public Safety NOC in conjunction with the CenturyLink change management team coordinates planned and unplanned maintenance to reduce the impact to customer service. Our change management team will provide notice of the change via emails, distribution mailboxes and or Web portal. Each change is tracked and available for future reference in our Change Management Module of portal whether it was successful or unsuccessful. If the change is closed as unsuccessful and the back-out plan was enacted, the issues that caused the event to be unsuccessful are documented. A change plan and request must be submitted for re-approval by the NGCS Core Team. If the change was successful with deviation, this is also tracked with the deviations documented in our Web portal and email processes.				

Any additional documentation can be inserted here:

NOC/ SOC 10	**NOC/SOC – Change Management System** **Change Testing and Training Environment** A non-production ESInet replica / NGCS replica, test lab, or similar system shall be established to test, and exercise proposed upgrades, third-party interfaces, and applications prior to release in live production. This system also could be leveraged for training purposes. Provide detailed descriptions of how the solution satisfies this function in the change management process.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: We employ rigorous steps to technically and operationally review all new hardware, software, network and patch releases end-to-end. All hardware and software elements deployed in a production environment go through stringent release management processes that incorporate thorough testing and scans. The testing program includes the following elements. • Test plans developed in conjunction with equipment and software vendors. • Labs that mirror the production architecture and operating environment. • Coordination with vendors to address any problems related to new product or software releases. • Oversight of the First Office Application (FOA) of all newly introduced hardware or software releases • We employ rigorous steps to technically and operationally review all new hardware, software and patch releases end-to-end. All hardware and software elements deployed in a production environment go through stringent release management processes that incorporate thorough testing and scans. The testing program includes the following elements. • Test plans developed in conjunction with equipment and software vendors. • Labs that mirror the production architecture and operating environment. • Coordination with vendors to address any problems related to new product or software releases. • Oversight of the Approved for Field Use (AFU) of all newly introduced hardware or software releases. • Provides Approval for Use and certifies new hardware or software release upon successful completion of FOA soak period. • CenturyLink offers an NG9-1-1 ESInet i3 test lab program. As part of this program, NG911 vendors can test with CenturyLink's NG9-1-1 lab to validate network, i3 interactions and Call Handling Equipment (CHE) before going into production.				

Any additional documentation can be inserted here:

NOC/ SOC 11	**NOC/SOC – Change Management System** **Change Management Process** 1. Outline bidder's proposed change management process. The ITIL change management standard methods and procedures are preferred. 2. Include a description of the process for notifying the Commission and affected PSAPs. Notification shall be made no less than ten (10) business days in advance of the change, except in emergency situations, in which case notification shall be provided immediately. 3. Include explanation of solution's Fault, Configuration, Accounting, Performance, and Security (FCAPS) procedures. 4. Provide a detailed explanation describing how the proposed solution meets or exceeds the requirements for the ITIL and FCAPS processes.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

1. CenturyLink will conduct major and minor planned and critical un-planned changes for all CenturyLink's NG9-1-1 ESInet system maintenance and or upgrades that may impact customers. CenturyLink will manage and complete events with a trained ESInet change management team facilitating the change implementation, monitoring, and communication through the length of the event. CenturyLink adheres to stringent internal event plan processes and procedures which include step-by-step execution procedures with the associated time frames, back-out procedures, and baseline and validation testing. CenturyLink will include the required back-out time within the scheduled maintenance timeframe.

Our 24x7x365 NOC dedicated to 9-1-1 call delivery services supports the CenturyLink's NGCS Solution network, core services, and equipment. CenturyLink utilizes industry standard processes, including adherence to Information Technology Infrastructure Library (ITIL) framework as well as best-in-class tools for Change Management.

We will rigorously enforce a formal change management program that satisfies the guidelines published by the Project Management Institute (PMI).

Change Requests vary widely in terms of scope and complexity, dependent upon the type of change. Change Requests with largest potential impact are submitted to a NGCS Core Team for approval. The NGCS Core Team is a committee that makes decisions regarding whether a change should be implemented. CenturyLink manages all aspects of Change Management through the Change Management Process including availability, capacity, configuration, incident, problem, release, service-level and IT Service continuity management. Our team coordinates planned and unplanned maintenance to reduce and or eliminate the impact to customer. The intent is to work within the PSAPs current Standard Operating Procedures (SOPs) or provide guidance on creating them on how to manage the planned or unplanned maintenance.

There are five categories of changes.

Table 1: Change Management Categories

Change Category	Description
STANDARD	This change indicates a low risk and repeatable change that occurs frequently. Once it is deemed appropriate (3 successful) Change plans / MOPs are in place, a template will be built so the change can be entered as a Standard Change for future usage negating the need for a normal change. This change type does not require Program Management Team approval.

NORMAL	Normal changes are often categorized according to risk and impact to the organization. A normal change will proceed through all steps of the change management process, including the Program Management team for approval.
LATENT	This change should be utilized for unplanned work, resulting from a critical incident ticket &/or Major Incident.
EXPEDITED	An expedited change will proceed through all steps of the change management process and will be reviewed by the our NG9-1-1 Program Management team. There is a valid business reason to bypass the 48-hour advance submittal time frame.
EMERGENCY	Utilized for a change that resolves a problem deemed critical to business continuity and for which a workaround is not enough. Examples are a router that could put voice delivery at risk and has a potential for an immediate threat to the production environment and /or to be a major impact to Business or Customer. Emergency changes are approved by our NG9-1-1 Program Management Team

NOCSOC 11 - Change Management Change Categories

CenturyLink will provide a notice in writing within five business days to the State on all Planned changes.

For Normal, Emergency, and Expedited changes, a change request is submitted to the NGCS Team. The request must include a step-by-step explanation of the purposed changes being made and clearly state the impact of the change. These changes must also include a detailed validation plan and back-out plan in compliance with implementation plan standards. All event resources are clearly listed and verified ahead of time. New application code is never to be loaded without it being officially released by QA and validated in our test environment.

The result of each change is tracked and available for future reference in our Change Management Module whether it was successful or unsuccessful. If the change is closed as unsuccessful and the back-out plan was enacted, the issues that caused the event to be unsuccessful are documented. A change plan and request must be submitted for re-approval by the NGCS Core Team. If the change was successful with deviation, this is also tracked with the deviations documented.

The process proceeds through several defined steps:

1. The change must be proposed by an authorized individual usually within the agency impacted by the change.
2. A thorough technical review is conducted to identify feasibility, direct and indirect impacts, potential compatibility issues and effect on network availability.
3. A security impact review is conducted, and plans are amended as needed.
4. A final approval is obtained from the appropriate level of management.
7. A project plan is prepared.
8. Users are notified if an outage is expected.
9. The project is completed and accepted.
10. A formal change report is submitted with a complete analysis of lessons learned.

	CenturyLink also utilizes Incident and Problem Management modules, which allows for tracking of break/fix issues as well as any resulting Problem Management requests.

Any additional documentation can be inserted here:

NOC/ SOC 12	**NOC/SOC - Network Management System** **System and Network Management Software** Software packages are widely available for capturing, analyzing, and reporting the network's health based on the Simple Network Management Protocol (SNMP) traffic it receives. Provide the name and description of the management software that will be implemented including all functional modules associated with it (e.g., reporting, backup, and IP address management).	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

The CenturyLink's NG9-1-1 solution NOC/SOC uses multiple tools and techniques to track performance and fault management activities. All tools are used to collect KPIs for their respective systems/servers which in turn are forwarded to HP OpenView, which is used to present a single pane of glass to the CenturyLink's NG9-1-1 solution NOC. OpenView utilizes the HP Operations Manager (OM) module, which monitors systems and applications using agents and provides SNMP trap and syslog receiver capabilities, and the HP Network Node Manager (NNMi) network monitoring software module based on SNMP. Visual alerts are available 24x7x365 to the CenturyLink 9-1-1 NOC. These systems also provide ICMP and SNMP trending and threshold alarming.

The CenturyLink's NG9-1-1 solution NOC also utilizes the following:

- CIMRaN is used immediately following an incident to provide a call impact report that identifies calls, callback numbers, PSAPs, state carriers and associated CDRs in a report that can be distributed to the customer. This report is generated within minutes following an incident.
- Netscout is used for network troubleshooting and analysis.

CenturyLink's NG9-1-1 solution system utilizes many mechanisms for event tracking and alerting. Systems leverage syslog and SNMP traps for event / fault notifications. Application hosts also utilize embedded agents which communicate directly with our monitoring platforms. Systems are monitored by use of SNMP polling and application health-checks. All systems are provisioned for fault, performance, and configuration monitoring / management.

BlueCat's Proteus IP Address Management (IPAM) solution is the IP Management tool; it enables us to design, deploy, reconfigure, and maintain the IP address inventory of all devices in the network, production, and lab environments.

CenturyLink will provide 24x7x365 monitoring of the NG9-1-1 network and equipment. CenturyLink will provide real-time reporting capabilities as well as access to the NOC for real-time updates on network and equipment health.

CenturyLink integrates a comprehensive set of tools for constant monitoring and management of the network. Multiple network management components will monitor network elements, IP paths, packet rates, packet loss, retransmission, and other IP network metrics. These components will generate alarms to appropriate systems. These components generate alarms to system operators if the reliable delivery of calls or data is threatened. Delivery of monitoring reports, including bandwidth utilization and connectivity are provided as mutually agreed upon during contract negotiations. Traditional network management tools are complimented by active application monitoring and alerting. Application elements, BRIX probes will also report network failures as detected by their monitoring activity, some of which is specific to managing the availability and integrity of the network.

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 13	**NOC/SOC – Network Management System** **NMIS Interworking with Elements and Services** Provide a detailed explanation and associated drawings explaining how the proposed solution interworks with all of the various elements and services of the proposed systems and network elements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution security policies, standards, and guidelines are compliant with industry best practices as defined by International Organization for Standardization and Control Objectives for Information and related Technology (COBIT). CenturyLink's next generation emergency services network is a secured and private IP managed network. All inbound and outbound traffic is through well-defined and controlled access points. Call processing and real-time data delivery are implemented through specialized subnets. With over 20 years of experience in cyber security, we have been recognized by industry analysts, including Gartner Group and Forrester Research, as an innovator and leader. CenturyLink's corporate security leaders participate on several private and public boards focused on IT cyber security. CenturyLink employs a defense-in-depth security strategy to protect sensitive information. Such controls include but are not limited to stateful packet inspection firewalls (host and network based), IDS/IPS, ACLs, Role-based Access control, two-factor authentication, encryption, and AV (email and host). Furthermore, systems are protected with build standards, patch management, and regular vulnerability scans. Sensitive data is housed in our data centers with logical and physical access controls. Development environments are separate from production and production data is not used in dev or SQA. Data transits untrusted networks (leaves CenturyLink custody) through applications or communication channels with encryption to safeguard confidentiality and integrity. CenturyLink's NG9-1-1 solution infrastructure (illustrated in the figure below) is built to withstand sophisticated attacks (including DDOS) by means of a defense in depth strategy. CenturyLink employs high availability systems with redundancy at geographical, carrier, circuit, power, application, and system levels. System/Application availability is safeguarded with clustering and load balancing techniques. Furthermore, CenturyLink's NG9-1-1 solution security architecture employs defenses that include, but are not limited to, stateful packet inspection firewalls, IDS/IPS, multi-factor authentication, strong encryption, anti-virus/anti-malware, and vulnerability/patch management solutions. All inter-zone traffic is restricted to only the necessary protocols/destinations, both ingress and egress.				

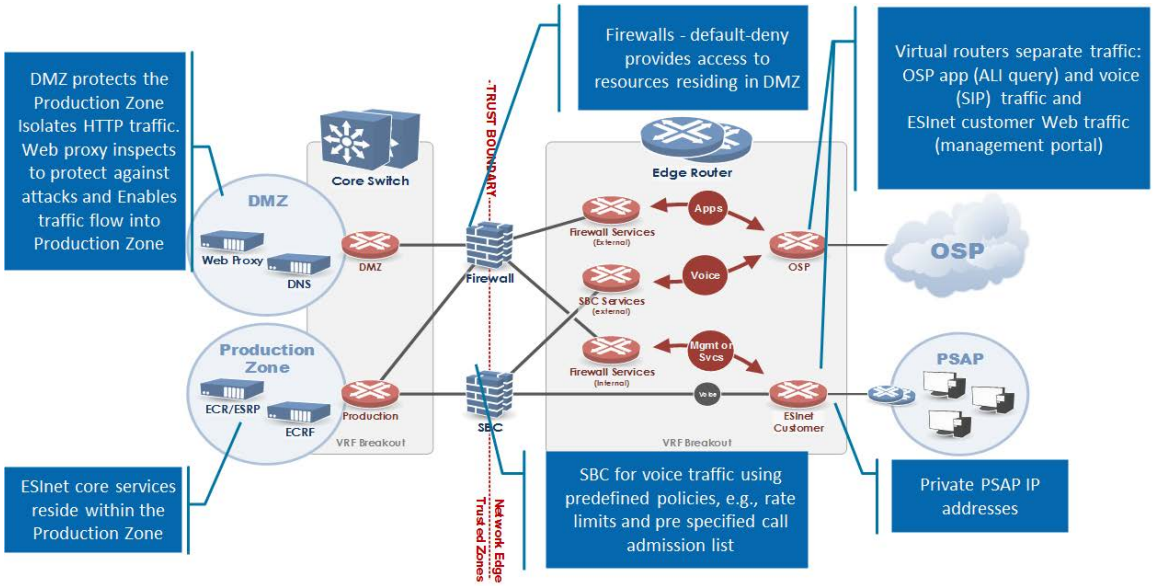


Figure 2. Defense in-depth Security Architecture

The network is capable of processing all traffic, but administratively denies protocols identified as a threat, or that otherwise fall outside of pre-defined parameters. This is partially managed via routing tables and/or Access Control Lists (ACLs). CenturyLink and Intrado continually investigate and upgrade with new advances in protective technology with tools such as Intrusion Detection System (IDS).

The solution incorporates physical, network, and application security principals. Traffic between Core processing sites and distributed sites (e.g., ingress call traffic, PSAPs, management capabilities) is route- and protocol-secure. A combination of route paths, IP address recognition, limited protocols, VPNs, session border controllers, and firewalls secure the various communication elements of the proposed solution.

CenturyLink's NG9-1-1 solution deploys firewalls and other network security devices and software to protect against inbound network threats on the servers that make up the proposed ESInet. The NOC also employs a regularly scheduled patching process to protect against the effects of malware. Computing devices are subjected to thorough security scans so that there are no malware elements present. Access to processing elements is restricted to authorized personnel. Network connections from solution components are limited to those connections needed for operation and maintenance. Physical and network access to production components is restricted to those that have an operational responsibility, and all activity is audited and monitored.

	All development environments are fully separate from production environments. All hardware and software elements deployed in a production environment go through stringent release management processes that incorporate thorough testing and scans.

Any additional documentation can be inserted here:

NOC/ SOC 14	**NOC/SOC - Network Event Logging** **System and Network Event Logging and Reporting** The network management system shall capture real-time and historical tracking of network and system events, as well as event resolution of the IP network and attached systems. This is for logging errors and statistical information related to the health of the network and attached systems. Events shall include, but are not limited to, hardware (power, processor, interface cards, ports), software (operating system errors, database errors, application errors and failures), network (Quality of Service (QoS), Mean Opinion Score (MOS), jitter, latency, and packet loss)). The events recorded in this section are not related to the event logging of 911 requests for service as part of NGCS Option B requirement NGCS 13 Event Logging. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink Real Time Monitoring via SolarWinds modular, scalable network management tools will obtain end-to-end visibility into the health and performance of the ESInet. This provides critical path hop-by-hop analysis and visualization all along the delivery track. We can quickly see maps of network connections, dependency relationships, and topology information, and know who and what is connected to the network, and when and where they are connected. This application ensures devices are configured and operating in compliance with regulatory standards and that network managers are prepared to recover quickly from hardware faults and human errors using automatic backups. CenturyLink's NG9-1-1 Solution utilizes software developed in collaboration with Oracle; security, Quality of Service (QoS), and interoperability are "baked in" to our critical services. QoS monitoring and reporting measures each media flow through the system, calculating quality scores (such as Mean Opinion Score) and aggregating the information into data for transmission to external reporting systems At each ESInet Site location, CenturyLink will provide redundant routers for each physical circuit and a Network Probe for network monitoring. Network performance event monitoring provides constant monitoring of Customer's contracted devices and associated network elements using a suite of monitoring tools which collect various types of performance related data. This data is delivered to the CenturyLink NOC monitoring center via intelligent probes, data collectors, or VPN polling as required. The data is then analyzed by NOC personnel to identify fault occurrences and to determine the overall health of the managed portions of the Customer's network. Our other monitoring tools will also allow end-users to gain visibility into signaling and media interactions, and leverage key indicators to identify, troubleshoot, and resolve issues that can reduce the efficiency of enhanced IP network service. Our monitoring tools captures all messages transiting the network using network probes linked to an unrivaled correlation engine. Results are viewable through a web-architected GUI. This Monitor runs on commercial-off-the-shelf hardware and software components that are integrated into our session border controller (SBC) service delivery platforms. CenturyLink's network performance monitoring includes but is not limited to bandwidth utilization, delay(latency), jitter, MOS, and packet loss to name the most used items for monitoring. Custom elements can be configured if required by the State.				

With our NG9-1-1 solution, problems that might be a request for service in a CPE situation are often recognized by our network event logging management tools before a customer realizes there is an issue and submits a ticket.

1. To track and report the performance of the NGCS core, we employ the Oracle Enterprise Operations Monitor (OCOM) and the FortiSIEM security and event management platform and other Network and CPE monitoring and alarm systems. A software and hardware health check against each instance is automatically performed once per second and will immediately pull an unhealthy element from our active-active pool and raise a system alert.

   Working in a complementary way, these two tools gather a comprehensive set of data about the status of the network, including device reachability, SIP endpoint behavior, predicted MOS performance, routing topology, security threats, infrastructure alarms, SLA compliance, and a host of other relevant data. Both tools have a network-wide view starting at the TDM trunks at the aggregation infrastructure and all the way through the call flow to the demarcation device at each PSAP. Then, these and other data sources such as E-Bonding ticket information are consolidated into a single viewing portal for access by the state.

   Oracle Communications Operations (OCOM) is a proactive call monitoring solution. It captures and analyzes all required signaling messages and media from the network, providing full correlation and quality metrics in real time. It also enables easy to-use, drill-down troubleshooting for root-cause analysis of any reported problem related to a user, user group, trunk, network device, or Internet Protocol (IP) address. Key features include:

   - End-to-end call correlation and analytics in real time
   - Segmentation of the network path for fast and accurate problem localization
   - On-demand troubleshooting down to the individual subscriber, customer, or employee
   - Media quality analysis, including R- Factor and MOS scores
   - Unparalleled insight into and analysis of signaling messages
   - Embedded software to eliminate need for additional monitoring equipment in the network
   - Intuitive and simple GUI

   FortSIEM enables unified and cross-correlated analytics from diverse information sources including logs, performance metrics, SNMP Traps, security alerts and configuration changes. FortSIEM essentially takes the analytics traditionally monitored in separate silos from — SOC and NOC — and brings that data together for a more holistic view of the threat data available in the organization. Every piece of information is converted into an event which is first parsed and then fed into an event-based analytics engine for handling real-time searches, rules, dashboards and ad-hoc queries. Key features include:

   - Unified, Real-Time, Network Analytics
   - Single IT Pane of Glass
   - Multi-tenancy
   - MSP/MSSP Ready
   - Cross Correlation of SOC & NOC Analytics
   - Self-Learning Asset Inventory

- Cloud Scale Architecture

Security and Compliance out-of-the-box Data collected from these platforms and other sources is then reviewed in our multi-level audit program.

This program has three audit levels.

- The first (Management) includes control self-assessments (CSAs), attack/break penetration testing, functional/technical testing, social/behavioral testing and regular management reviews. Level activities typically are reviewed annually.
- The second (Risk Management) includes assessments of threats, vulnerabilities and risk followed by a formal risk evaluation. This level also produces a business impact analysis (BIA) and draws conclusions about emerging risk. Level two activities are accomplished at least quarterly and more often if the threat so dictates.
- The third level (Internal Audit) involves internal controls testing, cyber security compliance, a Formal risk acceptance protocol and appropriate investigation/forensics. These are usually unannounced and scheduled by the Network Security Officer. Some sort of level three audit occurs monthly.

Our change management protocol requires an environmental impact assessment and risk management review prior to the implementation of any change in the operational environment.


2. To track report and log statistics and the performance of the **NG9-1-1 MPLS and TDM ESInet network**, we employ Network Probes and Solar Winds

   Solarwinds event logs events including:

   - Pcap files to determine issues with packet or frame level networking failures
   - Bandwidth utilization
   - Tracks IP and switch ports of the network
   - Monitors and provides event logs on each edge device in the network
   - Secure flows, IDS and IPS to ensure segmentation of traffic for 9-1-1 call delivery to the PSAP end points delivery to the PSAP interface and endpoints. Monitors and logs traffic for signature and anomaly-based attacks.
   - QOS including prioritization, policing and marking. QOS Policies can identify traffic based on Layer 3 attributes such as source/destination IP/Port as well as DSCP markings along with Layer 7 capabilities such as Application and URL category to provide fine grained QOS Control.
   - **BGP and OSPF Routing –** Provides flexibility in routing integration

3. CenturyLink will deploy a Brix network probe solution for End-to-End MOS scoring from Ingress to PSAP edge to track, report and log events including:


	Capture of all messages transiting the network using network probes linked to a correlation engine CenturyLink's solution will use network probes at each PSAP per circuit for MOS scoring and event logging including: – This will test end to end call quality metrics (MOS Scoring) – This system will also do automatic call testing to insure network availability and functionality. – Capture of all messages transiting the network using network probes linked to a correlation engine – Brix verifier solution for End-to-End MOS scoring from Ingress to PSAP edge – Our Brix solution uses Perceptual Objective Listening Quality Analysis (POLQA). Our Brix places a short call every minute to every PSAP probe and a long call every 4 to 7 minutes specifically to test MOS. – Probes will generate alarms/tickets on the impacted service If specific criteria are met – CDR Streaming for call by call reporting – Provides events on: • No Heartbeat (HB) • Two of these ticket types from each probe could indicate a network outage. • Packet Loss (PL) • Historical condition types in the ticket events section of NMA may indicate a network problem. • Jitter (JR) • Historical condition types in the ticket events section of NMA may indicate a network problem • Mean Operating Score (MOS).

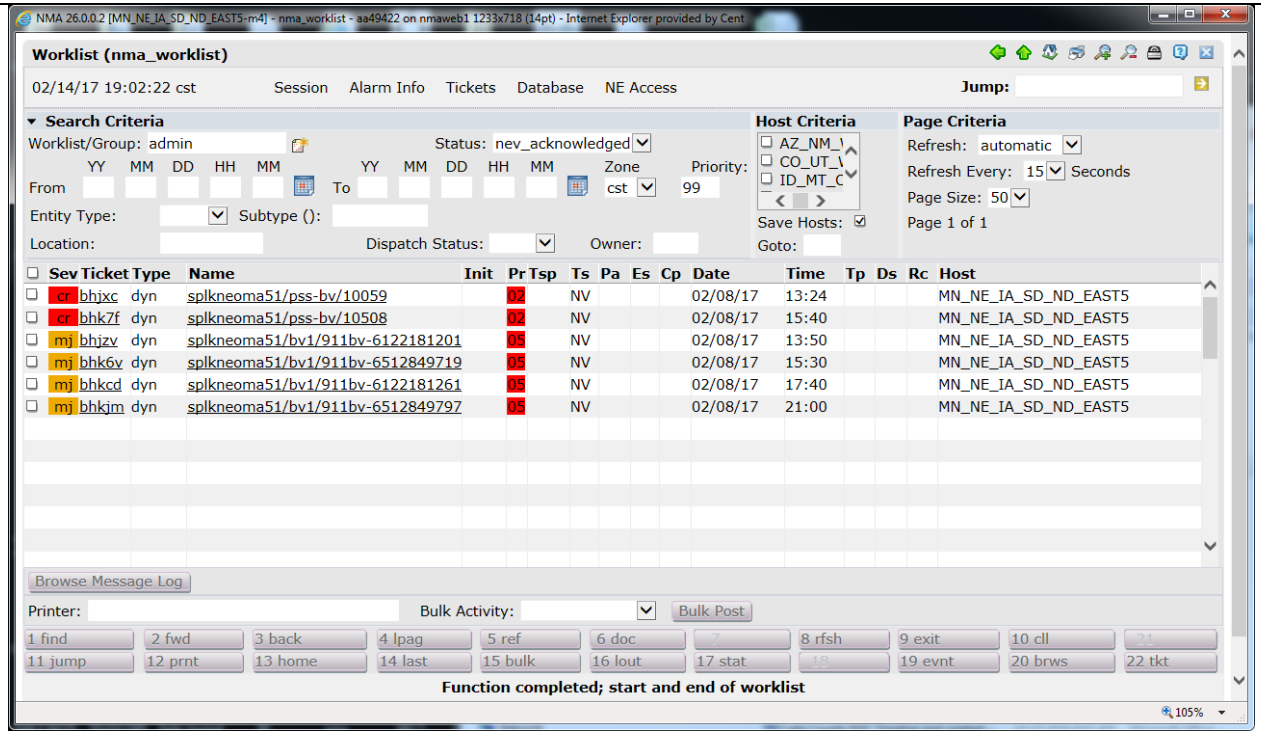

NOC/SOC 14 Network probes logging event sample

The alarms are sectioned into 4 areas, (Heartbeat HB, Packet **Loss PL, Jitter JR, and MOS).**

This data is delivered to the CenturyLink Public Safety 9-1-1 NOC monitoring center via intelligent probes, data collectors, or VPN polling as required. The data is then analyzed by NOC personnel to identify fault occurrences and to determine the overall health of the managed portions of the Customer's network.

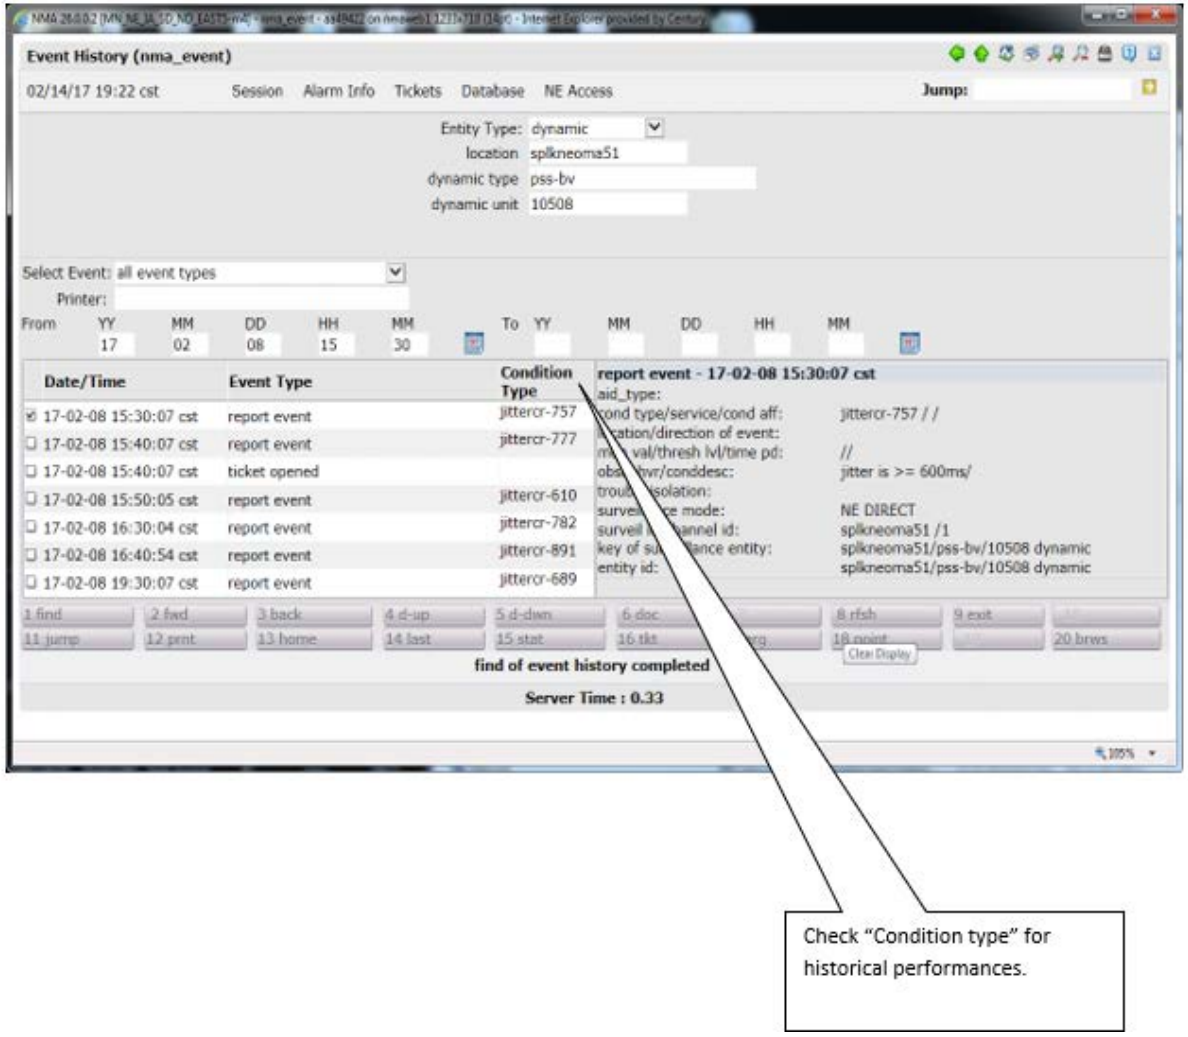

NOC/SOC 14 Network probes event log report sample

	– Our ESInet network provides custom Quality of Service (QoS) for our managed private IP network which can prioritize any type of IP traffic: voice, data, and multi-media. Our solution uses QoS and VLANs between data centers and PSAPs to prioritize and protect the data/traffic that provides additional logging events and the health of the network. – QOS events are logged across the entire IP/MPLS network. QoS monitoring and reporting measures each media flow through the system, calculating quality scores (such as Mean Opinion Score) and aggregating the information into data for transmission to external reporting systems. – Onboard QoS monitoring and measurement is also utilized for real-time functions such as QoS-based routing and load balancing. This does not compromise end-user QoS – – QoS in the CenturyLink ESInet is performed primarily through packet marking with DSCP on ingress to the switch ports attaching voice equipment to routers at remote and core sites. In some cases, the voice equipment manages its own marking, and the router/switch honors these QoS settings. In others, the router/switch will override the DSCP marking with a more appropriate setting. Typically, the audio stream (RTP) is marked with "Expedited Forwarding," the highest class of service available. This is appropriate for real-time media such as voice and is mapped to a priority queue. Signaling packets are placed in another queue, which will typically have a small but firmly reserved portion of bandwidth. – Reported QoS data includes the following per-flow metrics events includes: – RTP Lost Packets – RTP Jitter – RTP Maximum Jitter – RTCP Lost Packets – RTCP Jitter – RTCP Latency

Any additional documentation can be inserted here:

NOC/ SOC 15	**NOC/SOC - Network Event Logging** **Management System Interface to Incident Management System** This system should be part of, or interfaced with, the bidder's incident management system, or contain cross-reference abilities. Contractor shall maintain historical information for the term of the contract and provide copies of the data to the Commission on request, and at the end of the contract. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

CenturyLink maintains a problem management system for tracking and reporting trouble. We can also provide monthly trouble reports showing tickets opened, resolved, and unresolved.

In case of a service interruption and/or outage, we have instituted Incident Management processes and procedures for dealing with various severity levels during an event. Our incident response tools include use of the Incident Command System (ICS modeled directly from the Federal Emergency Management Agency (FEMA) Emergency Management Institute. The ICS processes include resolution, documentation of any incident, communications, and post-event review and root cause analysis. We manage incidents and provide customers with notifications and status of ongoing service affecting issues that may impact the CenturyLink NG9-1-1 ESInet Solution.

CenturyLink will prepare and submit a preliminary root cause analysis (RCA) for a Severity Level 1 or Severity Level 2 event. The preliminary report will provide an overview of all information known at that time. The Incident Command team will prepare and submit a final report of a Priority Level 1 or Level 2 event describing the impact of the event, the cause, resolution and any preventative steps that can be taken to eliminate future events.

Example of our Root Cause analysis. Focus on relevant objective assessment activities including:

a. Review of logs, forms, reports, and other incident documentation
b. Identify recorded precursors and indicators
c. Determine if the incident caused damage before it was detected
d. Determine if the actual cause of the incident was identified
e. Determine if the incident is a recurrence of a previous incident
f. Calculate the estimated monetary damage from the incident
g. Measure the difference between initial impact assessment and the final impact assessment
h. Identify measures, if any, that could have prevented the incident

Satisfy local, state and federal reporting requirements. This includes SLA reporting requirements

The CenturyLink NOC shall notify within 30 minutes of discovering an event or outage that may impact 9-1-1 services. CenturyLink's NGCS Solutions service assurance strategy places the highest emphasis on service restoration.

Communication will be supplied to all parties provided to CenturyLink by the Customer and its entities.

The following are key highlights for the notification system:

- The five state levels are as indicated: Critical, Major, Minor, Warning, and Normal

- We provide notification to the 24x7x365 NOC
- We provide notification by various means
- Notification levels are defined by the supporting entity
- We are capable of alarm suppression by time, quantity, and a combination for reducing alarm notifications. For example, we can say "no more of a certain alarm for the next 30 minutes" or we can say "send me duplicate alarms every 5 minutes"

NOC/SOC 15 CenturyLink Severity Levels

Severity Level	Description	Response Time	Customer Resolution Time	Status
Critical	Any outage or condition that results in: • Loss of 911 call processing • End office or Remote Switch isolation from 911 network for 10 or more minutes • Loss of end office to 911 tandem circuits • Loss of ANI / ALI to a PSAP for 15 or more minutes (excludes CPE or customer PSAP issues) • PSAP isolation for 10 or more minutes. Excluding troubles at PSAP and reroute successful with both ANI/ALI. • Any fault condition meeting FCC reportable criteria	Immediate	30 min-2 hrs	15 min
Major	Client is able to access the system, or ancillary products, but is experiencing a partial loss of critical functionality due to software or network problems and has no acceptable work around.	15 min	4 hrs	30 min
Minor	Client is able to access system, or ancillary products, but is experiencing a loss of non-critical functionality and has an acceptable work around.	30 min	8 hrs	60 min
Intermittent	Client has an informational request or questions of a general nature concerning the overall product suite functionality or is experiencing an operator inconvenience.	4 hours	24 hrs	2 hours
Informational	ORT Testing, SMOP Events, non-customer impacting problems or informational types of trouble	N/A	N/A	N/A

Any additional documentation can be inserted here:

NOC/ SOC 16	**NOC/SOC - Network Event Logging Interfacing Between Solutions** Provide a detailed explanation and associated drawings explaining bidder's processes, tools, and procedures for interfacing with the bidder's monitoring solutions.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

CenturyLink has implemented processes and procedures for interfacing regarding event logging. To ensure high performance and reliable networking services for State of Nebraska, CenturyLink's IP networking framework is based upon the Information Technology Information Library (ITIL) principles. We use ITIL for service delivery including design, operation, and transitioning of services. We also conduct detailed IT needs assessments in an effort to identify specialized equipment and software that are required by customers in the public safety sector. CenturyLink's Network Operations Center (NOC) offer end-to-end service management using highly trained networking professionals who are available 24x7 for the monitoring and management of our network infrastructure. Our NOC services include service coordination, reporting, and logistical support.

CenturyLink's NOCs analyze performance statistics for our network. We analyze network uptime, bandwidth utilization, and other performance metrics.

CenturyLink's NOCs provide 24x7, services that deliver ongoing, real-time protection with an emphasis on the following elements:


- Detect quickly
- Respond appropriately
- Restore critical services
- Provide complete RCA (Root Cause Analysis)

NOC operation can provide 24x7 geo-redundant network monitoring and reporting tools optimized by a team of highly trained experienced engineers and full-suite third-party vendor support. Our personnel have an average of eight years' plus network and system experience and service on design, implementation, and operational teams. Our network core- and carrier- grade NOC is located in our facilities. Both facilities are equipped with multiple internet service providers (ISPs), UPS and a dedicated diesel generator, closed-caption television, dual fire suppression systems, and secure access that ensures HA for all monitoring and support services.

In addition, the NOC provides continuous system support and monitoring 24x7 to each ALI node and to the database management system. The NOC also monitors all PSAP connections into the ALI nodes at the application level. Staffing in the NOC is second to none in the industry with Tier 1 through Tier 3 support staff on duty 24x7x365.

The following are key highlights for the network management system (NMS):

- The five state levels from NMS are as indicated: Critical, Major, Minor, Warning, and Normal
- We provide notification to the 24x7x365 NOC
- We provide notification by email and SMS
- Notification levels are defined by the supporting entity

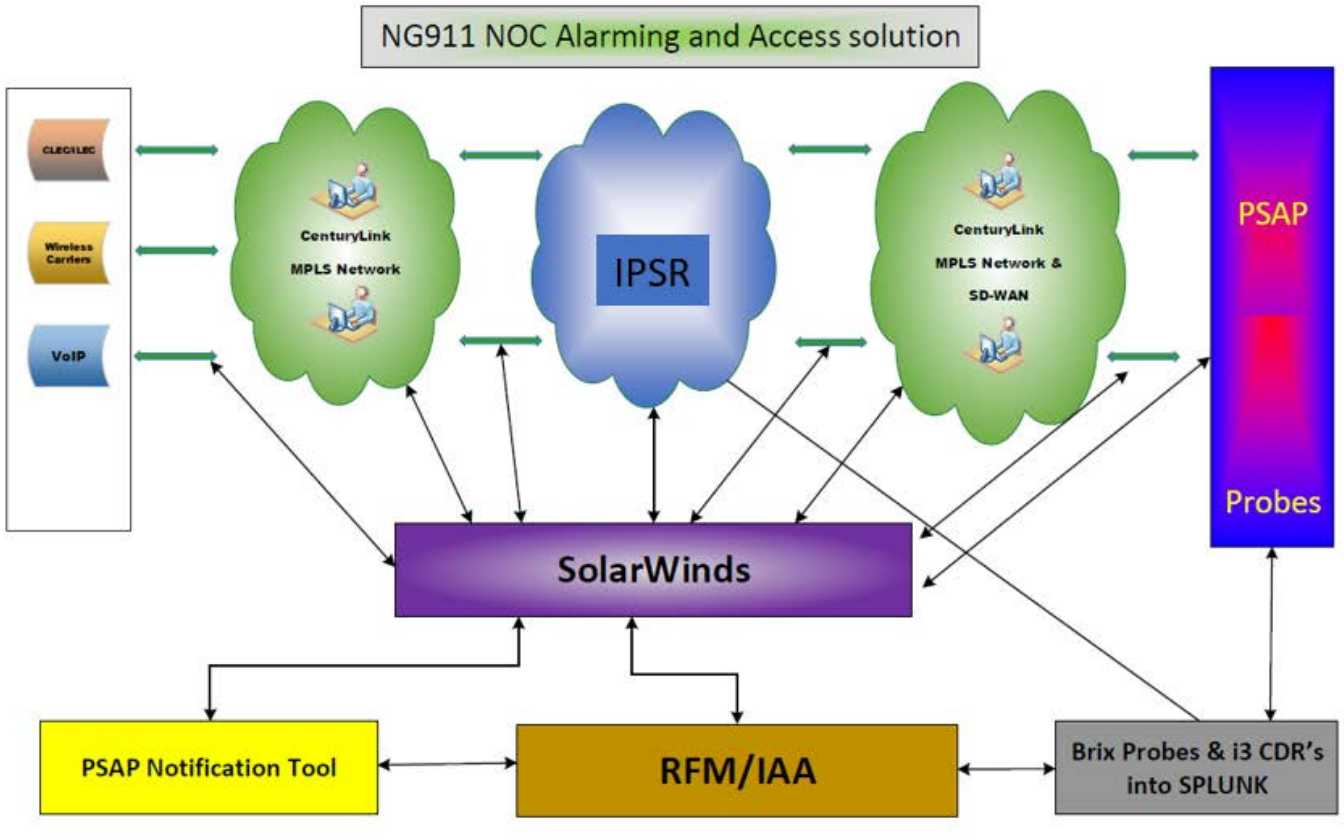

- We are capable of alarm suppression by time, quantity and a combination for reducing alarm notifications. For example, we can say "no more of a certain alarm for the next 30 minutes" or we can say "send me duplicate alarms every 5 minutes"



NOC/SOC 16 Solarwinds Event Log Manager Sample Report

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

	NOC/SOC - Access to Technical Staff 1. Detail the procedures by which bidder communicates with technical personnel from participating subcontractors, the Commission, and the participating PSAPs. 2. Specify the level of assistance required from such technical personnel to resolve service-related issues.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
NOC/ SOC 17	**Bidder Response:** CenturyLink will communicate with our technical personnel from our participating suppliers and the Commission and PSAPs through phone calls and ticketing system applications. A dedicated toll-free number has been established for the Commonwealth, PSAPs, and our participating suppliers to utilize for reporting and obtaining/providing status on ESInet issues. CenturyLink has also established a dedicated toll-free number for use by the CenturyLink for ESInet issues. CenturyLink provides a web-based ticketing system for use by our customers as well and a ticketing interface tool between CenturyLink and our participating suppliers. From the outset, we try and involve authorized third parties in our project management program. They are invited to attend planning meetings; project plans are shared with them and their participation in joint deployment and test teams is solicited. They are copied, where appropriate, when report are issues. We need third-party technical representatives to understand the interface issues facing the integration of their tools with the remainder of the solution and to make their labs available for interoperability testing				


Any additional documentation can be inserted here:

NOC/ SOC 18	**NOC/SOC - Notification** Specify how the bidder's NOC informs the Commission and the affected PSAPs or their designees of problems with the network, scheduled service and maintenance outages, and upgrades. Include all methods of notification used. Notifications for scheduled maintenance or outages shall be made no less than ten (10) business days in advance, except for emergency situations in which case, notification will be given immediately. Tickets related to the services delivered to subcontractors shall be forwarded automatically. Notification shall be provided via multiple communications means to the Commission and applicable PSAPs. Entities requiring notification may change, depending on the alarm or incident. Provide a detailed explanation explaining how the solution meets or exceeds the above requirements, including the methods of communications used.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

CenturyLink will communicate with our technical personnel from our participating suppliers and State of Nebraska and PSAPs through phone calls and ticketing system applications. A dedicated toll-free number has been established for the PSAPs, and our participating suppliers to utilize for reporting and obtaining/providing status on ESInet issues. CenturyLink has also established a dedicated toll-free number for use by the CenturyLink for ESInet issues. CenturyLink provides a web-based ticketing system for use by our customers as well and a ticketing interface tool between CenturyLink and our participating suppliers.

CenturyLink trouble notification process. The process is followed to keep customers well informed:

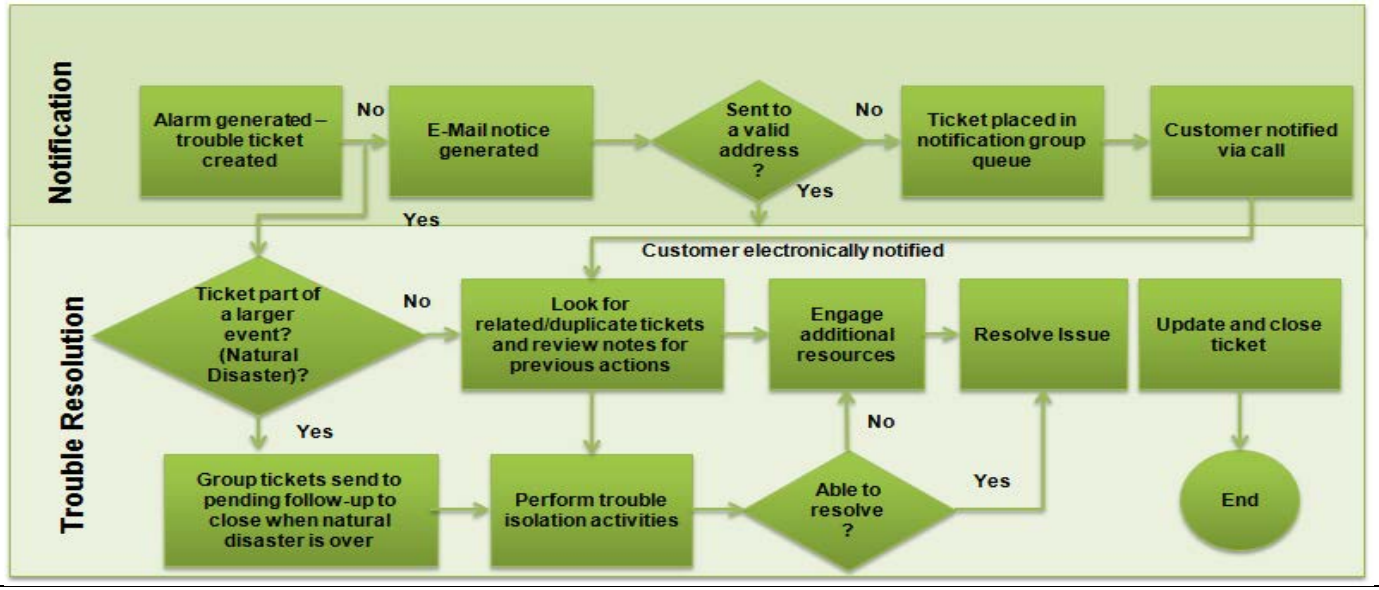

CenturyLink maintains a problem management system for tracking and reporting trouble. We can also provide monthly trouble reports showing tickets opened, resolved, and unresolved.

In case of a service interruption and/or outage, we have instituted Incident Management processes and procedures for dealing with various severity levels during an event. Our incident response tools include use of the Incident Command System (ICS modeled directly from the Federal Emergency Management Agency (FEMA) Emergency Management Institute. The ICS processes include resolution, documentation of any incident, communications, and post-event review and root cause analysis. We manage incidents and provide customers with notifications and status of ongoing service affecting issues that may impact the CenturyLink NG9-1-1 ESInet Solution.

CenturyLink will prepare and submit a preliminary root cause analysis (RCA) for a Severity Level 1 or Severity Level 2 event. The preliminary report will provide an overview of all information known at that time. The Incident Command team will prepare and submit a final report of a Priority Level 1 or Level 2 event describing the impact of the event, the cause, resolution and any preventative steps that can be taken to eliminate future events.

The following are key highlights for the notification system:

- The five state levels are as indicated: Critical, Major, Minor, Warning, and Normal
- We provide notification to the 24x7x365 NOC
- We provide notification by various means
- Notification levels are defined by the supporting entity

We are capable of alarm suppression by time, quantity, and a combination for reducing alarm notifications. For example, we can say "no more of a certain alarm for the next 30 minutes" or we can say "send me duplicate alarms every 5 minutes

Our CenturyLink Service Manager provides State of Nebraska and PSAP with a single point of contact for notification, escalating and tracking any major service outage. The Service Manager responsibilities includes:

- Hourly updates via telephone, emails and or on-site meetings of the event. Including details of the area effected.
- Provides current repair contacts and escalation guide to the PSAP and or State personnel
- Performs escalation function for customer during critical outages
- Ensures action plan is identified/executed in the event of recurring or chronic issues
- Maintains customer contact information for Network Maintenance activity
- Gathers and delivers Reason for Outage (RFO) explanation, post-event
  Participates in Service Reviews, presenting repair metrics as requested

For routine problems, stakeholders are notified through the ticketing process. If an outage occurs, SLA reporting is activated.

Here are five Change Management categories.

Change Category	Description

STANDARD	This change indicates a low risk and repeatable change that occurs frequently. Once it is deemed appropriate (3 successful) Change plans / MOPs are in place, a template will be built so the change can be entered as a Standard Change for future usage negating the need for a normal change. This change type does not require NG9-1-1Team approval.
NORMAL	Normal changes are often categorized according to risk and impact to the organization. A normal change will proceed through all steps of the change management process, including the NG9-1-1 Team for approval.
LATENT	This change should be utilized for unplanned work, resulting from a critical incident ticket &/or Major Incident.
EXPEDITED	An expedited change will proceed through all steps of the change management process and will be reviewed by the executive NG9-1-1. There is a valid business reason to bypass the 48-hour advance submittal time frame.
EMERGENCY	Utilized for a change that resolves a problem deemed critical to business continuity and for which a workaround is not enough. Examples are a router that could put voice delivery at risk and has a potential for an immediate threat to the production environment and /or to be a major impact to Business or Customer. Emergency changes are approved at an Emergency Executive NG911 Team.

CenturyLink will provide a notice in writing within ten (10) business days to the state in advanced on all Planned Maintenance changes except for any commission initiated, expedited and or emergency which take place immediately.

For Normal, Emergency, and Expedited changes, a change request is submitted to the NG9-1-1 Team. The request must include a step-by-step explanation of the purposed changes being made and clearly state the impact of the change. These changes must also include a detailed validation plan and back-out plan in compliance with implementation plan standards. All event resources are clearly listed and verified ahead of time. New application code is never to be loaded without it being officially released by QA and validated in our test environment.

The result of each change is tracked and available for future reference in our Change Management Module whether it was successful or unsuccessful. If the change is closed as unsuccessful and the back-out plan was enacted, the issues that caused the event to be unsuccessful are documented. A change plan and request must be submitted for re-approval by the NG9-1-1 Core Team. If the change was successful with deviation, this is also tracked with the deviations documented.

CenturyLink also utilizes Incident and Problem Management modules, which allows for tracking of break/fix issues as well as any resulting Problem Management requests.

Any additional documentation can be inserted here:

NOC/ SOC 19	**NOC/SOC - Executive Dashboard** Contractor shall provide a web-based executive dashboard or similar tool, providing near real-time visibility of network status displayed geographically with service impact levels color-coded. Open ticket status shall be available to users through this dashboard. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
			X		

Bidder Response:

The Customer Management Portal (CMP) provides participating PSAPs and approved personnel 24x7x365 access to a reporting suite including call detail records and PSAP operational status through a secure, web-based portal. Call detail records provide the user with all of the pertinent information for each call.

The current CMP functionality does not include geographical display of routers, switches, and IP connections, but will provide status on a PSAP's available trunks or IP resources as well as Call Statistics for the last hour in addition to allowing PSAPs to view Call Detail Records.

The CMP allows user profiles to be set up for both local (for a single PSAP) and regional (multiple PSAPs under the same jurisdictional authority) views. CMP uses dual factor authentication to keep sensitive data secure and only accessible by the correct resources.

CMP provides access to the following information:

- Operation State of PSAP(s)
  - Current status
  - History of changes in status including who made the change and when
  - Resource Counts (available TDM trunks or IP Contacts)
  - Operation State color-coded with indications for In Service/Out of Service
- PSAP Route Lists
  - Primary
  - Alternative
  - Abandonment
  - Backup
- Fixed Transfer/Bridge List
- Statewide PSAP Directory
- Call Detail Records
  - Call Detail Records provide PSAPs information including alternately routed calls, i3 to ESN fallback, and transferred calls

Any additional documentation can be inserted here:


NOC/ SOC 20	**NOC/SOC - Escalation Procedures** 1. Outline a detailed regional-level escalation process to be used during incidents that affect service, particularly those that result in critical service outages. 2. Describe how discrepancies in the perception of service level agreement (SLA) incident levels may be escalated and addressed. These procedures shall be maintained and accessible via an online portal. This escalation notification process shall be integrated with the notification processes described above, based on the problem reported.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's Next Gen 9-1-1 Public Safety NOC will be the State and PSAPs' single point of contact for all service issues. The Public Safety NOC is staffed 24x7x365, is accessible via a toll-free number. The NOC is staffed by highly trained 9-1-1 professionals. There unique skill set, coupled with advanced training and CenturyLink's refined logging and reporting functionality, means that CenturyLink's call agents are highly equipped and prepared to handle and supervise emergency service calls. CenturyLink uses a proactive monitoring and notification process (Error! Reference source not found.). The process uses platform-specific alarm thresholds to identify potential service impairments. CenturyLink network alarms are customer specific and generate trouble tickets that automatically notify customers via e-mail, text messaging, pager, and telephone. Proactive Customer Notification (PCN) also gives customers with flexibility to specify certain notification parameters on a service-by-service basis. To ensure rapid resolution of network issues, CenturyLink adheres to strict escalation procedures and measurable timeframes. If active progress and meaningful status updates are not being made, CenturyLink technicians are empowered to escalate issues internally and externally as required. CenturyLink and PSAPs may also request escalations. CenturyLink customer service is chartered to provide world-class customer support that attempts to resolve issues on a first contact basis. With geographically diverse NOC, CenturyLink provides ensures high availability of technical support personnel who provide rapid problem resolution and efficient work management in the event of natural or manmade disaster. CenturyLink also maintains records (log) of all trouble tickets. Our records allow our managers to review trouble tickets on a customer-by-customer, day-by-day, and criticality basis. When an incident impacts a CenturyLink customer our response is not complete until a CenturyLink representative contacts the customer with an explanation of the problem and a discussion of the actions that CenturyLink took to resolve issues and a discussion of how CenturyLink plans to keep the problem from occurring again. **Customer Notification** CenturyLink notifies affected customers and Nebraska of faults, restoration updates, and impact level. We include in our outage report information about impacted network switches and facilities. Our outage reports also include information about issues and concerns related to catastrophic events (i.e., fires at a transport site) and various other service issues. When a CenturyLink representative contacts a PSAP or CenturyLink, he/she will provide a tracking number, description of the fault, date and time the fault was detected, customers that are affected by the fault, and any peripheral information regarding faults and/or locations.				

	The CenturyLink representative will provide an estimated time to repair when possible and the circuit Telecommunication Service Priority (TSP) status. In order to allow CenturyLink personnel sufficient time to understand an issue, personnel are required to notify affected customers within 15 minutes. As more information about an issue is understood, CenturyLink will communicate that information to the customer. CenturyLink will utilize our WFA/OTTO ticketing system to track all NG9-1-1 proactive and reactive trouble reports. Escalation for all trouble reports occurs every 30 minutes or as appropriate if an ETA/ETR is provided. Tier 2 support is engaged within 30 minutes if no significant progress in the repair of the trouble is occurring. 1st Level Escalation = Supervisor or Duty Supervisor 2nd Level Escalations = Manager of the 9-1-1 PSS NOC 3rd Level Escalations = Director of the 9-1-1 PSS NOC 4th Level Escalations = VP of Service Assurance NOC RFO can be requested from the 9-1-1 Service Managers and they will submit an RFO request via internal systems. CenturyLink will provide a legally approved RFO within 10 business days that contains the following information.

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 21	**NOC/SOC -Statement on Standards for Attestation Engagement Number 16** Bidder shall demonstrate compliance with the Statement on Standards for Attestation Engagements Number 16 (SSAE 16). The applicable report from an SSAE 16 engagement is the Service Organization Controls 1 (SOC 1) report. 1. If bidder is proposing services, provide a detailed explanation of how bidder has complied with SSAE 16 for similar solutions, and how this would be implemented with the Commission's NG911 implementation. 2. Provide with the detailed explanation and graphical representation explaining how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: All of datacenters and attendant facilities are subject to SSAE-16 audit. Each datacenter is equipped with emergency power meeting SSAE 16 standards. All facilities are redundant so that a power failure at one will not impact another. Datacenters are linked to redundant grids and have up to three days of generator capacity. Each undergo annual SSAE-16 audits Every POI and datacenter are equipped with emergency power meeting SSAE 16 standards. All facilities are redundant so that a power failure at one will not impact another. Datacenters are linked to redundant grids and have up to three days of generator power.				

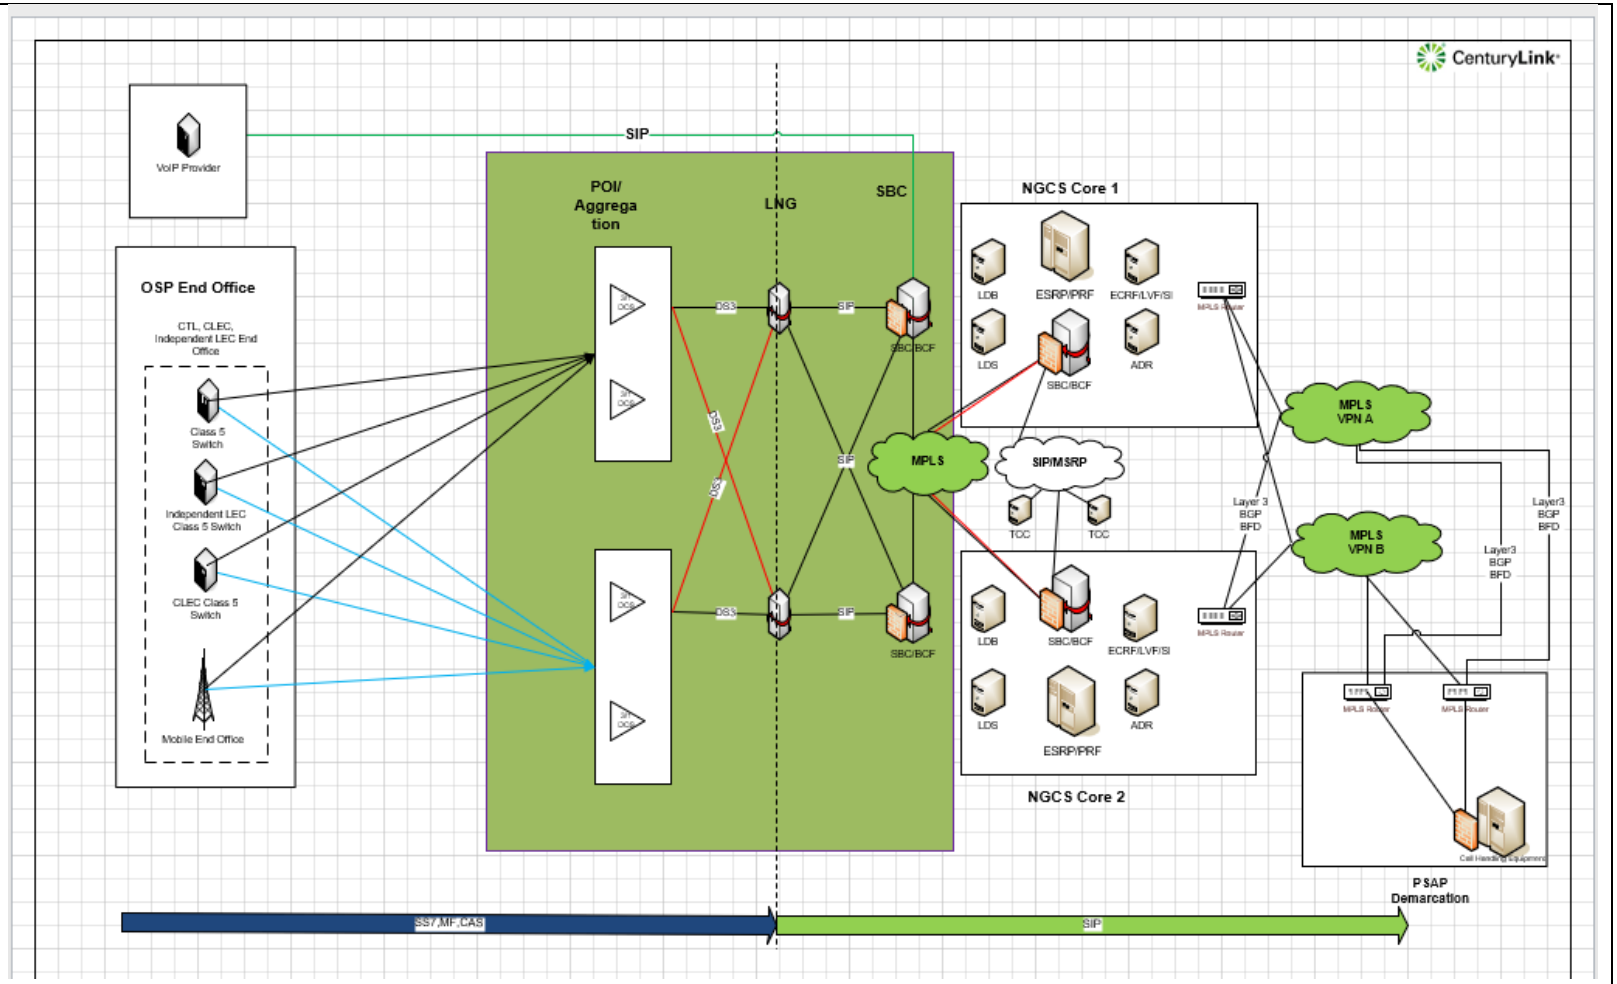

NOC/SOC 21 Standards for Attestation Engagement Number 16

Any additional documentation can be inserted here:

NOC/ SOC 22	**NOC / SOC - Configuration Backup and Restoration** 1. The bidder shall deploy and provide detailed descriptions of bidder and any subcontractors' capabilities to automatically or routinely back up configuration data and define the conditions under which the configuration of network elements, such as routers or switches, will be restored, and the process that will be used. A reporting process shall confirm regularly scheduled (e.g., monthly, quarterly) backup and restoration, and provide sufficient details on backup and restoration activity. 2. Describe the bidder's abilities to perform on-demand backups, such as at the end of a successful configuration change. A reporting process shall confirm on-demand backup and restoration and provide sufficient details on backup and restoration activity. 3. Describe bidder's COOP as it applies to the NGCS and delivery of 911 traffic via IP network to the respective host locations. 4. Provide a detailed explanation and any associated drawings explaining how the proposed processes and procedures provide the ability to manage these configuration backup and restoration processes in a manner that has no negative impact on the total Commission ESInet and NGCS solution.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: 1. CenturyLink's NG9-1-1 solution network configuration tools provide version control and "rollback" functionality to all network elements, with backups of all network configuration performed daily. This allows the restoration of previously "known good" configurations or timely restoration of stored configurations in the event of equipment failure or disaster recovery. Using the above process, our network configuration management tools perform the following functions: • Detect and report on configuration policy violations or configuration backup failures to ensure compliance with corporate standards. • Utilize configuration templates and command templates, custom scripts, and configuration changes to provide consistent implementation of network configurations across similar site types. • Simultaneously modify configurations, change community strings, update ACLs, and block MAC addresses across many devices. • Compare start-up and running configuration files to troubleshoot device configurations issues. • Automatically check all network elements for changes and perform backup for all changed network device configurations on a daily or ad hoc basis, as needed. CenturyLink can provide reports confirming regularly scheduled daily backup and restoration files archived and provide additional details on backup and restoration activity as required. CenturyLink can provide copies of all data upon request. 2. CenturyLink can provide reports confirming on-demand backup and restoration files archived and provide additional details on backup and restoration activity as required. CenturyLink can provide copies of all data upon request. 3. CenturyLink provides life-critical services supporting 9-1-1 and public safety and is strongly committed to continuous, sustained readiness of its applications, systems, networks, and processes 24x7x365. CenturyLink's business and service continuity plans, geographically diverse and				

redundant systems, and incident management processes and plans provide confidence that continuous operations will be sustained through planned or unplanned events.

Service Continuity Planning Steps

1. Risk Assessment

CenturyLink business and service continuity risk assessment addresses naturally occurring and facility affecting events, as well as system interruptions. Processes in place address interactive management of events designed to support continuous functioning of 9-1-1 systems and enable personnel to continue to perform through specific incident conditions.

2. Service Continuity Strategy

CenturyLink is strongly committed to providing essential business processes, systems, and networks on a 24x7x365 basis and is well prepared for possible disruptions and disasters. As a critical public safety service provider, CenturyLink has in place a robust business and service continuity program designed to prevent or mitigate service disruptions and support rapid response to loss or impairment of crucial business functions or infrastructure. To address potential risks, CenturyLink utilizes:

- Redundant, Geographically Diverse Systems – The CenturyLink's NG9-1-1 solution architecture is located in geographically diverse and redundant data centers in Longmont, Colorado and Miami, Florida.
- Incident Management – In the event of an unplanned outage, or intermittent outage of a system, network component, or application that has the potential to cause an adverse impact to production services, CenturyLink immediately engages the Incident Command System, which is based on the FEMA Incident Command Structure. The incident team, led by a qualified incident commander and supported by technical and operations resources, evaluates the information received, determines the problem statement, categorizes the problem severity level, and manages/works the incident until the incident objectives are met.
- Business and Service Continuity, Disaster Recovery, and Emergency Procedures – CenturyLink has established business and service continuity, disaster recovery, and emergency procedures that address potential risk situations to our facilities or systems, including:
  - Building emergency procedures (e.g. bomb threat, earthquake, power failure, and flood
  - Data center risks (e.g. water, flood, power, electrical, and fire)
  - Security Risks (e.g., information and network security, physical security)
  - Building evacuations
  - Pandemic
  - Inclement weather
  - Building disasters

3. Implementing Risk Reduction and Recovery Measures

CenturyLink's essential processes, systems, and networks supporting 9-1-1 traffic are designed and deployed to accommodate possible disruptions and disasters to any given element or data center and support 24x7x365 continuous operation. In the event of unplanned system or network outages,

	this diversity allows for CenturyLink 9-1-1 systems to continue operating while Incident Management processes are engaged to identify and resolve issues so that redundancy is fully restored. 4. Developing Plans and Procedures Continuity plans cover critical application and infrastructure components. At least one copy of the continuity plans is maintained offsite in secure storage, available 24x7. Key personnel possess encrypted electronic copies of business continuity information, updated regularly. CenturyLink conducts reviews and updates of continuity data and plans at least annually. Certain continuity plan functions are exercised on an on-going basis, such as Incident Management, which is utilized for all planned and unplanned events. CenturyLink is well prepared and practiced for contingencies and has communications protocols and processes in place to notify personnel, customers, vendors, suppliers, and regulatory bodies in support of our applications, systems, and network components. Continuity plan materials include: • Essential functions and personnel • Employee emergency contact information • Building emergency procedures • Contractor/Vendor contact procedures • Crisis communication plans • Specific scenario response procedures • Customer contact and notification • Life mission critical system recovery processes **Testing Service Continuity Plan** CenturyLink implements and tests its Incident Management Plan on a regular basis and conducts audits and reviews and/or walk through exercises of its continuity plans at least annually. Information gathered feeds into a continuous improvement cycle as part of the maintenance and review process. **Service Continuity Plan Maintenance** CenturyLink conducts a maintenance review of its continuity plans at least annually. In this review, which is coordinated by the overall plan owner, the interdependent plan owners identify, validate, implement, and document changes to the plan components. 4. Network configuration management tools automatically check all network elements for changes and perform backup for all changed network device configurations on a daily basis, and may be performed on-demand, as needed. Network configuration management tools have been implemented with geo-diversity in place.

Any additional documentation can be inserted here:

NOC/ SOC 23	NOC/SOC - Third-Party Management The Commission is seeking the optimum value provided by best-of-class products and services integrated as part of the total IP network solution. This may present a situation where no single manufacturer or supplier can provide a public safety-grade, unified NOC/SOC accountable for all components, products, and services that comprise the Commission's total IP network solution. Consequently, the Commission may find it beneficial to have a third party provide that overarching NOC/SOC service. A third-party NOC/SOC provider may be responsible for functioning as an umbrella for monitoring all of the Contractor's products and services, including collaboration with the Contractor's NOC/SOC. To facilitate that capability, the third-party NOC/SOC shall have a view into all elements that are under SLAs. Bidder's NOC/SOC NMIS and/or incident-tracking tools shall have the ability to perform eBonding, which enables bidirectional data synchronization. 2. Provide a detailed narrative discussing bidders experience in providing access to third-party NOC/SOC, overarching support as well as for each of the requirements in Third-Party NOC/SOC Support below.				
	Bidder Response: CenturyLink provides a single inclusive direct support when it comes to collaboration with 3rd party contractors. This support goes beyond the normal NOC'SCO support but also includes the development of interfaces through API's, E-bonding for monitoring and ticketing, synchronizing datasets, alert and monitoring tool integration, and tier 1-3 support with 3rd party NOC/SOC centers in order to provide an end to end monitoring solution to the State of Nebraska Examples of this collaboration with these 3rd party companies examples includes Synergem, Comtech, NG911 solutions for HG 9-1-1 in California, Atos Public Safety LLC, NGA911, Motorola Solutions, Intrado, and others. CenturyLink will work with State of Nebraska Commission and any selected third-party NOC/SOC for a functional requirements document for evaluation of CenturyLink and Nebraska commission compliance guidelines. No cost has been included in this proposal for any required integration work for the integration				

1. In support of the Commission's consideration of such an option, bidder shall indicate the compliance level of experience in providing access to third-party NOC/SOC overarching support, as related to the requirements identified in the table below.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
Change management processes	X			
Coordinating and managing trouble tickets to resolution from bidder and multiple suppliers.	X			

Trouble ticket report management (reports may be daily, weekly, monthly, quarterly, or yearly).	X			
Notification processes for bidder and suppliers, and any other entities or people designated by the Commission.	X			
System alarm access in the form of SNMP or syslog data.	X			
Experience and processes for interworking of multiple public safety data system suppliers.	X			

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

	General Operations - Service Level Agreements **System Capacities and Performance** 1. Provide capacity levels of each element of the IP Network This may be in terms of busy-hour calls, network bandwidth, or any other applicable measure. The proposed solution shall be capable of handling current and planned IP traffic and usage plus 50 percent capacity growth over the term of the contract. 2. Specify lead times required to increase capacities on each element of the IP network.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
SLA 1	**Bidder Response:** CenturyLink's NG9-1-1 solution ESInet is capable of handling current and planned IP traffic and usage plus 50 percent capacity growth over the term of the contract. Existing Host PSAP Sites are being designed with 100MB Network Capacity which currently exceeds the needs for the State of Nebraska Host PSAP Sites. CenturyLink can easily scale IP capacities through simple provisioning processes, eliminating the need for additional network buildouts, and enabling customers to increase capacities within a few weeks vs. months. CenturyLink will work with the State of Nebraska for capacity planning and to mutually agree on ordering timeframes. This methodology provides the State of Nebraska with a cost-effective solution in the near term and allows for growth based on coordinated agreements. The IP network transport used by CenturyLink's NGCS will initially be sized to comply with specified network bandwidth requirements. The CenturyLink MPLS IP network is monitored for capacity trends that indicate the need for proactive growth of the ESInet. As the needs of the State of Nebraska grow, local PSAP connectivity bandwidth will be scaled up or down by a change order process or through procedures as defined in the SLA and/or contract. CenturyLink's NG9-1-1 solution provides a fully compliant, scalable environment in the existing LNG and ESInet core infrastructure. Currently the LNGs operate with redundancy at each location and the bandwidth is expandable in a short timeframe with no need for a forklift upgrade. CenturyLink's NG9-1-1 solution ESInet network is capable of bandwidth growth at each network element, existing end sites, and future end sites without sacrificing reliability of the solution. The solution is capable of interconnecting to other national- and/or state-level ESInets via open standards-based interfaces. CenturyLink's NG9-1-1 solution model is deployed from a network perspective with a 2N redundancy model – each remote site is provisioned with 50% more bandwidth as is required per the RFP to serve the total number of TDM voice trunks provisioned at the site. The network has the scalability to adjust bandwidth to changing needs easily, quickly, and with minimal operational impact. The bandwidth for each data center will support the bandwidth requirements and ease of future growth of the PSAP network. As it is proposed, our NG9-1-1 core is highly scalable capable of handling up to 4 million routes and up to 500,000 SIP-TLS sessions. As a carrier grade network, CenturyLink's NG9-1-1 Solution is easily scalable to a capacity that can support every 9-1-1 required by the local jurisdiction region or state deployment.				

	CenturyLink's NG9-1-1 solution provides ethernet local access loops that can scale easily up to 1Gbps and larger with a few network interface device Network Interface Device (NID) dependencies. Majority of the ethernet local access circuits that are deployed with a fiber media to the PSAP, this allows for the needed scalability of this solution. CenturyLink utilizes optical wave services, dark fiber leases and eNNI connectivity to provide a diverse POP MPLS delivered design. The network has the scalability to adjust bandwidth to changing needs easily, quickly, and with minimal operational impact. Ingress carrier network is designed to have multiple termination locations that can take 100% of the load in the event of a location failure. Connections to the PSAP are sized up to accommodate necessary bandwidth based on a concurrent G.711 SIP session (Call path). Each circuit is engineered to handle 100% of the call demand in the case of a failure of the primary or secondary circuit. Bandwidth is managed and monitored and can fluidly change as needed based on call volume. CenturyLink's NG9-1-1 solution is capable of bandwidth growth at each network element, existing end sites, and future end sites without sacrificing reliability of the solution. The solution is capable of interconnecting to other national- and/or state-level ESInets via open standards-based interfaces. CenturyLink integrates a comprehensive set of tools for constant monitoring and management of the network. Multiple network management components will monitor network elements, IP paths, packet rates, packet loss, retransmission, and other IP network metrics. These components will generate alarms to appropriate systems. These components generate alarms to system operators if the reliable delivery of calls or data is threatened. Delivery of monitoring reports, including bandwidth utilization and connectivity are provided as mutually agreed upon during contract negotiations. Traditional network management tools are complimented by active application monitoring and alerting. Application elements, BRIX probes and well as SDWAN deployment will also report network failures as detected by their monitoring activity, some of which is specific to managing the availability and integrity of the network.

Any additional documentation can be inserted here:

	Service Level Agreements - System Performance **Network Latency** Specify the guaranteed maximum latency across the backbone network under a full-load condition, and include how that information will be gathered, calculated and provided to the Commission and the affected PSAPs.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

CenturyLink maximum latency across our backbone is based on 30-day average for the month of April and is provided in the blow table. Latency across the core network, which includes from the LNG to the PSAP.

For traffic that traverses AS209, the maximum one-way latency is 32ms across the backbone.

For traffic that traverses AS3549 the maximum one-way latency is 21ms across the backbone.

SLA 2

Location A	Location B	AS Number	One Way Latency (ms)	Round Trip Latency (ms)	Jitter (ms)	Packet Delivery
Highlands Ranch, CO	Chicago, IL	AS 209	9.68	19.36	0.02	100%
Highlands Ranch, CO	Los Angeles, CA	AS 209	11.84	23.68	0.01	100%
Highlands Ranch, CO	Omaha, NE	AS 209	7.99	15.98	0.02	100%
Highlands Ranch, CO	Bellevue, NE	AS 209	9.58	19.16	0.02	100%
Chicago, IL	Los Angeles, CA	AS 209	21.01	42.02	0.02	100%
Chicago, IL	Los Angeles, CA	AS 3549	21.01	42.02	0.02	100%
Chicago, IL	Omaha, NE	AS 209	4.785	9.57	0.02	100%
Chicago, IL	Bellevue, NE	AS 3549	9.58	19.16	0.02	100%


CenturyLink deploys active monitoring probes to measure MOS scores from the ingress of the network to the PSAP. With this active monitoring, our host server places a call into the NG9-1-1 network every 6 to 7 minutes to a probe located at each core host PSAP. Every 6 to 7 minutes, we are testing the following:

- Logical connectivity to the host PSAP
- MOS scoring
  - Latency
  - Jitter
  - Package Loss

These network probes will alert our NG9-1-1 NOC whenever thresholds are exceeded. All tests are capture and stored and results are viewable through a web-architected GUI dashboard portal to the Commission and affected PSAP's.

We use a combination of platforms for accomplishing monitoring, data management, and oversight tasks, including SolarWinds, Brix network probes. Splunk, and others. Outputs from the various platforms are gathered, calculated and combined into single-pane views specific to the NG9-1-1 services arena using developed tools. This combined approach allows CenturyLink to tailor the solutions to the specific NG9-1-1 environment while leveraging best-in-class off the shelf tools where appropriate monthly results are viewable.

Please see SLA 5 for examples of Active Probe reports

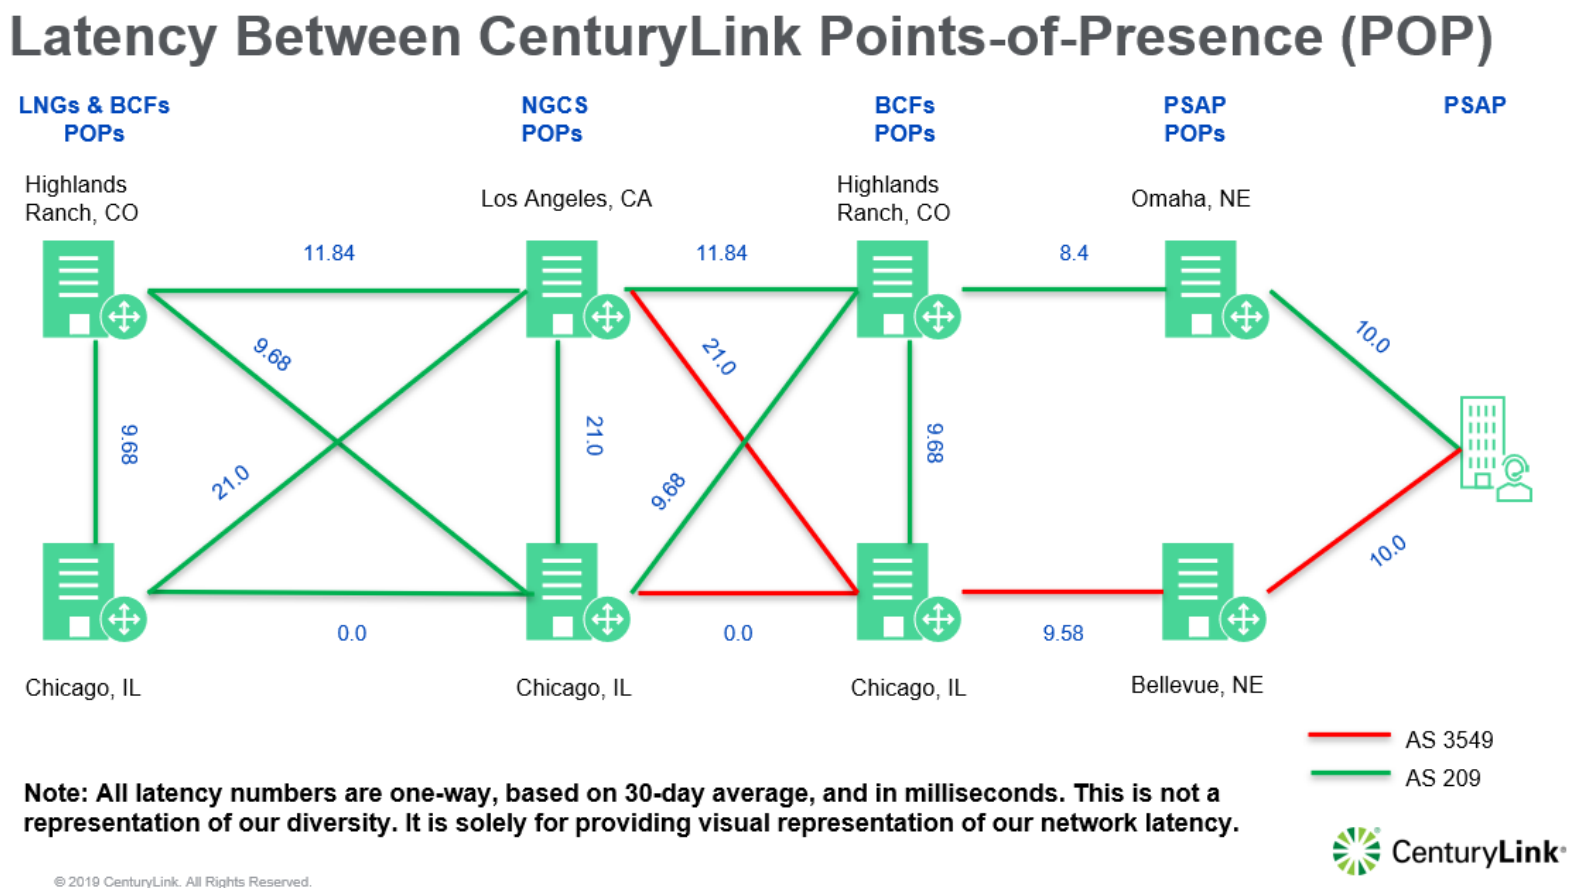

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

Any additional documentation can be inserted here:

SLA 3	**Service Level Agreements - System Performance** **Point of Presence (POP) to POP** Specify the guaranteed maximum latency from interconnection facility to interconnection facility, and include how that information will be gathered, calculated and provided to the Commission and the affected PSAPs.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

These parameters are built into our design. Confirmation of this budget is a task that occurs early in our program plan after we have confirmed all network details with OSPs and end. Including the following maximum latency from our POI to POP NG9-1-1 design.

1. Transmission delay – Average 5ms – Maximum 5ms
2. Encoding/Compression/Buffering - Average - 20ms - Maximum 30ms
3. Service Provider Network - Average - 25ms - Maximum 30ms
4. Transcoding/Queuing/Buffering - Average - 2ms - Maximum 2ms
5. ESInet - Average - 25ms - Maximum 50ms
6. Decoding/Debuffering - Average - 20ms - Maximum 30ms
7. Local LAN - Average - 1ms - Maximum 2ms

Including

- Total - Average - 97ms - Maximum - 149ms
- SLA Compliance Testing (Peak Load)
- Packet Latency – (20ms)
- Packet Loss – (0.5%)
- Jitter – (20ms)

CenturyLink maximum latency from interconnection facility to interconnection facility is based on 30-day average for the month of April and is provided in the blow table.


Our maximum latency from POP to POP is 25ms.

The table below provides max latency from POP to POP.

Location A	Location B	AS Number	One Way Latency (ms)	Round Trip Latency (ms)	Jitter (ms)	Packet Delivery
Highlands Ranch, CO	Chicago, IL	AS 209	9.68	19.36	0.02	100%
Highlands Ranch, CO	Los Angeles, CA	AS 209	11.84	23.68	0.01	100%
Highlands Ranch, CO	Omaha, NE	AS 209	7.99	15.98	0.02	100%

Highlands Ranch, CO	Bellevue, NE	AS 209	9.58	19.16	0.02	100%
Chicago, IL	Los Angeles, CA	AS 209	21.01	42.02	0.02	100%
Chicago, IL	Los Angeles, CA	AS 3549	21.01	42.02	0.02	100%
Chicago, IL	Omaha, NE	AS 209	4.785	9.57	0.02	100%
Chicago, IL	Bellevue, NE	AS 3549	9.58	19.16	0.02	100%

Latency Between CenturyLink Points-of-Presence (POP)

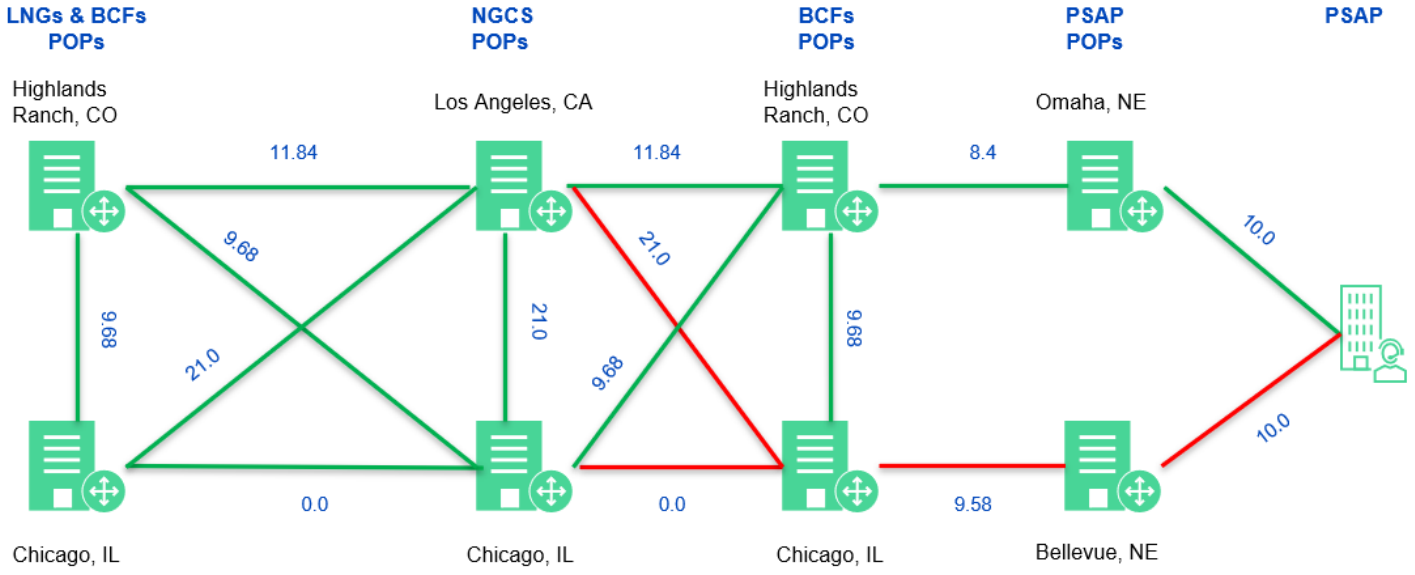

Note: All latency numbers are one-way, based on 30-day average, and in milliseconds. This is not a representation of our diversity. It is solely for providing visual representation of our network latency.

© 2019 CenturyLink. All Rights Reserved.

CenturyLink

	CenturyLink deploys active monitoring probes to measure MOS scores from the ingress of the network to the PSAP. With this active monitoring, our host server places a call into the NG9-1-1 network every 6 to 7 minutes to a probe located at each core host PSAP. Every 6 to 7 minutes, we are testing the following: • Logical connectivity to the host PSAP • MOS scoring – Latency – Jitter – Package Loss These network probes will alert our NG9-1-1 NOC whenever thresholds are exceeded. All tests are capture and stored and results are viewable. We use a combination of platforms for accomplishing monitoring, data management, and oversight tasks, including SolarWinds, Brix network probes. Splunk, and others. Outputs from the various platforms are gathered, calculated and combined into single-pane views specific to the NG9-1-1 services arena using developed tools. This combined approach allows CenturyLink to tailor the solutions to the specific NG9-1-1 environment while leveraging best-in-class off the shelf tools where appropriate monthly results are viewable. Please see SLA 5 for examples of Active Probe reports Service Level Agreements (SLAs) will be provided as a part of our Program Development Plan (PDP). The CenturyLink Program Manager will work with the Commission and or PSAP's to track services against SLAs and provide monthly reporting to the customer. During the planning phase of the project the CPrgM will work with the state to define reporting criteria, format and frequency. Refer to Attachment labeled "2.d CenturyLink Sample Program Management Plan for Nebraska".

Any additional documentation can be inserted here:

SLA 4	**Service Level Agreements - System Performance** **POP to Endpoints** Specify the guaranteed maximum latency from interconnection facilities to the network interface device located at the entrance to the hosts' premises, and include how that information will be gathered, calculated and provided to the Commission and the affected PSAPs.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			


Bidder Response:

CenturyLink maximum latency from interconnection facilities to the network interface device located at the entrance to the host's premises is based on 30-day average for the month of April and is provided in the blow table.

POP to Endpoint maximum latency from interconnection facilities to the network interface device is 10 ms.

The table below provides max latency from POP to POP.

Location A	Location B	AS Number	One Way Latency (ms)	Round Trip Latency (ms)	Jitter (ms)	Packet Delivery
Highlands Ranch, CO	Chicago, IL	AS 209	9.68	19.36	0.02	100%
Highlands Ranch, CO	Los Angeles, CA	AS 209	11.84	23.68	0.01	100%
Highlands Ranch, CO	Omaha, NE	AS 209	7.99	15.98	0.02	100%
Highlands Ranch, CO	Bellevue, NE	AS 209	9.58	19.16	0.02	100%
Chicago, IL	Los Angeles, CA	AS 209	21.01	42.02	0.02	100%
Chicago, IL	Los Angeles, CA	AS 3549	21.01	42.02	0.02	100%
Chicago, IL	Omaha, NE	AS 209	4.785	9.57	0.02	100%
Chicago, IL	Bellevue, NE	AS 3549	9.58	19.16	0.02	100%

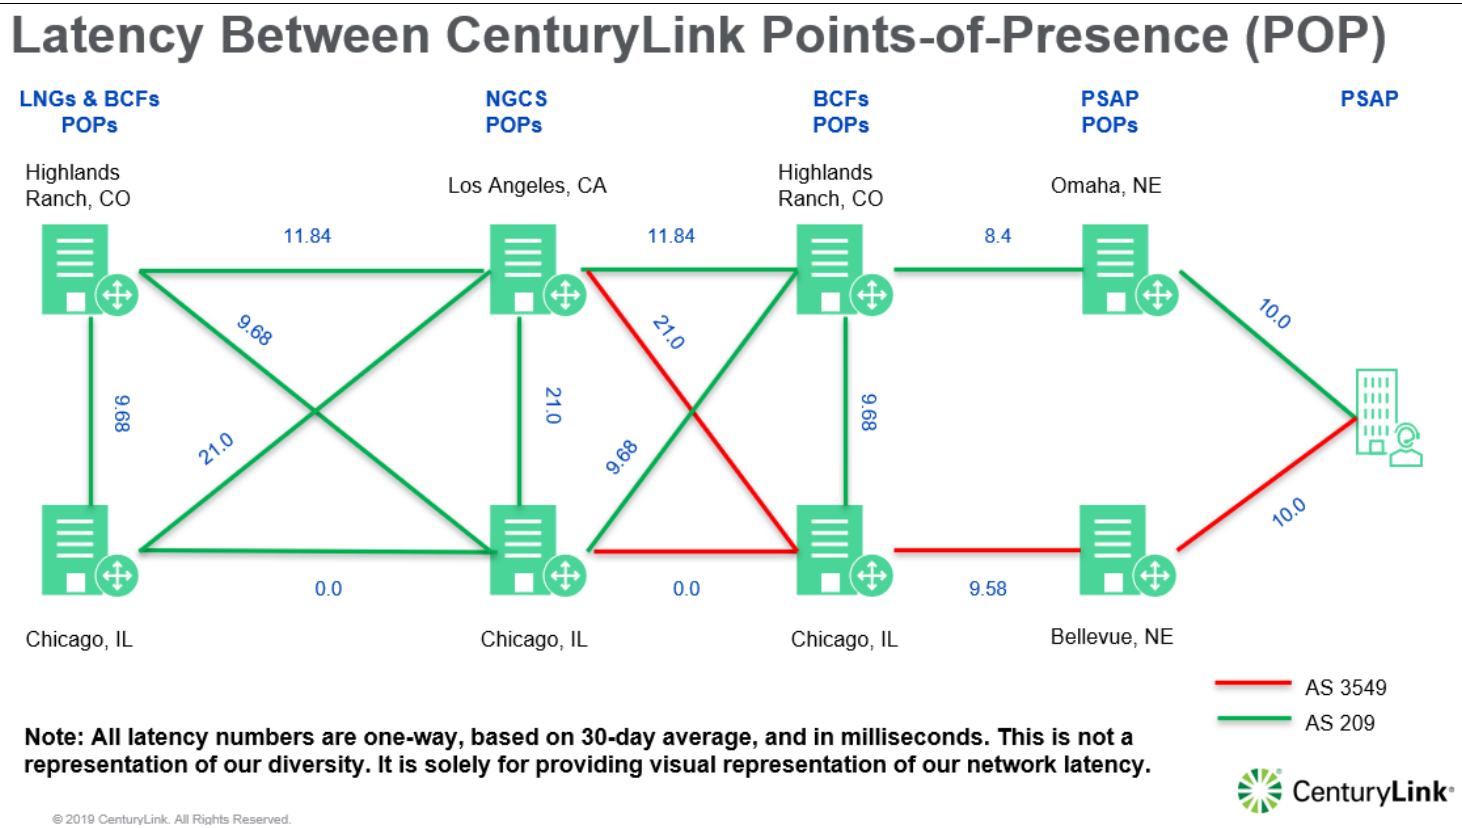

CenturyLink deploys active monitoring probes to measure MOS scores from the ingress of the network to the PSAP. With this active monitoring, our host server places a call into the NG9-1-1 network every 6 to 7 minutes to a probe located at each core host PSAP. Every 6 to 7 minutes, we are testing the following:

- Logical connectivity to the host PSAP
- MOS scoring
  - Latency
  - Jitter
  - Package Loss

	These network probes will alert our NG9-1-1 NOC whenever thresholds are exceeded. All tests are capture and stored and results are viewable. We use a combination of platforms for accomplishing monitoring, data management, and oversight tasks, including SolarWinds, Brix network probes. Splunk, and others. Outputs from the various platforms are gathered, calculated and combined into single-pane views specific to the NG9-1-1 services arena using developed tools. This combined approach allows CenturyLink to tailor the solutions to the specific NG9-1-1 environment while leveraging best-in-class off the shelf tools where appropriate monthly results are viewable. Please see SLA 5 for examples of Active Probe reports Service Level Agreements (SLAs) will be provided as a part of our Program Development Plan (PDP). The CenturyLink Program Manager will work with the Commission and or PSAP's to track services against SLAs and provide monthly reporting to the customer. During the planning phase of the project the CPrgM will work with the state to define reporting criteria, format and frequency. Refer to Attachment labeled "2.d CenturyLink Sample Program Management Plan for Nebraska".

Any additional documentation can be inserted here

SLA 5	**Service Level Agreements - System Performance** **Mean Opinion Score (MOS)** Bidder shall guarantee, in the response, a consistent MOS of 4.0 or better across all network links transporting media streams from interconnection facilities to the network interface device located at the entrance to the hosts' premises, and include how that information will be gathered, calculated and provided to the Commission and affected PSAPs monthly or as requested. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

Edge routers in the CenturyLink's NG9-1-1 solution network carry out constant quality testing back to the core sites by sending a stream of synthetic RTP packets across the tunnels that traverse the MPLS networks. This is done with Cisco's IPSLA functionality. This configuration is controlled by the remote site routers; all testing is generated by these routers towards edge routers at the core sites, which then change the sequence number and timestamp on each synthetic RTP packet, which is then retransmitted back to the remote site router.

This generates a 4-second long stream of RTP towards the mGRE interface on a core edge router, using the same codec used for the voice application itself. 100 packets are sent with an interval of 40ms. The test restarts after five seconds (each test is padded with an extra second to avoid overlapping tests). The test results are quite detailed; results for RTT, unidirectional latency, jitter, and packet loss are all generated. The IPSLA engine then derives both Impairment Calculated Planning Impairment Factor (ICPIF) and Mean Opinion Score (MOS) values from these results.

Additionally, CenturyLink actively monitors the network's quality using the industry standard Mean Opinion Score (MOS) that automatically alarms on the router if the MOS score dips below a specific value. When this occurs, the router will automatically shut down the route that is having an issue and route all traffic over the redundant IP route. Major alarm notifications regarding the MOS score issue are paged out to the Network Engineering 24x7 on call staff.

Our NG9-1-1 solutions uses the G.711 codec, and the network supports voice quality that meets or exceeds ITU-T-P.830, maintaining an MOS standard rating of 4.0 or higher.

CenturyLink deploys active monitoring EXFO probes to measure MOS scores from the ingress of the network to the PSAP. With this active monitoring, our host server places a test call into the NG9-1-1 network every 6 to 7 minutes to a probe located at each core host PSAP. Every 6 to 7 minutes, we are testing the following:

- Logical connectivity to the host PSAP
- MOS scoring
  - Latency
  - Jitter
  - Package Loss

These network probes will alert our NG9-1-1 NOC whenever thresholds are exceeded. All tests are capture and stored and results are viewable.

When two consecutive test calls or MOS score fails, CenturyLink's monitoring system will auto-notify the CenturyLink NOC and PSAP customer of the failure and CenturyLink takes proactive remediation steps to resolve any service degradation as well as employing IP SLA's to remediate issues until the network path congestion or failure is resolved.

	The attached document is an example of actual results for four PSAPs in different states.. (See Proposal 1 Option C File 1 of 4 for copies of these embedded attachments)  SLA 5 PSAP_Active_Test_V4· The following attachment contains actual results used for trouble resolution. (See Proposal 1 Option C File 1 of 4 for copies of these embedded attachments)  SLA 5 Brix_probe_PSAP_Trou We use a combination of platforms for accomplishing monitoring, data management, and oversight tasks, including SolarWinds, Brix network probes. Splunk, and others. Outputs from the various platforms are gathered, calculated and combined into single-pane views specific to the NG9-1-1 services arena using developed tools. This combined approach allows CenturyLink to tailor the solutions to the specific NG9-1-1 environment while leveraging best-in-class off the shelf tools where appropriate monthly results are viewable. Service Level Agreements (SLAs) will be provided as a part of our Program Development Plan (PDP). The CenturyLink Program Manager will work with the Commission and or PSAP's to track services against SLAs and provide monthly reporting to the customer. During the planning phase of the project the CPrgM will work with the state to define reporting criteria, format and frequency. Refer to Attachment labeled "2.d CenturyLink Sample Program Management Plan for Nebraska".

Any additional documentation can be inserted here

SLA 6	**Service Level Agreements - System Performance** **Packet Loss** Specify the guaranteed maximum end-to-end packet loss across the network. This specification also shall include any loss characteristics associated with another carrier's network or any applicable wireless links, including how that information will be gathered, calculated and provided to the Commission and affected PSAPs monthly or as requested.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

It is a best practice to engineer ESInets to keep the packet loss budget under 2.5 percent. ESInets should be designed without oversubscription. Packet loss of less than 1 percent should be achievable. Packet loss, latency, and jitter are measured at each core site. Predicted MOS thresholds are established to alert and cause intervention if thresholds are exceeded. IP packet characteristics are used to establish production acceptance criteria and are available for trouble shooting problems. In addition, the dual transport paths between any two sites uses IP packet characteristics via Cisco's IP Service Level Agreements (IPSLA) functionality to determine the best IP path for IP packet transport.

Proposal maintains a Packet Delivery >/=99.9%.

The below table provides a 30-day average for the month of April for Packet Loss.

Location A	Location B	AS Number	One Way Latency (ms)	Round Trip Latency (ms)	Jitter (ms)	Packet Delivery
Highlands Ranch, CO	Chicago, IL	AS 209	9.68	19.36	0.02	100%
Highlands Ranch, CO	Los Angeles, CA	AS 209	11.84	23.68	0.01	100%
Highlands Ranch, CO	Omaha, NE	AS 209	7.99	15.98	0.02	100%
Highlands Ranch, CO	Bellevue, NE	AS 209	9.58	19.16	0.02	100%
Chicago, IL	Los Angeles, CA	AS 209	21.01	42.02	0.02	100%
Chicago, IL	Los Angeles, CA	AS 3549	21.01	42.02	0.02	100%
Chicago, IL	Omaha, NE	AS 209	4.785	9.57	0.02	100%
Chicago, IL	Bellevue, NE	AS 3549	9.58	19.16	0.02	100%

CenturyLink deploys active monitoring probes to measure MOS scores from the ingress of the network to the PSAP. With this active monitoring, our host server places a call into the NG9-1-1 network every 6 to 7 minutes to a probe located at each core host PSAP. Every 6 to 7 minutes, we are testing the following:

- Logical connectivity to the host PSAP
- MOS scoring
  - Latency

	– Jitter – Package Loss These network probes will alert our NG9-1-1 NOC whenever thresholds are exceeded. All tests are capture and stored and results are viewable. through a web-architected GUI dashboard portal to the Commission and affected PSAP's. Please see SLA 5 for examples of Active Probe reports We use a combination of platforms for accomplishing monitoring, data management, and oversight tasks, including SolarWinds, Brix network probes. Splunk, and others. Outputs from the various platforms are gathered, calculated and combined into single-pane views specific to the NG9-1-1 services arena using developed tools. This combined approach allows CenturyLink to tailor the solutions to the specific NG9-1-1 environment while leveraging best-in-class off the shelf tools where appropriate monthly results are viewable. Service Level Agreements (SLAs) will be provided as a part of our Program Development Plan (PDP). The CenturyLink Program Manager will work with the Commission and or PSAP's to track services against SLAs and provide monthly reporting to the customer. During the planning phase of the project the CPrgM will work with the state to define reporting criteria, format and frequency. Refer to Attachment labeled "2.d CenturyLink Sample Program Management Plan for Nebraska".

Any additional documentation can be inserted here

	Service Level Agreements - System Performance **Network Latency** Specify the guaranteed maximum end-to-end network latency across the network. This specification also shall include any latency associated with another carrier's network or any applicable wireless links, including how that information will be gathered, calculated and provided to the Commission and affected PSAPs monthly or as requested.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

CenturyLink's NG9-1-1 solution network latency will be a monthly network-wide average roundtrip transmission of fifty (50) milliseconds or less between the data centers and the PSAP end points. Packet loss, latency, and jitter are measured at each core site. Predicted MOS thresholds are established to alert and cause intervention if thresholds are exceeded. IP packet characteristics are used to establish production acceptance criteria and are available for trouble shooting problems. In addition, the dual transport paths between any two sites uses IP packet characteristics via Cisco's IP Service Level Agreements (IPSLA) functionality to determine the best IP path for IP packet transport.

As also referenced in above section "SLA 2" "

NG9-1-1 network latency will be a monthly network-wide average roundtrip transmission of fifty (50) milliseconds or less end to end across our network.

The below table provides a 30-day average for the month of April for Packet Loss.

SLA 7

Location A	Location B	AS Number	One Way Latency (ms)	Round Trip Latency (ms)	Jitter (ms)	Packet Delivery
Highlands Ranch, CO	Chicago, IL	AS 209	9.68	19.36	0.02	100%
Highlands Ranch, CO	Los Angeles, CA	AS 209	11.84	23.68	0.01	100%
Highlands Ranch, CO	Omaha, NE	AS 209	7.99	15.98	0.02	100%
Highlands Ranch, CO	Bellevue, NE	AS 209	9.58	19.16	0.02	100%
Chicago, IL	Los Angeles, CA	AS 209	21.01	42.02	0.02	100%
Chicago, IL	Los Angeles, CA	AS 3549	21.01	42.02	0.02	100%
Chicago, IL	Omaha, NE	AS 209	4.785	9.57	0.02	100%
Chicago, IL	Bellevue, NE	AS 3549	9.58	19.16	0.02	100%

Packet loss, latency, and jitter are measured at each core site. Predicted MOS thresholds are established to alert and cause intervention if thresholds are exceeded. IP packet characteristics are used to establish production acceptance criteria and are available for trouble shooting problems.

CenturyLink deploys active monitoring probes to measure MOS scores from the ingress of the network to the PSAP. With this active monitoring, our host server places a call into the NG9-1-1 network every 6 to 7 minutes to a probe located at each core host PSAP. Every 6 to 7 minutes, we are testing the following:

	• Logical connectivity to the host PSAP • MOS scoring – Latency – Jitter – Package Loss These network probes will alert our NG9-1-1 NOC whenever thresholds are exceeded. All tests are capture and stored and results are viewable. Please see SLA 5 for examples of Active Probe reports Service Level Agreements (SLAs) will be provided as a part of our Program Development Plan (PDP). The CenturyLink Program Manager will work with the Commission and or PSAP's to track services against SLAs and provide monthly reporting to the customer. During the planning phase of the project the CPrgM will work with the state to define reporting criteria, format and frequency. Refer to Attachment labeled "2.d CenturyLink Sample Program Management Plan for Nebraska".

Any additional documentation can be inserted here

	Service Level Agreements - System Performance **Jitter** Specify the guaranteed maximum end-to-end jitter across the network. This specification also shall include any jitter characteristics associated with another carrier's network or any applicable wireless links, including how that information will be gathered, calculated and provided to the Commission and affected PSAPs monthly or as requested.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply

SLA 8

Bidder Response:

Jitter shall not exceed twenty (20) milliseconds. CenturyLink's NG9-1-1 solution currently uses a 40 ms jitter buffer for all voice calls. This means that all voice packets have been treated such that minimal end point jitter buffering would be needed (typically much less than 20 ms).
Packet loss, latency, and jitter are measured at each core site. Predicted MOS thresholds are established to alert and cause intervention if thresholds are exceeded. IP packet characteristics are used to establish production acceptance criteria and are available for trouble shooting problems. In addition, the dual transport paths between any two sites uses IP packet characteristics via Cisco's IP Service Level Agreements (IPSLA) functionality to determine the best IP path for IP packet transport.

Jitter shall not exceed twenty (20) milliseconds.

The below table provides a 30-day average for the month of April for Packet Loss.

Location A	Location B	AS Number	One Way Latency (ms)	Round Trip Latency (ms)	Jitter (ms)	Packet Delivery
Highlands Ranch, CO	Chicago, IL	AS 209	9.68	19.36	0.02	100%
Highlands Ranch, CO	Los Angeles, CA	AS 209	11.84	23.68	0.01	100%
Highlands Ranch, CO	Omaha, NE	AS 209	7.99	15.98	0.02	100%
Highlands Ranch, CO	Bellevue, NE	AS 209	9.58	19.16	0.02	100%
Chicago, IL	Los Angeles, CA	AS 209	21.01	42.02	0.02	100%
Chicago, IL	Los Angeles, CA	AS 3549	21.01	42.02	0.02	100%
Chicago, IL	Omaha, NE	AS 209	4.785	9.57	0.02	100%
Chicago, IL	Bellevue, NE	AS 3549	9.58	19.16	0.02	100%

CenturyLink deploys active monitoring probes to measure MOS scores from the ingress of the network to the PSAP. With this active monitoring, our host server places a call into the NG9-1-1 network every 6 to 7 minutes to a probe located at each core host PSAP. Every 6 to 7 minutes, we are testing the following:

- Logical connectivity to the host PSAP
- MOS scoring

	– Latency – Jitter – Package Loss These network probes will alert our NG9-1-1 NOC whenever thresholds are exceeded. All tests are capture and stored and results are viewable. Please see SLA 5 for examples of Active Probe reports Our NG 9-1-1 end to end solution currently uses a 40 ms jitter buffer for all voice calls. This means that all voice packets have been treated such that minimal end point jitter buffering would be needed (typically much less than 20 ms). Our Project Management team will oversee the establishment of network system performance SLA's to meet external/internal customer business objectives, work plans, and ensures performance requirements are met across our NG9-1-1 ESInet solution. They will also develop methodologies, procedures, to produce performance reporting. Service Level Agreements (SLAs) will be provided as a part of our Program Development Plan (PDP). The CenturyLink Program Manager will work with the Commission and or PSAP's to track services against SLAs and provide monthly reporting to the customer. During the planning phase of the project the CPrgM will work with the state to define reporting criteria, format and frequency. Refer to Attachment labeled "2.d CenturyLink Sample Program Management Plan for Nebraska".

Any additional documentation can be inserted here

SLA 9	**Service Level Agreements - System Performance** **Network Traffic Convergence** Specify convergence protocols and the estimated or guaranteed network convergence time (less than 54 ms) of IP traffic at any point within the proposed solution, including how convergence information will be gathered, calculated and provided to the Commission and affected PSAPs monthly or as requested.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution utilizes an MPLS private IP network that may include the use of third-party network providers that provide the local access and path diversity. These networks are comprised of different components, multiple technical solutions, and various types of interfaces. Due to the nature of MPLS-based transport, WAN failures (within the carrier network or last-mile) may not be immediately detected by NGCS network equipment at the physical layer. Knowing this, CenturyLink's NG9-1-1 solution employs a more robust means of end-to-end failure detection to ensure the reliable delivery of 9-1-1 traffic. These methods include creating a tunnel overlay through the MPLS-based carrier networks, as well as running heartbeats from the NGCS Core equipment to the PSAP. In today's environment it would be extremely challenging to create an effective and affordable means to support IP network convergence times of less than 50ms. Technologies such as MPLS fast-reroute, which can re-converge in ~50ms in specific conditions rely on immediate detection of end-to-end circuit failures at the physical layer (optical/electrical), which is not possible when using L2VPN/L3VPN carrier services such as MPLS products for WAN transport. As a result, a <50ms requirement not only implies the exclusive use of point-to-point circuits, but also that the circuits not be virtual in nature, such as L2VPN pseudo-wires. A full-mesh of leased copper/fiber pathways would raise cost to the point where the solution would be cost prohibitive, or in the absence of a full-mesh, would result in reduced reliability and redundancy within the NGCS network. CenturyLink meets the requirements set by ITU-T G.8031 and G.8032 which dictate sub-50ms failover in ethernet networks and that MPLS networks are to support Fast Re-Route (FRR) which also is sub-50ms. CenturyLink and our Vendor also offers an i3 CPE test lab program. As part of this program, Call Handling vendors can test with CenturyLink's NG9-1-1 solution lab to validate i3 interactions before going into production. Service Level Agreements (SLAs) will be provided as a part of our Program Development Plan (PDP). The CenturyLink Program Manager will work with the Commission and or PSAP's to track services against SLAs and provide monthly reporting to the customer. During the planning phase of the project the CPrgM will work with the state to define reporting criteria, format and frequency. Refer to Attachment labeled "2.d CenturyLink Sample Program Management Plan for Nebraska".				

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

<table>
<tr><td rowspan="2">SLA 10</td><td>Service Level Agreements - System Performance
Mean Time to Repair (MTTR)
Specify the MTTR characteristics of the proposed solution. These specifications shall reflect the end-to-end solution, as well as components or subsystems that are subject to failure. Include how MTTR information will be gathered, calculated and provided to the Commission and affected PSAPs.</td><td>Comply</td><td>Partially Comply</td><td>Complies with Future Capability</td><td>Does Not Comply</td></tr>
<tr><td></td><td>X</td><td></td><td></td><td></td></tr>
<tr><td></td><td colspan="5">Bidder Response:

We will follow standard MTTR operational guidelines for responding to customer troubles and providing updates on all products. Specific MTTR criteria will establish severity levels as part of the mutually agreed SLA. TTR times begin when a trouble ticket is opened after detection or report of an outage. Calculation of TTR service level will be based on the time taken to restore service following an event that results in the outage.

MTTR characteristics are commensurate with the appropriate level of service at which the ESInet system is functioning (i.e., system components in the call path are Life and Mission Critical Services (LCMS) while, peripheral systems are considered Business Critical Services (BCS). The MTTR characteristics are listed in the table below.

• Life and Mission Critical Services (LCMS)
• Business Critical Services (BCS)
• Business Essential Services (BES)
• Business Support Services (BSS)
• Unsupported Business Services (UBS)

Service Level Agreements (SLAs) will be provided as a part of our Program Development Plan (PDP). The CenturyLink Program Manager will work with the Commission and or PSAP's to track services against SLAs and provide monthly reporting to the customer. We use a combination of platforms for accomplishing monitoring, data management, and oversight tasks, including SolarWinds, Brix network probes. Splunk, and Oracle Operations control Monitor and others. Outputs from the various platforms are gathered, calculated and combined into single-pane views specific to the NG9-1-1 services arena using developed tools. This combined approach allows CenturyLink to tailor the solutions to the specific NG9-1-1 environment while leveraging best-in-class off the shelf tools where appropriate results are viewable.

<table>
<tr><th colspan="3">SLA 10: MTBF and MTTR</th></tr>
<tr><th>Service Class</th><th>MTBF (Service)</th><th>MTTR (Service)</th></tr>
<tr><td>LMCS</td><td>>5 years</td><td><2 minutes</td></tr>
<tr><td>BCS</td><td>>1 year</td><td><4 hours</td></tr>
<tr><td>BES</td><td>>3 months</td><td><40 hours</td></tr>
<tr><td>BSS</td><td>>1 month</td><td><3 days</td></tr>
<tr><td>UBS</td><td>Unspecified</td><td>Unspecified</td></tr>
</table>
</td></tr>
<tr><td></td><td></td><td></td><td></td><td></td><td></td></tr>
</table>

Any additional documentation can be inserted here

SLA 11	**Service Level Agreements - System Performance** **Mean Time Between Failures (MTBF)** Specify the MTBF characteristics of the proposed solution. These specifications shall reflect the end-to-end solution, as well as components or subsystems that are subject to failure. Include how MTBF information will be gathered, calculated and provided to the Commission and affected PSAPs.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

MTBF characteristics are commensurate with the appropriate level of service at which the system is functioning i.e., systems in the call path are Life and Mission Critical Services (LCMS) while peripheral systems are considered Business Critical Services (BCS). The MTBF characteristics are listed in the table below, where the following abbreviations are used:

- Life and Mission Critical Services (LCMS)
- Business Critical Services (BCS)
- Business Essential Services (BES)
- Business Support Services (BSS)
- Unsupported Business Services (UBS)

Table 2: MTBF and MTTR

Service Class	MTBF (Service)	MTTR (Service
LMCS	>5 years	<2 minutes
BCS	>1 year	<4 hours
BES	>3 months	<40 hours
BSS	>1month	<3 days
UBS	Unspecified	Unspecified

Based on our public safety experience, CenturyLink has found that measuring Service Availability from a call processing perspective is more applicable and relevant to 9-1-1 service vs. traditional methods of calculating availability thru MTBF and MTTR measures.

CenturyLink believes that the most relevant measure of service availability is evidenced by uninterrupted, reliable 9-1-1 call routing and delivery to the PSAPs.

Our NG9-1-1 availability is calculated from the time an outage begins that impacts call processing ability, until such time that the NG9-1-1 call processing ability is restored. This includes all NG9-1-1 downtime for the end-to-end service. This report will be made available on a monthly basis to the State of Utah.

Maintenance of and upgrades to the NG9-1-1 solution are done with no scheduled downtime. We schedule planned events for routine maintenance in ways that 9-1-1 operations are not impacted. A notification of the upcoming event will be sent to the customer as applicable. Planned events are fully staffed and managed with a trained event management team, facilitating the change implementation, monitoring, and communication through the length of the event.

The CenturyLink team will conduct major and minor planned and critical un-planned events for all NG9-1-1 Services, system maintenance, or upgrades that may impact the NG9-1-1 Customer PSAPs. CenturyLink fully manages and completes these events with a trained event management team, facilitating the change implementation, monitoring, and communication through the length of the event. Event team personnel will keep the customer informed of event progress. We adhere to stringent, internal event plan processes and procedures to include step-by-step execution procedures with the associated time frames, back-out procedures, and baseline and validation testing. CenturyLink includes the required back-out time within the scheduled maintenance time frame.

Standard 9-1-1 availability as described in this response will be supported for all services offered in Next Generation ESInet solution. CenturyLink would like to point out that availability for the network is valid for diverse and redundant connectivity into the PSAP or third-party providers network.

	We use a combination of platforms for accomplishing monitoring, data management, and oversight tasks, including SDWAN, SolarWinds, Brix network probes, Splunk, and others. Outputs from the various platforms are gathered, calculated and combined into single-pane views specific to the NG9-1-1 services arena using developed tools. This combined approach allows CenturyLink to tailor the solutions to the specific NG9-1-1 environment while leveraging best-in-class off the shelf tools where appropriate monthly results are viewable through our Web-Based customized dashboard to both the Commission and affected PSAP's. During the planning phase of the project the CPrgM will work with the state to define reporting criteria, format and frequency. Refer to Attachment labeled "2.d CenturyLink Sample Program Management Plan for Nebraska".

Any additional documentation can be inserted here

SLA 12	**Service Level Agreements - System Performance** **Network Reliability** Network reliability is defined as the ability for system endpoints to effectively communicate with each other, and all associated data and information is exchanged in usable formats. An IP-based network looks at reliability as an overall redundancy design, rather than component by component. Specify in the response the overall reliability service level of the IP network, including all bidder-provided components and facilities.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's **overall reliability is 99.999%.** Our CenturyLink network is known for its reliability, security, and redundancy. It uses a private, high-speed, MPLS IP backbone, not the public Internet, for transmission; and it has an availability target of 99.999%. Our CenturyLink network is known for its reliability, security, and redundancy. It uses a private, high-speed, MPLS IP backbone, not the public Internet, for transmission; and it has an availability target of 99.999%. We accomplish this through problem detection, prevention, redundancy, and restoration offers to ensure that the network is always up and running. To ensure circuit 99.999% reliability will require at least two diverse circuits going to different POPs and utilizing different carriers where possible and at a minimum media diversity. Two connections are included in our ESInet design to each Host PSAP site supported by two separate edge routers and two separate IP VRF instances increasing the network reliability. All network routing infrastructure and equipment is designed and deployed in an N+1 model. N+1 redundancy provides a minimum of one additional unit, module, path, or system in addition to the minimum required to satisfy the base connectivity, ensuring that a failure of any single component at a given diverse site, such as an LNG, will not render the location inoperative making our network more reliable. Our two (2) physically diverse MPLS Network to each PSAP are predetermined, so packets travel only along the paths to which they are directed adding reliability to our network. Our NG9-1-1 ESInet is designed to meet more stringent requirements for security, resiliency, and reliability service levels than most other IP networks. CenturyLink ESInet utilizes an MPLS private IP network that includes the use of third-party network providers that provide the local access and path diversity. These networks are comprised of different components, multiple technical solutions, and various types of interfaces. Due to the nature of MPLS-based transport, WAN failures (within the carrier network or last-mile) may not be immediately detected by NGCS network equipment at the physical layer. Knowing this, the CenturyLink ESInet solution employs a more robust means of end-to-end failure detection to ensure the reliable delivery of 9-1-1 traffic				

All systems and components have redundant (parallel) capabilities into each of our CenturyLink facilities to provide additional reliability including:

- Datacenters are widely separated, and are powered off of different power grids
- Redundant Power systems
- Telecommunications services
- Network electronics
- Cooling
- Fuel

SLA Reliability - Assuming a 7x24x365 deployment (8,760 available hours), these ranges produce the following expected outage totals.

Nines	Availability	%	Downtime/ Year	Downtime/ Month*	Downtime/ Week
One	0.9	90%	36.5 days	73 hours	17.18 hours
Two	0.99	99%	3.65 days	7.30 hours	1.72 hours
Three	0.999	99.9%	8.76 hours	43.2 minutes	10.1 minutes
Four	0.9999	99.99%	52.56 minutes	4.32 minutes	1.01 minutes
Five	.99999	99.99%	5.3 minutes	25.9 seconds	6 seconds

Any additional documentation can be inserted here

SLA 13	**Service Level Agreements - System Performance** **Network Availability** 1. Specify the service level offered as a percentage of time when the service is available, and the maximum period of total outage before remedies are activated. Availability is defined as MTBF/(MTBF+MTTR). 2. Include how system availability information will be gathered, calculated and provided to the Commission and affected PSAPs.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: 1.End-to-end, the CenturyLink solution is architected to be secure, reliable, resilient, and robust. All applications and network in the 9-1-1 call path are designed to achieve 99.999% system availability using a number of techniques to improve resiliency such as geo-diverse redundancy, fail-over techniques, virtualization, high availability, etc. The solution utilizes redundant hardware components (network interfaces, hard disks, hot swap power supplies, etc.) wherever possible, and the solution has no single point of failure. NGCS services operate in an active-active configuration in two geo-diverse datacenters. This feature employs redundant, high-quality, fault-tolerant critical components operating continuously in tandem. If one should fail, the redundant component continues to carry the entire load with no interruption of service. No failover time is required. All applications are deployed on virtual servers and data is shared among and within each datacenter. These applications leverage high availability functionality within the hypervisor. DRS and HA features are utilized to ensure an "always on" architecture. Because of this, no single point of failure that will disrupt the ability to provide on-going call processing. Transactions or call traffic divert to available components on failure or degradation of service of a given functional component or a loss of a physical site. IP transport paths for critical service components are redundant and designed for multipath IP packet delivery so the failure of a given IP transport mechanism does not affect overall service availability. Core sites include redundant network transport and redundant network interfacing elements to ensure optimal operation and availability. Network interfacing elements include switches, routers, SBCs, firewalls, and other security devices. All network routing infrastructure is designed and deployed in an N+1 model. N+1 redundancy provides a minimum of one additional unit, module, path, or system in addition to the minimum required to satisfy the base connectivity, ensuring that a failure of any single component at a given diverse site, such as an LNG, will not render the location inoperative. All network connectivity is established via dynamic routing protocols. The use of dynamic routing protocols allows the routers to automatically discover each connected network and adapt to changes in the network topology. Network probes will also report network failures as detected by their monitoring activity, some of which is specific to managing the availability and integrity of the network. Network Probes – will test end to end call quality metrics (MOS Scoring) this system will also do automatic call testing to insure network availability and functionality. CenturyLink's Statistic and Risk analysis reporting tools will be used to provide: Distribution of calls by destination; Call success rate; Average call length; Average number of calls per day; Ratio of incoming versus outgoing calls; and Average mean opinion score (MOS) value scores. The NG9-1-1 Service availability SLA measures the availability requirement of 99.999% for Call Processing ("Service Availability"). Call Processing is the ability of the Service to deliver calls from the inbound Service demarcation point into the Core Call Processing Nodes and from the Service demarcation point to a Valid Destination (for example a PSAP). The Service Availability is calculated from the time an issue is reported that impacts				

	Call Processing ability, until such time that the Service Call Processing ability is restored. The Service Availability downtime will not exceed 26.3 seconds per month. Customers are eligible for remedies and service credits when the Service Availability SLA is not achieved. 2.We use a combination of platforms for accomplishing monitoring, data management, and oversight tasks, including SolarWinds, Brix network probes. Splunk, and Oracle Operations control Monitor and others. Outputs from the various platforms are gathered, calculated and combined into single-pane views specific to the NG9-1-1 services arena using developed tools. This combined approach allows CenturyLink to tailor the solutions to the specific NG9-1-1 environment while leveraging best-in-class off the shelf tools where appropriate monthly results are viewable. Service Level Agreements (SLAs) will be provided as a part of our Program Development Plan (PDP). The CenturyLink Program Manager will work with the Commission and or PSAP's to track services against SLAs and provide monthly reporting to the customer. During the planning phase of the project the CPrgM will work with the state to define reporting criteria, format and frequency. Refer to Attachment labeled "2.d CenturyLink Sample Program Management Plan for Nebraska".


Any additional documentation can be inserted here

SLA 14	**Service Level Agreements - System Performance** **End-of-Support Equipment** Contractor shall proactively replace, at Contractor's expense, any hardware that has reached end of support (EOS) no later than 90 calendar days prior to the manufacturer's EOS date. All equipment must be new and of current manufacture, not refurbished. Describe your procedures for End-of-Support Equipment.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: Key components within the CenturyLink's NG9-1-1 solution are periodically renewed to enable PSAPs to operate on the most modern communications technology during the life of the contract. CenturyLink maintains and monitors all equipment and software within the solution, and it is CenturyLink's commitment to replace End of Support (EOS) equipment prior to the EOS vendor published date assuming the replacement of equipment does not have a negative impact on the reliability and availability of the systems applications and solutions. CenturyLink will replace any faulty equipment at no additional cost to the jurisdiction that is not a direct result of negligence of on-site PSAP personnel. All equipment is new and of current manufacture; refurbished equipment is not used.				

Any additional documentation can be inserted here

	Service Level Agreements – **SLAs for Incident Management** The Commission requires the Contractor to establish processes and procedures for supporting a NOC/SOC that can rapidly triage and manage reported network incidents. Bidder shall develop an ITIL compliant severity-level scale that includes levels one through four, with level one being the most severe incident. The top two levels shall capture all incidents affecting the level of service of one or more endpoints. Include a description of incident severity-level attributes, including response and resolution times for each severity level, and how response and resolution times are measured.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
SLA 15	**Bidder Response:** The CenturyLink Network/Security Operations Center (NOC/SOC) is staffed 24 hours a day, seven days a week, 365 days a year to actively monitor and manage CenturyLink's NGCS Solution associated services and connectivity. When a potential or actual customer-affecting event or outage is defined and determined to be an incident, the Incident Administration team is engaged by the NOC. The team uses established processes that are ISO 9001:2015-compliant for immediate escalation, notification, resolution, and reporting. In case of a service interruption and/or outage, we have instituted Incident Management processes and procedures for dealing with various severity levels during the course of an event. Our incident response tools include use of the Incident Command System (ICS modeled directly from the Federal Emergency Management Agency (FEMA) Emergency Management Institute. The ICS processes include resolution, documentation of any incident, communications, and post-event review and root cause analysis. We manage incidents and provide customers with notifications and status of ongoing service affecting issues that may impact the CenturyLink's NGCS Solution. **Notification** The CenturyLink support center shall notify the ISP and ICC within 30 minutes of discovering an event or outage that may impact 9-1-1 services. CenturyLink's NGCS Solutions service assurance strategy places the highest emphasis on service restoration. Communication will be supplied to all parties provided to CenturyLink by the Customer and its entities. CenturyLink complies with applicable FCC rules regarding outage notification and Reason for Outage (RFO) reporting. CenturyLink will prepare and submit a preliminary root cause analysis (RCA) for a Severity Level 1 or Severity Level 2 event. The preliminary report will provide an overview of all information known at that time. The Incident Command team will prepare and submit a final report of a Priority Level 1 or Level 2 event describing the impact of the event, the cause, resolution and any preventative steps that can be taken to eliminate future events. The following are key highlights for the notification system: • The five state levels are as indicated: Critical, Major, Minor, Warning, and Normal • We provide notification to the 24x7x365 NOC • We provide notification by various means • Notification levels are defined by the supporting entity • We are capable of alarm suppression by time, quantity, and a combination for reducing alarm notifications. For example, we can say "no more of a certain alarm for the next 30 minutes" or we can say "send me duplicate alarms every 5 minutes" **Communication**				

	Communication will be supplied to all parties provided to CenturyLink by the Customer and its entities. We provide notification by various means. In the event of an outage CenturyLink applies immediate and sustained effort, 7x24, until a final resolution is in place. We use all reasonable efforts to provide a temporary workaround within an agreed upon time frame of the issue being detected. If a temporary workaround solution is provided, we provide an action plan to be mutually agreed upon for the final resolution. We continue resolution activity until full service is restored. The primary objective of an incident is to mitigate impact. The Incident Commander and Incident Administrator are able to call upon whatever resources are required to identify and restore functionality. **Reason for Outage Reporting** In addition to tracking planned and emergent events, CenturyLink maintains a problem management system for tracking and reporting trouble. We can also provide monthly trouble reports showing tickets opened, resolved, and unresolved. CenturyLink will prepare and submit a preliminary root cause analysis (RCA) for a Severity Level 1 or Severity Level 2 event. The preliminary report will provide an overview of all information known at that time. A final report will also be provided that describes the cause, resolution and any preventative steps that can be taken to eliminate future events. CenturyLink uses a proactive monitoring and notification process (**Error! Reference source not found.**). The process uses platform-specific alarm t hresholds to identify potential service impairments. CenturyLink network alarms are customer specific and generate trouble tickets that automatically notify customers via e-mail and telephone. Proactive Customer Notification (PCN) also gives customers with flexibility to specify certain notification parameters on a service-by-service basis.

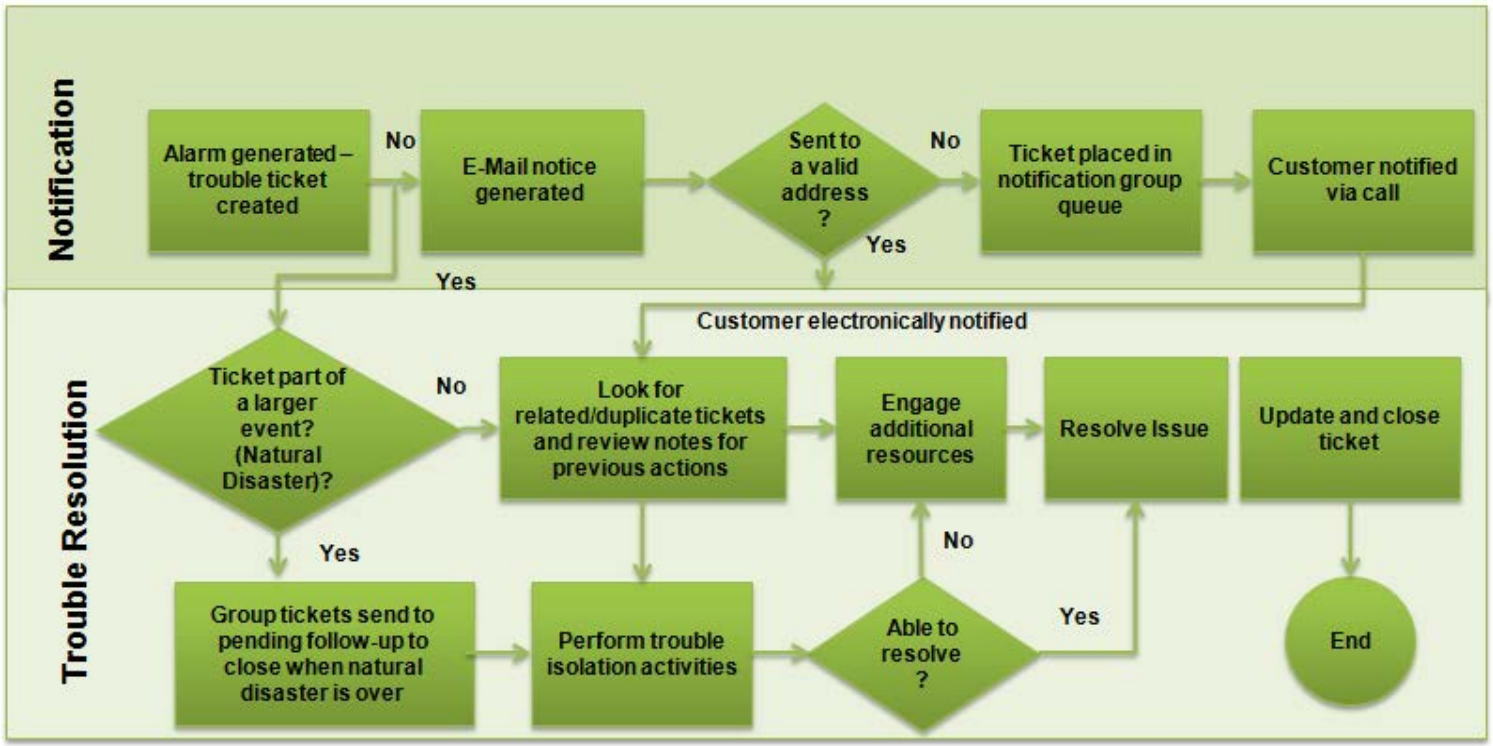

Any additional documentation can be inserted here

SLA 16	**Service Level Agreements –** **Outage Notification and Reason for Outage (RFO) Report** **Outage Summary and Lessons Learned** Provide a summary of FCC reportable outage situations that interrupted 911 service to bidder's clients over the past three years, where 911 calls were not delivered or not delivered to the appropriate PSAP as a result of the issue. The response shall include the deployment type (legacy, ESInet, and NGCS), month, year, duration, number of PSAPs or population impacted, number of PSAPs or population served by the impacted system, impacted system, and lessons learned from each outage. **Regulatory Compliance** Contractor shall comply with all applicable local, state, and federal outage and notification rules throughout the term of the contract.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

Limited to FCC outage reports for Nebraska

Limited to NE FCC outage reports where there was impact to 911 calls - ANI/ALI-only outages were excluded

Notes: – Numbers listed in "Population Impacted" represent who could not have used the service if they tried, not actual failed attempts.

). – If 911 calls are rerouted to another PSAP with ANI/ALI, within 30 minutes of the start, it is not FCC reportable and not included here.

Deployment Type	Event Date	Duration	Number of PSAPs Impacted	Population Impacted	Area	RFO	Impacted System
Legacy	6/28/2017	25 hours, 13 minutes	1 - Dual ALI - 31 minutes	3898	Oakdale, O'Neill, Atkinson and Valentine	The cause of this outage was a damaged fiber cable due to rodent chew.	Transport
Legacy	8/29/2018	37 hours, 49 minutes	6	2426	North Platte, Lexington, Scottsbluff, Mitchelle, Oshkosh, Gering, Sidney, Gothenburg, Elm Creek, McCook, Denver, CO	The cause of this outage was a fiber cable cut by a mower. No locates were requested.	Transport
Legacy	4/9/2019	4 hours	1	3795	Randolph	The cause of this outage was a failure in the offnet provider's network.	Offnet

Legacy	6/8/2019	15 hours, 28 minutes	0	1155	St. Paul	The cause of the outage was failed synchronization on the remote links.	Transport
Legacy	7/5/2019	(911 rerouted in 41 minutes) event: 11 hours, 34 minutes	1	391	Laurel	The cause of this outage was a fiber cable cut.	Transport
Legacy	9/12/2019	17 hours, 40 minutes	0	690	Elwood	The cause of this outage was a fiber cable cut.	Transport
Legacy	10/8/2019	18 hours, 21 minutes	0	376	Elwood	The cause of this outage was a fiber cable cut by a mower	Transport
Legacy	12/4/2019	(911 rerouted in 52 minutes) event: 11 hours, 15 minutes	1	1438	Scottsbluff	The cause of this outage was a fiber cut on a local providers network.	Offnet
Legacy	4/3/2020	7 hours, 20 minutes	1	9999	South Sioux City	This outage was caused when AC Power took brief hits. The power hits confused the equipment so the generator was not engaged. Service did switch to battery and ran until battery power ran out and the switch failed.	Switch

Any additional documentation can be inserted here

SLA 17	**Service Level Agreements –** **Outage Notification and Reason for Outage (RFO) Report** **Outage Notification** Contractor shall notify the Commission and affected PSAPs within a maximum 30 minutes of discovering an event or outage that may impact 911 services. All events that meet criteria for local, state, or federal reporting shall also be completed by the Contractor. At the time of initial notification, the Contractor shall convey all available information that may be useful in mitigating the effects of the event or outage, as well as a name, telephone number, ticket or reference number, and email address at which the service provider can be reached for follow-up. The Contractor is responsible for coordinating data gathering, troubleshooting and reporting on behalf of subcontractors. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink complies with applicable FCC rules regarding outage notification and Reason for Outage (RFO) reporting. In case of a service interruption and/or outage, our team has instituted Incident Management processes and procedures for dealing with various severity levels during the course of an incident. Our incident response tools include use of the Incident Command System (ICS), which is housed within our Ticketing System. The CenturyLink support center shall notify the ISP and ICC within 30 minutes of discovering an event or outage that may impact 9-1-1 services. CenturyLink's NG9-1-1 solution service assurance strategy places the highest emphasis on service restoration. Communication will be supplied to all parties provided to CenturyLink by the Customer and its entities. CenturyLink complies with applicable FCC rules regarding outage notification and Reason for Outage (RFO) reporting. CenturyLink will prepare and submit a preliminary root cause analysis (RCA) for a Severity Level 1 or Severity Level 2 event. The preliminary report will provide an overview of all information known at that time. The Incident Command team will prepare and submit a final report of a Priority Level 1 or Level 2 event describing the impact of the event, the cause, resolution and any preventative steps that can be taken to eliminate future events. The following are key highlights for the notification system: • The five state levels are as indicated: Critical, Major, Minor, Warning, and Normal • We provide notification to the 24x7x365 NOC • We provide notification by various means • Notification levels are defined by the supporting entity • We are capable of alarm suppression by time, quantity, and a combination for reducing alarm notifications. For example, we can say "no more of a certain alarm for the next 30 minutes" or we can say "send me duplicate alarms every 5 minutes".				

Any additional documentation can be inserted here

Attachment “C”
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

	Service Level Agreements – **Outage Notification and Reason for Outage (RFO) Report** **Status Updates** The Contractor shall communicate any updated status information to the Commission and affected PSAPs no later than two hours after the initial contact, and at intervals no greater than two hours thereafter until normal 911 service is restored. This information shall include the nature of the outage, the best-known cause, the geographic scope of the outage, the estimated time for repairs, and any other information that may be useful to the management of the affected operations. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
SLA 18	**Bidder Response:** The CenturyLink Network Operations Center (NOC) is staffed 24 hours a day, seven days a week, 365 days a year to actively monitor and manage CenturyLink's NGCS Solution associated services and connectivity. When a potential or actual customer-affecting event or outage is defined and determined to be an incident, the Incident Administration team is engaged by the NOC. The team uses established processes that are ISO 9001:2015-compliant for immediate escalation, notification, resolution, and reporting. Initial notifications are sent within 30 minutes of any troubles discovered by the 9-1-1 Public Safety NON for Severity level 1 and Severity level 2. Updates occur every 30 minutes or as appropriate, and trouble resolution within 4 Hours. 86% of repairs completed in less than 4 Hours. The 30-minute notification is in compliance with the FCC requirement. To effectively support and handle customer questions, incidents or requests, we have adopted the ticket resolution procedure outlined below. The process is one that allows for continual improvement and ensures that all support requests are tracked and maintained in an efficient and effective way. Each of the steps is designed to allow for all types of questions, incidents or requests whether they are complicated or simple. Some of the steps can be removed if the nature of the inquiry is simple. CenturyLink repair procedures emphasize quality service for responsiveness and reliability to all the 9-1-1 centers. Our escalation policies and procedures allow for escalation to be invoked at any time deemed necessary by the customer, by the CenturyLink 9-1-1 Field Technicians, or by CenturyLink in-house Tier 2 technical support. CenturyLink will track all escalations via the CenturyLink repair web portal. Each escalation will be tracked during entire duration of the repair. CenturyLink agrees to begin Tier 1 support within 15 minutes of identifying a service affecting event. CenturyLink agrees to begin Tier 2 support within (2) hours of identifying a service affecting event and Tier 3 support with (4) hour or upon Center request. Under our normal protocol, for all Severity Level 1 & 2 (Critical and Major is your example) issues reported, we provide an immediate response, and will ensure the initiation of corrective action no longer than 30 minutes from time of notification. Within two (2) hours of any Severity Level 1 & 2 report, if the problem has not been corrected, we begin the escalation process and ensure an onsite dispatch, if required, has been affected. The escalation procedures are outlined as follows for previously reported problems:				

Step 1: Customer (PSAP) will call the CenturyLink 9-1-1 Public Safety Services Network Operations Center (NOC) and request a manager referencing the original repair ticket and escalation request. The manager will document the escalation in the CenturyLink 9-1-1 online repair system and call the local 9-1-1 CenturyLink Service manager.


Step 2: CenturyLink Service manager will provide email and verbal updates to the customer

Step 3: if Customer (PSAP) is still not satisfied, the local CenturyLink 9-1-1 Account Team will be called. CenturyLink will provide a written action plan that outlines the steps that will be taken to resolve this escalation.

Additional conference calls or meeting(s) may be required to resolve the escalation.

CenturyLink meets monitoring and reporting time requirements for key SLA metrics listed above via our analytics portal associated with the SD-WAN devices in our proposed architecture.

CenturyLink's minimum reporting interval is "last 5 minutes as noted below.

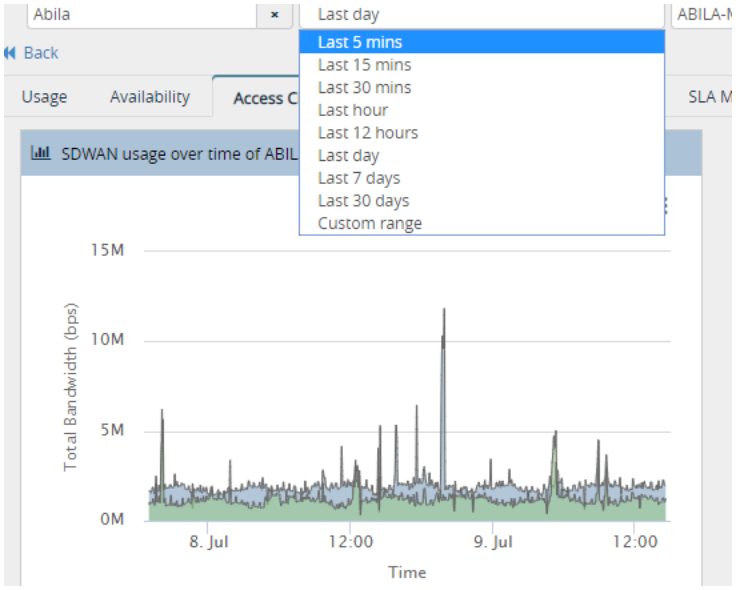

CenturyLink Public Safety Service (PSS) Network Operations Center (NOC)

Group	Name	Title	Contact	Number
PSS NOC	PSS Network Operations Center	24x7	PSS NOC Center Main Number	800-357-0911
PSS NOC	1st Level Escalation	1st Level Escalation	PSS NOC Center Main Number	800-357-0911 – request a first level escalation
PSS NOC	2nd Level Escalation	PSS NOC Supervisor – Monday – Friday 7am to 3pm CST	Linda Capetz	612-256-6357 (O)
		PSS NOC Supervisor – Monday – Friday 3pm to 11pm CST	Will Cave	612-439-8968 (O)
		PSS NOC Duty Supervisor After hours, weekends and holidays	Duty Supervisor	833-291-4450
PSS NOC	3rd Level Escalation	PSS NOC Manager	Carl Klein	612-439-8841 (O)
				651-442-5999 (M)
PSS NOC	4th Level Escalation	PSS NOC Director	Sally Bakarich	720-888-8988 (O)
				303-507-4367 (M)
PSS NOC	5th Level Escalation	VP Centralized Services	Jorge Magana	404-526-4428 (O)
				404-384-1576 (M)

updated 2/19/2020

During the development of the final PMP, the escalation chart will be incorporated into the PMP as shown in the Sample PMP in the attachments section of this RFP

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SLA 19	**Service Level Agreements –** **Outage Notification and Reason for Outage (RFO) Report** **Reason For Outage (RFO) Reporting** Following the restoration of normal 911 service, Contractor shall provide a preliminary RFO report to the Commission and affected PSAPs no later than three (3) calendar days after discovering the outage. An in-depth RFO report, including a detailed root-cause analysis, shall be provided to the Commission and affected PSAPs no later than ten (10) calendar days after discovering an outage. 1. Describe how bidder will comply with the notification and reporting requirements above. 2. Describe the NOC/SOC tools and techniques at bidder's disposal to ensure that bidder's various subcontractor perform troubleshooting and post-event analysis and provide associated reports.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: A detailed description of the RFO process is included in the attached Program Development Plan. An initial RFO is provided at ticket closure, when verifying service is restored. A formal RFO can be delivered, upon request, within 5 business days.				

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SLA 20	**Service Level Agreements –** **Outage Notification and Reason for Outage (RFO) Report** **PSAP Notifications** Outage notifications and follow-up analysis of outages are a critical element to understanding overall system health and preventing future service interruptions. Having awareness of issues that exist in a neighboring PSAP provides valuable insight into potential issues that may begin impacting another PSAP's operations. The Commission' is seeking an outage notification service that allows for each PSAP to elect the outage notification types and PSAPs for which it will receive outage notifications, outage updates and RFO reports. A web portal for authorized users to select/deselect outage notifications is required. Provide a detailed description of how bidder will support such an outage notification service.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink will work with the PSAPs to establishing the notification types available. Within the portal, the PSAPs can set permissions for any user to view that PSAP's trouble tickets. The PSAP can provide CenturyLink an email address in the form of a distribution list for all notifications. Authorized portal users will be able to select to receive notifications.				

Any additional documentation can be inserted here

SLA 21	**Service Level Agreements –** **Media Contact** 1. Contractor shall provide a 24 x 7 spokesperson who will be available for media contact regarding ANY outage of 911 service due to any failure of 911 call delivery to the Commission's host equipment and to the affected PSAPs. **Government & Regulatory Contact** 2. Contractor shall provide a 24 x 7 representative who will be available for government and regulatory contact regarding ANY outage of 911 service due to any failure of 911 call delivery to the Commission's host equipment and to the affected PSAPs Describe bidder's experience in providing both a Media Contact and Government & Regulatory Contact for similar contracts.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

1. Our two (2) contact(s) for CenturyLink Media regarding 9-1-1 outages for the State of Nebraska our as follow:

Linda M. Johnson
Corporate Communications
CenturyLink
tel: 202.429.3130
cell: 202.538.9892
http://news.centurylink.com/public-policy

Mark Molzen
Global Issues Manager, Transformation, Legal
CenturyLink, Inc.
20 E. Thomas, Phoenix, AZ
O: 602-716-3389
C: 602-614-7476
Twitter: @mdmolzen

2. Our two (2) contact(s) for CenturyLink Government and Regulatory regarding 9-1-1 outages for the State of Nebraska our as follow:

Linda M. Johnson
Corporate Communications
CenturyLink
tel: 202.429.3130
cell: 202.538.9892
http://news.centurylink.com/public-policy

	Mark Molzen Global Issues Manager, Transformation, Legal CenturyLink, Inc. 20 E. Thomas, Phoenix, AZ O: 602-716-3389 C: 602-614-7476 *CenturyLink also will follow the FCC rules regarding outage notification and Reason for Outage (RFO) reporting as outlined in this RFP and SLA's.*

Any additional documentation can be inserted here

SLA 22	**Service Level Agreements –** **SLA Violations** An SLA violation shall have occurred whenever: A. The Contractor fails to meet any single performance level; or, B. The average of any single performance item over the preceding two-month period fails to meet the service level stated in response to requirements SLA 1 through SLA 22. Contractor shall deliver an SLA violations report to the Commission on a monthly basis. **SLA Reporting** Provide a detailed description of how bidder measures and reports incidents, including immediate notifications and regularly scheduled reports. SLA results shall be delivered to the Commission on the 10th business day of the month. The report shall include all performance items identified in the bidder's proposal and documented in contract negotiations.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Specific performance reports will be identified and mutually agreed upon during contract negotiations. **SLA Reporting:** The NG9-1-1 Public Safety NOC is staffed 24 hours a day, seven days a week, 365 days a year to actively monitor and manage the NG9-1-1 ESInet and associated services. When a potential or actual customer-affecting issue is defined and determined to be an incident, the Incident Administration team is engaged by the NOC. The team uses established processes that are ISO 9001:2008-compliant for immediate escalation, notification, resolution, and reporting. CenturyLink's monitoring system will auto-notify the CenturyLink NG9-1-1 Public Safety NOC and commission of a failure and CenturyLink takes proactive remediation steps to resolve any service degradation as well as employing IP SLA's to remediate issues until the network path congestion or failure is resolved. Via SolarWinds and other monitoring system CenturyLink will monitor all network elements and E-Bonding to the Dashboard to provide "Near" Real-Time data for alarming, notification, SLA reporting, etc... • CenturyLink will consume and display the data for SLA compliance via our portal and dashboard. • The dashboard is customizable and provides a multi-tenant view available via a web GUI. – API Integration into the State Ticketing system available upon request. – Two factor authentications. – Analytics, statistical data and reports will be developed based on requirements and agreed upon thresholds. – Auto ticket and alarming thresholds are to be customized based on negotiated SLAs and triggers. CenturyLink will provide monthly reporting on incidents, including open/closed ticket status, resolution times, and service level agreement (SLA) compliance to the commission.				

Any additional documentation can be inserted here

SLA 23	**Service Level Agreements –** **SLA Violation Financial Remedies** Contractor shall provide financial remedies to the Commission for each event in which service levels are not maintained. The Commission requires that all of the Contractor's network facilities, devices, and services will be measured on a rolling, 12-month calendar. Failure to meet SLAs shall be measured per service-affecting outage. Financial remedies shall be assessed for failure to meet SLAs. For service-affecting incidents, a 10 percent (10%) discount shall be accessed against the Monthly Recurring Charge (MRC) applicable to the source of the failure, whenever the initial period of resolution is exceeded. If the resolution period length of time doubles, then the discount shall increase to 20 percent of the MRC. If the resolution period length of time quadruples the initial period, then 50 percent of the MRC shall be assessed. The amount related to the damages is to be credited to the invoice for the month immediately following the violation. Bidder shall include how uptime information will be gathered, analyzed and provided to the Commission.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's solution includes "Near" Real Time Network Outage Monitoring and Reporting for the satisfactory operation and security of all significant components and required performance parameters. The State or its designated representative will be able to ascertain the status of major IP network elements and PSAP endpoints with a Web browser which will connect to the dashboard made available to the state.				

Any additional documentation can be inserted here

Operational Scenarios

Safeguards shall be established to minimize the impact of human or system error. Describe bidder's risk-mitigation and issue-resolution strategies for the following hypothetical scenarios:

GEN SCEN 1	**Scenario 1** At 0300 hours, a series of SBC alarms previously unseen by the NOC staff on duty begin to increase in volume and frequency. At 0330, multiple critical alarms are received. At 0345, a few PSAPs start reporting garbled audio while others report an inability to obtain location information. At 0600, some PSAPs are reporting that they have not received a call in the last 15 minutes.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

Assumption the ingress calls are SS7.

- Review alarms for indication and correlation of customer specific or SBC events (0300).
- If SBC specific alarms indicate critical errors that necessitate rerouting of traffic manually, complete a High Availability (HA) redirection on the SBCs. This activity moves traffic away from potentially impacted interface.
- (0330) If critical alarms are SBC related and continue after the switch over evaluate if they are PSAP specific or specific to one of the redundant SBCs per Core. If SBC specific alarms are still persistent move SBC experiencing issues completely out of path.
- (0345) Reports of garbled voice – The NGCS allows for voice to be evaluated post call. This capability would be utilized by the NOC engineer to evaluate both ingress and egress voice traffic to look for commonalities. If a common route is identified, the NOC engineer would remove route from service and notify customer and appropriate vendors.
- Evaluate the circuit connectivity, location information is completed by ALI lookup from ANI or held query over an I3 interface and indicates a potential local or common circuit issue in the PSAP area.
- (0600) Look for calls to the reported PSAPs. The NOC makes test calls from the application out to the PSAP to recreate the issue. If no calls are coming in this indicates the problem resides with ingress path, that would indicate the previously report issues are a separate issue. Next step would be identify/isolate circuit and busy out the trunks associated with that circuit. Report ingress 26 codes to carrier for repair. Previous steps for 0330 – 0345 would identify the problem on the egress side.
- In each of these scenarios the NOC would be working directly with the customer ensuring open communications and joint troubleshooting is occurring.

*It should be noted that the alarms from 0300 may or may not be related to the garbled audio issue beginning at 0345.

Restoration and Resolution Timeframes

CenturyLink will apply immediate and sustained effort, 7x24, until a final resolution is in place. All reasonable efforts will be made to provide a temporary workaround within two (2) hours and permanent resolution with a target of twenty-four (24) hours of the issue being detected.

Table 3. Restoration and Resolution Timeframes

Severity Code	Description	Response Time	Customer Resolution Time	Status
Severity 1*	Inoperative/Severely Impacted - PSAP not receiving calls, audio is working on only one side of incoming calls, End Office traffic not able to reach PSAP. Critical network or data communications problem on a system that prevents transmitting ANI to the PSAP, and/or network hardware, or circuit. All FCC reportable outages are considered	Immediately upon detection, but no longer than 10 minutes after determination of impact	Target Mitigation = 30 minutes Target Resolution 2 hours	Hourly
Severity 2	Routing services are impaired, where major functions are operative but functioning at limited capacity or critical elements are no longer redundant.	As soon as possible, but no longer than 30 minutes after detection identification	4 hours	Every 4 hours or mutually agreed timeframe
Severity 3	Routing services are impaired and some functions are not operating, but those functions are not mandatory or critical to 9-1-1 call delivery.	As soon as possible, but no longer than 1 hour after detection	</= 7 days	Every 8 hours or mutually agreed timeframe.

Root Cause Analysis Report

Root Cause Analysis (RCA) report for Severity Level 1 or 2 service disruptions will be available within ten (10) Business Days following the resolution of a Severity Level 1 or 2 Service Disruption outlining the conditions that caused the trouble, the corrective action taken, and any corrective action plans to prevent future occurrences of the trouble. This report will include the following:

- Date/Time of the start of the service disruption.
- Date/Time of service restoration.
- Date/Time of service resolution.
- Date/Time service disruption was detected.
- Associated Ticket Number (s).
- Number of customers impacted.
- Actual number of calls impacted.
- Functionality lost during the service disruption.
- Corrective action(s) (completed and future as applicable).
- City(ies) and state(s) where failed equipment is located.

- City(ies) and/or county(ies) and state(s) impacted, as applicable.

Table 4: Restoration and Resolution Timeframes

Severity Code	Description	Response Time	Customer Resolution Time	Status
Severity 1*	Inoperative/Severely Impacted - PSAP not receiving calls, audio is working on only one side of incoming calls, End Office traffic not able to reach PSAP. Critical network or data communications problem on a system that prevents transmitting ANI to the PSAP, and/or network hardware, or circuit. All FCC reportable outages are considered.	Immediately upon detection, but no longer than 10 minutes after determination of impact	Target Mitigation = 30 min, Target Resolution 2 hours	Hourly
Severity 2	Routing services are impaired, where major functions are operative but functioning at limited capacity or critical elements are no longer redundant.	As soon as possible, but no longer than 30 minutes after detection identification	4 hours	Every 4 hours or mutually agreed timeframe
Severity 3	Routing services are impaired and some functions are not operating, but those functions are not mandatory or critical to 9-1-1 call delivery.	As soon as possible, but no longer than 1 hour after detection	</= 7 days	Every 8 hours or mutually agreed timeframe.

Any additional documentation can be inserted here

GEN SCEN 2	**Scenario 2** All originating service providers in the state are connected directly via Signaling System Number 7 (SS7) protocol to the bidder's LNGs that serve the PSAPs in Nebraska, as well as others outside the Commission's footprint. Each LNG consistently processes about 10,000 calls per day, but each is capable of processing in excess of 100,000 calls per day. One of the LNGs experiences a catastrophic failure and is unable to process any calls. In a review of the prior day's logs, it is found that the two surviving LNGs only are processing 2,000 calls each.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: This situation is managed as a Major Incident, ensuring expedited resolution. The technical resources will be working to restore the catastrophic failure – as well as working the possible redundant infrastructure issues. This response focuses on the immediate need to restore the OSPs traffic to full capacity. Those steps are listed below. • If failure is at the LNG, investigate if OSPs are experiencing a route selection temporary failure. Work to identify and evaluate potential for OSPs not load sharing traffic between LNGs. • Contact Ingress OSP providers to verify alternate route configuration is correctly provisioned • Contract Ingress OSP providers to verify redundant circuit/bandwidth availability • Complete Test calls with OSPs to verify proper failover and bandwidth • Test and Verify internal LNG network failover • Investigate additional alternate paths for ingress into the infrastructure. This incident would be initially designated as a Severity 2 (routing services are impaired) issue, but upon review would change the classification to a Severity 1 (severely impacted). Once the perceived call volume mismatch is detected CenturyLink will, until proven otherwise, assume that calls were/are being impacted by this outage. **Restoration and Resolution Timeframes** Initial Classification: CenturyLink and its subcontractors will apply immediate and sustained effort, 7x24, until a final resolution is in place. All reasonable efforts will be made to provide a temporary workaround within four (4) hours and permanent resolution with a target of twenty-four (24) hours of the issue being detected. Updated Classification: CenturyLink and its subcontractors will apply immediate and sustained effort, 7x24, until a final resolution is in place. All reasonable efforts will be made to provide a temporary workaround within two (2) hours and permanent resolution with a target of twenty-four (24) hours of the issue being detected.				

Table 5. Restoration and Resolution Timeframes

Severity Code	Description	Response Time	Customer Resolution Time	Status
Severity 1	Inoperative/Severely Impacted - PSAP not receiving calls, audio is working on only one side of incoming calls, End Office traffic not able to reach PSAP. Critical network or data communications problem on a system that prevents transmitting ANI to the PSAP, and/or network hardware, or circuit. All FCC reportable outages are considered	Immediately upon detection, but no longer than 10 mins after determination of CTL impact	Target Mitigation = 30 minutes, Target Resolution 2 hours	Hourly
Severity 2	Routing services are impaired, where major functions are operative but functioning at limited capacity or critical elements are no longer redundant.	As soon as possible, but no longer than 30 minutes after detection identification	4 hours	Every 4 hours or mutually agreed timeframe
Severity 3	Routing services are impaired and some functions are not operating, but those functions are not mandatory or critical to 9-1-1 call delivery.	As soon as possible, but no longer than 1 hour after detection	</= 7 days	Every 8 hours or mutually agreed timeframe.

Root Cause Analysis Report

A Root Cause Analysis (RCA) for Severity Level 1 or 2 service disruptions will be available within ten (10) Business Days following the resolution of a Severity Level 1 or 2 Service Disruption outlining the conditions that caused the trouble, the corrective action taken, and any corrective action plans to prevent future occurrences of the trouble. This report will include the following:

- Date/Time of the start of the service disruption.
- Date/Time of service restoration.
- Date/Time of service resolution.
- Date/Time service disruption was detected.
- Associated Ticket Number (s)
- Number of customers impacted.
- Actual number of calls impacted.
- Functionality lost during the service disruption.
- Corrective action(s) (completed and future as applicable).
- City(ies) and state(s) where failed equipment is located.

- City(ies) and/or county(ies) and state(s) impacted, as applicable.

Table 6. Restoration and Resolution Timeframes

Severity Code	Description	Response Time	Customer Resolution Time	Status
Severity 1	Inoperative/Severely Impacted - PSAP not receiving calls, audio is working on only one side of incoming calls, End Office traffic not able to reach PSAP. Critical network or data communications problem on a system that prevents transmitting ANI to the PSAP, and/or network hardware, or circuit. All FCC reportable outages are considered	Immediately upon detection, but no longer than 10 minutes after determination of CTL impact	Target Mitigation = 30 minutes, Target Resolution 2 hours	Hourly
Severity 2	Routing services are impaired, where major functions are operative but functioning at limited capacity or critical elements are no longer redundant.	As soon as possible, but no longer than 30 minutes after detection identification	4 hours	Every 4 hours or mutually agreed timeframe
Severity 3	Routing services are impaired and some functions are not operating, but those functions are not mandatory or critical to 9-1-1 call delivery.	As soon as possible, but no longer than 1 hour after detection	</= 7 days	Every 8 hours or mutually agreed timeframe.

Any additional documentation can be inserted here

GEN SCEN 3	**Scenario 3** As part of normal data-maintenance procedures, the bidder has uploaded six minor recent changes. The bidder's Quality Assurance/Quality Integrity (QA/QI) process provides a discrepancy report detailing 15,000 errors resulting from the updated file.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution Spatial Interface (SI) is built to deal with this exact scenario. GIS submissions will be provided via the SI. CTL utilizes the Enterprise Geospatial Database Management System (EGDMS) to allow customers to both submit data and view reports. EGDMS will not provision GIS Data updates to production systems (ECRF/LVF) for any polygon layer if there is a critical error found. In other words, all polygon layer updates must be 100% error free to proceed to production. For polygon, road centerline and address points submissions, there are safeguards in place for feature count deviation. In the event that there was an omission of GIS data features from one upload to the next, and the omission resulted in a percentage change above the tolerance defined for each layer, the upload is held until CenturyLink i3 GIS Analysts review and approve the submission. Critical errors identified in the road centerline and address points are identified in the upload summary report and detailed error shape files, and should be corrected as soon as possible after the report is received. For the above scenario, call routing would never be affected since the SI is designed to know when there is a problem and stops the changes from being committed to the ECRF. ECRF will continue to utilize the existing data within its database until the errors are corrected and resubmitted to the EGDMS.				

Any additional documentation can be inserted here

GEN SCEN 4	**Scenario 4** At 0700, the NOC has received an alarm reporting loss of connectivity for a single path to Host A. At 0705, the NOC contacts Host A to confirm the loss of connectivity. The PSAP has found that the link lights are off, but the system appears to be operational. At 0725, the redundant link appears to be bouncing for Host A. At 0900, the PSAP is reporting a decrease in typical call volume.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

As part of normal operations, The NOC actively monitors all paths between PSAPs and the core processing locations. When a path or device fails, the NOC sees alarms and begins troubleshooting. All alternate and paths for PSAP connectivity are pre-tested during integration and turnup. Any issues with failover will be addressed prior to turning the PSAP live.

The presumed response of the NGCS vendor of scenario 4 differ from how (CUSTOMER) would institute mitigation. At 7:25, the team's priority would be to evaluate if there is any risk of 9-1-1 call or data degradation. Since the redundant path is not reliable(bouncing), and although the system is configured to do this in an automated fashion, the recommendation to force automated failover of all calls would be made. This would allow for reduced failover timing and/or other possible unforeseeable impacts. This situation would be worked at the highest priority with an Incident Commander and team assigned to work the issue to resolution. CenturyLink would continue to work troubleshooting the issue from a circuit perspective and verify with internal test calls to the effected PSAP. Once a single link was brought back into service, a joint decision would need to be made by CenturyLink and the PSAP on whether or not to bring the PSAP back up one-sided (understanding the previous instability). In a typical environment, although not preferred, a one-sided solution is temporarily acceptable. For this particular situation and the history of one-sided issue with possible call impacts, a real-time decision would need to be made. Tools (call tracing, MOS evaluation, and test call validation) will be critical in determining next steps.

This incident would be initially designated as a Severity 2 (routing services are impaired) issue, but upon review would change the classification to a Severity 1 (severely impacted). Once the perceived call volume mismatch is detected CenturyLink will, until proven otherwise, assume that calls were/are being impacted by this outage.

Restoration and Resolution Timeframes

CenturyLink and its subcontractors will apply immediate and sustained effort, 7x24, until a final resolution is in place. All reasonable efforts will be made to provide a temporary workaround within four (4) hours and permanent resolution with a target of twenty-four (24) hours of the issue being detected.

Table 7. Restoration and Resolution Timeframes

Severity Code	Description	Response Time	Customer Resolution Time	Status
Severity 1	Inoperative/Severely Impacted - PSAP not receiving calls, audio is working on only one side of incoming calls, End Office traffic not able to reach PSAP. Critical network or data	Immediately upon detection, but no longer	Target Mitigation = 30 minutes,	Hourly

	communications problem on a system that prevents transmitting ANI to the PSAP, and/or network hardware, or circuit. All FCC reportable outages are considered	than 10 minutes after determination of impact	Target Resolution 2 hours	
Severity 2	Routing services are impaired, where major functions are operative but functioning at limited capacity or critical elements are no longer redundant.	As soon as possible, but no longer than 30 minutes after detection identification	4 hours	Every 4 hours or mutually agreed timeframe
Severity 3	Routing services are impaired and some functions are not operating, but those functions are not mandatory or critical to 9-1-1 call delivery.	As soon as possible, but no longer than 1 hour after detection	</= 7 days	Every 8 hours or mutually agreed timeframe.

Root Cause Analysis Report

A Root Cause Analysis (RCA) for Severity Level 1 or 2 service disruptions will be available within ten (10) Business Days following the resolution of a Severity Level 1 or 2 Service Disruption outlining the conditions that caused the trouble, the corrective action taken, and any corrective action plans to prevent future occurrences of the trouble. This report will include the following:

- Date/Time of the start of the service disruption.
- Date/Time of service restoration.
- Date/Time of service resolution.
- Date/Time service disruption was detected.
- Associated Ticket Number (s)
- Number of customers impacted.
- Actual number of calls impacted.
- Functionality lost during the service disruption.
- Corrective action(s) (completed and future as applicable).
- City(ies) and state(s) where failed equipment is located.
- City(ies) and/or county(ies) and state(s) impacted, as applicable.

Table 8. Restoration and Resolution Timeframes

Severity Code	Description	Response Time	Customer Resolution Time	Status
Severity 1	Inoperative/Severely Impacted - PSAP not receiving calls, audio is working on only one side of incoming calls, End Office traffic not able to reach	Immediately upon detection, but no longer than 10 minutes	Target Mitigation = 30 minutes, Target	Hourly

		PSAP. Critical network or data communications problem on a system that prevents transmitting ANI to the PSAP, and/or network hardware, or circuit. All FCC reportable outages are considered	after determination of CTL impact	Resolution 2 hours	
	Severity 2	Routing services are impaired, where major functions are operative but functioning at limited capacity or critical elements are no longer redundant.	As soon as possible, but no longer than 30 minutes after detection identification	4 hours	Every 4 hours or mutually agreed timeframe
	Severity 3	Routing services are impaired and some functions are not operating, but those functions are not mandatory or critical to 9-1-1 call delivery.	As soon as possible, but no longer than 1 hour after detection	</= 7 days	Every 8 hours or mutually agreed timeframe.

PM 1	**Project Management and Ongoing Client Management Services** **Project Management Methodology** 1. Describe bidder's project management methodology and support structure. 2. Describe the daily, weekly, and monthly interactions during the migration. 3. Include a proposed high-level project plan. 4. Include a schedule for the through implementation of this project.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: Bidder Response: A detailed Program Development Plan has been included with this proposal, this document outlines both the implementation project management approach and the overall Program Management approach for the lifecycle of the contract. A regular communications cadence will be established with the State, to include weekly status meetings, a detailed order tracker to be delivered prior to the weekly status meetings, monthly overall Program level meetings and quarterly Program Review meetings will also be established. A draft schedule has also been included, as an attachment, outlining all tasks and timeframes necessary to complete the implementation of the project.				

Any additional documentation can be inserted here:

PM 2	**Project Management and Ongoing Client Management Services** **Post-Deployment Client Management** Describe the post-deployment client management service, including client management reports, executive briefings and the fielding of ad hoc support requests.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

As outlined in the attached Program Deployment Plan, the Program Manager will maintain both project and program level oversight for the entire lifecycle of the contract, The assigned support teams are provided in detail in the PDP, which also outlines their respective roles and responsibilities for the contract lifecycle.

Post Deployment Client Management

CenturyLink's Program Manager manages the ongoing maintenance of CenturyLink's NG9-1-1 solution services through the life of the contract. Beginning with ALI migration, as each end office re-homes to CenturyLink's NG9-1-1 solution , and continuing through the term of the contract, the Program Manager oversees all aspects of CenturyLink's full suite of maintenance services for all components of the solution, including:

- Data Integrity Services
  - Service Order processing, including PAD installation, SIP enablement and Session Augmentation.
  - Master Street Address Guide (MSAG) management
  - Emergency Service Number (ESN) and ALI Response format management
  - Error correction for data content, MSAG, LNP, ANI/ALI Discrepancy, and No Record Found (NRF) errors
- Special Services, including data extracts, reconciliations, and audits
- Routing Services
  - i3 Routing management
  - Provisioning support for routing, star code assignment, transfer, and other configurable attribute changes
- Telephone Service Provider Management
  - Outstanding error management
  - Deployment of new Telephone Service Providers (TSPs)
  - Support of end office and Mobile Switching Center (MSC) re-homes
  - Assistance in wire center overlap issue resolution
- System, Network and Hardware monitoring, maintenance, upgrades, and support

	CenturyLink has a Communication Management process that is followed. Depending on the phase of the project, the CenturyLink Program Manager will provide either a bi-weekly or weekly status report. In addition, there will be bi-weekly or weekly (depending on the phase) conference calls with minutes distributed. Email correspondence will be used as well as phone calls as necessary, which will be followed up with written documentation. Throughout the duration of the contract, the CenturyLink Program Manager will keep the PSAP and State representatives apprised of ongoing project status via regular project team meetings. During the maintenance period, the Program Manager facilitates regularly scheduled operations meetings and periodic formal reviews with the customer to monitor general status and trends, receive customer performance reviews and obtain customer feedback, and address any questions or concerns. CenturyLink prides itself on customer satisfaction and encourages the use of project team meetings as a forum for continual feedback on performance. With this feedback, the CenturyLink Program Manager can refine the implementation plan or take necessary action so that the final NG 9-1-1 solution implementation and management meets the customer's expectations. Schedule is maintained using Microsoft Project and cost monitoring is done using Oracle Applications for actual/to-date information and a combination of Microsoft Project and Microsoft Excel for Estimate-To-Complete (ETC) information.

Any additional documentation can be inserted here:

TRN 1	**General Requirements – Training** **Comprehensive Training** Contractor shall provide comprehensive training to designated Commission representatives responsible for varying layers of network/system monitoring and system maintenance. Describe bidder's training program for system implementation and ongoing operation and maintenance, including but not limited to the following topics: 1. user-configurable elements 2. NOC/SOC procedures 3. escalations; 4. trouble reporting 5. help desk portal 6. executive dashboard 7. service monitoring tools Training shall be available at the user level and delivered to the PSC and each region (up to 10) and also the train-the-trainer level (up to 25 individuals).	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: The CenturyLink Program Manager will work with the state to identify the individuals requiring training, as well as the types of training required. As outlined in the attached Program Development Plan the training programs include, but are not limited to the above requested trainings				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

TRN 2	**General Requirements – Training** **Attendees and Curriculum** 1. Describe the number and types of attendees required to attend training, training curriculum, number of training attendees included in the proposed price, and the duration of the training program per attendee (expressed in hours per day and number of days), as well as the location of the training and whether such training is available online or onsite. Preference is given to training that can be conducted in an onsite setting for attendees. 2. Provide Examples of the proposed training plans. 3. Provide a sample of the training materials to be used. Training classes shall be recorded for future reference and training of new Commission and PSAP employees.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: The CenturyLink Program Manager will work with the state to identify the individuals requiring training, as well as the types of training required. As outlined in the attached Program Development Plan the training programs include, but are not limited to the above requested trainings				

Any additional documentation can be inserted here:

	General Requirements – Service, Repair and Advance Replacement The Commission shall not be responsible for the replacement and maintenance of hardware and software required to provide the NGCS or ESInet connectivity provided as part of the bidder's solution. The Contractor shall resolve all faults or malfunctions at no additional cost to the Commission. **Support Maintenance** 1. Describe in detail bidder's 24 x 7 x 365 maintenance support for the life of the contract. 2. Describe bidder's understanding of public safety maintenance windows and associated notification processes. 3. Describe bidder's problem resolution and change management processes, the supporting systems, and adherence to best practices, such as those described in the ITIL version 3 or most current version.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
SRAR 1	**Bidder Response:** A detailed description of trouble management, trouble ticket handling, planned maintenance and change management can be found in the attached Program Development Plan. CenturyLink maintains a 24 x 7 x 365 Public Safety NOC dedicated to ensuring that and service effecting event is minimized and resolved as quickly as possible. A full escalation matrix is provided in the draft PDP, as well as additional service management contacts that are available to the state at all time to ensure quick resolution of any issue. As an "as-a-Service" model, the CenturyLink's NG9-1-1 solution minimizes the need to constantly maintain, upgrade, and administer a complex hardware and software solution and maximizes the ability to focus on public safety. This 9-1-1 network services model consistently renews key components to enable PSAPs to operate on the most modern communications technology and eliminates the service development and deployment bottlenecks present in legacy solutions. During the life of the contract, CenturyLink will maintain and monitor all equipment and software within the NGCS solution. CenturyLink will replace any faulty equipment (that was not a direct cause of negligence of on-site PSAP personnel) at no additional cost to the State. **Support Maintenance** **1**. All aspects of the CenturyLink's NG9-1-1 solution architecture are designed to be extremely resilient and redundant, allowing call traffic to continue in case of a failure at one or more pieces of hardware, software, or network infrastructure. This also allows repair to take place without further impacting PSAPs or call delivery. Disaster recovery plans have been created for each aspect of the CenturyLink's NG9-1-1 solution infrastructure, with on-call available resources and replacement hardware to quickly restore impacted systems. CenturyLink will conduct major and minor planned and critical un-planned changes for all CenturyLink's NG9-1-1 solution maintenance or upgrades that may impact customers including hardware service, repair, and replacement. CenturyLink's NG9-1-1 solution utilizes the Change Management module of ServiceNow for managing changes to the service including aggregation sites, core call routing complexes, PSAP equipment maintenance, circuit maintenance, and hardware and software versions. CenturyLink will manage and complete these events with a trained ESInet change management team facilitating the change implementation, monitoring, and communication through the length of the event. CenturyLink adheres to stringent internal event plan processes and procedures which include step-by-step execution procedures with the associated time frames, back-out procedures, and baseline and validation testing.				

	The Solution Maintenance phase begins once live traffic is transferred onto any part of the system. During this phase, CenturyLink provides ongoing tiered support services to monitor service level performance allowing the State of Nebraska to reach the highest level of operational excellence. The solution support team is in place to receive, analyze, and rectify problems and information requests throughout the term of the contract. A designated customer Program Manager is provided who is responsible for coordinating and delivering support through the term of the customer's purchased services. The Program Manager is the single point of contact for the Commission and PSAPs and assists with all billing and reporting questions as well as provides monthly/quarterly customer reviews and functions as the State's first point of escalation. The Program Manager is responsible for overall customer service management that includes: • Scheduling and facilitating kickoff meeting and status updates • Coordinating resources • Ongoing project management for the duration of the Statement of Work (SOW) • Writing and maintaining all methods and procedures that affect CenturyLink operations and its interface with the customer, carriers, and PSAP operations During implementation of services, CenturyLink provides a dedicated Project Manager who works with the customer. The implementation Project Manager is responsible for all implementation-related activities including creation and management of the implementation project plan with the customer and coordinating activities with carriers such as establishing connectivity and test/migration schedules. The implementation Project Manager is an integrated partner with the Program Manager and meets with the customer on a periodic basis to review the status of implementation and completion of implementation tasks against target timeframes as described within the integrated project plan. 2. Maintenance of the CenturyLink's NG9-1-1 solution is done with no scheduled downtime. We schedule planned events for routine maintenance in ways that 9-1-1 operations are not impacted. A notification of the upcoming event will be sent to the customer as applicable. Planned events are fully staffed and managed with a trained event management team, facilitating the change implementation, monitoring, and communication through the length of the event. Team will conduct major and minor planned and critical un-planned events for all NG9-1-1 Services, system maintenance, or upgrades that may impact the NG9-1-1 Customer PSAPs. CenturyLink fully manages and completes these events with a trained event management team, facilitating the change implementation, monitoring, and communication through the length of the event. Event team personnel will keep the customer informed of event progress. We adhere to stringent, internal event plan processes and procedures to include step-by-step execution procedures with the associated time frames, back-out procedures, and baseline and validation testing. CenturyLink includes the required back-out time within the scheduled maintenance time frame. The CenturyLink's NG9-1-1 solution maintenance window is 12am-6am per time zone (Tuesday- Thursday), unless otherwise agreed to in order to resolve service impacting issues. Changes affecting multiple time zones will be completed between 12AM-6AM CT. Customer PSAPs may require maintenance at the PSAP to be done outside of this maintenance window, in which case CenturyLink will coordinate an appropriate time to perform maintenance at the PSAP Maintenance and repair of those elements of the ESInet and interconnections owned, operated, installed or controlled as part of the solution will be provided by CenturyLink. CenturyLink will provide on-site support for all CenturyLink's NG9-1-1 solution Equipment including removal and disposal. CenturyLink will provide all necessary resources to successfully perform and complete the maintenance.

3. A 24x7x365 NOC dedicated to 9-1-1 call delivery services supports the CenturyLink's NG9-1-1 solution network, core services, and equipment. CenturyLink utilizes industry standard processes, including adherence to Information Technology Infrastructure Library (ITIL) framework as well as best-in-class tools for Change Management, including the use of the ServiceNow Change Management Module.

CenturyLink will conduct major and minor planned and critical un-planned events for all CenturyLink's NG9-1-1 solution system maintenance or upgrades that may impact customers. CenturyLink will manage and complete changes to the service including aggregation sites, core call routing complexes, PSAP equipment maintenance, circuit maintenance, and software upgrade events, with a trained ESInet event management team facilitating the change implementation, monitoring, and communication through the length of the event. CenturyLink adheres to stringent internal event plan processes and procedures which include step-by-step execution procedures with the associated time frames, back-out procedures, and baseline and validation testing. CenturyLink includes the required back-out time within the scheduled maintenance timeframe.

Change Requests very widely in terms of scope and complexity, dependent upon the type of change. Change Requests with largest potential impact are submitted to a Change Advisory Board (CAB) for approval. The CAB is a committee that makes decisions regarding whether or not a change should be implemented. The Change Advisory Board consists of executive stakeholders or their representatives. CenturyLink manages all aspects of Change Management through the Change Management Process including availability, capacity, configuration, incident, problem, release, service-level and IT Service continuity management.

Depending on the type of change, changes are submitted to a Change Advisory Board (CAB) for approval. The CAB is a committee that makes decisions regarding whether or not a change should be implemented. The Change Advisory Board consists of executive stakeholders or their representatives. We manage all aspects of change management through the Change process including availability, capacity, configuration, incident, problem, release, service-level and IT service continuity management. Generally speaking, there are two classes of ESInet maintenance e.g., standard and emergency.

- **Standard:** CenturyLink will provide a schedule of standard maintenance windows for activities defined below as: level 4 standard and level 3 normal.
- **Emergency:** Where reasonably practicable, CenturyLink will give the Commission and any affected PSAPs 24 hour notice of the need for the maintenance and a summary of the potential impact. Emergency maintenance may occur at any time.

There are five categories of changes.

Table 9. Change Management Change Categories

Change Category	Description
STANDARD	This change indicates a low risk and repeatable change that occurs frequently. Once it is deemed appropriate (3 successful) Change plans / MOPs are in place, a template will be built so the change can be entered as a Standard Change for future usage negating the need for a normal change. This change type does not require CAB approval.
NORMAL	Normal changes are often categorized according to risk and impact to the organization. By definition, a normal change will proceed through all steps of the change management process, including the CAB for approval.
LATENT	This change should be utilized for unplanned work, resulting from a critical incident ticket &/or Major Incident.

EXPEDITED	By definition, an expedited change will proceed through all steps of the change management process and will be reviewed by the executive CAB. There is a valid business reason to bypass the 48-hour advance submittal time frame.
EMERGENCY	Utilized for a change that resolves a problem deemed critical to business continuity and for which a workaround is not sufficient. Examples are a router that could put voice delivery at risk and has a potential for an immediate threat to the production environment and /or to be a major impact to Business or Customer. Emergency changes are approved at an Emergency Executive CAB.

For a Planned or Emergent Event to receive approval there must be an event plan submitted to the CAB. The event plan must include a step-by-step guide of changes being made and clearly state the impact of the change. All event plans must also include a detailed validation plan and back-out plan in compliance with implementation plan standards and approved by the CAB Stakeholders. All event resources are clearly listed and verified ahead of time. New application code is never to be loaded without it being officially released by QA. CenturyLink will provide written notification and release content (when applicable) to the jurisdiction(s).

For Normal, Emergency, and Expedited changes, a change request is submitted to the CAB. The request must include a step-by-step explanation of the purposed changes being made and clearly state the impact of the change. These changes must also include a detailed validation plan and back-out plan in compliance with implementation plan standards. All event resources are clearly listed and verified ahead of time. New application code is never to be loaded without it being officially released by QA and validated in our test environment.

The result of each change is tracked and available for future reference in our ServiceNow Change Management Module whether it was successful or unsuccessful. If the change is closed as unsuccessful and the back-out plan was enacted, the issues that caused the event to be unsuccessful are documented. A change plan and request must be submitted for re-approval by the CAB. If the change was successful with deviation, this is also tracked with the deviations documented.

If the event is closed as unsuccessful and the back-out plan was enacted, the issues which caused the event to be unsuccessful are documented. A new event plan and subsequent change must be submitted for re-approval by the CAB.

The CAB also documents and stores each event for tracking and reporting purposes. The CAB logs all planned and emergent event change requests on events that are both approved and declined. We also review and issue Reason for Outage (RFO) reports when outages occur.

We have scheduled maintenance time frames for non-emergency events. If we have an emergency item, we will alert the Commission and affected PSAPs using a standard process. The State can choose the modality of this communication (i.e. text, email, etc.)

Service Manager will provide notice of maintenance events. For questions during the maintenance window, the State should contact the CenturyLink NOC.

The CenturyLink's NG9-1-1 solution maintenance window is 12am-6am per time zone (Tuesday- Thursday), unless otherwise agreed to in order to resolve service impacting issues. Changes affecting multiple time zones will be completed between 12AM-6AM CT. Customer PSAPs may require maintenance at the PSAP to be done outside of this maintenance window, in which case CenturyLink will coordinate an appropriate time to perform maintenance at the PSAP.

In addition to managing planned and emergent events, we maintain a problem management system for tracking and reporting trouble. CenturyLink provides a service for opening trouble tickets, change requests, and checking status of existing items e.g., tickets opened, resolved and pending.

Escalation

We will notify the specified single point of contact in writing concerning scheduled release installations. Acknowledgement of notification is required from the customer. CenturyLink will send an email notification to the customer at the start and end of the pre- arranged maintenance interval. Listed below are the current CenturyLink's NG9-1-1 solution escalation procedures.

Table 1: Escalation Procedures

Escalation Intervals	Level	Responsibility
First Escalation SEV 1 - 2 Hours SEV 2 – 4 Hours SEV 3 – 6 Hours	NOC Manager	• Review Customer Request and keep customer updated • Escalate as needed to the appropriate partner center
Second Escalation Customer Discretion	Area Manager Or Delegate	• Review status of ticket • Monitor ticket progress • Notify Director - when appropriate
Third Escalation Customer Discretion	Director	• Status Customer • Escalate as needed to partner centers • Monitor ticket Progress/ documentation • Notify VP when appropriate
Fourth Escalation	Vice President	• Ensure adequate resources are available and engaged for prompt resolution • Update customer as appropriate • Escalate as needed to appropriate levels

When escalating a problem, it is important to provide the following information:

- Customer's name and telephone number
- Active ticket number(s)
- Trouble Location
- Trouble description (e.g., out of service, service degraded, etc.)
- The action or resolution requested

CenturyLink understands the requirement for integration and information sharing to the Customer for service management support. CenturyLink will work with the Commission to develop an appropriate integration design, plan, and MOP for information sharing.

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SRP 1	**General Requirements – Software Release Policy** **Scheduled Releases** **Frequency of Scheduled Releases** 1. Describe the frequency of scheduled software releases, the feature release testing process, and the decision-making processes involved in deciding what features and defect resolutions to include in a scheduled release. 2. Include a current roadmap of feature updates and additions with projected release by quarter and year.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Please see this response filed with the PROPRIETARY INFORMATION				

Any additional documentation can be inserted here:

SRP 2	**General Requirements – Software Release Policy** **Maintenance Releases** Describe the frequency of defect-resolution software releases, as well as the decision-making processes involved in selecting which software defects to fix.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Upon discovery and communication by the customer of a software defect, a ticket (change request) is created and reviewed by a cross-functional team. A disposition is typically made within three weeks or sooner depending upon the severity of the issue. A disposition can range from 'no-action' required to immediate resolution required. Once a disposition is made; the ticket is slated against a specific release. The frequency of defect resolution software releases is driven to some extent by the nature of the defect. 'Must fix' defects (call delivery impacting) are normally rolled into the release immediately following the time of discovery. This will typically make the fix available within 6 months if not earlier. Defects characterized by the customer as minor will be prioritized in partnership with the customer. The decision-making processes involved in selecting which software features to provide are based on standards updates and market demand. A typical annual release schedule includes one major software release with up to two minor releases as required. The decision-making processes involved in selecting which software defects to fix is done in partnership with the customer. All defects are assessed, managed, and scheduled by the Change Control Board. Critical and Major defects are managed as soon as discovered and communicated by the customer. The initial solution may be a manual process. A long-term solution will be with the next ESInet platform code release. Minor defects are reviewed within three weeks of discovery and communication by the customer. The solution will be ranked against other defects and enhancements and road-mapped appropriately. Once a defect has been assigned to a release, we will communicate back to customer the timeline for defect resolution. Defects are reviewed on a periodic basis for changes in priority and coding/testing synergies. After a defect has installed in production, we will follow up with the customer to make sure the issue has been resolved. e CenturyLink's NG9-1-1 solution is offered as a service; therefore, known issue and defects resolution are included at no cost. Enhancements and custom development could incur additional fees.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

	General Requirements – Software Release Policy **Test Environment** Prior to install of new releases, bidder shall explain how Contractor replicates the production environment for software release testing to provide assurances that future software releases will not negatively impact PSAP operations.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
SRP 3	**Bidder Response:** All releases to CenturyLink's NG9-1-1 solution i3/IP Selective Router product are rigorously tested prior to installation in CenturyLink's Production Network. Software release are tested in multiple, exactly replicated, Test and Pre-Production environments prior to deployment. These environments are comprised of the same hardware systems, e.g., OEM model/series number, CPU and memory generation, high availability/redundant server system complement. All new features are thoroughly tested, and vigorous regression testing, load and performance, and backwards compatibility are verified to ensure that no new bugs have been introduced. After SQA testing, additional deployment testing is performed in the Pre-Production labs. Here the MOP is tested to ensure CenturyLink's NG9-1-1 solution i3/IP Selective Router Administrative team, who will perform the production installation, are familiar and practiced at performing the installation prior to the install event. During this time, each phase of the install is executed as it will be performed, and any changes to the environment are verified and validated prior to finalizing the MOP.				

Any additional documentation can be inserted here:

SRP 4	**General Requirements – Software Release Policy** **Access to Defect Tracking System** Contractor shall provide the Commission with access to the Contractor's defect tracking system for the Commission to track the progress of defect resolutions. **Software Defect Tracking Process** Provide a detailed description of the software defect tracking process and describe how bidder will provide training for no more than ten (10) Commission staff prior to Final Acceptance Testing.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: **1.** CenturyLink will provide monthly reports on defects to the Commission. **2.** Upon discovery and communication by the customer, a ticket (change request) is created and reviewed by a cross-functional team with representatives from Engineering and Product and a CenturyLink Customer Representative. A disposition is typically made within 3 weeks or sooner depending upon the severity of the issue. A disposition can range from 'no-action' required to immediate resolution required. Once a disposition is made; the ticket is slated against a specific release. CenturyLink has a comprehensive defect tracking process as part of our defect tracking tool, Jira. Critical and Major defects are managed as soon as discovered and communicated by the customer. The initial solution may be a manual process. 'Must fix' defects (call delivery impacting) are normally rolled into the release immediately following the time of discovery. This will typically make the fix available within 6 months if not earlier. Defects characterized by the customer as minor will be prioritized in partnership with the customer. The decision-making processes involved in selecting which software defects to fix is done in partnership with the customer. All defects are assessed, managed, and scheduled by the Change Control Board. Once a defect has been assigned to a release, we will communicate back to customer the timeline for defect resolution. Defects are reviewed on a periodic basis for changes in priority and coding/testing synergies. After a defect has been installed in production, we will follow up with the customer to make sure the issue has been resolved.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SRP 5	**General Requirements – Software Release Policy** **Software Defect Aging** Describe how service-affecting software defects are aged. If minor problems (from the Contractor's perspective) are not identified and resolved immediately, these minor problems can become major or critical problems. Describe in detail how/when this minor problem gets scheduled or automatically escalated, and the feedback mechanism in place for keeping the Commission informed.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink has a comprehensive defect tracking process as part of our defect tracking tool, Jira. Critical and Major defects are managed as soon as discovered and communicated by the customer. The initial solution may be a manual process. CenturyLink will utilize the Product Roadmap and the Service Enhancement Request process to track the status and prioritize the enhancement with other Product Roadmap improvements. 'Must fix' defects (call delivery impacting) are normally rolled into the release immediately following the time of discovery. This will typically make the fix available within 6 months if not earlier. Defects characterized by the customer as minor will be prioritized in partnership with the customer. Upon discovery and communication by the customer of a "minor" defect, a ticket (change request) is created and reviewed by a cross-functional team. A disposition is typically made within three weeks or sooner depending upon the severity of the issue. A disposition can range from 'no-action' required to immediate resolution required. Once a disposition is made; the ticket is slated against a specific release. The decision-making processes involved in selecting which software defects to fix is done in partnership with the customer. All defects are assessed, managed, and scheduled by the Change Control Board (CAB). Once a defect has been assigned to a release, we will communicate back to customer the timeline for defect resolution. Defects are reviewed on a periodic basis for changes in priority and coding/testing synergies. After a defect has been installed in production, we will follow up with the customer to make sure the issue has been resolved.				

Any additional documentation can be inserted here:

DOC 1	**General Requirements – Documentation** The Contractor shall provide the Commission with all pertinent documentation for the ESInet and/or NGCS connectivity provided as part of the Contractor's solution as implemented, No more than 30 days after completion of the network construction, and update the Commission as configurations change over the term of the contract. The required documentation shall include the following: **1.** Detailed project plan **2.** Escalation procedures **3.** Circuit identification **4.** Single points of failure **5.** Network path diversity drawings into each PSAP **6.** Network path diversity drawings into each non-PSAP site or structure housing any element or device that is part of the overall system **7.** PSAP backroom as built drawings **8.** PSAP demarcation point drawings **9.** All user interface training and reference materials **Network As-Built Documentation** Upon implementation, Contractor shall provide a network or solution diagram that clearly depicts the Contractor's solution as implemented. The Contractor shall provide all documentation in agreed-upon electronic format via a Contractor-hosted web portal. Please describe how bidder's solution meets or exceeds this requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink will provide appropriate documentation to the Commission as listed above. CenturyLink will provide each of the PSAPs with pertinent documentation for the ESInet and NGCS and update the PSAPs as configurations changes. CenturyLink will author PSAP backroom as built and PSAP demarcation point drawings. CenturyLink will provide customized migration plans for each PSAP that will be proactively utilized and managed by the CenturyLink Project Manager. Web-based, user interface reference materials will be provided along with a "leave behind" reference guide for each PSAP. CenturyLink will also provide user interface training on the web-based portal for accessing documentation and reviewing reports. CenturyLink and our partner will co-develop and maintain the operational procedure documentation required for the day-to-day interaction between the parties. **Network As-Built Documentation** CenturyLink will provide a network or solution diagram that clearly depicts the Contractor's solution as implemented. Documentation will be provided in agreed-upon soft copy format.				

Any additional documentation can be inserted here:

ESI 1	**Emergency Services IP Network (ESInet)** **Diversity** The network shall be designed with diverse entrances (e.g., east-west entrances) into specified buildings that are part of the ESInet. This requirement shall apply to the core network sites, including data centers and PSAPs specified in Attachment A - PSAP Host End-Point Locations, Equipment List and Selective Router Locations. Primary and redundant links shall not share common routes, trenches, or poles. If last-mile facility or building construction is required, bidder shall so indicate. If this is not possible at a given location, indicate how bidder intends to provide redundant and resilient connectivity to that location. Describe how bidder's solution meets or exceeds the above requirement.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

CenturyLink's NG9-1-1 solution is designed with diverse entrances into each core call processing facility that is part of our solution, e.g. data centers. Primary and redundant links do not share common routes or trenches. PSAP connections to the ESInet are redundant, resilient, physically diverse when possible, and can use media diversity at a minimum to logically separate for delivery of 9-1-1 calls.

CenturyLink has performed hundreds of PSAP migrations to ESInet services. Each migration has its own unique requirements and dependencies. CenturyLink works with all stakeholders to plan and execute migrations in phases and in parallel with the embedded 9-1-1 service.

To meet diversity best practices, CenturyLink has included two carrier diverse circuits and connections at each PSAP Host End Point Locations supported by two (2) separate edge routers and two separate IP VRF instances. All IP data circuit connections are established from two (2) separate physical paths.

All east and west diverse entrances will utilize two (2) separate end-offices to the PSAP Host End Point sites listed in Attachment A.

Locations that require fiber build outs:


- South Central Region-Dawson
- South Central Region-Dawes
- Southeast Region-Windstream DC
- North Central Region-Cherry
- Metro Region-Douglas
- Metro Region-Pottawattamie
- West Metro Region - Fremont-New Region
- Northeast Region - City of Norfolk -New Region (Under Development)
- Northeast Region - City of South Sioux City-New Region (Under Development)
- Wayne County - City of Wayne

Note: All construction costs are included in our proposal.

CenturyLink's project team will work with each PSAP Host site personnel to implement the best paths possible into each facility location.

CenturyLink service utilizes our MPLS private IP network that will include use of diverse two different network including CenturyLink network and a third-party network provider that provides the local access and path diversity for the local loop diversity. CenturyLink will work to identify last mile diversity designs including separate building entrances, conduit etc. for our diverse egress deployments.

Also refer to additional Diversity references in Section "SEC 7 – Physical Security

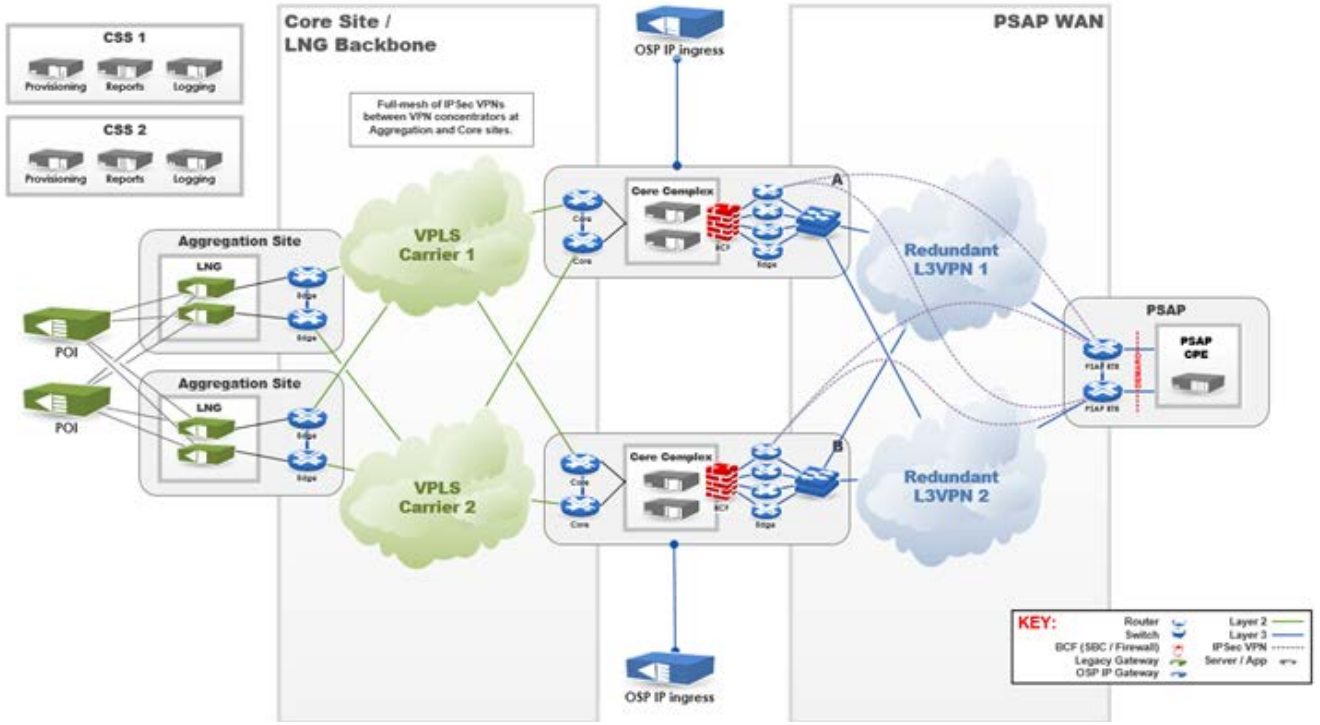


ESI 1 Diversity

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

ESI 2	**Emergency Services IP Network (ESInet)** **Network Design** Bidder shall design the physical network using the most robust facilities available. Use of fiber-optics is the preferred method for connectivity due to available capacity (bandwidth) and increased reliability. Given the amount of fiber-optic facilities and interconnections between the fiber-optic networks in Nebraska, the ESInet design should include as much fiber as possible, not only on the transport side but on the access side as well. Describe the design of proposed network with specific details on connectivity.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: As a global network provider, our Network Cores (POPs) are carrier grade and are serviced on multiple OC192 rings. CenturyLink will provide physically diverse fiber with a minimum of dual building entrances with 1G bandwidth to each datacenter from physically diverse CenturyLink Points of Presence (POP). CenturyLink will provide physically diverse fiber with 100mbps bandwidth, scalable to 1G bandwidth, to every host PSAP site from physically diverse CenturyLink POPs. Our handoff to the PSAP call handling equipment from our edge device can be either fiber or copper, depending on what the call handling equipment is able to accept. Our Network Design uses a private, high-speed, MPLS IP fiber backbone, not the public Internet, for transmission. IP transport paths for critical service components are redundant and designed for multipath IP packet delivery so the failure of a given IP transport mechanism does not affect overall service availability Our NGCS are designed to leverage multiple tiers of redundancy to eliminate any single point of failure. This includes the availability of dual fiber path circuits to all required facilities, with dual building entrances, and signals carried over diverse carrier networks. All connections are provisioned in a dual carrier- fashion to provide redundancy and diversity. Capacity of circuits is sized in accordance with expected call volume and call handling capacity of the connected sites. In the case of datacenter links, they are provisioned and sized to handle the expected call volume. Fundamentally, the system is connectivity-agnostic, so if there are existing connectivity arrangements in place, these could be leveraged to support the desired connectivity. CenturyLink acquired Level 3 Communications. This transaction positions CenturyLink with being able to provide are entire network design to include fiber end to end from the Ingress, Egress into the Host/PSAP connections within the State of Nebraska. Our CenturyLink NG9-1-1 solution utilizes our MPLS private IP fiber network that will use diverse carrier networks that will provide the local access and path diversity. These networks are comprised of different components, multiple technical solutions, and various types of interfaces. Our last mile design will include two (2) separate diverse fiber paths to each of PSAP Host sites using the east/west dual entrance design as outlined in this RFP.				

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

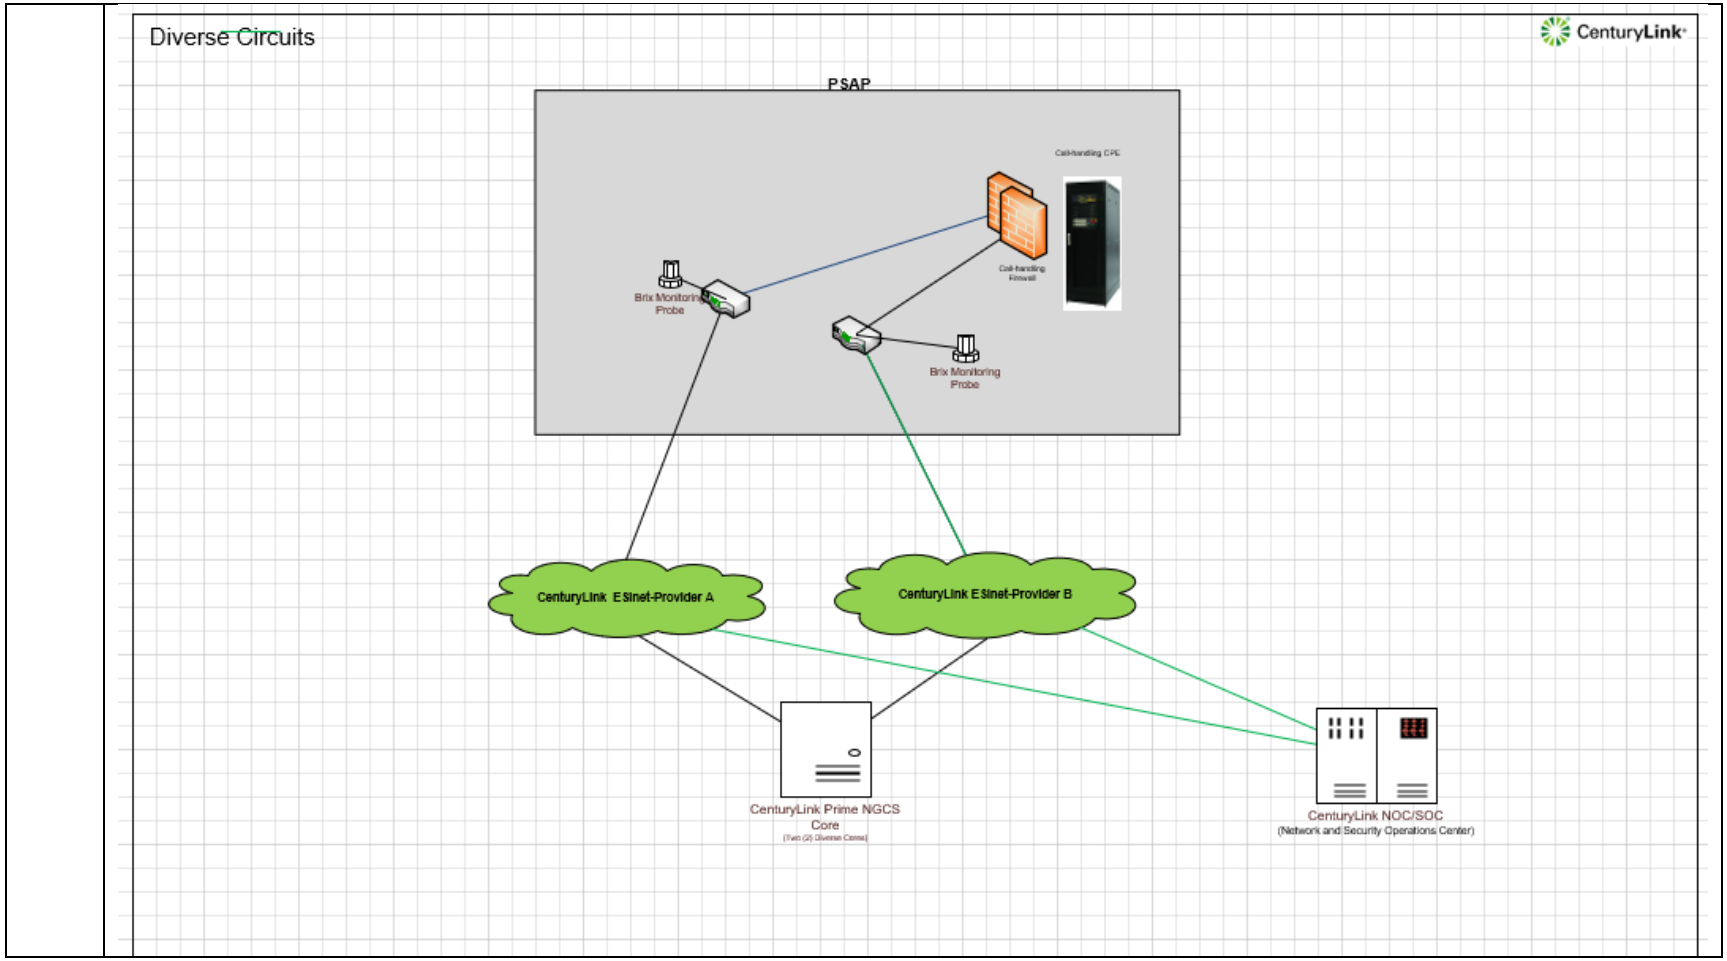


Diverse ESINet Network Design

Any additional documentation can be inserted here:

ESI 3	**Emergency Services IP Network (ESInet)** **No Single Points of Failure** The mission critical ESInet shall be designed with no single points of failure. All equipment shall include redundant processors and power supplies and be supported by an uninterruptible power supply (UPS) system and alternate power source in a properly conditioned environment. Describe how the solution meets or exceeds the above requirement.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: Our CenturyLink network is known for its reliability, security and redundancy. It uses a private, high-speed, MPLS IP backbone, not the public Internet, for transmission; and it has an availability target of 99.999%. We accomplish this through problem detection, prevention, redundancy, and restoration offers to ensure that the network is always up and running. CenturyLink ESInet achieves 99.999% service availability 24x7x365 for call processing and has no single point of failure that will disrupt the ability to provide on-going call processing. Transactions or call traffic divert to available components on failure or degradation of service of a given functional component or a loss of a physical site. IP transport paths for critical service components are redundant and designed for multipath IP packet delivery so the failure of a given IP transport mechanism does not affect overall service availability. CenturyLink NG9-1-1 core and ESInet components are designed and configured for continuous operation. **Core sites** include redundant network transport and redundant network interfacing elements to ensure optimal operation and availability. Network interfacing elements include switches, routers, SBCs, firewalls, and other security devices. CenturyLink's NG9-1-1 solution operates within a highly survivable network architecture. Our solution operates in an **active-active** configuration in each datacenter with redundant, highly available fault-tolerant critical components operating continuously in tandem. If one should fail, the redundant components continue to carry the entire load with no interruption of service. No failover time is required. All applications are deployed on virtual servers and data is shared among and within each data center. These applications leverage H/A functionality within the vSphere hypervisor and associated Snapshots. vMotion, DRS and High Availability (HA) features are utilized to ensure backup and recovery. Our geographically diverse data centers monitor all critical systems automatically 24x7x365. Electronic logs are created and maintained in the system dashboard. This includes an historical record of availability and outage incident tracking. These facilities meet Tier II-III standards stipulated in the two main data center tier classifications developed by the Telecommunications Industry Association (TIA) and the Uptime Institute (UI). Within each center, data is backed up and recovered based upon global standards and best practices. All applications are deployed on virtual servers and all applications and data are shared among and within each datacenter. The applications will be leveraging all High Availability (HA) functionality within the hypervisor, DRS and HA features are utilized to ensure an "always on" architecture. Data Center facility requirements address 24x7x365 secured physical access, secured floor or locked equipment cabinets with controlled access, and monitoring and alarming for all facility elements, such as electrical, heating, cooling, etc. Data Centers include redundancy and diversity in electrical, to include power feeds and Uninterruptible Power Supplies (UPS). The CenturyLink ESInet network implements a design of redundancy upon redundancy. Individual processing elements are redundant at each Core Site and Core Sites are redundant to each other. The failure of any given component at a Core Site will not prevent that Core Site from processing 9-1-1 calls. If a dual failure does occur at a Core Site, or a Core Site somehow becomes unavailable, calls are processed at another Core Site. Any Core Site can process any 9-1-1 call.				

	The ESInet system design is a highly available and highly reliable distributed and redundant architecture with no single points of failure. Key components are redundant within a given geographic site and are also geographically redundant. The loss of any single element will not prohibit call processing functions. The architecture is also extremely scalable to meet current and future needs. The solution includes internal audits and background test capabilities to continuously ensure solution integrity and to detect abnormal conditions. The CenturyLink services maintain the highest system availability. CenturyLink embraces and creates all offerings based upon a "no single point of failure" principle, using fully redundant networks, multi-path, multi-protocol network linking all network elements and PSAPs within the ESInet. All the NGCS and network elements utilize dual power supplies so that a failure on the primary circuit will not disable the operation of the device. CenturyLink facilities and nodes are equipped with physically redundant data communications and power equipment so that any component can be maintained without overall service impact. The facilities and nodes that support the ESInet are equipped with physically redundant data communications and power equipment such that any component can be maintained without overall service impact. A minimum of two, entrances to each facility via diverse facility transport paths and diverse points of interconnection. CenturyLink NG9-1-1 systems are deployed in a redundant, geographically diverse configuration to ensure the highest reliability and survivability. All critical system components are redundant, and the application employs application level monitoring and automated failover to recover from system failures without impact to 9-1-1 call processing. In addition to physically diverse and redundant architecture, network components of the CenturyLink ESInet and associated core services have additional redundancy within each diverse location. CenturyLink carrier grade facilities including POI's and switching centers meet Tier III standards stipulated and developed by the Telecommunications Industry Association (TIA) and the Uptime Institute (UI).

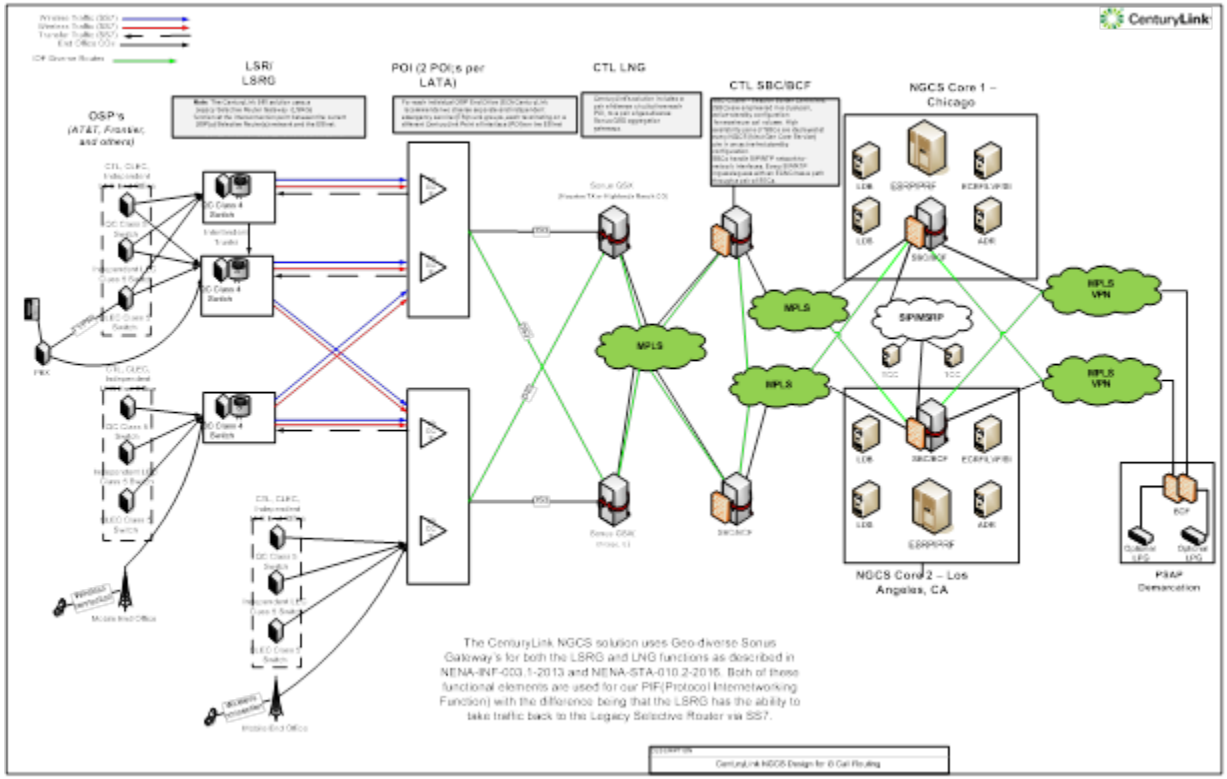

ESI 3 – ESINET Design – No Single Point of Failure.

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

ESI 4	**Emergency Services IP Network (ESInet)** **IPv4 and IPv6 Support** All network equipment shall be new and of current manufacture at the time of implementation. All servers, systems, routers, switches, and other network equipment shall support IPv4 and IpPv6 and have the capability to run dual protocol stacks. Describe how the solution meets or exceeds the above requirement.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution will provide either an IPv6 or IPv4 interface to external entities as desired for ingress to and egress from the service. IPv6 interfaces are supported according to NENA i3 standards. All network equipment has the capability to utilize IPv4 and IPv6 addresses and is configurable to support dual stack operation. Whereas some components of internal systems only support IPv4; this will not be a limitation for this solution. When an IPv6 external device sends a request packet to an internal IPv4 device, the ESInet Core strips down the IPv6 packet, removes the IPv6 header and adds the IPv4 header and passes it through. The reverse happens when the response comes back from the IPv4 device to the IPv6 device. The IPv4 network and IPv6 interfaces are continuously monitored for availability and performance. This is accomplished with the use of a back-to-back user agent session border controller, rather than Network Address Translations (NATs). All devices within the network shall be assigned static addresses.				


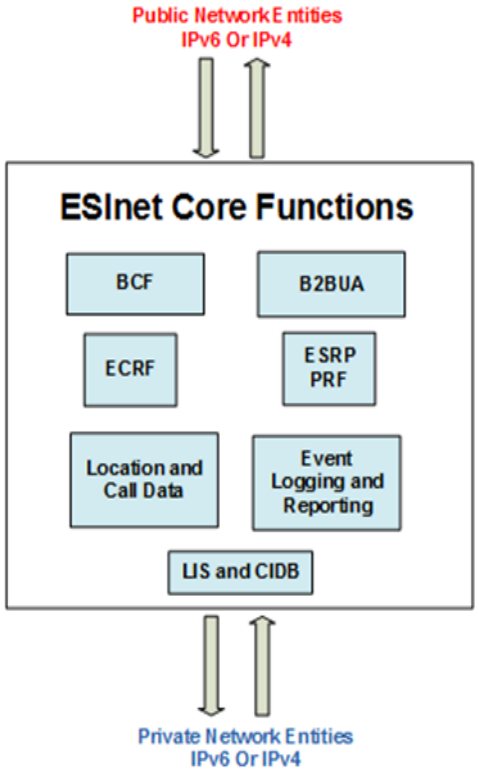


Figure 3: IPv4 and IPv6 Support Model

Any additional documentation can be inserted here:

	Emergency Services IP Network (ESInet) **Open Standards** Open standards-based protocols shall be used, and the use of proprietary routing protocols is prohibited. **Resiliency** Resiliency, or fast failover, may be achieved through the use of the Bidirectional Forwarding Detection (BFD) protocol as defined in IETF Request for Comments (RFC) 5880 and RFC 5881, or other standards-based, non-proprietary methods. Describe how the bidder's solution will achieve resiliency.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
ESI 5	**Bidder Response:** CenturyLink's NG9-1-1 solution provides a Next Generation 9-1-1 (NG9-1-1) solution that adheres to industry standards. CenturyLink's NG9-1-1 solution system complies with NENA STA-010.2-2016 which in itself is based upon IETF RFCs such as SIP (RFC 3261), LoST (RFC 5222), PIDF-LO (RFC 4119 and successive updates), and IETF ECRIT best practices documents and ANSI standards. The CenturyLink's NG9-1-1 solution network architecture adheres to the guidelines and recommendations of the NENA ESIND (ESInet Network Design) CenturyLink's NG9-1-1 solution meets the security criteria as defined in the NENA NG-SEC specifications for NG9-1-1 security. CenturyLink's NG9-1-1 solution service adheres to the NENA i3 standards for NG9-1-1 models and offers customers transition strategies to an NG9-1-1 end state while maximizing investment and leveraging existing network assets. CenturyLink and our partner actively participate in developing new standards and we are familiar with NENA STA-010.2, the NENA Detailed Functional and Interface Standards for the NENA i3 solution (formerly NENA 08-003). Any time NENA documents conflict, an evaluation is done as to the direction of the industry and intent of the most recent standards documents. CenturyLink and our partner are committed to continued participation in the active NENA workgroups as well as in the annual NENA meetings where conflicts within NENA (and other) documents are discussed and resolved. Typically, the most recently issued documents or working drafts will take precedence over older NENA documents when determining a roadmap that will keep CenturyLink systems NENA i3-compliant. The solution does not use proprietary routing protocols. **Resiliency** CenturyLink leverages the use of Bidirectional Forwarding Detection (BFD) on all network backbone links for fast failover purposes. Two LPGs are deployed to each PSAP for redundancy and failover. All supporting network routing infrastructure connected to the LPGs is designed and deployed in an N+1 model. CenturyLink also utilizes Link Aggregation as a method of combining multiple physical network links into a single logical link. For example, two Network Interface Cards (NICs) are combined into one virtual/logical interface. The network and software running across it recognize these two NICs as one virtual connection. If one goes down, the other can still handle the traffic. When one or more interfaces in a group fail, the software automatically detects the failure and rebalances the traffic across the remaining links without a loss of data. Once the failed link has been restored, the system automatically reconfigures to use all active network links. This load balancing is transparent to the end user who experiences no downtime. A fault tolerant NIC group eliminates the single points of failure. The fault-tolerant interface group provides dynamic failover access across multiple redundant connections to the network. When a bad cable, a lost link, or a failed adapter causes a failure on the primary NIC link, the intermediate driver software will switch to the secondary adapter.				

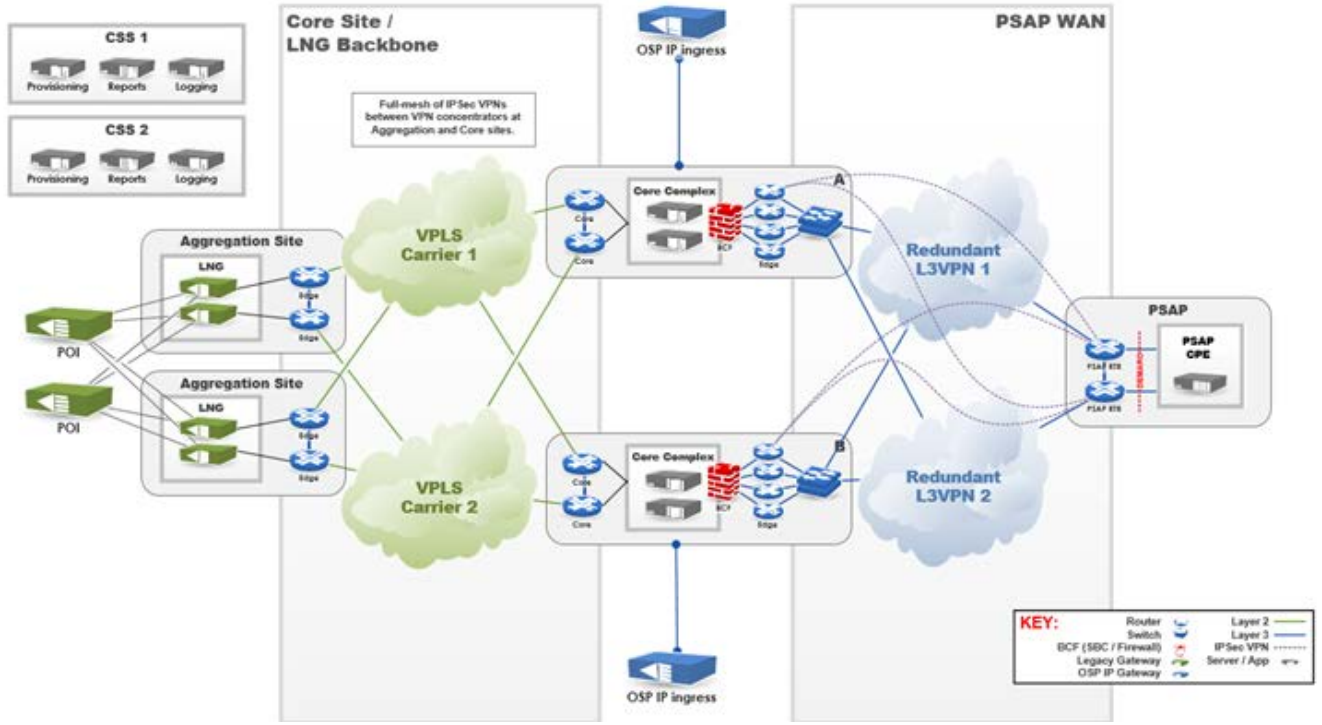

ESI 5 Resiliency - NG9-1-1 BFD Failover Drawing

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

ESI 6	**Emergency Services IP Network (ESInet)** **Multicast Routing and Switching** Routers and switches must support multicast routing and switching. The applicable base protocols are Internet Group Management Protocol (IGMP) and Protocol Independent Multicast (PIM). Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution is capable of supporting multicast routing and switching. If multicast is enabled for an application, CenturyLink's NG9-1-1 solution will use the following base protocols; Internet Group Management Protocol (IGMP) and Protocol Independent Multicast (PIM). CenturyLink has designed multiple solutions for end to end communication of non-NGCS applications and systems over the provided ESInet infrastructure. Multicast, although supported by the routers and switches, can introduce risks into a highly available and resilient 9-1-1 system. Additional supported options and configurations may be preferred and will be discussed with the State of Nebraska prior to implementing additional communication paths.				

Any additional documentation can be inserted here:

ESI 7	**Emergency Services IP Network (ESInet)** **Quality of Service (QoS)** The network equipment shall support Quality of Service (QoS) marking for prioritizing traffic in the network using the Differentiated Services Code Point (DSCP) protocol. While the network can change DSCP values through rules, the values typically are set by the system or functional element that originates the traffic. Network routers and switches shall not be configured in such a manner as to change DSCP values set by originating functional elements. Describe how the solution meets or exceeds the above requirement.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: The proposed ESInet is a Quality of Service (QoS)-managed private IP network which can prioritize any type of IP traffic: voice, data, and multi-media. The solution uses QoS and VLANs between data centers and PSAPs to prioritize and protect the data/traffic. Quality of Service in CenturyLink's NG9-1-1 solution network is performed through packet marking with Differentiated Services Code Point (DSCP) on ingress to the ESInet switch ports. In some cases, the voice equipment manages its own marking, and the router/switch honors these QoS settings. In others, the router/switch will override the DSCP marking with a more appropriate setting. The audio stream Real Time Protocol (RTP) is marked with "Expedited Forwarding", the highest class of service available, so that it is treated like real-time media (e.g., voice). This is typically mapped to a priority queue. Signaling packets (SIP or Media Gateway Control Protocol [MGCP]) are placed in another queue, which will typically have a small but firmly reserved portion of bandwidth. CenturyLink will configure all routing devices and switches to honor DSCP markers and not modify them or reclassify them to other priority queues. If a DSCP marker is destined to a P2 queue, the marker will be preserved and placed into the P2 queue without the devices overriding marker or placing into a P1 queue based on the traffic type.				

Any additional documentation can be inserted here:

ESI 8	**Emergency Services IP Network (ESInet)** **ESInet Properties** The proposed ESInet shall be private, robust, scalable, secure, diverse, redundant, sustainable, and self-healing. Bidder shall propose a network solution for all host sites listed in Attachment A - PSAP Host End-Point Locations and any future identified regions throughout the term of the contract. Describe how the proposed system meets each of these individual requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Any additional documentation can be inserted here:

Bidder Response:

Private- CenturyLink's NG9-1-1 solution network uses a private, high-speed, MPLS IP backbone, not the public Internet, for transmission.

Robust - CenturyLink's NG9-1-1 solution provides automatic rerouting and failover to an alternate routes, supporting '99.999' service availability. CenturyLink's NG9-1-1 solution IP routing protocol implementation robustly manages failure scenarios and provides re-routing capability to mitigate network instability. The solution is deployed over IP-based layer 3 VPN (L3VPN) services that provide connectivity between all sites; LNGs, Core call processing sites, and PSAPs. This provides a scalable point-to-multipoint WAN configuration that can easily and quickly provision new endpoints. Any endpoint attached to a given IP VPN instance can be configured to reach any other endpoint due to the use of dynamic routing protocols that allow precise policy control over routing updates.

Scalable - CenturyLink's NG9-1-1 solution provides a fully compliant, scalable environment in the existing LNG and ESInet core infrastructure. Currently the LNGs operate with redundancy at each location and are configured at 20-40mb on 100mb Ethernet circuits or 40mb on 45mb DS-3 based circuits. Future configurations will include GIGE interfaces. Therefore, the bandwidth is expandable in a short timeframe with no need for a forklift upgrade.

Secure - The MPLS VPN tunnels offer a stateful connection across the MPLS cores, so that both ends can quickly identify black holes or other network impairment. In addition, the tunnels are encrypted for security reasons, with AES 256-based IPSEC tunnel protection. Each router at a remote site has two tunnels built from that router over its attached MPLS network to the mGRE hub interfaces at each of CenturyLink's NG9-1-1 solution core site.

Diverse- CenturyLink's NG9-1-1 solution is designed with diverse entrances into each core call processing facility and each aggregation site (e.g., data centers). The solution uses MPLS networking between sites and avoids commonality of physical or virtual networks utilizing alternate POPs in all designs.

Redundant - CenturyLink's NG9-1-1 solution is built on the basic principle of "no single point of failure." CenturyLink utilizes a fully redundant, multi-path, multi-protocol network linking all CenturyLink NG9-1-1/E9-1-1 network elements and PSAPs. Within each redundant node, there are redundant network elements. CenturyLink facilities and nodes are equipped with physically redundant data communications and power equipment such that any component can be maintained without overall service impact. Failover within the system occurs automatically with no manual intervention. During the system failover, alarms are generated for technical resources to identify the issue and resolve. If necessary, an incident will be declared and external notification steps will be followed to make the PSAP aware of the impact and resolution steps.


Sustainable - CenturyLink utilizes best practices and adheres to industry standards for installation of all equipment and cabling. Installation procedures are comprised of best practices typically used in the installation of information technology networks. This includes, but is not limited to:

- Dedicated, dual commercial power feeds for all of our data center facilities.

- Redundant backup generators at our data centers.
- Redundant uninterruptible power supplies (UPS) connected to a common distribution and isolation bus. Each data center has its own battery bank with sufficient capacity to sustain the critical bus for 20 minutes at full load and for periods in excess of eight hours without the addition of power from utility or generator sources. We equip UPS systems with static bypass switches, which allow them to switch between power sources, in case of emergency or scheduled maintenance, without power interruption. The maintenance and static bypasses receive power feeds from alternate distribution buses (separate switchgear). This measure ensures that the same distribution bus does not feed both a UPS system that is being tested and the bypassed critical load. Electricity backup capabilities at data center facilities are essentially unlimited.
- Redundant HVAC
- Fire suppression system used at the Data Centers is built around the VESDA early detection system - a state-of-the art "sniffer" system that detects smoke.
- CenturyLink restricts and monitors physical access to its Data Centers via numerous security measures. We further control access via thorough ingress and egress sign-in procedures, managed key and access card plans, hand bio scanners and mantraps, various managed access permissions and access request methods, and controlled access and egress doors. In addition, we use closed-circuit TV (CCTV) cameras to monitor access, egress, and infrastructure.
- CenturyLink separates communication service provider entry points
- All interface connections and visible cables are standard EIA connectors.
- Any cables used are plenum rated where required by local building or fire codes.
- All devices proposed for the system are provided with any and all necessary connecting cords and cables conforming to National Electrical Manufacturers Association (NEMA) codes.
- Minimum standards used in the installations include, but are not limited to, the following:
  - ANSI/TIA/EIA-568 - Commercial Building Telecommunications Wiring Standard
  - ANSI/TIA/EIA-569 - Commercial Building Standard for Telecommunications Pathways and s
  - ANSI/TIA/EIA-606 - Administration Standard for the Telecommunications Infrastructure of Commercial Buildings
  - ANSI/TIA/EIA-607 - Commercial Building Grounding and Bonding Requirements for Telecommunications
  - Building Industry Consulting Service International, Telecommunications Distribution Methods Manual
  - National Electrical Code (NFPA-70)
  - FCC Rules and Regulations, Parts 68 and 15
  - ANSI/BICSI 002-2011 – Data Center Design and Implementation Best Practices
  - ANSI/TIA-942-2005 – Telecommunications Infrastructure Standard for Data Centers

	• Cabling, communications outlets, power wiring, system grounding, conduit facilities, and equipment rooms are installed in accordance with national standards and applicable local codes. • All devices proposed for the system are provided with any and all necessary connecting cords and cables conforming to National Electrical Manufacturers Association (NEMA) codes. • CenturyLink requires dedicated A&B 20amp 120v circuits. Included are NEMA L5-20R (twists lock) for any power cable connection beyond the enclosure/rack. • CenturyLink requires dedicated power be supported by facility-based UPS and generator backup. • All cables are clearly marked and/or numbered in a manner that reflects a unique identifier of the cable at both ends. • Any change to structured cabling, port assignment, or device name change requires new labels and updated drawings with version control as our standard practice. As-built drawings and photos are part of the installation package. Best practices always require separation of Cat 5/6 Ethernet to the fullest extent possible. Fiber is also separated to the fullest extent possible. When this is not possible, protective sleeves are used to protect fiber mixed in the cable pathway. On overhead ladder racks, separation is performed using tiered ladder rack when available. Any change to structured cabling, port assignment, or device name change requires new labels and updated drawings with version control as our standard practice. As-built drawings and photos are part of the installation package. Aggregation Sites with the Legacy Network Gateway and other equipment that handles and converts inbound calls to IP are located in a designated and secured caged room. **Self-healing** - CenturyLink's NG9-1-1 solution is self-healing as every PSAP has connectivity to the geographically diverse NGCS core sites and diverse aggregation centers. Network connectivity is provided by CenturyLink MPLS network and is guaranteed to be diverse and redundant. CenturyLink's NGCS Solution deploys on scalable ethernet local access connectivity using bandwidth-flexible infrastructure wherever possible. To accomplish this, we seek to provision connections on fiber facilities wherever possible. Host - PSAPS in the proposed solution will be served on 100Mbps connections and these would be provisioned on upgradeable facilities, allowing for significant future bandwidth growth without changing or adding facilities. These circuits are provisioned in an active-active circuit configuration meaning that under normal circumstances the full provisioned capacity of both circuits is available to handle calls, in contrast to failover type arrangements which only permit use of one circuit's capacity at any given time. Connections to the PSAP are sized up to accommodate necessary bandwidth based on a concurrent G.711 SIP session (Call path). Each circuit is engineered to handle 100% of the call demand in the case of a failure of the primary or secondary circuit.

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

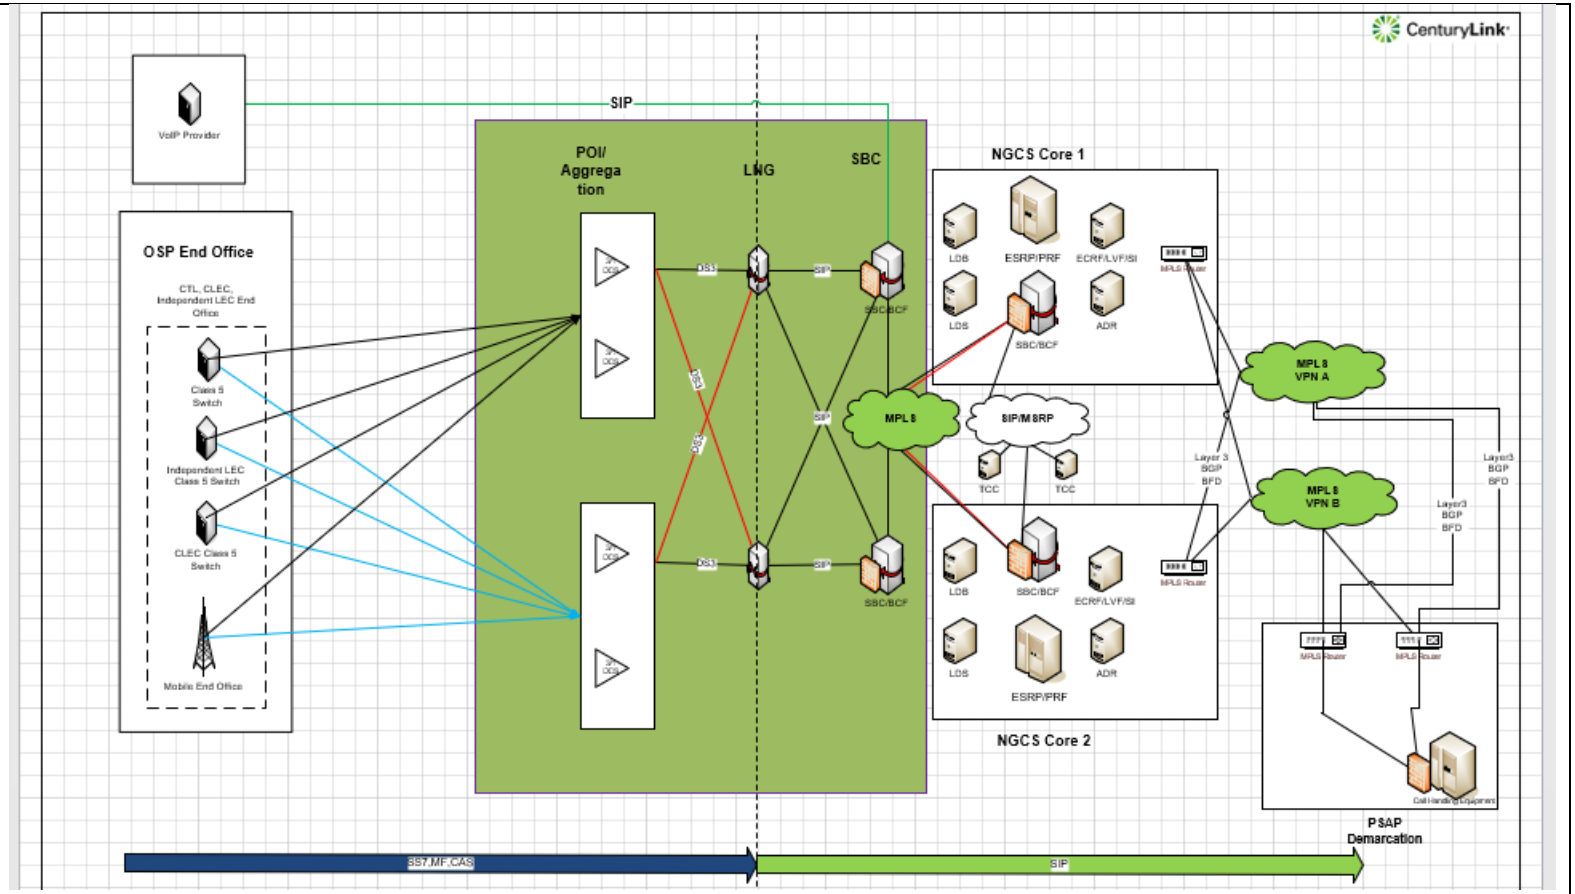


ESI 8 - ESInet Properties Diagrams

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

	Emergency Services IP Network (ESInet) **Special Construction** Bidder is responsible for any fees incurred through system commissioning, construction permits, make-ready costs, and other subcontracted activity. **Use of Existing Network Assets** There is already a microwave network in place that may be used as a backup network, as well as other local and state-owned network assets that may be suitable for inclusion in the ESInet. The final network design may make use of any of these facilities that are determined by the bidder to be suitable for inclusion in the ESInet. The bidder may support the router configuration necessary to make use of these facilities. **Network Design Documentation** Provide a network or solution diagram that clearly depicts the bidder's proposed transitional and end-state designs for the ESInet.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
ESI 9	Bidder Response: To meet diversity best practices, two diverse fiber connections are included in our design at each Host/PSAP site supported by two (2) separate edge Routers and two (2) separate IP instances. Our last mile MPLS 100M fiber design includes dual entrances (east/west), includes dual path circuits to all required Host/PSAP facilities identified in this RFP response, and traffic carried over diverse carrier networks. All Special construction charges have been identified and are included in our solution. Each Host/PSAP site will require a site survey which will be performed by CenturyLink engineers and required Nebraska stakeholders. This task will be scheduled by our Program Manager and will be included in our final Project Development Plant (PDPD). **Use of Existing Network Assets** CenturyLink's design is capable of supporting additional third-party networks such as state microwave. CenturyLink supports the use of additional redundancy and diversity the State may have to offer. Evaluations will need to be completed to determine the dependability of the network (public safety grade), demarc locations, delegation of responsibilities, and maintenance/escalation procedures. CenturyLink looks forward to understanding any/all possibilities of making the Nebraska ESInet a more available and reliable infrastructure.				

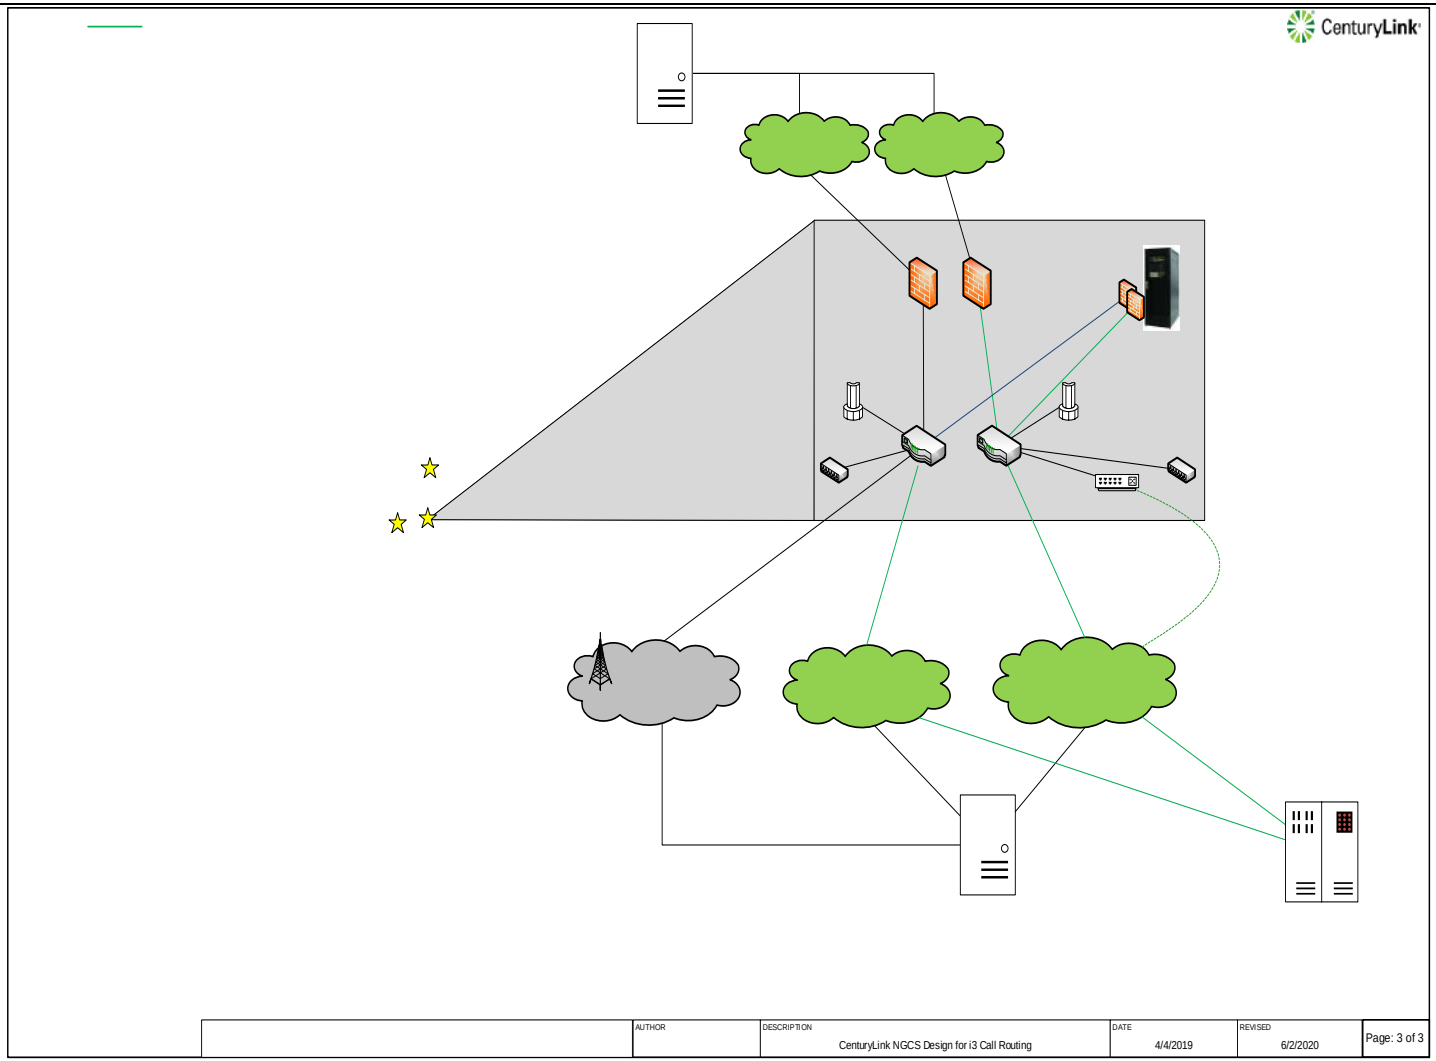


ESI 9 – Dual Entrance and use of 3rd Party networks


ESI 10	**Emergency Services IP Network (ESInet)** **Provide Network to Network Interface with Other IP Networks** Contractor shall provide an ESInet solution capable of interfacing with neighboring state and regional NG911 IP networks as they are established, and capable of transferring voice and data between PSAPs. Describe how the solution will meet these requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: **Please see this response filed with the PROPRIETARY INFORMATION**				

Any additional documentation can be inserted here:

ESI 11	**Emergency Services IP Network (ESInet)** **Provide Network to Network Interface with Other IP Networks** **Connecting to Other IP Networks** At such time as neighboring ESInets and NGCS systems are able to interconnect and exchange traffic, Contractor shall establish such connections and provide routing and security to allow traffic to be exchanged with neighboring ESInets and NGCS systems, regardless of the respective vendors of those systems. Describe how the solution meets or exceeds the above requirement.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution is a complete, end-to-end managed and hosted NG 9-1-1 solution that provides an i3 ESInet that is fully interoperable with neighboring non-CenturyLink ESInets as well as with legacy networks. CenturyLink's NG9-1-1 solution provides interconnection to a variety of networks and physical locations. These include, as required, all 9-1-1 calls originating in the State of Nebraska, any/all data centers serving 9-1-1 traffic, any bordering legacy networks, or any bordering regional, state, or national ESInets using IP interconnection, assuming that ESInet follows all NENA i3 standards. The proposed solution delivers the highest functionality, reliability and survivability. End-to-end, the CenturyLink solution is architected to be secure, reliable, resilient, and robust. All applications and network in the 9-1-1 call path are designed to achieve 99.999% system availability using a number of techniques to improve resiliency such as geo-diverse redundancy, fail-over techniques, virtualization, high availability, etc. CenturyLink's NG9-1-1 solution includes the design, development, installation, testing, interconnection, monitoring, maintenance, and operation of all ESInet components required to operate or support the operation of a Statewide Nebraska system. Each of these items will be documented including the following. • Maintenance and repair of those elements of the ESInet and interconnections owned, operated, installed or controlled as part of the solution will be provided by CenturyLink • Completion of as built drawings, sketches and/or other schematic materials related to the ESInet CenturyLink's NGCS Solution supports interconnection with Systems Service Providers (SSPs) in adjacent states as well as interconnection with State networks. The CenturyLink solution supports interconnection to both legacy TDM emergency networks, i2 networks, and next generation i3 ESInets. CenturyLink's NG9-1-1 Solution ESInet was designed to fully integrate with other neighboring networks such as the State of Nebraska network and NENA-compliant interfaces. Regardless if traffic is originating from another ESRP on a neighboring ESInet and destined for the ESRP on the NE ESInet or is from an application to application such as CAD, the interconnection to those ESInets would not change. All traffic will need to enter the NE ESInet through the interconnection BCF. How that traffic is treated once it hits the NE ESInet depends on the application type and the security rules configured for such application traffic.				

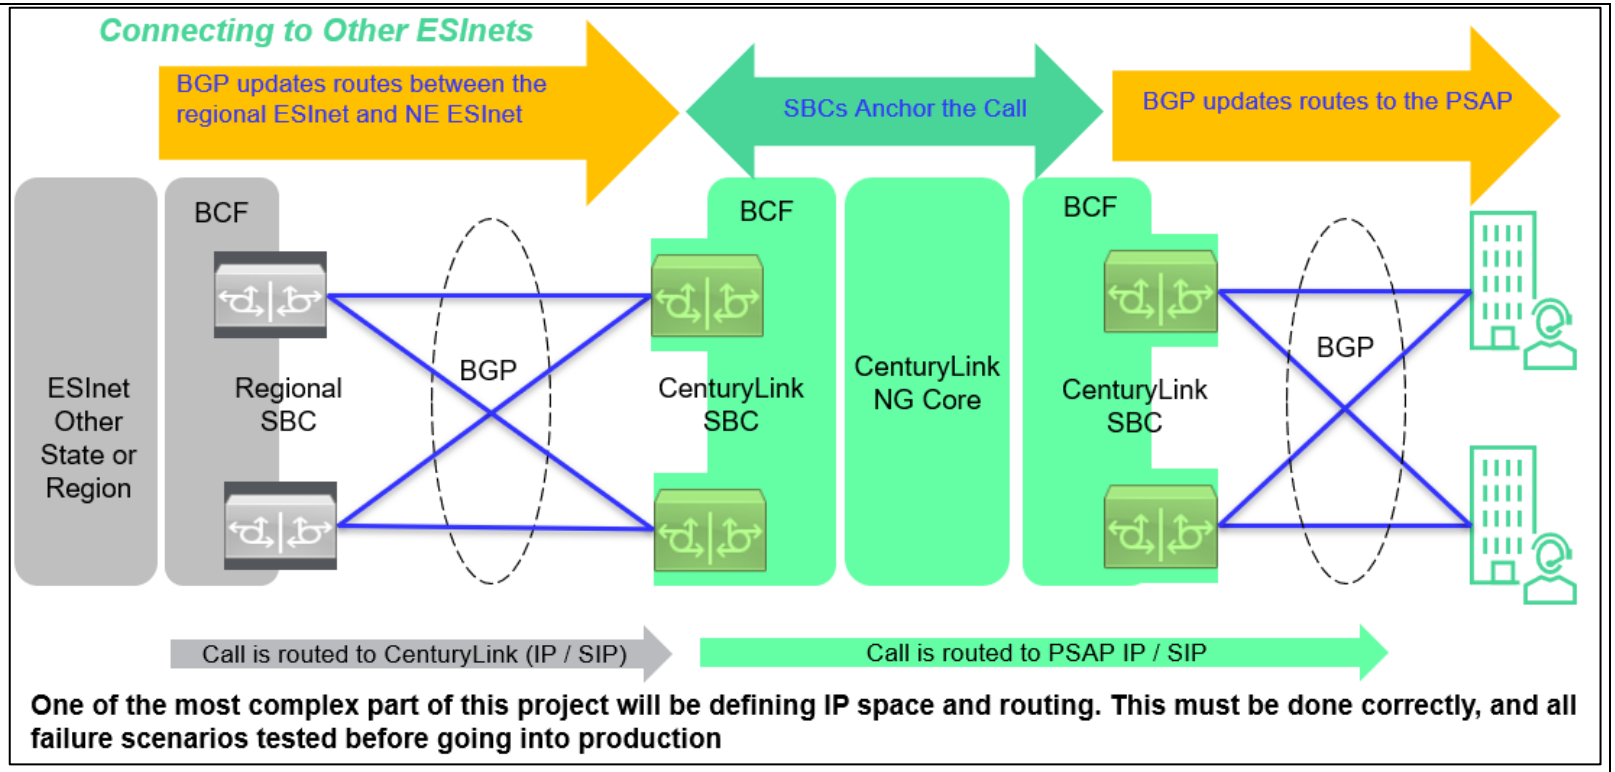


ESI 11 – 911 Call between NGCS

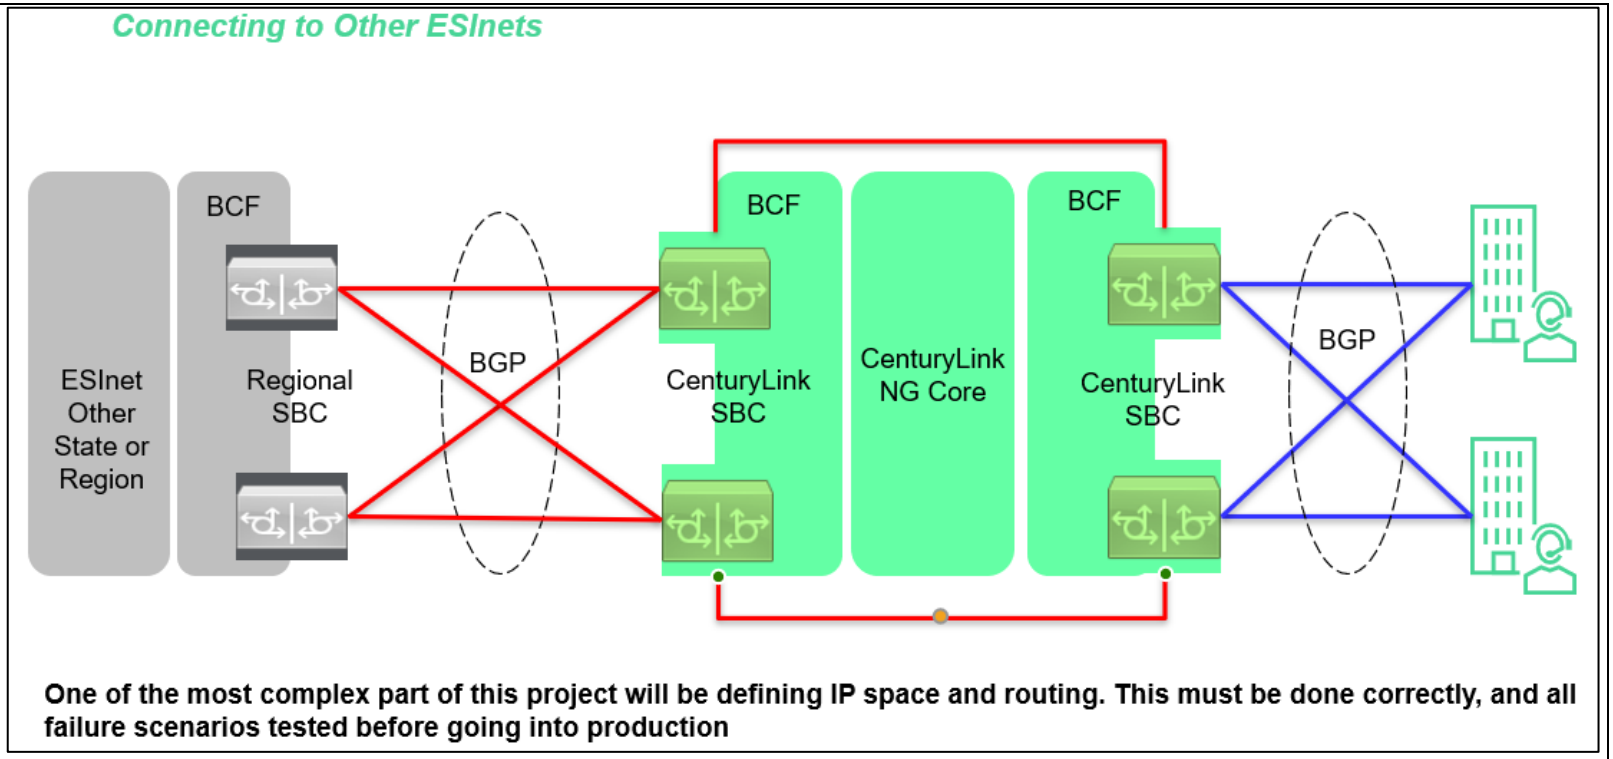

ESI 11 – Other Application Traffic

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

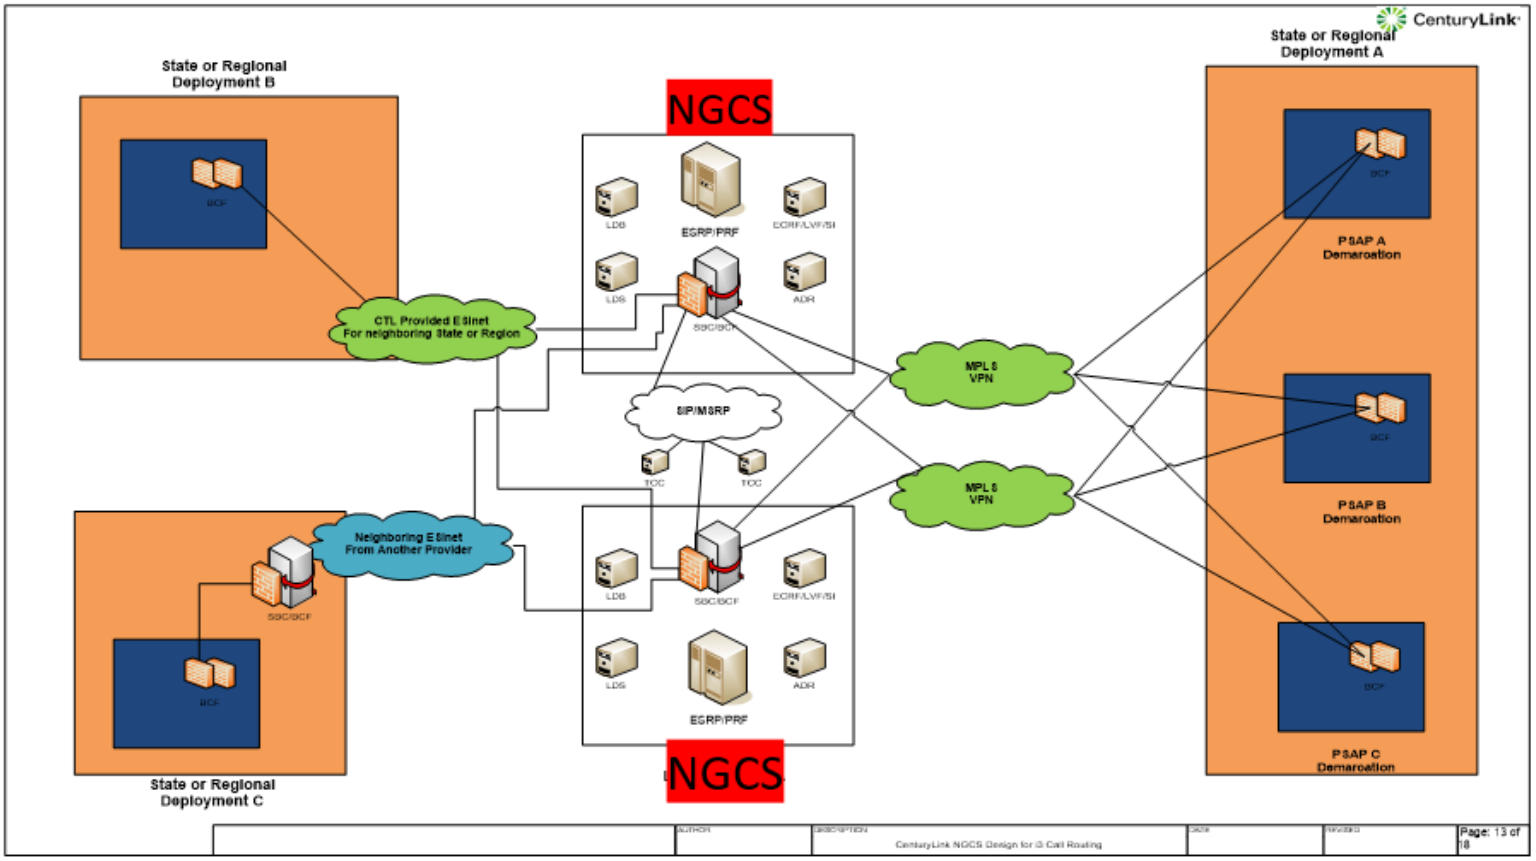


ESI 11 State and other Network to Network with Other IP Networks drawing

Any additional documentation can be inserted here:

NGCS 1	**Next Generation Core Services Elements (NGCS)** Provide a network or solution diagram that clearly depicts the bidder's proposed transitional and end state for the Commission's ESInet and NGCS, considering the hosts and PSAPs listed in Attachment A - PSAP Host End-Point Locations. The following functional elements and services be included: a. Originating Service Provider (OSP) Connectivity b. Legacy Network Gateway (LNG) c. Border Control Function (BCF) d. Emergency Services Routing Proxy (ESRP) e. Policy Routing Function (PRF) f. Emergency Call Routing Function (ECRF) g. Location Validation Function (LVF) h. Spatial Interface (SI) i. Location Database (LDB) j. Discrepancy Reporting; k. Logging and Recording l. Time Server m. Alarm Integration n Message Session Relay Protocol (MSRP) **Originating Service Provider (OSP) Connectivity** **Due Authorization** Bidder shall possess a certificate of public necessity to operate as a telecommunications provider in the state of Nebraska. The Contractor shall provide a copy of current certificate of public necessity prior to award of contract. **Identification of Service Providers Connected to the Legacy Selective Router** Contractor shall be responsible for identifying and for connecting all wireline, wireless, Voice over IP (VoIP), telematics, and other third-party service providers currently connected to the existing legacy selective router. Contractor shall be responsible for updating this information quarterly for the term of the contract. Bidder shall identify each service provider that will be utilized by Contractor.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution provides an end-to-end network i3-capable 9-1-1 service, based on an IP infrastructure. Our Legacy Network Gateway consists of three elements: PIF, LIF and NIF. The PIF converts analog or TDM trunks to SIP and with our NIF and LIF, is provided as an element of our i3-Routing Solution. Gateways supported by the CenturyLink's NG9-1-1 solution are vendor agnostic. The LNG functions can support TDM traffic from OSPs, preferably SS7 but support MF and CAS signaling. Our LNG complies with the requirements of the i3 Standard, Section 7.1 (NENA-STA-010.2) and the RFCs				

	cited therein (RFC 4904, RFC 3261, RFC 2392, RFC 2833, RFC 4244, RFC 3326, RFC 3515 and RFC 2616).2 It also satisfies a new section 7.1.1.3 in NENA-STA-010.2, titled "Early Media" that requires an LNG to provide Early Media (referencing RFC 3960) to downstream elements whenever it is possible to do so. Additional Data dereference requests are also handled. Our LNG satisfies the requirements to provide a revised Internal Interface to the NIF Component Section (7.1.1.3 of STA010.2) and to provision the PIF component of the LNG to (1) Use standard interworking procedures as defined in ATIS-1000679.2015 (revised from ATIS T1.679-2004); and (2) Include in the SIP INVITE, an SDP offer that includes the G.711 codec. To support incoming TTY calls, the SDP offer will describe a media format associated with real time text as described in RFC 4103. Transcoding of TTY to real time text per RFC 5194 is provided as part of our i3-Routing Solution.

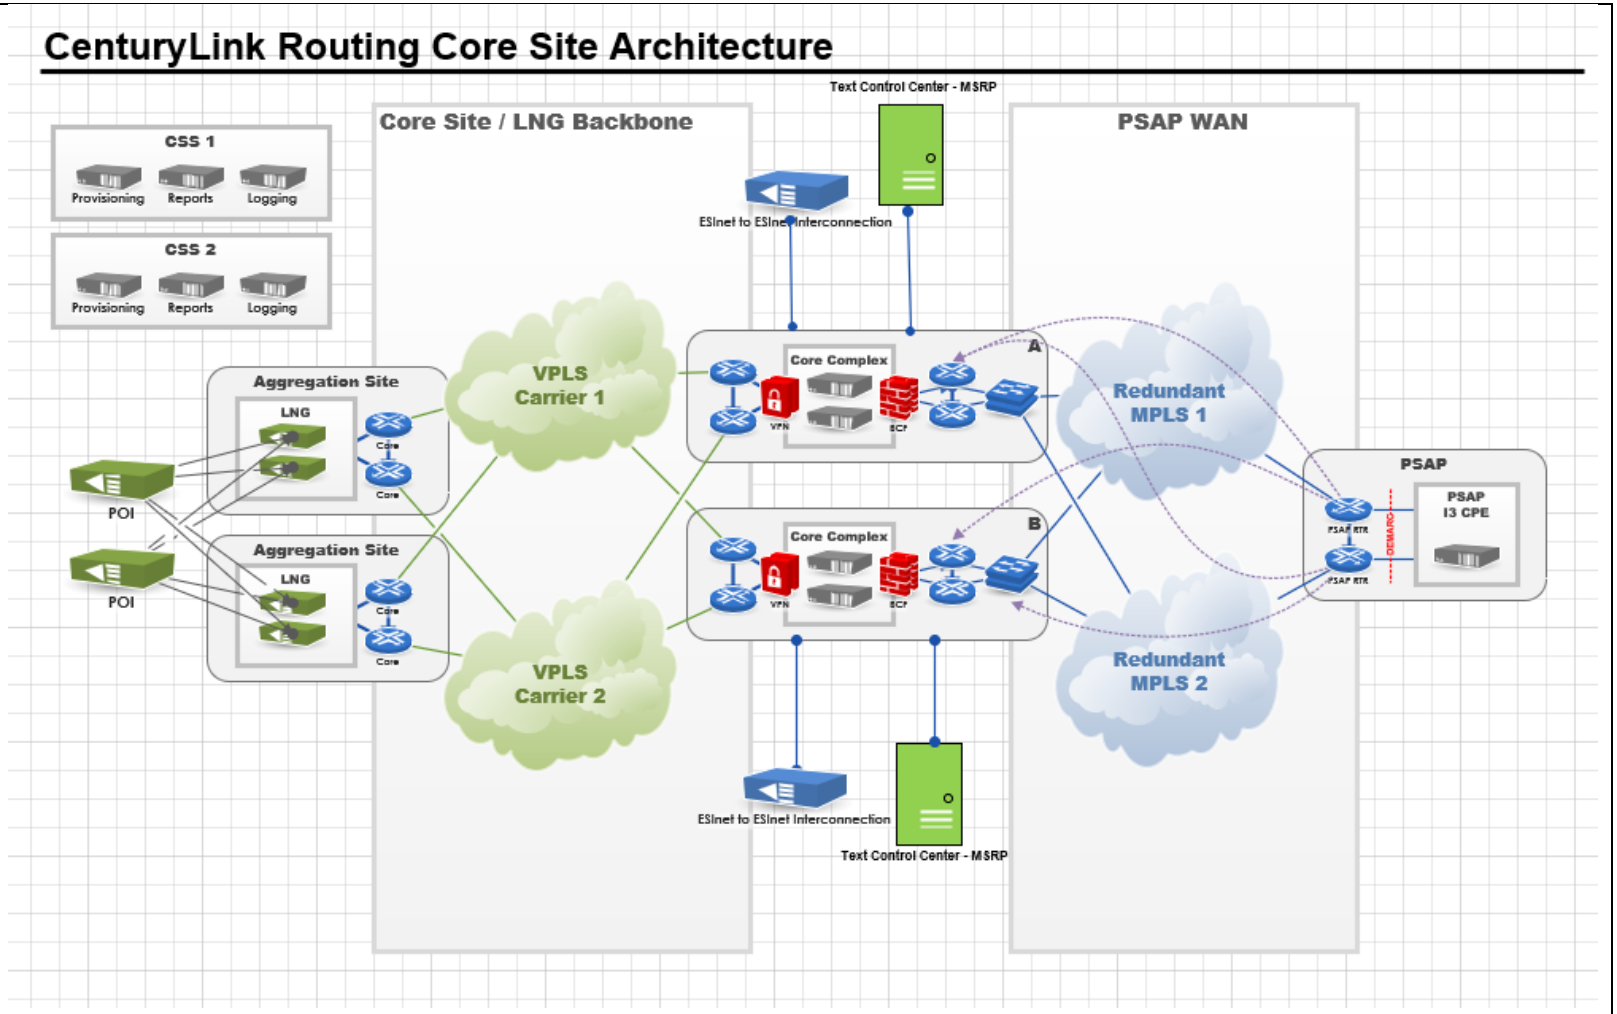

NGCS 1 NG9-1-1 Final End to End Drawing

a. **Originating Service Provider (OSP) Connectivity**: CenturyLink will negotiate interconnection agreements and trunking arrangements with all service providers. CenturyLink will provide OSP's providers with a minimum of two (2) strategically and geographically diverse POIs

(points of interconnect) for carriers that can send voice and data traffic via next generation protocols. CenturyLink will work with each OSP's to find the best way to connect and to help OSPs minimize the cost incurred to establish new circuits. If needed POI's can be extended into the LATA or long-haul transport can be arranged. Trunking configurations and signaling will be depended on the OSP's capabilities and will need to be coordinated, CenturyLink prefers to accept SIP or SS7, but can support other TDM deliveries such as MF and CAS. CenturyLink Core Sites interoperate with OSP aggregation sites to receive ingress TDM traffic at POI locations that will be diversely located and trunked to CenturyLink Legacy Network Gateway function.

CenturyLink will:

- Work with OSP's, PSAP's and State of Nebraska to develop a joint communication plan to each OSP outlining the scope of services to be implemented, a high-level implementation schedule, and key contact information for each entity.
- Facilitate the establishment of OSP communication guidelines and adhere to these guidelines for the project implementation and service duration. CenturyLink establishes expectations with each OSP and manages communication to the OSP for items related to the proposed services on behalf of the State of Nebraska.
- Provide transition planning and migration support to the OSP's through our assigned Project management team.

Aggregation Plan for Wireless Carriers:

In the case of an OSP connecting to the CenturyLink NGCS infrastructure, the OSP is responsible for connecting to the CenturyLink aggregation points designated to that carrier via TDM (SS7 preferred, MF and CAS) and for SIP connectivity to Session Border Controllers for secure diverse IP connectivity. CenturyLink will have assigned personnel to coordinate with each carrier to provide key dates and timelines necessary for the transition of traffic. In the CenturyLink Solution, the aggregation services and POI will be common facilities in most locations and become OSP point of demarcation.

CenturyLink takes responsibility for facilitating the establishment of OSP communication guidelines and adhering to these guidelines for the project implementation and service duration. CenturyLink will establish expectations with each OSP and manages communication to the OSP for items related to the proposed services. CenturyLink will escalate to the appropriate 9-1-1 groups regarding TSP initiatives and will request Customer intervention when necessary.

OSPs will connect to CenturyLink POIs using DS1 (T1) or higher transport facilities. OSPs will establish SS7, MF or CAS ES trunks (SS7 preferred) from OSP end offices to each of CenturyLink's diverse POIs. This is required to meet NENA 9-1-1 diversity rules "traffic will not ride on the same controller or shelf to maintain this diversity." SS7 point codes will be established for each trunk group the OSP connects to CenturyLink POIs.

Interoperability testing will be done between CenturyLink and each OSP that wishes to connect via IP. SIP Connectivity into CenturyLink's network will be through a BCF function(s) with termination on CenturyLink Core Session Boarder Controllers for delivery to our NGCS.

- For this type of delivery, TDM / SS7 will not be involved and only IP / SIP will be used
- OSPs will have the ability to send PIDF-LO location data with the call when OSPs support this.

OSP Aggregation Service with Wireless Service Providers:

Wireless Service Providers (WSP) can connect to CenturyLink's NGCS several ways:

1. Through a CenturyLink aggregation point utilizing TDM

2. Through a CenturyLink aggregation point utilizing IP / SIP
3. CenturyLink will soon be able to provide a SIP-to-SIP connectivity into CenturyLink's NGCS

b. Legacy Network Gateway (LNG) Our Legacy Network Gateway consists of three elements: PIF, LIF and NIF. The PIF converts analog or TDM trunks to SIP and with our NIF and LIF, is provided as an element of our i3-Interconnect. Gateways supported by CenturyLink's NG9-1-1 solution are vendor agnostic. The LNG functions can support TDM traffic from OSPs, preferably SS7 but support MF and CAS signaling. LPG provided at the PSAP emulates CAMA delivery or supports CAS T1 and deliver serial ALI for the call handling equipment (CHE) at the PSAP to meet non i3 PSAP requirements. Our LNG complies with the requirements of the i3 Standard, Section 7.1 (NENA-STA-010.2) and the RFCs cited therein (RFC 4904, RFC 3261, RFC 2392, RFC 2833, RFC 4244, RFC 3326, RFC 3515 and RFC 2616).2 It also satisfies a new section 7.1.1.3 in NENA-STA-010.2, titled "Early Media" that requires an LNG to provide Early Media (referencing RFC 3960) to downstream elements whenever it is possible to do so.

Additional Data reference requests are also handled. Our LNG satisfies the requirements to provide a revised Internal Interface to the NIF Component Section (7.1.1.3 of STA010.2) and to provision the PIF component of the LNG to

(1) Use standard interworking procedures as defined in ATIS-1000679.2015 (revised from ATIS T1.679-2004); and

(2) Include in the SIP INVITE, an SDP offer that includes the G.711 codec. To support incoming TTY calls, the SDP offer will describe a media format associated with real time text as described in RFC 4103. Transcoding of TTY to real time text per RFC 5194 is provided as part of our i3-Interconnect service.

c. **Border Control Function (BCF):** The Border Control Function/Session Border Controller (BCF/SBC) that we employ is the foundation of our security solution for call flow protection. It integrates fully with all other NGCS. Threats are detected by monitoring the NENA-defined Security Posture as well as predetermined threat profiles. Log events are created which include:

(1) Normal operation; or the presence of suspicious activity that does not impact normal operations.

(2) The presence of fraudulent calls and events that are stressing a facility's ability to continue most operations; and

(3) System under active attack and overwhelmed. These will be configured to accomplish such goals as elevated trust of call flows and aggregation infrastructure.

This BCF provides both application and network layer protection and scanning. It will also mitigate lower layer protocol attacks and provide denial of service (DoS) and distributed denial of service (DDoS) detection and protection. The firewall component of the Oracle/Acme Packet BCF/SBC will inspect all traffic transiting the network edge. In accordance with NENA-STA-010.2, the BCF/SBC will ensure any connection involving a call origination sources, gateways, and similar elements outside the ESInet are properly screened.

a. Ensure the BCF supports an automated interface that allows a downstream element to mark the source of a call as a "bad actor". This would normally occur when a call is received that appears to be part of a deliberate attack on the system.

b. Ensure the BCF installs a "NENA-source" parameter in the Via header that in the outgoing INVITE message associated with every call. Calls are marked by the SBC in a way that allows a recipient to identify the BCF that processed the call.

c. The SBF/BCF functions are agnostic meaning the Nebraska i3 network will be able to connect to other providers' NGCS cores as long as those providers are i3 compliant.

d. **Emergency Services Routing Proxy (ESRP):** Our ESRP is the most robust element of its kind available on the market and scales to well over 200 call setups per second which equates to over 720,000 busy hour call attempts (BHCA). With software developed in collaboration between Synergem and Oracle; security, Quality of Service (QoS), and interoperability are "baked in" to the functional element. After the

BCF security check, our ESRP provides routing based on the caller's location. It extracts the location of the caller from SIP signaling, queries the Emergency Call Routing Function (ECRF) for the nominal next hop route, and evaluates the route policy of that entity using its Policy Routing Function (PRF) to determine the actual next hop the call takes.

When calls arrive at one of the NGCS instances, the first step is an evaluation of the incoming call to determine if location information is already available in the SIP headers. If location is already known, then the call proceeds to ESRP processing. If the location is not known, then the calling number is used to transmit a HELD query to the LDB. The LDB responds with location information by reference or by value, and this info is then added to the headers for the call and it proceeds to the ESRP.

Once the call with location information enters the ESRP, that element determines whether the location provided is by value or by reference. If by reference, a dereference request is sent in order to obtain the current actual location for the call. Then, the next step is for the ESRP to submit a LoST query to the ECRF using the a fore mentioned location and service type SOS. The ECRF replies with a URI. The ESRP then uses the returned URI to process the call via the PRF.

In the PRF, the candidate destination URI returned by the ECRF is used along with other known data points (other header information, current time and date, etc.) to query against the currently active policy routing rule set. If this query returns any results, then the substitute URI provided in the policy rule is used as the definitive destination URI for the call. Otherwise, the candidate URI becomes definitive. The security protocol described in our replies to NGCS-75 and NGCS-210 protects the ECRF from attack.

e. **Policy Routing Function (PRF):** Our ESRP-supported PRF is the principal policy control tool with standardized methods to define/build and control Policy Rules. determines potential emergency call routes. Other rules the PRF can apply govern call termination and can include a route decision based on knowledge that a downstream ESRP is busy (call queue full) or that a PSAP is offline. Rules also may be used to "permit" or "deny" network access. With software developed in collaboration between Synergem and Oracle; security, Quality of Service (QoS), and interoperability are "baked in" to the functional element. Our ESRP provides final routing to a PSAP based on the caller's location. It extracts the location of the caller from SIP signaling, queries the Emergency Call Routing Function (ECRF) for the nominal next hop route, and evaluates the route policy of that entity using its Policy Routing Function (PRF) to determine the actual next hop. In the PRF, the candidate destination URI returned by the ECRF is used along with other known data points (other header information, current time and date, etc.) to query against the currently active policy routing rule set. If this query returns any results, then the substitute URI provided in the policy rule is used as the definitive destination URI for the call. Otherwise, the candidate URI becomes definitive

f. **Emergency Call Routing Function (ECRF):** CenturyLink's NGCS Solution Emergency Call Routing Function (ECRF) and Location Validation Function (LVF) complies with all NENA and IETF standards and provides full migration into i3 without costly technology acquisition and process overhaul. Key aspects include:

- Allows data analysts to correlate street and community names from three data sources (Postal, MSAG, and GIS). • Allows authorized service providers to validate locations and route calls using real time data.
- Integration with the LDB, MSAG Conversion Service, and Spatial Interface.
- Identifies common error discrepancies between MSAG, GIS, and Postal.
- Extensive online help. • Extensive security mechanisms allow access and updating tailored to most organizations' GIS data or operations.
- Links to online mapping resources.

- Web-based user interface for ease of data management.
- Extensive reporting capabilities.
- Allows establishment of translations.

g. **Location Validation Function (LVF):** The CenturyLink NGCS Solution ECRF contains a LoST server that validates location information against the system's database. This LVF is part of the NGCS suite provided in this service that will enable geospatial routing for call delivery to the correct PSAP boundary/jurisdiction. Both the ECRF and the LVF are compliant with applicable NENA and IETF standards. Key capabilities include:

- Data analysts can correlate street and community names from three data sources (Postal, MSAG, and GIS).
- OSPs can validate locations and route calls using real time data.
- Common error discrepancies between MSAG, GIS, and Postal are automatically identified.
- Extensive online help is available.
- Extensive security mechanisms allow access and updating tailored to most organizations' data operations.
- Links to online mapping resources are provided.
- Web-based user interface for ease of data management is available.
- ALI/Location Database (LDB) is fully integrated.
- Extensive reporting capabilities area available including 17 reports – all of which can be exported to Excel, PDF, etc. A Tracking agency and individual progress in data preparation. Translations can be established including County (e.g., "007" = "Boone County"), Community (e.g., "North Boone" = "Beaverton") and Street (e.g., "SH 76" = "Fairground Rd." = "State Line Rd.")

h. **Spatial Interface (SI)** is at the heart of the GIS to ECRF/LVF integration. This function supports the periodic loading of GIS data from external systems.

GIS data can be uploaded via an intuitive web interface enabling authorized users to provision the SI with geospatial data in ESRI shapefile or file geodatabase formats, verify that the data is in the expected schema, and initiate the load process into the SI. Alternatively, automated routines can be set up to populate the SI without having to upload via the web interface.

The load into the SI system does not do a complete overwrite; rather, it performs a change detection operation. As a result, an historical record of data changes can be maintained by the system, and detailed results of any load errors are provided. This process, either with the web interface or using automated routines, can be run as frequently as needed, although daily is recommended.

Once the data load is complete, the system performs numerous quality control checks on the data. The resulting QC errors can be viewed directly using any software capable of consuming ESRI-based web services. This will allow the viewing of any map data discrepancies in real-time.

Following the QC process, if the number and severity of any errors are within configurable limits, the system will automatically publish updated data to the master ECRF/LVF database. This database acts as a replication master, pushing all changes to child databases that are used for ECRF/LVF functionality. All replication distributions run on the master database to minimize the load on the databases that are being actively used for LoST

query processing. Server replication occurs in near-real-time. The SI also provides reporting, allowing real-time access into the state of the datasets used by the ECRF/LVF.

Additional publishing routines can be set-up for other applications that may need GIS data. This allows administrators to create publishing tasks that export copies of the data into a format that is required by third-party applications. For example, CPE may require a certain data extract that is different from what CAD requires.

i. **Location Database (LDB):** A NENA compliant Location Database (LDB) that serves as both a legacy ALI database and as a LIS in an i3 NG9-1-1 environment will be provided. The LDB retains the current information, functionality, and interfaces of today's ALI, but also can utilize the new protocols required in an NG9-1-1 deployment. The LDB supports the protocols for legacy ALI query and ALI query service, the protocols required to obtain information for wireless calls by querying the mobile positioning center (MPC) or gateway mobile location center (GMLC), and the protocols required for i3 location information retrieval and conveyance, such as HTTP-Enabled Location Delivery (HELD) or other proprietary protocols.

To successfully replace a legacy ALI system with an LDB, a mechanism must be provided to the Service providers to update the location information in the LDB. During the transition to i3, and to aid 9-1-1 authorities gaining cooperation from the Service providers, the LDB system includes a Service Order Input (SOI) processing function that matches existing SOI processing. This means that the Service providers do not have to change current processes to support the i3 system. Our solution provides a translation mechanism called the MSAG Conversion Service (MCS) to convert SOI records into the appropriate CLDXF format for comparison against the LVF).

The LDB provides both legacy and NG9-1-1 location interfaces. To support NG9-1-1 capable PSAP's a HELD interface is provided. To support legacy PSAPs, a legacy ALI interface is provided, and location data within the LDB is converted into legacy formats using the MSAG Conversion Service (MCS).

The HELD interface can support hundreds of queries per second. The legacy ALI interface requires the legacy CPE to maintain one or more TCP/IP connections. Each CPE instance must initiate and maintain the connection to the LDB legacy ALI interface. Each individual TCP/IP connection can handle one legacy ALI query at a time. This is a limitation of the legacy interface, not of the LDB.

The LDB utilizes a web-based interface allowing authorized personnel access to the backend location database. From this web interface, users with the appropriate permissions can schedule reports and data extracts to be run.

Key capabilities of the LDB include:

- Support all relevant sections of NENA 02-010, 02-011, 02-015, 04-005, 08-501, and 08-502 related to ALI DBMS. Be capable of assuming the role of a location database as defined in the NENA NG9-1-1 Transition Plan Considerations (NENA INF 008.2-2013).
- Support NENA standards (such as E2, E2+, NCAS, CAS). • Be able to provide location server functionality and interfaces as defined in NENA-STA-010.2-2016. • Be able to seamlessly interact with a NENA i3 ECRF/LVF for location validation, as described in NENA-STA-010.2- 2016.
- Provide location by value or by reference, as defined in NENA-STA-010.2-2016.
- Be able to dereference requests for additional information, as defined in NENA-STA-010.2- 2016.
- Be able to interface simultaneously with multiple wireless callers.
- Be able to interface simultaneously with multiple remote MPC/VPC databases.

	• Automatically detect, import and validate customer records (SOI records). • Convert legacy MSAG style addresses using an MSAG Conversion Service (MCS) as defined in NENA-STA-010.2-2016. Civic address data stored in the LDB database must conform to all PIDFLO and CLDXF standards. • Dynamically convert MSAG style address received over E2 using the MSAG Conversion Service so these calls can be routed using the ECRF which must contain CLDXF compliant data. • Natively support all CLDXF fields for each civic address stored, including all the street name elements (PRM, PRD, STP, STPS, RD, STS, POD, POM) and ALL of the address number and sub address elements (HNP, HNO, HNS, BLD, LOC, FLR, UNIT, ROOM, SEAT). Provide Service Providers with the ability to update their location records using their existing processes (such as SOI), or a web-based user interface. • Provide a legacy MSAG for Service Providers that still require it. To ensure that records in this MSAG will be valid after MCS conversion to CLDXF and LVF validation, it must be generated from the inverse operation (i.e., taking all the CLDXF GIS road centerline records and converting them back into legacy format using the MCS). • Be able to be used simultaneously by both NG9-1-1-capable and E9-1-1-capable PSAPs. For E9-1-1 PSAPs, a legacy ALI service must be provided, with address data being "downgraded" from the LDB CLDXF compliant data into legacy MSAG style data using the MCS. NG9-1-1 PSAPs will utilize the HELD interface. • Allow different E9-1-1 PSAPs to use different ALI formats based on individual needs. • Use LVFs to validate civic addresses using CLDXF compliant PIDF-LO. • Support location data formatting as defined in the NENA CLDXF. • Periodically reevaluate the location information using LVF functions within the system. • Communicate with NG9-1-1 functional elements using the HELD protocol. • Provide a PIDF-LO based on both the wireless and VoIP E2 response. Wireless phase 2 should be represented with a circle in the PIDF-LO. • Be able to dereference additional data requests. • Consistently respond to all requests within 400ms for data that is contained within the LDB. • Provide Service Providers and GIS Users with the necessary workflows to correct civic address records that fail validation. • Record all NRF conditions and provide a workflow for Service Providers for corrections. The system should query the NPAC database to determine ownership of the NRF TN and automatically assign the error to the owning Service Provider. • Support the transition of existing PS/ALI customers to the LDB. • Web interface allowing Service Providers or other authorized users to add additional data to each record as defined in IETF RFC 7852. At a minimum, an authorized user must be able to add, edit or delete additional data blocks for a record. Supported additional data blocks must include: a Data Provider Information b. Service Information c. Device Information

d. Owner/Subscriber Information Comments

- The HELD interface must support the delivery of additional data as defined in IETF RFC 7852.
- All changes to customer records in the LDB must include a full historical change history

j. **Discrepancy Reporting:** We accomplish discrepancy reporting in accordance with applicable SLAs employing a web-based portal for notification and correction. A discrepancy workflow will be available to all users to correct errors between the service provider records and the GIS (LVF).

k. **Logging and Recording**: We support logging and recording for relevant i3 event as define in Section '5.13 Logging Service' in NENA STA 010.2 2016 or its successors.

l. **Time Server**: CenturyLink's NG9-1-1 Solution processing elements achieve time synchronization via Network Time Protocol (NTP) from redundant and geographically distributed sources within the CenturyLink's NGCS Solution domain. Time stamps are included in logs, system traces, and user reports.

m. **Alarm Integration; and**,: CenturyLink uses various different tools and Software packages are widely available for capturing, analyzing, and reporting the health of the network and NGCS functional elements based on the (Simple Network Management Protocol) SNMP traffic it receives. We set up platform-specific alarm thresholds to identify potential service impairments. CenturyLink network alarms are customer specific and generate trouble tickets that automatically opens up trouble tickets and reporting alarms to our CenturyLink, NOC/SOC and Nebraska customers. Proactive Customer Notification (PCN) gives customers with flexibility to specify certain notification parameters on a service-by-service basis.

n. **Message Session Relay Protocol (MSRP):** MSRP is the standard protocol specified for handling text in an NGCS structure and our systems are designed to support it. Because MSRP text is a native capability of CenturyLink's NG9-1-1 Solution, Policy Routing Rules in the ESRP can be based on the call type. This allows for such possibilities as routing text calls differently than voice, having different alternate routing rules for text, or making manual changes based on call type. Native MSRP delivery to capable PSAPs allows for handling of text calls with the same capabilities as voice calls. For instance, at ACD, PSAPs texts can be included in the normal voice queue, or they may be segregated into their own queue. Because text handling is not a separate service for CenturyLink's NGCS Solution reporting and logging capabilities are the same for text calls as for voice calls.

SMS/text messages received from the TCC can be delivered to any destination connected to CenturyLink's NGCS Solution.

To support incoming TTY calls, the SDP offer will describe a media format associated with real time text as described in RFC 4103. Transcoding of TTY to real time text per RFC 5194 is provided as part of our interconnect service. Other protocols such as XMPP may be supported if interworked to MSRP prior to NGCS presentation.

We comply with to NENA 08-003, NENA-STA-010.2-2016 that requires interworking real time text and TTY in our PIF component per RFC 5194, accepting DTMF signaling from the legacy PSAP and sending it to the NIF component in RTP packets, per RFC 4733, and recognizing Baudot tones in incoming media and replacing them with RFC 4103 real time text.

Tasks for provisioning SMS to 9-1-1 for PSAPs deploying the TTY method are the responsibility of the wireless provider, the TCC provider, and the PSAP or 9-1-1 Authority. CenturyLink's NGCS Solution will deliver TTY calls where the legacy 9-1-1 environment (SR/ALI DBMS) is being emulated by our solution. MSRP is the standard protocol specified for handling text in an NGCS structure. Other protocols such as XMPP may be supported if interworked to MSRP prior to NGCS presentation.

	If a text message is presented to our network in the proper configuration, it will be handled just as any other call-for-service. • CenturyLink's NG9-1-1 solution network is media agnostic and routes all inbound calls in the same way, whether voice, RTT (RTP) text (MSRP), video, or a mix of media types. Current i3 NENA standard limits direct SIP RTT delivery to MSRP according to NENA-STA-010.2-2016 Section 4.1.9. This specification notates that OSP delivery may use differing protocols (XMPP) but must be converted to MSRP for delivery into the ESInet for endpoint PSAP delivery. This function would be handled in the same fashion as any other media in the CenturyLink NGCS solution, presented with location our NGCS would apply the correct the Policy Routing Function (PRF) to enable direction of Real Time Text-to-9-1-1 to appropriate destination. • CenturyLink will be aggregating the connections from the nationally recognized TCCs at the NGCS. The communication and role of coordination to the TCCs will be managed through a CenturyLink Program Manager in conjunction with the locally relevant information for handling delivery to the PSAP. • CenturyLink's NG9-1-1 solution is committed to working within the specifications laid out by NENA, the PSAP communities and industry partners for Next Generation 9-1-1 and NENA i3 standards. • Specific delivery options available today that allow RTT to be delivered via TTY (baudot) emulation will be supported in the CenturyLink NGS solution presented to the appropriately routed PSAP's. • CenturyLink's NG9-1-1 solution supports RTT within the NG9-1-1 data stream natively. It is the role of the CPE equipment to decode this correctly.

Any additional documentation can be inserted here

NGCS 2	**Next Generation Core Services Elements (NGCS)** **Interconnection and Commercial Agreements, and Trunking** **Originating Service Provider (OSP) Connectivity** Contractor shall be responsible for negotiating interconnection or commercial agreements, and for data and network connection arrangements with each service provider identified in requirement NGCS 1. Interconnection or commercial agreements shall cover subjects including, but not limited to, split rate centers and cell sectors, tandem-to-tandem connections to legacy selective routers and NGCS, Local Number Portability (LNP), National Number Portability (NNP), and Function of Code R (FoCR). Describe the process and provide timelines for meeting the requirements of this section, as well as the expected process for resolution of disputes.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink is veterans at negotiating interconnection agreements and migrating agencies from existing systems to newer iterations. Our wealth of experience has produced innovations specifically designed to manage these concerns and mitigate migration risk. We will collaborate extensively with the state and PSAP stakeholders to develop a detailed migration strategy. Our nationwide ESInet, integrates with both legacy and NG9-1-1 infrastructures, which allows for migration to NG9-1-1 technology on your schedule without the need for a 'forklift' upgrade. During implementation of services, CenturyLink will provide a dedicated Project Manager who works with the Program Manager and each telecommunication companies. The CenturyLink Project Manager is responsible for all implementation-related activities including creation and management of the implementation Program Development plan with the customer and coordinating activities with carriers and vendor/partners such as establishing connectivity and test/migration schedules. Considering the State's needs and the constraints of the other Telecommunications Service Providers serving the State, the CenturyLink Project Manager creates and manages the project plan and milestone schedule tailored to the needs of the State's requirements with mutually agreed-upon timeframes. We have wide experience in negotiating Interconnect Agreements with a broad range of OSPs. We begin by meeting with each provider during the project kickoff phase to determine their needs and how we can take advantage of their existing operational strategy to facilitate transition to the ESInet environment. This includes a detailed review of all Local Area Telephone areas (LATA's), wireless cell sectors, Local Number Portability (LNP), National Number Portability (NNP), and Function of Code R (FoCR). The process for NEW interconnection between OSPs and CenturyLink NG9-1-1 ESInet solution is straightforward and consists of four steps that take an estimated 70 days. Phase 1 – Design, Assign & Test (Timeline ~ 30 days). OSP inventories 9-1-1 connectivity and capacity requirements. Our team reviews end-to-end signaling design with OSP. OSP requests LOA/CFA (Letter of Authority/ Customer Facility Assignment); our team assigns: (1) POI location. Review LATA, Split Center, cell sectors and other Environments. (2) We provide cross-connect information when the OSP connecting to our NG9-1-1 solution via SIP and (3) OSP circuit activation (BERT) by Network Delivery Team. OSP and team coordinate trunk activation.				

	Phase 2 – & Signaling (Timeline ~ 25 days). OSP submits SS7 ISUP orders to enable (possible 3rd Party). If SIP share host & IP with OSP and coordinate Inter-Op testing. OSP and our team coordinate end to end test calls to NG9-1-1 network - provisioned to our NG 9-1-1 solution. OSP and team ensure proper routing in place on the voice and signaling switches to deliver calls to our NGCS. OSP and team coordinate and execute the tests defined in the test strategy/acceptance test plan document. Phase 3 – Cutover (Timeline ~ 15 days). FINAL Maintenance Operation Protocol (MOP) review w/OSP. Team coordinates cutover dates. Execute cutover. Phase 4 – Disconnects – (Timeframe varies) After bi-directional connectivity is established to selective routers and an OSP is connected, it may immediately disconnect existing circuits from the SRs and discontinue monthly circuit, port and voice trunk payments to the ILEC. Interconnect with the OSPs and will receive SOI, MPC and VPC updates without the need for an ALI database or selective router. Per NENA i3, these obsolete components do not exist in an NG environment and can be decommissioned. Throughout the duration of the project implementation, our CenturyLink Project Manager(s) will keep the State of Nebraska informed of ongoing project status via regular project team meetings with each telecommunications provider. CenturyLink project management team will focus on "one team" approach with frequent project team discussions and written project documentation between the customer/CenturyLink and all participating subcontractors. The CenturyLink Project Manager, in coordination with the Program Manager, will take necessary actions to ensure the final project implementation exceeds the State's expectations.

Any additional documentation can be inserted here

NGCS 3	**Next Generation Core Services Elements (NGCS)** **Originating Service Provider (OSP) Connectivity** **Management of OSP Connectivity** Contractor shall be responsible for managing moves, adds, changes, and deletions of the connections from the OSPs to the Contractor's systems for the term of the contract. Contractor shall allow for both Time-Division Multiplexing (TDM) and IP ingress to the network, proactively monitor these connections, and work with the respective service providers to resolve problems as they arise. Describe the process and provide timelines for meeting these requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Connectivity extends beyond the internal ESInet transport to external network and OSP interfaces. CenturyLink's NG9-1-1 solution supports both TDM and IP OSP ingress at geographically distributed POIs. CenturyLink's NG9-1-1 solution supports standards-based protocol interfaces to external ESInets for call hand-off and call transfers. Given pre-established connectivity capability, PSAPs on the NG9-1-1 ESInet solution have the ability to transfer calls to PSAPs on other ESInets or PSAPs that have not yet transitioned off legacy selective routers.				

Bidder Response:

CenturyLink will be responsible for managing moves, adds, changes, and deletions of the connections from the OSPs to our systems for the term of the contract.

CenturyLink will provide an OSP Coordinator for the life of the project. The OSP coordinator will be responsible for managing all moves, adds, changes, and deletions of connections for the OSPs to the CenturyLink system.

Contractor shall allow for both Time-Division Multiplexing (TDM) and IP ingress to the network, proactively monitor these connections, and work with the respective service providers to resolve problems as they arise.

CenturyLink's solution will support the following types of TDM networks: SS7, ISUP, MF or CAS.

CenturyLink's solution will support native SIP ingress from OSPs with this capability

Describe the process and provide timelines for meeting these:

As one of the existing E911 Service Providers in the State of Nebraska, CenturyLink has a long history of successfully working with all OSPs in the state. In general, our approach would be to migrate each legacy selective router one at a time. Our Program Manager will work with the State of Nebraska on a schedule and timeline.

Steps and typical timelines working to migrate OSPs pre-migration and migration

Step 1 - Design, Assign & Test (Timeline ~ 30 days): OSP inventories 9-1-1 connectivity and capacity requirements. Our team reviews end-to-end signaling design with OSP. OSP requests LOA/CFA (Letter of Authority/ Customer Facility Assignment); our team assigns 9-1-1 POI location. We provide cross-connect information when the OSP connecting to our ESInet via SIP. OSP circuit activation (BERT) by Network Delivery Team. OSP and team coordinate trunk activation.

Step 2 Signaling (Timeline ~ 25 days): OSP submits SS7 ISUP orders to enable (possible 3rd Party). If SIP, share host and IP with OSP and coordinate Inter-Op testing. OSP and our team coordinate end-to-end test calls to our NG9-1-1 ESInet. The OSP's and our CenturyLink Public Safety team will ensure proper routing is in place on the voice and signaling switches to deliver calls to the NG9-1-1 solution. The OSP's and CenturyLink Public Safety team will coordinate and execute the tests defined in the test strategy/acceptance test plan document.


Step 3 Cutover (Timeline ~ 15 days): FINAL Maintenance Operation Protocol (MOP) review w/OSP. Team coordinates cutover dates. Execute cutover.

Before and after system cutover, calls from any OSP serving a PSAP, must be able to be answered by that PSAP and transferred to, at a


minimum, any other PSAP to which they were initially able to transfer. To ensure call integrity during the deployment, we execute a detailed NG9-1-1 testing plan that includes:

- Extensive connectivity checks.
- SBC Security Testing:
  - (1) Rogue RTP Protection – RTP stands for Real-Time Protocol which is responsible for delivering real-time media.
  - The SBC will be configured to include provisions to detect and block Rogue RTP media streams.
- SBC/SIP Call Routing/Policy Management tests (signaling and Media). Signaling and media will be generated by the OSP.
- SIP Trunking Interoperability between our ESInet and NGCS
- SIP Trunking Interoperability between our ESInet and NGCS Production Environment
- TDM to SIP messaging conversion/Translation
- SIP Message manipulation/Mediation – ESRN/ESQK. ESRN SIP Header Insertion
- Media Transcoding – Testing Different Codecs, G.711, G.726 optional, G.729 optional. Ensuring the Media Codecs are supported.
- DTMF/Fax Interworking – Dual-tone multi-frequency. IP based T.38 Fax Transmission functionality
- Abandoned and Silent Calls:
  - (1) Abandoned call testing
  - (2) DTMF tone testing
  - (3) TDD/TT/TTY call testing
- Basic T1 BERT Testing – ESF (Extended Super Frame), AMI (Alternative mark Inversion) or B8ZS (Bipolar 8 zero substitution) encoding methods, CRC error testing.
- Redundant Components Failover Testing: SBC, Ethernet Switching TDM Conversion
- Circuit Failover Testing
- Site Failover Testing
- End to end Validation testing - CSP to PSAP
- Load Balancing – Distributing Traffic Load testing. SIP call load balancing vs failover functionality testing
- Simulation of Peak Traffic Load.
- Reporting/Monitoring Testing (Peak Load)
- Alerting/Alarm Validation Testing (Peak Load)
- SLA Compliance Testing (Peak Load). (1) Packet Latency – (20ms); (2) Packet Loss – (0.5%); (3) Jitter – (20ms)
- MF trunk (CAS signaling) testing if required:
  - (1) Trunk seizure and wink back
  - (2) Feature group D testing
  - (3) Wireless emergency call routed via MSC over MF trunk (ANI and ESRD out pulse)
  - (4) Wireless emergency call routed via MSC and uses wireline compatibility mode


		– (5) On-hook indication to SIP BYE • SS7 interface. – (1) SS7 ISUP call end-to- end testing; Supervisory message testing (blocking/unblocking/ acknowledgement) Call Transfer/Conference functionality testing Refer to Attachment 2.e"CenturyLink Sample Nebraska Draft Project Schedule Gantt Chart Format" for the sample Gantt chart of this deployments timelines Refer to the three (3) drawings shown below as "OSP TDM Connection Drawing, POI and Aggregation Service for OSP's Drawing" and SIP Drawing for OSP Connections Drawing:

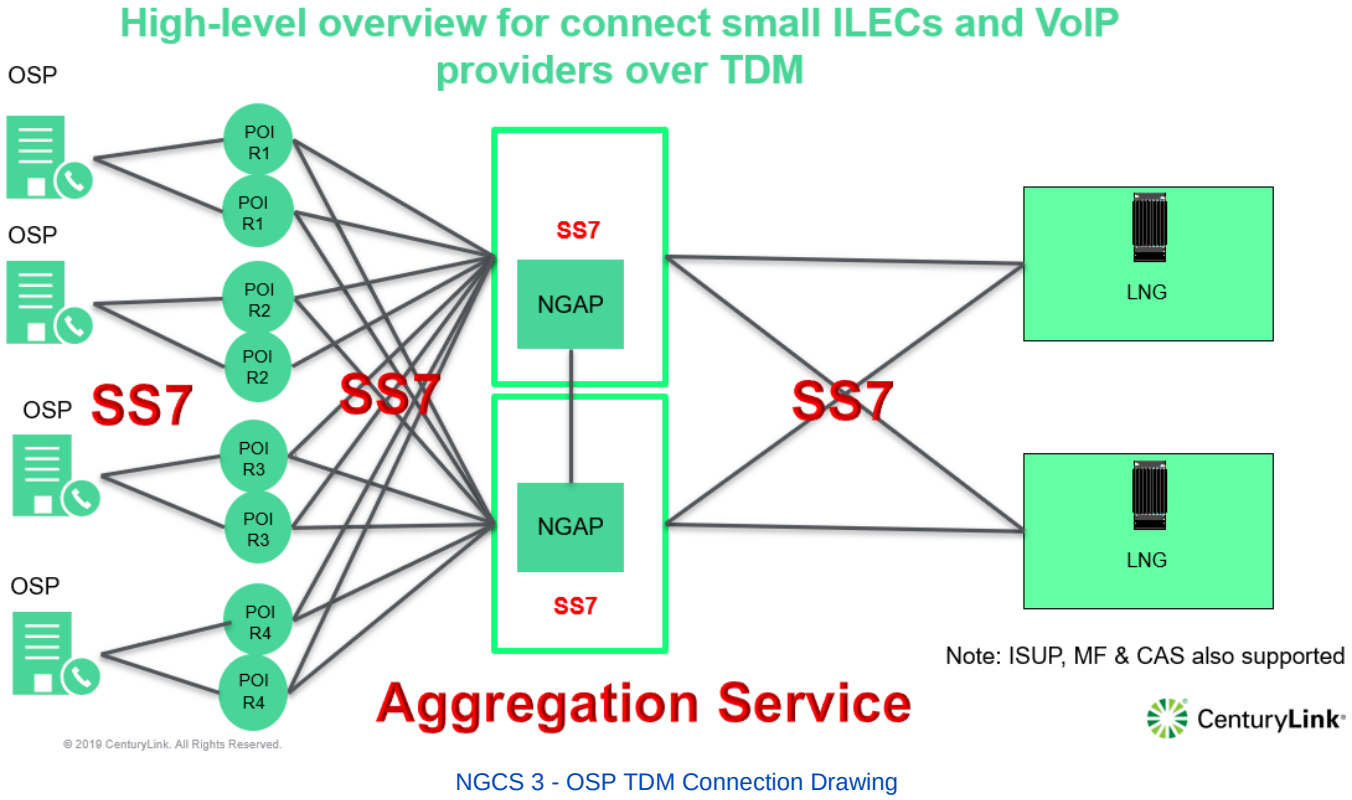

NGCS 3 - OSP TDM Connection Drawing

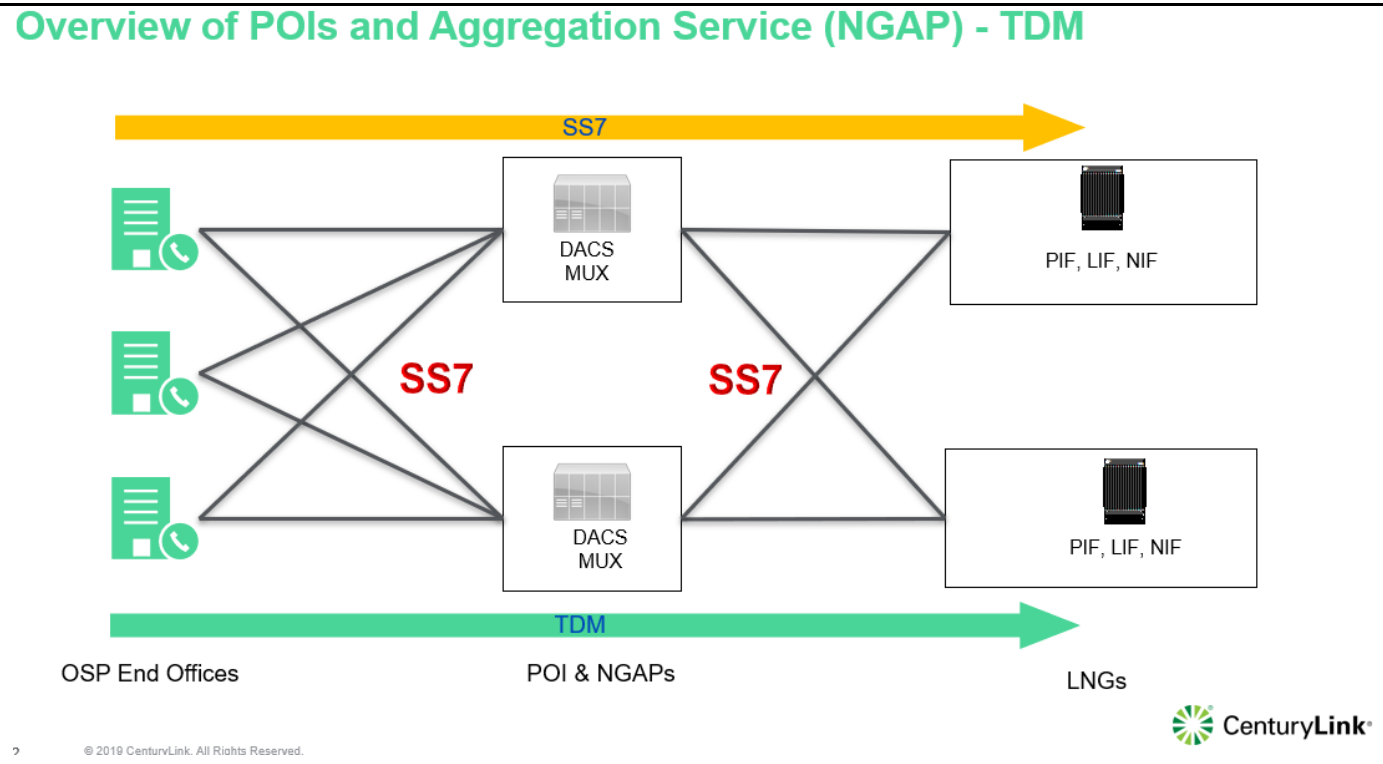

NGCS 3 - POI and Aggregation Service for OSP's Drawing

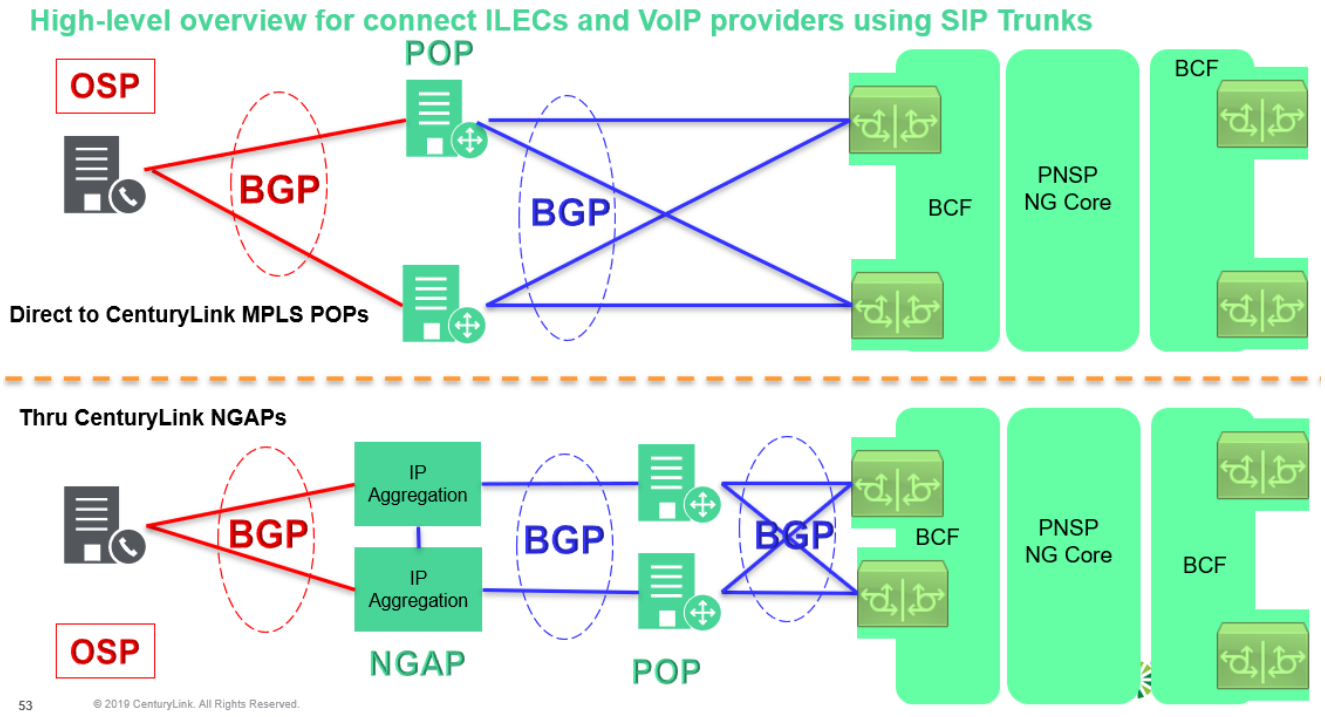

NGCS 3 – Native IP SIP Ingress Drawing

Any additional documentation can be inserted here

Attachment “C”
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1


Any additional documentation can be inserted here

NGCS 4	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **LNG Description** The LNG is a signaling and media interconnection point between callers in legacy call-originating networks, i.e., Enhanced 911 (E911), and the NENA NG911 i3 architecture. The LNG shall log all calls it receives and processes and shall permit the uploading of daily log files to a network monitoring and management system for analysis. The LNG shall allow for ad hoc uploads of log files for troubleshooting and incident response. All call activity on both the legacy side (TDM) and the IP side of the LNG shall be logged. The LNG shall have Intrusion Detection System (IDS)/ Intrusion Prevention System (IPS) functionality to detect and mitigate Distributed Denial of Services (DDoS) attacks from both the TDM side and the IP side. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: The LNG is a signaling and media interconnection point between callers in legacy call-originating networks, i.e., Enhanced 9-1-1 (E9-1-1), and the NENA NG9-1-1 i3 architecture The LNG collects full detail on all calls received on TDM interfaces and transmitted to upstream IP interfaces. LNG call detail is transmitted in real time to CenturyLink's NG9-1-1 solution management system for reporting and analysis. The system does not allow for ad hoc uploads of log files for troubleshooting and incident response. All call activity on both the legacy side (TDM) and the IP side of the LNG is logged. The LNG has intrusion detection system (IDS)/intrusion prevention system (IPS) functionality to detect and mitigate telephony denial of service (TDoS) attacks. The LNG shall log all calls it receives and processes and shall permit the uploading of daily log files to a network monitoring and management system for analysis. CenturyLink collects all CDR logs from our LNGs for all calls received on TDM interfaces and transmitted upstream at the IP interface. CenturyLink collects and stores this data for monitoring and analysis of the LNG and upstream IP interfaces. This data is used to provide health statistics within our customer dashboards. The CDR captures all relevant call details such as TDM incoming trunk group and member, calling party, signaling parameters, date and time stamp, was call delivered for example The LNG shall allow for ad hoc uploads of log files for troubleshooting and incident response CenturyLink allows for ad hoc uploads of log files for troubleshooting and incident response The LNG shall have Intrusion Detection System (IDS)/ Intrusion Prevention System (IPS) functionality to detect and mitigate Distributed Denial of Services (DDoS) attacks from both the TDM side and the IP side. DDoS is relevant to only the IP side of our LNGs. CenturyLink does have controls for detecting and responding to TDOS attacks. When we detect a TDOS attack, CenturyLink will work with the Commission and affected PSAPs on the best method to employee to stop the TDOS attack. An example of this would be we determine that the attack is only coming from a small amount of NPA – NXXs, or a specific range of ES Trunks from one OSP, we can block traffic from only the sources we identify for a specific amount of time if this is the action the Commission and affected PSAPs would like implemented. From our LNG to our dedicated NG9-1-1 SBCs (LNG BCF), these circuits are completely private and not routable except from and to our NGCS BCF. We apply our IDS/IPS further downstream before any malicious traffic can reach the network domain between the LNG BCF and the NGCS BCF.				

	Our CenturyLink network infrastructure is built to withstand sophisticated attacks (including DDOS) by means of a defense in depth strategy. We employ high availability systems with redundancy at geographical, carrier, circuit, power, application, and system levels. System/Application availability is safeguarded with clustering and load balancing techniques. Furthermore, our security architecture employs defenses that include, but are not limited to, Stateful packet inspection firewalls, IDS/IPS, multi-factor authentication, strong encryption, anti-virus/anti-malware, and vulnerability/patch management solutions. All inter-zone traffic is restricted to only the necessary protocols/destinations, both ingress and egress. We discuss our full solution security in the security questions above.

NGCS 5	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** Contractor shall provide redundant, resilient LNGs with legacy selective router gateway (LSRG) functionality to allow the legacy selective routers to transfer calls with Automatic Number Identification (ANI) and Automatic Location Identification (ALI) information to deployed NGCS and vice versa. Legacy functionality and components shall be in place and operational during the NG911 transitional phase until all 911 authorities and PSAPs served by the legacy selective router have completed the transition. Describe the steps bidder will take to meet the transition timelines and minimize overlapping network costs.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: As one of the largest ILECs and operating four of the five legacy selective routers (LSR) in Nebraska, CenturyLink can minimize and provide significant cost savings to the Commission. Our proposal includes all ES Trunk connectivity to our POIs from CenturyLink serving wire centers with no cost recovery. CenturyLink will not bill cost recovery to the Commission under state tariff for this connectivity if CenturyLink is awarded the State contract to provide NG9-1-1 services. Included in our solution is an LSRG and all inter-tandem trunking required to connect to all five state LSRs. Often missed and critically important in the migration to a NG9-1-1 solution is the migration of PS ALI customers. Without continuing to support the LSR for legacy PS ALI customers, these customers can be left scrambling to find an alternative solution that works with a NG9-1-1 system. CenturyLink will continue to maintain and support the LSR and LSRG until all PS ALI customers are migrated as the final phase to decommissioning the LSRs. CenturyLink has developed a process we call "Transitional, Consolidation and Transformation" (TCT) which provides a robust tried and tested framework. TCT projects have 3 broad phases: 1. Transition – CenturyLink will take-over customers' existing estates and enable them take advantage of instant cost savings. 2. Consolidate – CenturyLink will look to make efficiency savings and network improvements. 3. Transform – CenturyLink will work with the State of Nebraska to implement new NG9-1-1 technologies to agreed service levels. CenturyLink Project Management (CPM) adheres to Best Practices Methodology as prescribed by the Project Management Institute standards. The CPM charter underscores CenturyLink's commitment to facilitate a seamless transition for our customer's communications services to CenturyLink's network, ensure compliance with the terms of the contract, and maintain customer satisfaction throughout the project life cycle. We believe that by following these proven project management practices, the project milestones can be successfully achieved. **MIGRATION STEP 1:** In order to eliminate the current expense associated with the existing ALI DBMS, Migration Step 1 involves provisioning of the Location Database (LDB). Once this step is complete, the existing ALI DBMS can be eliminated. Our Proposal includes an LDB that can serve as both an ALI and a LIS. We provision a migration mechanism for both data and business processes, making the transition a flexible, yet controlled, evolution. We support current and future versions of location validation, emergency call routing, and location-based call routing. Our service consists of database and database management software. It provides request / response and is compatible with all leading Automatic Number Identification (ANI) / ALI				

	controllers as well as NG9-1-1 components such as Legacy Network Gateways (LNGs) and Emergency Service Routing Proxies (ESRPs). Our software can provision customer location data manually and in batches. **MIGRATION STEP 2**: In order to eliminate the current expense associated with State reimbursements to originating service providers for connectivity to selective routers, Migration Step 2 connects OSPs to our NG9-1-1 ESInet. Once that occurs, 9-1-1 calls will be routed through the NG9-1-1 ESInet to the selective routers. Existing OSP connectivity to the select routers can be disconnected. OSPs deliver 9-1-1 calls to the POI with the ESRN in the calling party 'to' field and ANI or ESQK/ESRK in the calling party 'from' field. The trunks are processed through a Protocol Internetwork Function (PIF). The PIF converts TDM trunks to Session Initiation Protocol (SIP) trunks with ANI, ESQK or ESRK in the P-Assert Identity field. The PIF also provides TTY transcoding for TDM trunks. The NG9-1-1 ESInet also provides a direct interface for OSPs able to connect via SIP with or without PIDF-Lo. **MIGRATION STEP 3:** In a parallel effort to Migration Steps 1 and 2, we will engage with the State and individual PSAPs to configure our NGCS. Our team will work with the user agency(s) to develop a Functional Specifications Document (FSD) that will establish in detail the specific goals, objectives, deliverables, and measures of success. At this point, a Project Management Plan (PMP) can be developed with a high degree of certainty. Once 9-1-1 calls flow through our NG9-1-1 service in step 2 above, PSAPs can be systematically and individually transitioned off the selective router and onto NGCS solution. This process mitigates transition risk by allowing for fallback to legacy connectivity. Once thoroughly tested, PSAPs can disconnect from the selective router and repurpose associated expense for NG9-1-1 services. PSAPs with CPE that does not currently support an IP interface will be equipped with an LPG. The PIF portion of the Legacy PSAP Gateway (LPG) will be provisioned on-site. Once the PSAP has upgrade their CPE to accommodate NENA i3 IP connectivity, the LPG will be replaced with an SBC. It is strongly recommended that the PSAP use their funds to upgrade their CPE instead of purchasing an LPG. CenturyLink will provide transition planning and migration support and timelines through our assigned Project management team. The detailed steps to transition to the NGCS LNG/LSRG is outlined in Attachment 2.d "CenturyLink Sample Program Management Plan for Nebraska" document.

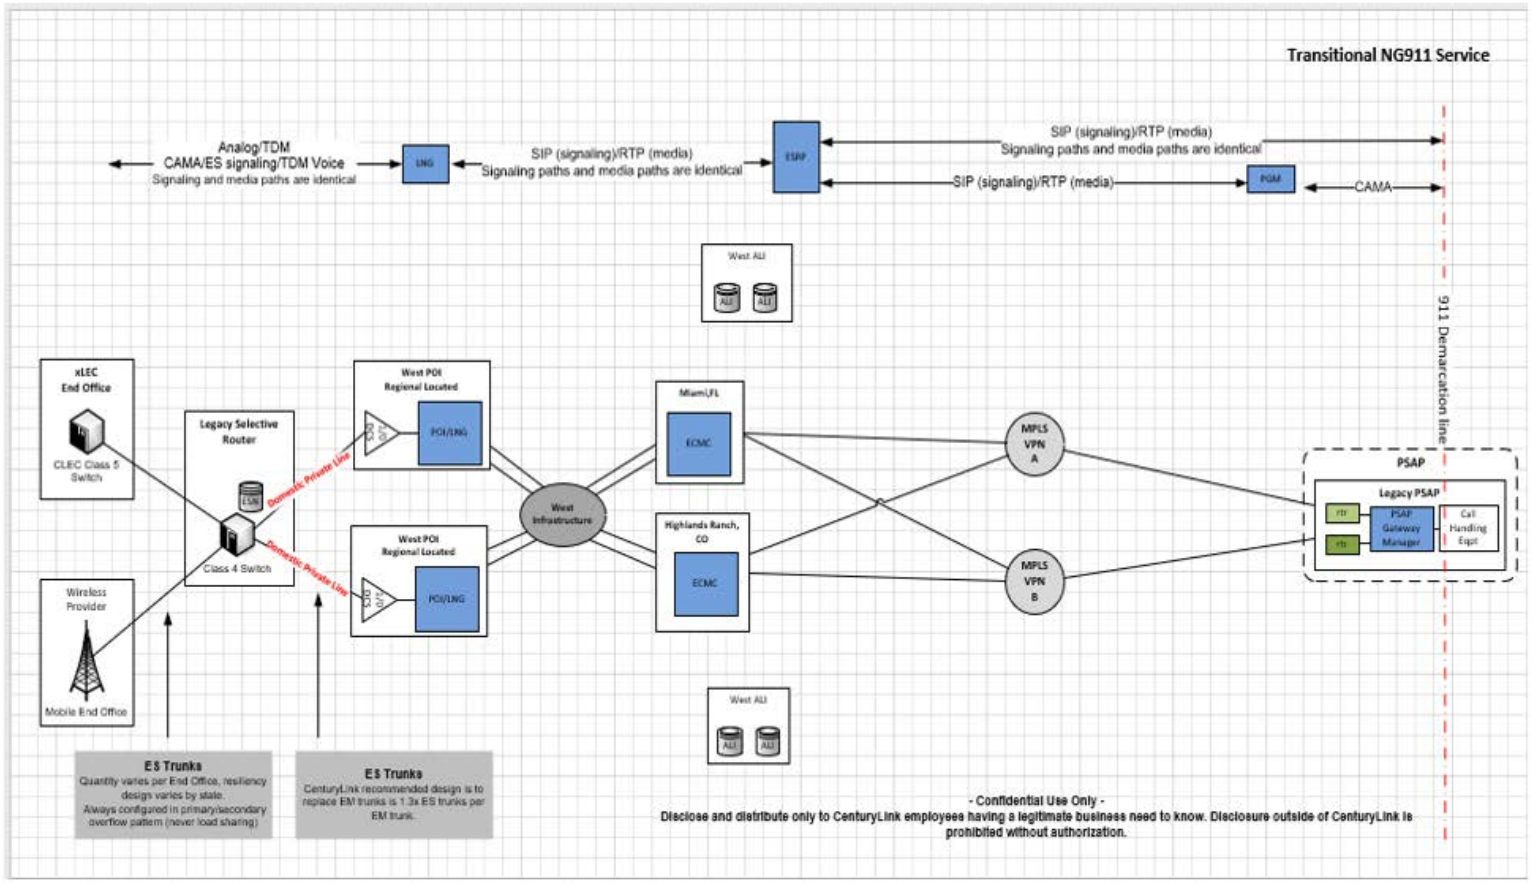

NGCS 5 – NG9-1-1 Transitional Drawing

Any additional documentation can be inserted here

NGCS 6	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Previous Work on Similar Solutions** 1. Explain how bidder has worked with legacy OSPs with similar solutions on similar projects. 2. Submit specific plans for working with established legacy 911 service providers in Nebraska.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

1. CenturyLink has a long history of working with OSPs across the globe. We are ILECs and/or CLECs in all 50 states. Our most recent work with OSPs on a CenturyLink NG9-1-1 solution is in SD, CO, and CA. In SD and CO, CenturyLink provided all E9-1-1 services in the state. In CA, CenturyLink operates as a CLEC. We are currently in the deployment phase of the network and are working with OSPs to move their services to CenturyLink POIs.

2. CenturyLink is the major legacy 911 service provider in the state. For this response, we will detail our plan for working with the other state 911 service provider, Windstream. CenturyLink has a long relationship with Windstream in Nebraska and other states were CenturyLink and Windstream operate. CenturyLink has existing interconnect agreements with Windstream and existing process for order services between us.

Step 1 - Design, Assign & Test (Timeline ~ 30 days): OSP inventories 9-1-1 connectivity and capacity requirements. Our team reviews end-to-end signaling design with OSP. OSP requests LOA/CFA (Letter of Authority/ Customer Facility Assignment); our team assigns 9-1-1 POI location. We provide cross-connect information when the OSP connecting to our ESInet via SIP. OSP circuit activation (BERT) by Network Delivery Team. OSP and team coordinate trunk activation.

Step 2 Signaling (Timeline ~ 25 days): OSP submits SS7 ISUP orders to enable (possible 3rd Party). If SIP, share host and IP with OSP and coordinate Inter-Op testing. OSP and our team coordinate end-to-end test calls to our NG9-1-1 ESInet. The OSP's and our CenturyLink Public Safety team will ensure proper routing is in place on the voice and signaling switches to deliver calls to the NG9-1-1 solution. The OSP's and CenturyLink Public Safety team will coordinate and execute the tests defined in the test strategy/acceptance test plan document.

Step 3 Cutover (Timeline ~ 15 days): FINAL Maintenance Operation Protocol (MOP) review w/OSP. Team coordinates cutover dates. Execute cutover.

Before and after system cutover, calls from any OSP serving a PSAP, must be able to be answered by that PSAP and transferred to, at a minimum, any other PSAP to which they were initially able to transfer. To ensure call integrity during the deployment, we execute a detailed NG9-1-1 testing plan that includes:

- Extensive connectivity checks.
- SBC Security Testing:
  - (1) Topology Hiding – The SBC will be configured to protect the identity of phones, computers and IP devices under test. (optional)
  - (2) Rogue RTP Protection – RTP stands for Real-Time Protocol which is responsible for delivering real-time media. The SBC will be configured to include provisions to detect and block Rogue RTP media streams.
- SBC/SIP Call Routing/Policy Management tests (signaling and Media). Signaling and media will be generated by the OSP.
- SIP Trunking Interoperability between our ESInet and NGCS
- SIP Trunking Interoperability between our ESInet and NGCS Production Environment

	• TDM to SIP messaging conversion/Translation • SIP Message manipulation/Mediation – ESRN/ESQK. ESRN SIP Header Insertion • Media Transcoding – Testing Different Codecs, G.711, G.726 optional, G.729 optional. Ensuring the Media Codecs are supported. • DTMF/Fax Interworking – Dual-tone multi-frequency. IP based T.38 Fax Transmission functionality • Abandoned and Silent Calls: – (1) Abandoned call testing – (2) DTMF tone testing – (3) TDD/TT/TTY call testing • Basic T1 BERT Testing – ESF (Extended Super Frame), AMI (Alternative mark Inversion) or B8ZS (Bipolar 8 zero substitution) encoding methods, CRC error testing. • Redundant Components Failover Testing: SBC, Ethernet Switching TDM Conversion • Circuit Failover Testing • Site Failover Testing • End to end Validation testing - CSP to PSAP • Load Balancing – Distributing Traffic Load testing. SIP call load balancing vs failover functionality testing • Simulation of Peak Traffic Load. • Reporting/Monitoring Testing (Peak Load) • Alerting/Alarm Validation Testing (Peak Load) • SLA Compliance Testing (Peak Load). (1) Packet Latency – (20ms); (2) Packet Loss – (0.5%); (3) Jitter – (20ms) • MF trunk (CAS signaling) testing if required: – (1) Trunk seizure and wink back – (2) Feature group D testing – (3) Wireless emergency call routed via MSC over MF trunk (ANI and ESRD out pulse) – (4) Wireless emergency call routed via MSC and uses wireline compatibility mode – (5) On-hook indication to SIP BYE • SS7 interface. – (1) SS7 ISUP call end-to- end testing; Supervisory message testing (blocking/unblocking/ acknowledgement) • Call Transfer/Conference functionality testing

Any additional documentation can be inserted here

	Next Generation Core Services Elements (NGCS) **Legacy Network Gateway (LNG)** **Traffic Engineering Process** Describe the process that will be utilized to analyze the current trunk engineering for 911 traffic, and to validate any applicable trunk rebalancing for public-safety grade service.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
NGCS 7	**Bidder Response:** As a 911 service provider for the State of Nebraska CenturyLink has existing knowledge of the current ES trunks that terminate on our legacy selective routers. For OSPs that don't currently terminate their ES trunks on one of the four CenturyLink selective routers in Nebraska, we use the Local Exchange Routing Guide (LERG) database managed by Telcordia, that provides all the existing wire centers within the state and the number of subscribers serviced out of those wire centers. In addition to traditional wireline services, these reports provide the subscriber base of VoIP and wireless OSPs. CenturyLink uses a long standing and proven industry standard to calculate the required ES trunks for wire centers based on the number of subscribers serviced by a serving wire center. The industry rule is for serving wire centers with 10,000 or less subscribers, 2 ES trunks must be provisioned to route 911 calls. For every additional 5,000 subscribers, one additional ES trunk must be provisioned. Therefore, a wire center with a subscriber base of 20,000, we would expect that OSP to deliver 4 ES trunks to our Point of Interfaces (POI). In this example, the OSP would deliver 2 ES trunks to POI A and 2 ES trunks to POI B. From the POI to our LNGs, we provision diverse DS3s, one to each of our geo-redundant carrier grade LNGs. Each DS3 is provisioned to carry 100% of the TDM traffic from the POI to the LNG in the event connectivity to an LNG is lost. The number of DS3s from each POI to the LNG is a function of the number of ES trunks terminating at the POI. Each DS3 can carry up to 672 DSOs or ES trunks. After the media has be transcoded to IP at the LNG, CenturyLink provisions diverse 10G IP circuits to each geo redundant dedicated NG9-1-1 SBC. Each link from the LNG to the SBC is provisioned to handle 100% of the traffic load. At implementation, we will adjust (rebalance) our POI capacity up or down based on the number of ES trunks OSPs will deliver. After implementation, CenturyLink monitors the ingress TDM traffic, validating we are delivering a P.01 grade service or greater on all trunk groups. Connections to the PSAP are sized up to accommodate necessary bandwidth based on a concurrent G.711 SIP session (Call path). Each circuit is engineered to handle 100% of the call demand in the case of a failure of the primary or secondary circuit. Our model is deployed from a network perspective with a 2N redundancy model – each remote site is provisioned with bandwidth as is required to serve the total number of TDM voice trunks provisioned at the site and has at a minimum media diverse solution which is scalable to meet future needs with uplift in price for increased bandwidth. The MPLS network is designed in a 100% capacity and 100% redundancy configuration so that if one MPLS carrier's network goes down, the redundant bandwidth can manage 100% of the PSAP's capacity. The end result is a network that is truly public safety grade in terms of capacity, reliability, and redundancy. The overall network transport elements are engineered for maximum simultaneous call capacity requirements. Ingress call capabilities are engineered to the Originating Service Providers specific simultaneous call delivery capacity. Egress call delivery to PSAPs is specified by the PSAP CPE and controlled by the SIP messaging interactions between the ESRP and the PSAP's Terminating ESRP. Call Administration Control (CAC) capabilities are used to restrict IP ingress call capacity where legacy TDM trunks have been retired and replaced with IP transport capabilities. The i3 Core NG9-				

	1-1 processing elements are engineering to exceed simultaneous call delivery and call arrival rate requirements. The ESInet solution is designed to exceed call capacity requirements and has effective internal mechanisms to deal with volume scenarios, therefore, establishes a capability to effectively manage call congestion and control requirements.

Any additional documentation can be inserted here

	Next Generation Core Services Elements (NGCS) **Legacy Network Gateway (LNG)** **Location Information** The LNG shall obtain location information to define, create, populate and send the correct Presence Information Data Format Location Object (PIDF-LO) parameter to the correct ESRP or terminating PSAP, as described within NENA-STA-010.2-2016. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
NGCS 8	**Bidder Response:** The LNG obtains location information to define, create, populate and send the correct Presence Information Data Format Location Object (PIDF-LO) parameter to the correct ESRP or terminating PSAP, as described within NENA-STA-010.2-2016. CenturyLink's NG9-1-1 solution complies with NENA 08-003 which itself is based upon IETF RFCs such as SIP (RFC 3261), HELD (RFC 5985/6155), PIDF-LO (RFC 4119 and successive updates), and IETF ECRIT best practices documents and ANSI standards. The ESRP processes ingress calls received using Session Initiation Protocol (SIP) signaling with location embedded in the PIDF-LO from i3 compliant carrier networks, from legacy carriers, or selective routers via the LNG/LSRG or from an upstream i3-compliant ESInet. The HELD interface into CenturyLink's NG9-1-1 solution Location Database (LDB) is leveraged by the LNG to retrieve PIDF-LO, either by value or reference, to be delivered to the PSAP within the SIP messaging. The HELD interface is also presented to the PSAP CPE to provide dereferencing services and/or provide location updates for wireless calls.				

Any additional documentation can be inserted here:

	.				

	Next Generation Core Services Elements (NGCS) **Legacy Network Gateway (LNG)** **Protocol Conversion** **External Interfaces** The LNG external interfaces shall comply with NENA-STA-010.2-2016, requirements SLA 1-23, and other applicable standards and requirements. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
NGCS 10	**Bidder Response:** CenturyLink's NG9-1-1 solution service supports TDM SS7 calls from Originating Service Providers (OSP) as the standard ingress signaling configuration. Other signaling options such as PRI and CAMA can be supported upon request. The ESInet standard interfaces supported are listed below. • 9-1-1 Call Signaling Type • SS7 Wireline/NCAS (10 digits) • PRI/NI-2 (wireline, NCAS) • Analog CAMA I+7 (I always = 0) • DS1 CAMA I+7 (I always = 0) • DS1 CAMA 7 (No I digit)				

Any additional documentation can be inserted here:

	Next Generation Core Services Elements (NGCS) **Legacy Network Gateway (LNG)** **Baudot Code Transcoding** The bidder's BCF solution shall support transcoding of Baudot tones to real-time text (RTT), as described in IETF RFC 4103. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
NGCS 11	**Bidder Response:** Our Legacy network Gateways transcodes Baudot to RTT as described in RFC 4103. We comply with NENA 08-003, NENA-STA-010.2-2016 that requires interworking real time text and TTY in our PIF component per RFC 5194, accepting DTMF signaling from the legacy PSAP and sending it to the NIF component in RTP packets, per RFC 4733, and recognizing Baudot tones in incoming media and replacing them with RFC 4103 real time text. CenturyLink is committed to working within the specifications laid out by NENA, the PSAP communities and industry partners for Next Generation 9-1-1 and NENA i3 standards. Specific delivery options available today that allow RTT to be delivered via TTY (baudot) emulation will be supported in the CenturyLink NG9-1-1 ESInet solution presented to the appropriately routed PSAP's. CenturyLink's NG9-1-1 solution supports MSRP as the standard protocol for handling text. Other protocols such as XMPP may be supported if interworked to MSRP prior to NGCS presentation. We support RTT within the NG9-1-1 data stream natively. It is the role of the call-handling equipment to decode RTT correctly. CenturyLink will also work closely with Originating Service Providers, ESInet functional component vendors, and PSAP CPE vendors to proactively support end-to-end interoperability. Specific delivery options available today that allow RTT to be delivered via TTY (baudot) emulation will be supported in the CenturyLink NGS solution presented to the appropriately routed PSAP's. CenturyLink's NG9-1-1 solution supports RTT within the NG9-1-1 data stream natively. It is the role of the CPE equipment to decode this correctly.				

Any additional documentation can be inserted here

NGCS 12	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Callback Number** The LNG shall support obtaining the callback number associated with any pseudo ANI data that does not include the callback number. This may require the Contractor to obtain the callback number from the wireless or VoIP provider and may include additional recurring and non-recurring costs that are independent of this RFP. The Contractor shall be responsible for all recurring and non-recurring costs associated with this requirement. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution uses a Legacy Network Gateway (LNG) that provides a mechanism to obtain the caller's location and callback number at the time of the call by using the Location Interwork Function (LIF) to query the OSP's appropriate transitional location database solution. Prior to the carrier's i3 transition, CenturyLink will continue to manage the location data retrieval solution on behalf of the OSP. solution is designed to leverage the existing VoIP and Wireless legacy solutions during the transitional period while those carriers work towards i3 readiness. Prior to OSP i3 readiness, the provider will continue to send the pseudo ANI with the originating call to CenturyLink's NG9-1-1 solution LNG. Once received by the LNG, the CenturyLink's NG9-1-1 solution will perform the proper NIF, LIF, and PIF functions to query the CenturyLink-managed LDB and steer queries to the external OSP location database to acquire the callback number and location information. The HELD interface into the CenturyLink Location Database (LDB, aka ALI) is leveraged by CenturyLink's NG9-1-1 solution system to retrieve PIDF-LO, by value, to be delivered to the PSAP within the SIP messaging. The HELD interface is also presented to the PSAP CPE to provide dereferencing services and/or provide location updates for wireless calls. Note that not all ALI fields map to PIDF-LO, for example Class of Service and Customer Name. As such, CenturyLink will also provide an ADR interface to retrieve this information to be included in the SIP signaling. For these fields, the LNG supports the Additional Data protocol (draft-ietf-ecrit-additional-data-28) to provide these data fields via the Additional Data Repository (ADR). This solution is in production with multiple live CenturyLink-managed i3 PSAPs.				

Any additional documentation can be inserted here

NGCS 13	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Event Logging** The LNG shall facilitate logging of all significant events and 911 calls received and processed. Each call log shall contain all relevant parameters defined in Section 5.13.3 of NENA-STA-010.2-2016. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: The LNG facilitates logging of all significant events and 9-1-1 calls received and processed. Each call log shall contain all relevant parameters as defined in NENA STA-010.2-2016. CenturyLink's NG9-1-1 solution provides an i3 logging capability per the NENA STA-010.2 specification. The system can support near real-time log delivery and web service interfaces for log retrieval from authorized clients. CenturyLink's NG9-1-1 solution logs hundreds of data points for each call that traverses the system to assist in tracking and troubleshooting calls. Logged events include ingress and egress to an ESInet, ingress and egress to a PSAP, all steps involved in call processing, and processing of all forms of media. The Customer Management Portal provides participating PSAPs and approved personnel 24x7 access to call detail records through a secure, web-based portal. The call detail records provide the user with all the pertinent information for each call. Users have a predetermined PSAP or set of PSAPs for which they can view statistics. For example, some users will only be able to view their own PSAP's statistics, while another user may be provided authorization to view all PSAPs in a county, region, state, or other appropriate grouping. Event data is time stamped upon ingress of payload entry through the LNG or BCF and at the time of answer and disconnect at the PSAP. Event data also tracks the time for each functional element to perform routing and PSAP assignment, by tracking the time it takes to traverse from the selective router to be delivered to the PSAP. This event data tracking by functional element allows for call diagnostics.				


Any additional documentation can be inserted here

NGCS 14	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Extraction of Log Files** All LNG log files shall be capable of being extracted in near real-time and shall be in a format suitable for importing into a spreadsheet or word-processing program. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: LNG log files are capable of being extracted in near real-time and are available in a format suitable for importing into a spreadsheet or word processing program. Our LNG CDRs are captured using our SolarWinds monitoring and reporting system. These CDRs are passed through RFM / IAA as is data from all our monitoring tools. All CDRs are stored in our SPLUNK application for operational analysis and troubleshooting, CDR and syslog output for off-line analysis. .				

Any additional documentation can be inserted here

NGCS 15	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **High-Availability Design** The LNG solution shall be deployed in a high-availability design to meet public safety-grade resiliency and redundancy requirements, Section V.D.1.b. (General Requirements – Technical – Public Safety Grade). Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution achieves 99.999% service availability 24x7x365 for call processing and has no single point of failure that will disrupt the ability to provide on-going call processing. All functions necessary for call processing are deployed in a highly available configuration and duplicated across Core sites and LNGs. Transactions or call traffic divert to available components on failure or degradation of Service of a given functional component or a loss of a physical site. IP transport paths for critical service components are redundant and designed for multipath IP packet delivery so the failure of a given IP transport mechanism does not affect overall service availability. All our critical elements are deployed in an active-active mode. Each NGCS instance is paired with a redundant instance. Each redundantly paired instance is also paired with a geographically redundant, active-active pair. Our geographically diverse, active-active design means that up to three of the four NGCS instances can fail and the remaining instance will continue to carry the entire task load with no interruption nor degradation of service. Multiple GIII gateways are configured to operate in a dual redundant SS7 signaling architecture for added reliability in high availability environments. All network routing infrastructure is designed and deployed in an N+1 model. N+1 redundancy provides a minimum of one additional unit, module, path, or system in addition to the minimum required to satisfy the base connectivity, ensuring that a failure of any single component at a given diverse site, such as an LNG, will not render the location inoperative. All network connectivity is established via dynamic routing protocols. The use of dynamic routing protocols allows the routers to automatically discover each connected network and adapt to changes in the network topology. CenturyLink's LNGs are designed with high availability and meet public safety-grade resiliency and redundancy requirements. CenturyLink deploys a minimum of two redundant POIs for OSP to connect their end offices to. OSPs connect half of their ES Trunks to POI A and the other half to POI B. From each POI, we provide a pair of diverse DS3 circuits with circuit A terminating at LNG A and circuit B terminating at LNG B. This design provides for 100% failover from one LNG to the other LNG in the event connectivity from a POI to an LNG experiences a service disruption. From each LNG, we configure a pair of diverse 1G MPLS circuits to each of our diverse session border controllers (SBC). This design provides for 100% failover of all traffic from one SBC to the diverse SBC. From our diverse SBCs facing the LNGs, we configure a pair of diverse 10G circuits to our diverse SBCs facing into our NGCS. This design provides for 100% failover of all traffic from the LNG SBCs to the NGCS SBCs. All terminating equipment at our POIs and LNGs are designed with high-availability and redundancy. There is no single point of failure in our LNG design. On the egress side of our LNGs, we deploy a set of HA routers for our MPLS network to a diverse pair of SBCs. At each SBC location, we have two active SBCs for additional redundancy.				

The use of dynamic routing protocols allows the routers to automatically discover each connected network and adapt to changes in the network topology.

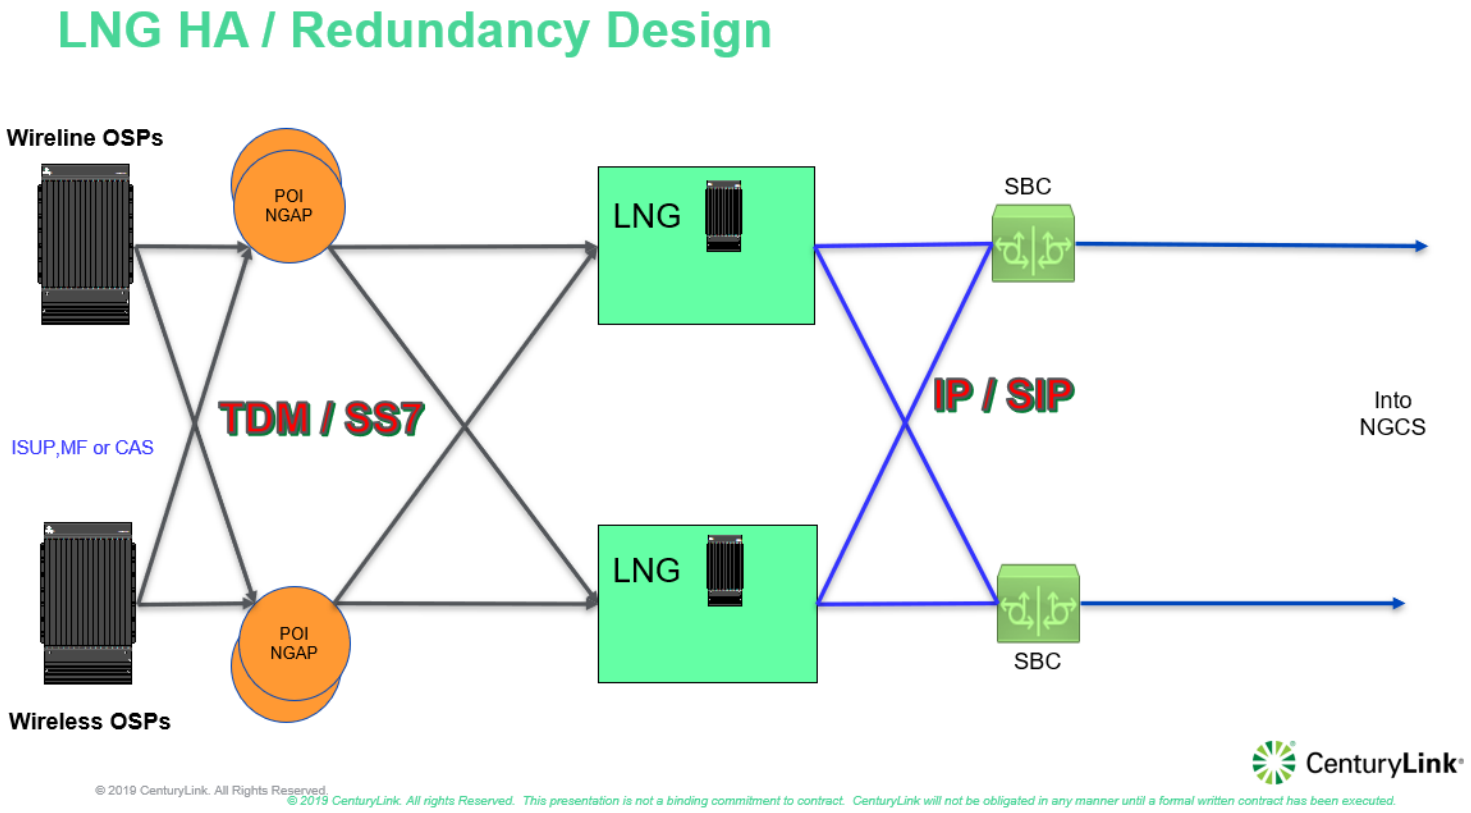

NGCS 15 – LNG High Availability Design.

Any additional documentation can be inserted here

NGCS 16	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Legacy Selective Router Gateway (LSRG) Functionality** The LSRG functionality shall support selective transfer, commonly referred to as "star code" transfers, made by legacy PSAPs for calls destined for the NextGen911 PSAPs or to neighboring legacy PSAPs outside of the ESInet. Describe how bidder's LNG solution provides for LSRG functionality.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink will provide a LSRG to facilitate the transfer of 911 calls from a legacy PSAP to a NG911 PSAP and from a NG911 PSAP to a legacy PSAP with the capability of using star codes. The LNG/LSRG relationship is addressed in our NG9-1-1- ESInet Solution. It provides the transitional elements to convert traffic from TDM/SS7 to SIP. Through diverse Point of Interconnections (POIs) strategically placed across Nebraska. Our LNG functions for the legacy network (LNG, LSRG) as well as enhanced wireless Location Determination Services (LDS). This solution supports star codes natively as part of its design. Our NG9-1-1 network supports star code transfers made by legacy PSAPs for calls destined for PSAPs on the ESInet or to neighboring legacy PSAPs outside of the ESInet. A call taker can use a single button on the call taker's display to complete either a transfer or three-way conference. They can transfer an incoming 9-1-1 call to another agency by pressing a button labeled with the type of agency: for example, "Fire"-on the PSAP premises equipment. These transfers utilize pre-provisioned codes on a per-PSAP basis.				

Any additional documentation can be inserted here

NGCS 17	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Proposed LNG Locations** Provide the proposed locations for hosting the primary LNGs for the NextGen911 system, including the data center tier level for the host sites.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink uses our carrier grade Sonus gateways for our LNGs. We have three sets of gateways installed in tier 3 data centers our carrier hotels. The locations of our GSXs are as follows: • Huston, TX – Tier 3 • Chicago, IL – Tier 3 • Highland Ranch, CO – Tier 3 CenturyLink will terminate OSP using these three LNGs.				

Any additional documentation can be inserted here

NGCS 18	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Charges for Dual Service** The bidder shall be responsible for meeting the timelines outlined above in requirement NGCS 2 and 3. If the transition from the legacy selective routers to NGCS exceeds the committed timeline, and is attributable to the acts or omissions of the Contractor, the Contractor will accept responsibility for financial support of the legacy network until such time as the full transition is complete. Describe how bidder's solution meets this requirement.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: All our CenturyLink deployments includes a parallel installation when moving to a NG9-1-1 solution. We understand this requirement and accept financial responsibility				

NGCS 19	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **BCF Description** The BCF shall provide logical network security functions between external networks and the ESInet, and between the ESInet and PSAP networks. The BCF is responsible for numerous functions, including the following: a. Border firewall b. VPN c. IDS/IPS d. Session Border Control (SBC) e. Opening and closing of pinholes f. Limiting access to critical components using VLANs g. Call admission control h. Media transcoding i. Signaling protocol normalization and interworking j. Network Address Translation (NAT) k. Codec negotiation l. Support for QoS and priority markings m. Media proxy Provide details, including drawings, describing how the proposed BCF meets or exceeds all functions listed above and the requirements described in NENA-STA-010.2-2016, as well as additional firewall requirements described in NENA 04-503, NENA-INF-015.1-2016, and NENA 75-001, or the next subsequent version of the NENA documents listed that are publicly available at the proposal release date.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: As part of CenturyLink's NG9-1-1 solution, we provide a Border Control Function (BCF) to interface with any non-trusted network components. The BCF provides session border control and border firewall functionality in accordance with the National Emergency Number Association (NENA) STA-010.2-2016 specification. The BCF inspects, modifies and controls SIP signaling and associated media where Emergency Services IP Networks (ESInet) and agency networks interconnect and where the ESInet connects with service provider networks. The BCF mitigates security threats, resolves interoperability problems, and ensures reliable SIP-based communications. It is designed to protect and control real-time voice, video, and text NG9-1-1 sessions as they traverse IP networks between callers and Public Safety Answering Points (PSAPs). The core functionality provided by the ESInet BCF under this proposed solution is in alignment with the requirements of the NENA i3 document STA-010.2-2016. Highlights of the key functions provided are: • **Border Firewall** – the BCF provides border firewall functionality in accordance with NENA STA-010.2-2016. • **VPN** – the BCF's SBC supports encryption for calls that are not protected using SSL/TLS or IPSEC VPN.				

- **IDS/IPS** - Each core emergency call processing site includes border control and security functions including firewalls, intrusion detection systems, and intrusion protection systems. Security management personnel specialize in managing and operating these facilities and validate their operation.
  CenturyLink's NG9-1-1 solution security architecture employs defenses that include, but are not limited to, stateful packet inspection firewalls, IDS/IPS, multi-factor authentication, strong encryption, anti-virus/anti-malware, and vulnerability/patch management solutions. All inter-zone traffic is restricted to only the necessary protocols/destinations, for both ingress and egress.
  The network is capable of processing all traffic, but administratively denies protocols identified as a threat, or that otherwise fall outside of pre-defined parameters. This is partially managed via routing tables and/or Access Control Lists (ACLs). CenturyLink continually investigates and upgrades with new advances in protective technology with tools such as Intrusion Detection System (IDS).
- **Session Border Control (SBC) -** the SBC supports SIP over Transmission Control Protocol (TCP) primarily and recommended, User Datagram Protocol (UDP), Transport Layer Security over TCP (TLS-over-TCP), and Stream Control Transmission Protocol (SCTP). The SBC populates Layer 3 headers in order to facilitate priority routing of packets and enables interworking between networks utilizing IPv4 and IPv6.
- **Opening and closing of pinholes -** CenturyLink's NG9-1-1 solution BCFs are set to deny by default all traffic. Rules are built into the BCF/firewall such that pinholes between the firewalls will allow trusted/known traffic. Allowances go through rigorous scrutiny before being approved by the NOC/SOC. Once approved, changes are made on a regular basis following standard procedures to ensure no other pinholes are opened. CenturyLink's NG9-1-1 solution NOC/SOC also does on-going traffic studies on the firewalls. If a pinhole is opened but not used, the NOC/SOC will close the pinhole if necessary.
- **Limiting access to critical components using VLANs -** The proposed ESInet is a Quality of Service (QoS)-managed private IP network which can prioritize any type of IP traffic: voice, data, and multi-media. The solution uses QoS and VLANs between data centers and PSAPs to prioritize and protect the data/traffic.:
- **Call admission control –** Call admission control (CAC) is used when establishing connectivity to internal and external IP resources.
- **Media transcoding and Signaling protocol normalization and interworking -** Below is a detailed list of the various VoIP protocols and established multimedia sessions supported by CenturyLink's NG9-1-1 solution. As designed, the CenturyLink's NG9-1-1 solution is evolutionary and will be able to support future i3 specifications. The CenturyLink's NG9-1-1 solution infrastructure is created to not only support an IPSR environment, but to support i3 NENA protocols, features, and functions.

Video/Audio

- Codecs
  - G.711 – telephony equivalency
  - Have tested (note: some of these have license costs)
    - G.729
    - G.723
    - AMR-WB
- Voice Quality
- Adaptive Jitter Buffers
  - Automatic Gain Control

- Echo Cancellation
- RCTP-XR
- No degradation of MOS score from input to output
- Existing deployments have run at > 4.0 MOS score

- Loss of RTP detection
  - network caused loss of RTP recovery in place
    - automatically converges RTP to the other network
  - Loss of RTP due to component failure
    - under development
    - will automatically re-present the call
- Packet Capture for analysis
- VQ test calls made to measure PESQ/MOS scores
  - Test device deployed at each PSAP for measurements

Signaling

- TDM
  - SS7 (North American)
  - ISDN/PRI (Q-SIG)
  - End Office CAMA
    - I or II digits
    - 7- or 10-digit ANI
- SIP
  - SIP + PIDF/LO
  - Architecture supports SIP with Multi-Media Attachments
- MSRP for text

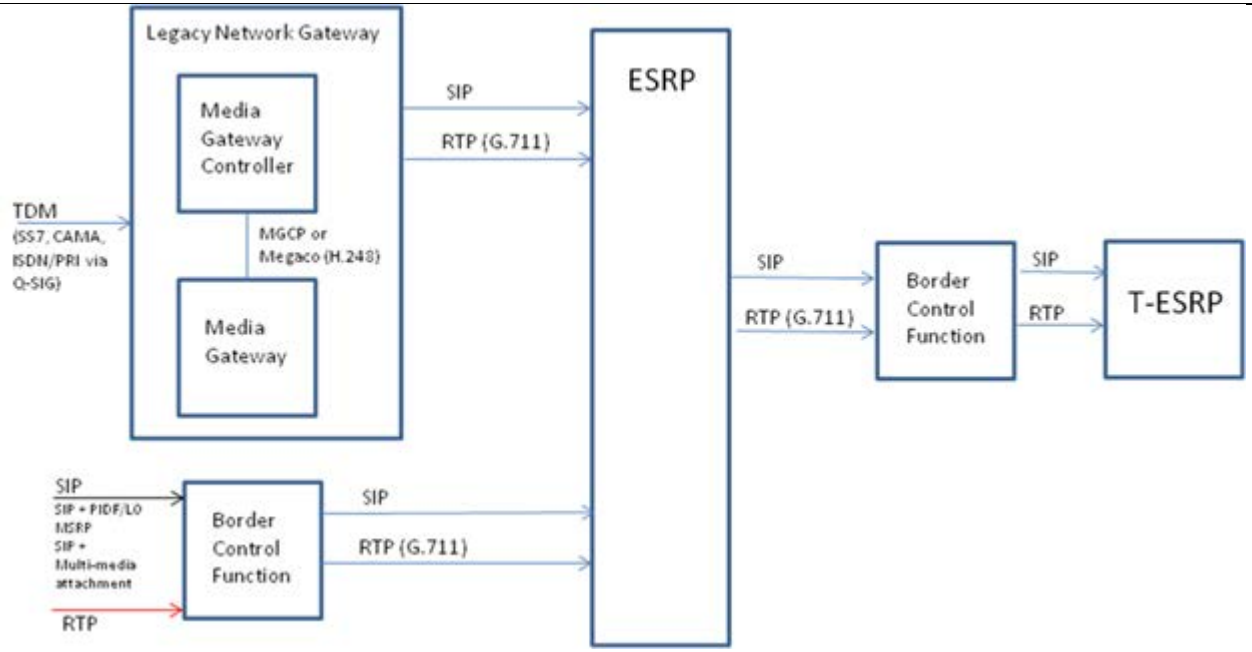


Figure 4: Nebraska ESInet Signaling Protocols

- **Network Address Translation (NAT)** - CenturyLink's NG9-1-1 solution uses a set of Header Manipulation Rules (HMR) in the SBC to NAT SIP headers in the messages. When the SBC receives a message the rules are applied, and the IP addresses in the headers are changed to correspond to the egress SBC interface and network. When messages are returned to the ingress (caller side), the SBC will NAT the headers back to the original IP addresses that were used in the originating message.
- **Codec negotiation** - CenturyLink's NG9-1-1 solution system performs codec negotiation and upgrades all calls to a codec of G.711.
- **Support for QoS and priority markings** - uses QoS and VLANs between data centers and PSAPs to prioritize and protect the data/traffic.
- **Media proxy** - CenturyLink's NG9-1-1 solution will perform this function.

Each core emergency call processing site includes border control and security functions including firewalls, intrusion detection systems, and intrusion protection systems. Security management personnel specialize in managing and operating these facilities and validate their operation.

CenturyLink's NG9-1-1 solution security architecture employs defenses that include, but are not limited to, stateful packet inspection firewalls, IDS/IPS, multi-factor authentication, strong encryption, anti-virus/anti-malware, and vulnerability/patch management solutions. All inter-zone traffic is restricted to only the necessary protocols/destinations, for both ingress and egress.

The network can process all traffic, but administratively denies protocols identified as a threat, or that otherwise fall outside of pre-defined parameters. This is partially managed via routing tables and/or Access Control Lists (ACLs). CenturyLink continually investigates and upgrades with new advances in protective technology with tools such as Intrusion Detection System (IDS).

The solution incorporates physical, network, and application security principals. Traffic between Core emergency call processing sites and distributed sites (e.g., ingress call traffic, PSAPs, management capabilities) is route- and protocol-secure. A combination of route paths, IP address recognition, limited protocols, VPNs, session border controllers, and firewalls secures the various communication elements of the proposed solution.

The following diagram depicts how the CenturyLink's NG9-1-1 solution BCF is deployed.

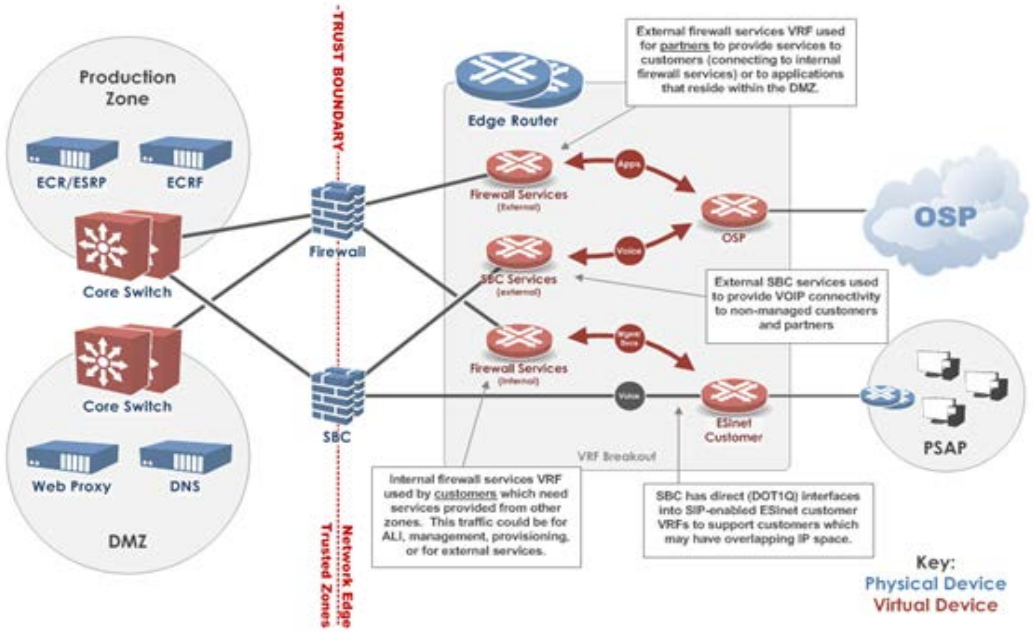


Figure 5. ESInet Border Control Function

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 20	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **High-Availability Design** The BCF solution shall be deployed in a manner to achieve 99.999 percent availability. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Each of the two geographically diverse data centers have redundant BCFs. The redundant n+1 BCF design and data center locations in Longmont, CO and Miami, FL allow for availability to meet or exceed 99.999%.				

Any additional documentation can be inserted here

NGCS 21	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **Auditing of System Log Files** Management of the BCF shall include continuous auditing of the system log files for anomalies, and processes for responding to and managing security incidents. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: We monitor and audit all aspects of CenturyLink's NG9-1-1 solution for threats from a variety of sources. Net flow statistics and packet level capture and forensics are continuously performed. This capability assists in troubleshooting and anomaly resolution as well as providing assurance of reliable performance.				

Any additional documentation can be inserted here

NGCS 22	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **Silence Suppression Detection** The BCF shall be capable of detecting when silence suppression is present in the 911 call and of disabling silence suppression if it is detected in the call. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Typically for 9-1-1 calls, an industry best practice is to preserve as much call detail as possible. Techniques such as voice activity detection (VAD) may not be sensitive enough to activate during low audio activity, and important background sounds may be missed. Additionally, some voice detection algorithms may not react in an expedient manner and may cut off the beginning of a word. The following comment is from NENA TID 08-501 in reference to silence suppression: "However, these techniques may not be appropriate for emergency calls in which "background noise" can be an important part of the call (both for the call taker and for logging recording purposes)." To that end CenturyLink's NG9-1-1 solution does not enable silence suppression for any calls that use CenturyLink's NG9-1-1 solution service. Currently, when CenturyLink's NG9-1-1 solution receives an emergency call with silence suppression requested, the ingress BCF answers with silence suppression disabled. Since we don't know if silence suppression was active or inactive for the upstream links, disabling silence suppression on the link into CenturyLink's NG9-1-1 solution prevents us from potentially being the only link with silence suppression active and dropping potentially important low-level background sounds.				

Any additional documentation can be inserted here:

NGCS 23	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **SIP Call Mediation** The BCF shall mediate all incoming 911 calls from VoIP providers to Session Initiation Protocol (SIP) calls and should be done in accordance with NENA-STA-010.2-2016. Any specific variations or non-compliance with this requirement shall be identified and documented below. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Please see this response filed with the PROPRIETARY INFORMATION				

Any additional documentation can be inserted here:

NGCS 24	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **Event Logging** The BCF shall provide the functionality to maintain logs of all 911 sessions and all additional BCF logging and recording requirements, as specified in NENA-STA-010.2-2016. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: The BCF maintains logs of all 9-1-1 sessions and all additional BCF logging and recording requirements, as specified in NENA STA-010.2-2016. A customer management portal is available for PSAP administrators to view end-to-end CDRs in real time. CDRs include the start time of the call as it enters the ESInet, answer time, end time, digits for ANI and any errors encountered. Additionally, i3 logs from all ESInet i3 components will be available per the NENA STA-010.2 specification. CenturyLink will support near real-time log delivery and web service interfaces for log retrieval from authorized clients.				

Any additional documentation can be inserted here:

NGCS 25	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **NAT/NAPT Detection and Mediation** Provide details on how the proposed Session Border Control (SBC) will recognize that a Network Address Translation (NAT) or Network Address and Port Translation (NAPT) has been performed on Open Systems Interconnection (OSI) Layer 3, but not above, and correct the signaling message for SIP.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution uses a set of Header Manipulation Rules (HMR) in the SBC to NAT SIP headers in the messages. When the SBC receives a message the rules are applied, and the IP addresses in the headers are changed to correspond to the egress SBC interface and network. When messages are returned to the ingress (caller side), the SBC will NAT the headers back to the original IP addresses that were used in the originating message.				

Any additional documentation can be inserted here:

NGCS 26	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **IPv4/IPv6 Interworking** Provide details on how the proposed SBC shall enable interworking between networks utilizing IPv4 and IPv6 using dual stacks, selectable for each SBC interface, based on NENA-STA-010.2-2016. All valid IPv4 addresses and parameters shall be translated to/from the equivalent IPv6 values.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution will provide either an IPv6 or IPv4 interface to external entities as desired for ingress to and egress from the service. IPv6 interfaces are supported according to NENA i3 standards. All network equipment has the capability to utilize IPv4 and IPv6 addresses and is configurable to support dual stack operation. Whereas some components of internal systems only support IPv4; this will not be a limitation for this solution. When an IPv6 external device sends a request packet to an internal IPv4 device, the ESInet Core strips down the IPv6 packet, removes the IPv6 header and adds the IPv4 header and passes it through. The reverse happens when the response comes back from the IPv4 device to the IPv6 device. The IPv4 network and IPv6 interfaces are continuously monitored for availability and performance. This is accomplished with the use of a back-to-back user agent session border controller, rather than Network Address Translations (NATs). All devices within the network shall be assigned static addresses.				

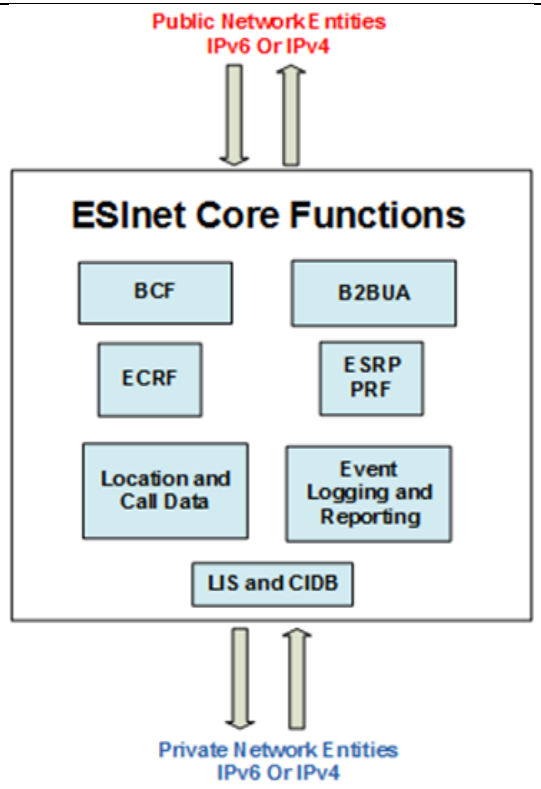


Figure 6. IPv4 and IPv6 Support Model

Any additional documentation can be inserted here:

NGCS 27	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **SIP Support Over Multiple Protocols** Provide details on how the proposed SBC shall support SIP over the following protocols: 1. Transmission Control Protocol (TCP), 2. User Datagram Protocol (UDP), 3. Transport Layer Security over TCP (TLS-over-TCP), and 4. Stream Control Transmission Protocol (SCTP). Protocols supported shall be selectable for each SBC interface to external systems. These transport layer protocols are generated and terminated at each interface to external systems.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: The solution uses Transmission Control Protocol (TCP) within the ESInet and highly recommends that PSAP call handling solutions support TCP. If the size of the SIP INVITE is within 200 bytes of the maximum transmission unit (MTU) of an Ethernet frame, fragmentation is likely to occur. Fragmentation may have impacts ranging from call setup delays of unknown duration and quantity, to blocked or abandoned calls. In some instances, fragmentation has no discernible impact to the call. Packet fragmentation is not unexpected, and it can be handled appropriately with the use of Transmission Control Protocol (TCP). Another protocol, User Datagram Protocol (UDP), is commonly used in VoIP implementations. This protocol differs from TCP, and its mechanisms for handling packet fragmentation are weaker. While CenturyLink's NG9-1-1 solution can support both UDP and TCP, we recommend that TCP be used. This recommendation is based upon the packet size experienced within CenturyLink's NG9-1-1 solution, the anticipated growth of such packet sizes with forward-looking NG9-1-1 message sets, and applicable standards including the NENA i3 specification and IETF RFC 3261. Transport Layer Security over TCP (TLS-over-TCP) and Stream Control Transmission Protocol (SCTP) are supported and selectable for each SBC interface to external systems.				

Any additional documentation can be inserted here:

NGCS 28	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **Packet Prioritization Based on Session Type** Provide details on how the proposed SBC shall be capable of populating the Layer 3 headers, based on call/session type (e.g., 911 calls) in order to facilitate priority routing of the packets.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Please see this response filed with the PROPRIETARY INFORMATION				

Any additional documentation can be inserted here:

NGCS 29	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **Encryption of Unencrypted Calls** Provide details on how the proposed SBC supports encryption for calls that are not protected entering the ESInet, based on NENA-STA-010.2-2016.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution provides a Border Control Function for encryption and interface with any non-trusted network components. The Border Control Function (BCF) provides session border control and border firewall functionality in accordance with the National Emergency Number Association (NENA) STA-010.2-2016 specification. The BCF inspects, modifies and controls SIP signaling and associated media where Emergency Services IP Networks (ESInet) and agency networks interconnect and where the ESInet connects with service provider networks. The solution for border control functions includes both security functions for the ESInet as well as the applications that ride the ESInet which include but are not limited to the SIP traffic on the ESInet. CenturyLink's NG9-1-1 solution employs encryption-in-transit where possible on networks not under direct CenturyLink control. Encryption is achieved either using SSL/TLS or IPSEC VPN. Tunnels are encrypted for security with IPSEC tunnel protection.				

Any additional documentation can be inserted here:

NGCS 30	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **BCF Elements** 1. Provide details, including drawings, describing the different BCF elements that the proposed solution comprises. 2. As part of the details, identify all the elements and/or interfaces to be provided by the Commission and/or PSAPs to the bidder.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: 1. As part of CenturyLink's NG9-1-1 solution, we provide a Border Control Function to interface with any non-trusted network components. The Border Control Function provides session border control and border firewall functionality in accordance with the National Emergency Number Association (NENA) STA-010.2-2016 specification. Customer access to the BCF is provided via the Customer Management Portal allowing for review of real-time CDR data. The BCF inspects, modifies, and controls SIP signaling and associated media where Emergency Services IP Networks (ESInet) and agency networks interconnect and where the ESInet connects with service provider networks. The BCF mitigates security threats, resolves interoperability problems and ensures reliable SIP-based communications. It is designed to protect and control real-time voice, video, and text sessions as they traverse IP networks between callers and Public Safety Answering Points (PSAPs). BCFs are included in the solution and interface to external components traversing through redundant BCF components. Each of CenturyLink's NG9-1-1 solution Core sites will have redundant BCFs. The redundant BCF components are market-leading products that provide high reliability and high availability. The BCFs work so that only authorized traffic to authorized end points are allowed. The redundant BCF design and redundant core architecture of CenturyLink's NG9-1-1 solution allows for availability to meet or exceed 99.999%.				

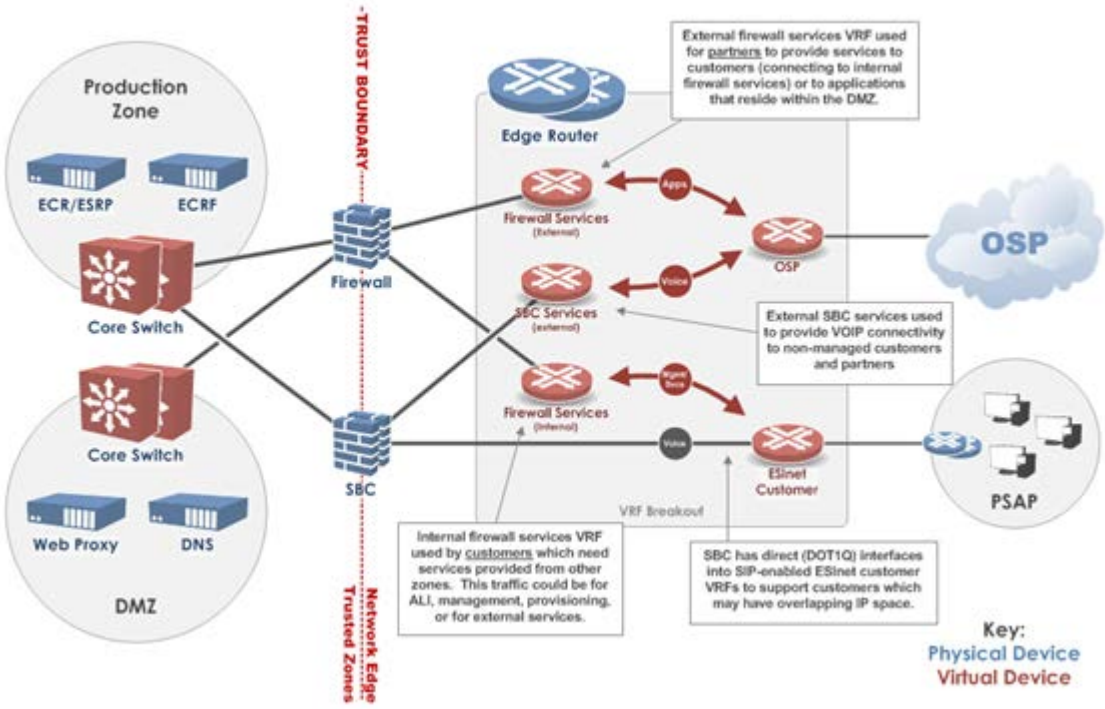


Figure 7. CenturyLink's NG9-1-1 solution ESInet Border Control Function

2. CenturyLink's BCF has minimal requirements from the Commission and/or PSAPs. CenturyLink's BCF assumes that anything outside the ESInet/NGCS should be treated as untrusted. Therefore, only known traffic is permitted (whitelisted) to be allowed into the solution. CenturyLink connectivity to the PSAP's CPE assumes the use of BGP as a routing protocol for a multimode setup such as the setup currently implemented in the State of Nebraska. Customers may use their own public ASN if they have one or CenturyLink can assign an ASN for those that do not have one. Additionally, CenturyLink supports and recommends the use of BGP passwords. CenturyLink can generate passwords for those PSAPs not wanting to provide their own.

NENA i3 standards strongly encourage the PSAP to have a security device providing a border between the ESInet and the local call taking equipment. Additionally, the ESInet routers installed at the PSAP will only be used for predefined traffic and not used as a default gateway. Using the

	ESInet provider as a default gateway prevents the call-taking equipment from being able to reach any other local resource, such as email, internet, or other individual applications. CenturyLink also allows users to access the CenturyLink ESInet Portal for access to CenturyLink's NG9-1-1 solution Customer Management Portal and additional reporting via secure internet connections using dual factor authentication. CenturyLink will provide the users with a username/password credentials and associated Entrust token to securely access the CenturyLink's NG9-1-1 solution Portal. Users do not have to supply their own tokens, and setup is included in the cost of the CenturyLink's NG9-1-1 solution.

Any additional documentation can be inserted here:

NGCS 31	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **ESRP Description** The ESRP routes a call to the next hop. It also evaluates the originating policy rules set for the queue the call arrives on, extracts the location of the caller from the SIP signaling, queries the Emergency Call Routing Function (ECRF) for the nominal next-hop route, evaluates the route based on policy rules and queue states of the downstream entity queues, and then forwards the call to the resulting next hop. Bidder's proposed ESRP must meet or exceed NENA-STA-010.2-2016. Describe how the proposed solution meets or exceeds the standards.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution Emergency Service Routing Proxy (ESRP) supports i3 compliant routing functionality including full integration with geographically determined routing, carrier grade voice quality, and demonstrated reliability. CenturyLink's NG9-1-1 solution provides the ability to interoperate NG9-1-1 systems in various configurations including the hierarchical network-of-networks model. The 9-1-1 technical architecture accommodates interacting ESRPs and ECRFs via the associated SIP and LoST protocols, respectively. Within the ESInet, the ESRP is interconnected with the LIS and ECRF systems. Interconnection with the PSAPs is via the Border Control Function. The diagram below illustrates the ESRP/PRF functional components and the interfaces with other CenturyLink's NG9-1-1 solution i3 solution elements.				

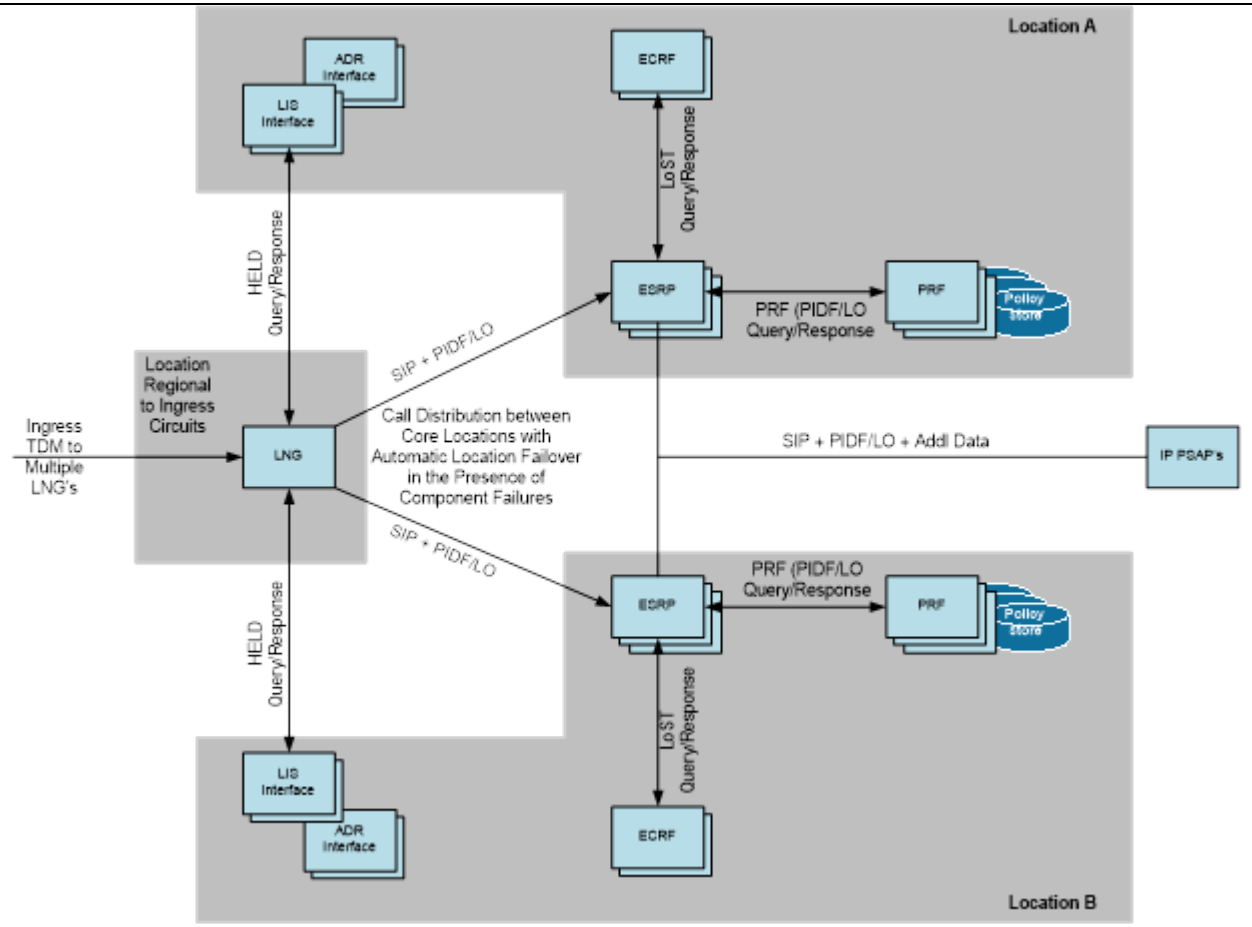


Figure 8: ESRP/PRF Diagram

The ESRP provides PSAPs with peace of mind by supporting multiple default routing fallback options until carriers transition to i3-compliant call delivery. Fallback to legacy ESN or No Record Found routing is supported to ensure every call is routed as accurately as possible even if VoIP or wireless carriers do not deliver or pre-provision routable location values or if carrier-provisioned records are error treated. If the ESRP must utilize the fallback ESN or NRF routing scheme, it will continue to deliver the call and location information. This innovative solution provides extreme reliability for the routing of calls.

	The ESRP supports an option to configure PSAP routing by call type, supporting areas where wireless calls are routed to a different PSAP than would be otherwise determined by PSAP geographical boundaries, such as the State Patrol. CenturyLink is committed to compliance with the NENA STA-010.2 standards for all external interfaces included in CenturyLink's NG9-1-1 solution Routing offer that require interoperability with other vendor's systems. CenturyLink and our partner work directly with various vendors and participate in NENA Industry Collaboration (ICE) Events and other similar i3 lab programs for the purpose of developing and demonstrating such compliance. CenturyLink and our partner also adhere to the various required interoperability protocols specified for use in the NENA i3 standards, such as HELD, LoST, Additional Data, MSRP, and others. While most internal interfaces are also NENA i3 v2 compliant, certain internal functions are not, for the sake of safety, efficiency, and the fact that they are not currently intended to be exposed as external interfaces. A relatively small number of the NENA i3 v2 requirements are on CenturyLink's NG9-1-1 solution Routing roadmap, waiting for market demand. NENA standards compliance is an ongoing commitment and CenturyLink actively participates on NENA standards development committees and other Industry Forums (i.e. ATIS) to help define the industry direction. As standards are ratified and there is a market demand for new capabilities, CenturyLink will work with industry providers to develop and test functionality to the new standards. Policy route determination includes evaluation of the PSAP-configured routing policy, the time of day, the caller's location (for geospatially determined alternate routing policies), the PSAP operational state, and the ring-no-answer timer configuration. The i3 SIP INVITE delivered to the PSAP (terminating ESRP) includes both geodetic/civic location, as available, and additional data conveyed by value and/or reference from the LIS and ADR interface responses. In addition to call delivery to i3-compliant PSAPs, the ESRP supports call delivery to legacy PSAPs. A sub-set of i3 routing policies can be provisioned for legacy PSAPs along with a 10-digit telephone number for delivery. When the ESRP receives an ingress call, it evaluates the SIP INVITE geolocation header within the PIDF-LO. If the geolocation header contains location by reference, the ESRP queries the LIS or LDB via the HELD interface to dereference the location and obtain a routable location provided as a geodetic and/or civic location value. The ESRP then queries the ECRF via the LoST protocol with the caller's geodetic or civic address location to identify the destination URI for the call. Using the location-determined URI retrieved from the ECRF via the LoST protocol, the ESRP interacts with the Policy Routing Function to determine call routing. The ESRP supports N-way bridging and call transfers using i3 SIP REFER and subscribe/notify messaging. i3 PSAPs can transfer calls to both i3 and non-i3 PSAPs. Subscribe/notify messaging allows the PSAP or secondary PSAP to take control over the call bridge once the call has been transferred.

Any additional documentation can be inserted here:

NGCS 32	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **Transition to Geospatial Routing** Bidder understands that all PSAPs and regions may not be ready for geospatial routing on day one of operations and shall provide tabular routing services, also known as Internet Protocol Selective Routing (IPSR), until such time as PSAPs and regions are ready for geospatial routing. In bidder's separate cost proposal response, indicate the pricing difference between tabular and geospatial routing. Describe the process for transitioning each PSAP or region from tabular routing to geospatial routing as PSAP's becomes ready and the manner in which the solution provides for routing by both means simultaneously.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Establishing and migrating from the existing legacy system to CenturyLink's NG9-1-1 solution infrastructure is substantial. Interconnecting OSPs, designing the network, establishing redundant and diverse networks, testing, configuration, and turnup. Once CenturyLink's NG9-1-1 solution system is in operation, additional capabilities were designed to be configurable without and major disruption in service. Most of the work for the transition from IPSR routing to i3/geospatial routing occurs on the PSAP/regional side. Moving to i3 NG9-1-1 begins with a data assessment that includes GIS data. The 9-1-1 Authority must establish a strategy to move from legacy ESN-based call processing to the NENA i3 call processing model. The structure of that transition will affect how to evolve existing data. CenturyLink has created a *GIS Data Provisioning Roles and Expectations v.3* document attachment, which allows this transition to go smoothly. This documentation includes guidelines on how to prepare the data for i3 functional element consumption. Additionally, training will be provided on how to properly use the GIS Spatial Interface (SI) to upload and manage ongoing spatial information. CenturyLink will have staff available to assist with the initial implementation and ongoing day-to-day support of GIS data maintenance. The GIS Authority and MSAG coordinator will need to create processes and procedures (if not already completed) to maintain consistency between the MSAG/AL/Location Database and the Street centerline and address points within the GIS data. Until OSPs are fully i3 and using the LVF for validation of address records, the legacy SOI processes and address validations will need to remain in place. This can be a complicated process. CenturyLink will provide guidance on processes that have worked well in past i3 implementations. CenturyLink offers additional services outside of what is requested within this RFP to assist and streamline the ongoing management and validation of the legacy and GIS data. From a NGCS perspective, few modifications need to be completed. Incoming traffic will need to be re-designated as GIS routable. PSAP i3 configurations within the ESRP will need to be created and tested through to the CHE prior to deployment. A test plan is run to validate the i3 protocols are handled in the proper way and that calls can be transferred from i3 PSAPs to non- i3 PSAPs internal and external to CenturyLink's NG9-1-1 solution. Fallback to ESN routing with i3 call delivery is also validated during the testing process. The NGCS processes listed above are not theory, they have been and continue to be deployed in CenturyLink's NG9-1-1 solution areas across the country.				

Any additional documentation can be inserted here:

NGCS 33	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **Policy Routing Function (PRF) Description** The PRF is a required function of the ESRP. The ESRP interacts with the PRF to determine the next hop of a call or event. Before the ESRP sends the call to the next hop, it first queries the PRF to check the status of the next hop to determine if a unique routing rule or policy is in place that would direct the call to another location. The destination of the next hop is typically a queue. The PRF monitors the downstream queues of ESRPs for active understanding of the entity's queue status. Describe how the solution meets or exceeds the standards.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

Using the location-determined URI retrieved from the ECRF via the LoST protocol, the ESRP interacts with the Policy Routing Function to determine call routing.

The PRF accounts for the operational status of any downstream ESRP in the evaluation of any policy. This ensures that an ESRP is in an operational state before any message is sent to that ESRP's queue.

CenturyLink's NG9-1-1 solution i3 policy routing will provide the State's PSAPs with extensive flexibility to define and update standard and alternate routing polices. PSAPs can modify routing policies, set priorities, and modify their operational state. Routing policies can be defined as recurring or one-time. The rules-based routing proxy includes the following elements:

- A repository of PSAP-defined routing policies. The following types of routing policies are supported:
  - Abandonment/Night Service Routing – The abandonment policy is engaged whenever the terminating ESRP (PSAP) operational state is defined as 'Abandoned'. The PSAP operational state may be modified by contacting the CenturyLink NOC, triggered via a device installed at the PSAP, or modified online.
  - Overflow Routing – The overflow routing policy is applied during overflow scenarios when a PSAP is receiving more calls than its occupied workstations can accommodate. Upon reaching the designated call capacity for the call type, cumulative calls, or if the target is unreachable, the ESRP engages the primary PSAP's overflow routing policy. Similarly, the alternating routing policy will be invoked if the terminating ESRP call handling system does not accept the SIP invite or for a ring-no-answer timeout.
  - Diversion Routing – The diversion routing policy is applied whenever the PSAP opts to engage alternate diversion routing rules. The PSAP operational state may be modified to engage the diversion routing policy by contacting the CenturyLink NOC or online.
  - Special Event Routing – Special event routing is a special type of diversion routing policy that is applied during a scheduled time window. If a PSAP jurisdiction contains venues that host events that may warrant dedicated call handling (mobile command center or dedicated resources at the PSAP), special event polygons can be pre-provisioned.

CenturyLink will provide a feature-rich management portal for the State and/or PSAPs to view their policies. Policies have attributes such as active/inactive, one-time or recurring time window, priority, or a set of destination(s) to send the call to, and call distribution method as examples.

Abandonment, Overflow, and Diversion policies can be configured to use any of the following policies.

	• Geographically – The system can be configured to send abandonment calls to different alternate PSAPs based on the geographic location of the calling party within the primary PSAP's jurisdiction. Geographic abandonment or alternate routing polygons can be pre-provisioned via the SI or submitted dynamically. • Hierarchically – The system can be configured to cascade a call to up to nine consecutive, alternate PSAPs. • Load-balanced – The system can be configured to distribute calls between PSAPs. All policies loaded by the State are held in a test state (non-active) until the State confirms that all test calls using the policies perform as expected.

Any additional documentation can be inserted here:

NGCS 34	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **PRF Policy Store and User Interface** The PRF shall allow defining of policy rules for distributing a wide range of calls in an efficient manner. 1. Describe the solution's Policy Store and the PSAP's ability to effect changes to the PRF. 2. Describe the user interface, role-based authentication, the ability of each PSAP or region to manage PSAP's own policy rules, and the types of policy rules available at the time of proposal submission, as well as those on the product roadmap. Roadmap items must include an estimated time of feature availability.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

1. CenturyLink's NG9-1-1 solution i3 store/policy routing will provide the PSAPs with extensive flexibility to define and update standard and alternate routing polices. PSAPs can modify routing policies, set priorities, and modify their operational state through a web-based management portal. Routing policies can be defined as recurring or one-time.

The PRF allows for defining policy rules for distributing a wide range of calls in an efficient manner. CenturyLink's NG9-1-1 solution i3 store/policy routing will provide the PSAPs with extensive flexibility to define and update standard and alternate routing polices. PSAPs can modify routing policies, set priorities, and modify their operational state through a web-based management portal. Routing policies can be defined as recurring or one-time.

Using the location-determined URI retrieved from the ECRF via the LoST protocol, the ESRP interacts with the Policy Routing Function to determine the policy that should be employed to deliver the call.

2. The PRF allows for defining policy rules for distributing a wide range of calls in an efficient manner. CenturyLink's NG9-1-1 solution i3 store/policy routing will provide the PSAPs with extensive flexibility to define and update standard and alternate routing polices. PSAPs can modify routing policies, set priorities, and modify their operational state through a web-based management portal. Routing policies can be defined as recurring or one-time.

Multi-factor authentication and role-based access control are used to restrict user access to the ESInet management portal. User access via the public Internet requires two-factor authentication, where one factor is provided through username and password and the second factor is provided through a dynamic, randomly changing secure access code from a security token. Users are configured in the CenturyLink identity management system, linked to a specific security token, and configured for access to a defined list of applications.

The routing proxy and policy store includes the following elements:

- A repository of PSAP-defined routing policies.
- CenturyLink's NG9-1-1 solution Customer Management Portal – A feature-rich web tool that allows PSAPs to view routing configurations, edit their routing policies, and modify their status (normal, abandoned, diverted). The feature rich ESInet management portal is a user-friendly tool that can be used by jurisdiction(s) and/or PSAPs to view, enable, and maintain their policies. Policies have attributes such as active/inactive, one-time or recurring time window, priority, or a set of the destination(s) to send the call to as examples. Routing destinations can be pre-provisioned and then enabled in real time to handle incidents.

The following types of routing policies are supported and can be managed by the user via the portal.

	• **Abandonment/Night Service Routing.** The abandonment policy is engaged whenever the terminating ESRP (PSAP) operational state is defined as 'abandoned. The PSAP operational state may be modified by contacting the NOC, triggered via a device installed at the PSAP, or modified online. • **Overflow Routing** – The overflow routing policy is applied during overflow scenarios when a PSAP is receiving more calls than its occupied workstations can accommodate. Upon reaching the designated call capacity for the call type, cumulative calls, or if the target is unreachable, the ESRP engages the primary PSAP's overflow routing policy. Similarly, the alternating routing policy will be invoked if the terminating ESRP call handling system does not accept the SIP invite or for a ring-no-answer timeout. • **Diversion Routing** – The diversion routing policy is applied whenever the PSAP opts to engage alternate diversion routing rules. The PSAP operational state may be modified to engage the diversion routing policy by contacting the CenturyLink NOC or online. • **Alternate Routing.** The alternating routing policy will be invoked if the terminating ESRP call handling system does not accept the SIP invite or for a ring-no-answer timeout. The user can prioritize an alternate destination via the management portal and enable a PSTN back-up route on-the-fly. • **Special Event Routing.** Special event routing is a special type of diversion routing that is applied during a scheduled time window. If a PSAP jurisdiction contains venues that host events that may warrant dedicated call handling (mobile command center or dedicated resources at the PSAP), special event polygons can be pre-provisioned. Additionally, abandonment, overflow, and diversion policies can be configured to use any of the following policies. • **Geographically.** The system can be configured to send abandonment calls to different alternate PSAPs based on the geographic location of the calling party within the primary PSAP's jurisdiction. • **Hierarchically.** The system can be configured to cascade a call to up to nine consecutive, alternate PSAPs. • **Load Balanced.** The system can be configured to distribute calls between PSAPs. All policies loaded are held in a test state (non-active) until the jurisdiction(s) confirms that all test calls using the policies perform as expected. Additional short-term roadmap items include the support of additional responder boundaries and policies (Q4 2020). CenturyLink looks forward to developing an ongoing relationship with the State of Nebraska. This relationship will allow the State and CenturyLink to fully understand the ongoing and dynamic State-specific requirements within the 9-1-1 environment. The end goal is to establish a partnership, in which future capabilities will be developed and supported together with the end goal of making the Next Generation solution a key part of saving more lives by creating and maintaining innovative, reliable, and available solutions.


Any additional documentation can be inserted here:

NGCS 35	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **Next-Hop Queues** A next-hop queue may be a Uniform Resource Identifier (URI) that routes the call to an interactive multimedia response system (as described in IETF RFC 4240) that plays an announcement (in the media negotiated by the caller) and potentially accepts responses via Dual-Tone Multi-Frequency (DTMF) signaling or other interaction protocols. Describe how the bidder's solution implements next-hop queueing.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: A next-hop queue that is a uniform resource identifier (URI) that routes a call to an interactive multimedia response system that plays a voice announcement and accepts responses via Dual-Tone Multi-Frequency (DTMF). DTMF signaling is supported. The PRF accounts for the operational status of any downstream ESRP in the evaluation of any policy. This ensures that an ESRP is in an operational state before any message is sent to that ESRP's queue. CenturyLink will work with the State of Nebraska to assess and support use cases for when an announcement is negotiated by the caller to be played in a media format other than voice.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 36	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **High-Availability Design** The ESRP/PRF solution shall be designed with resiliency and redundancy to provide a minimum of 99.999 percent availability. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: The redundant ESRP/PRF design and the overall two-core architecture of CenturyLink's NG9-1-1 solution allows for availability to meet or exceed 99.999%. ESRP high availability is achieved through an application processing complex consisting of multiple application servers, each of which operates independently of the others so that a single application processor failure does not disrupt the processing of the complex. There are two application processing complexes that operate independently of each other and are geographically distributed. Each component at an application processing complex has redundancy and high availability within its own domain. The ESRP application is highly redundant within each of the geographically separate sites. There are multiple computers running the ESRP application and the failure of any one or two of those computers does not affect calls in progress. Failure of a data center results in all future calls being processed by the other geographically diverse data center and will still provide the total required call processing capacity requirement.				

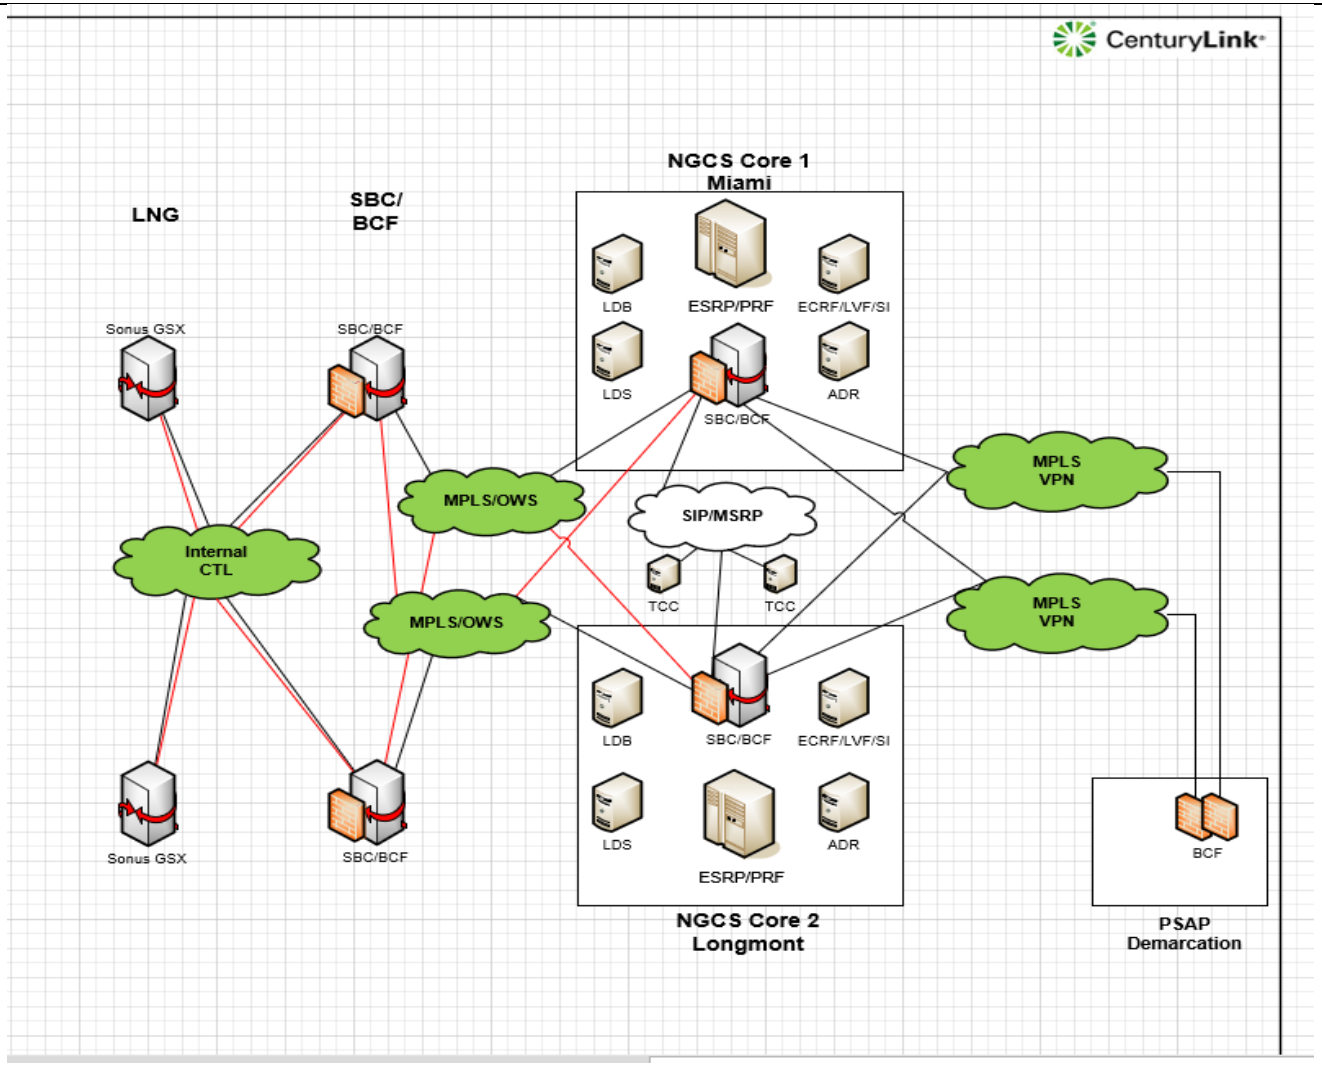

NGCS 36 - Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF) High-Availability Design

Any additional documentation can be inserted here:

NGCS 37	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **Keep-Alive Signaling Between Elements** Provide an explanation of how the proposed ESRPs use the SIP "options" transactions for maintaining "keep -alive" signaling between ESRPs, LNGs, Legacy PSAP Gateways (LPGs) and session recording services.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Option messages are used in CenturyLink's NG9-1-1 solution to ensure path and element availability. If an option response is not received, the solution will identify an alternate and/or resource to complete the transaction while maintaining 99.999% availability. SIP monitoring via SIP "Options" messages exists between the core site call control application and each ingress (OSP) and PSAP endpoint. To detect failure of DS0 channels, continuity tests (COT), loopback, and tone check tests are performed between the LNGs and OSP switching equipment before a circuit is established.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 38	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF** **TCP/TLS Implementation** The upstream interface on the proposed non-originating ESRPs shall implement Transmission Control Protocol/Transmission Layer Security (TCP/TLS), but shall be capable of fallback to UDP, as described in NENA-STA-010.2-2016. Stream Control Transmission Protocol (SCTP) support is optional. The ESRP shall maintain persistent TCP and TLS connections to the downstream ESRPs or User Agents (UA) that it serves. Provide detailed documentation describing how the non-originating ESRP interface supports TCP/TLS with fallback to UDP.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution uses Transmission Control Protocol (TCP) within the ESInet and highly recommends that both ingress and egress partners support TCP as well. While CenturyLink's NG9-1-1 solution can support both UDP and TCP, we recommend that TCP be used. This recommendation is based upon the packet size experienced within CenturyLink's NG9-1-1 solution, the anticipated growth of such packet sizes with forward-looking NG9-1-1 i3 message sets and applicable standards including the NENA i3 specification and IETF RFC 3261. CenturyLink's NG9-1-1 solution SBC also supports SIP over Transport Layer Security over TCP (TLS over-TCP). Protocols are selectable for each SBC interface to external systems. This transport layer protocol is generated and terminated at each interface to external systems. Support for Stream Control Transmission Protocol can be added for an additional charge.				

Any additional documentation can be inserted here:

NGCS 39	**Next Generation Core Services Elements (NGCS)** **NENA Compliance Chart** Provide a description of how the proposed ESRPs meet or exceed all functional requirements below as defined in NENA-STA-010.2-2016, which are listed below.	X			
	Bidder Response: The ESRP is the "outgoing proxy server" for calls originated by the PSAP. The ESRP will route calls within the ESInet and will route calls to destinations outside the ESInet through an appropriate gateway or SIP trunk to a PSTN or other carrier connection. Transfers to another PSAP or agency is an example of such outgoing calls to external destinations. **INVITE Transaction Processing Section 5.2.1.7** – Comply. When the ESRP receives an INVITE transaction it first evaluates the Origination rule set. If a LoSTServiceURN condition is encountered, it looks for the presence of a Geolocation header. If present, the ESRP evaluates the header and extracts the location in the Geolocation header. Each ESRP is capable of receiving location as a value or a reference and is provisioned with credentials suitable to present to all LISs in its service area to be able to dereference a location reference using either SIP or HELD. **Logging Interface Section 5.2.2.8** Comply**.** The ESRP supports a logging interface. The ESRP logs every transaction and every message received and sent on its call interfaces, every query to the ECRF and every state change it receives or sends. It can log the rule set it consulted, the rules found to be relevant to the route, and the route decision it made. Please see this response filed with the PROPRIETARY INFORMATION**Overview Section 5.2.1.1** – Comply. Termination Policy				

Any additional documentation can be inserted here:

	Next Generation Core Services Elements (NGCS) **Emergency Call Routing Function (ECRF)** Describe how the ECRF interfaces with other ECRF solutions which may interface with the bidder's solution. Awarded Contractor shall coordinate with other ECRF solution providers to ensure interoperability between the respective solutions.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
NGCS 40	**Bidder Response:** Interactions with external ECRFs or the PSAP CPE will utilize digital certificate-based authentication as defined by NENA and managed by the PSAP Credentialing Agency (PCA), once available. Until that time, CenturyLink will manage credentialing and the issuance of digital certificates to ensure protection and security. This mechanism will also be utilized for PSAP access to systems within CenturyLink's NG9-1-1 solution, including access to the LIS interface, ADR interface and ECRF. Interactions between the ECRF and the ESRP are secured within the ESInet. If the ECRF receives a request for a location outside its coverage area, it will send a recursive (parent ECRF) or iterative (National Forest Guide) query to a parent/state ECRF or the National Forest Guide, once available. Absent a parent ECRF or the National Forest Guide, the ECRF can store coverage areas for other ECRFs. When a request for a location that falls outside of its own coverage area is received, the ECRF will check to see if the location falls within another known coverage area and send a recursive query to that ECRF and per RFC 5222, pass that response along to the requesting system.				

Any additional documentation can be inserted here:

Attachment “C”
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 41	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **ECRF Description** The ECRF shall be designed according to NENA-STA-010.2-2016 and be implemented using diverse, reliable and secure IP connections. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution provides geo-redundant emergency call routing functions (ECRF) that utilize geographic location information to route emergency calls to the appropriate PSAP. The ECRFs support i3 standards and contain geographic boundaries provided by the customer for 9-1-1 call routing and responder determination. The ECRF LoST protocol interface meets RFC 5222 and NENA STA-010.2 requirements. CenturyLink's NG9-1-1 solution ECRF provides full i3 compliance and contains the geographic boundaries provided by the customer for 9-1-1 call routing and responder determination. The ECRF LoST protocol interface meets RFC 5222 and NENA STA-010.2 requirements. Where applicable, the ECRF also meets NENA 01- 014 and NENA 01-010, though there are transitional considerations and conflicts between these documents, NENA STA-010.2, and the draft NG9-1-1 GIS Data Model. The redundant ECRF design and the overall redundant architecture of CenturyLink's NG9-1-1 solution allows for availability to meet or exceed 99.999%. The ECRFs exist within a highly available and geographically distributed application processing environment. A single hardware component failure at one of the application processing complexes will not interrupt processing of the ECRF. A single geographic site failure (either the communication to the site or elimination of the site itself) will not prevent further call processing from occurring. High availability is achieved through highly reliable, secure and diverse IP connections as well as high-availability software design, redundant ECRF instances, and transactions using dynamic client/server connections with ECRF serving entities. The ECRF(s) will only allow queries from trusted resources. When implementing the T-ESRP (CPE) onto the system, required configurations and procedures will be established within the various resources to allow for the appropriate amount of LoST traffic for ECRF queries. Standard operating procedures will be verified during interoperability (pre-live) testing. The geographically diverse ECRFs utilize redundant data stores to support high availability. These systems are monitored 24x7x365 by the Network Operating Center (NOC) and supported through the Incident Command System. All transactions are logged. Errors are logged for reporting and analysis and directed to the NOC when immediate action is required. With the ECRF architecture including two separate servers at each geographically diverse location, upgrades and other maintenance can be performed one server at a time so that at no time will the system be one-sided. As are of all the NGCS elements, the ECRF is architected to be secure, reliable, resilient, and robust. All applications and network in the 9-1-1 call path are designed to achieve 99.999% system availability using several techniques to improve resiliency such as geo-diverse redundancy, fail-over techniques, virtualization, high availability, etc. The solution utilizes blade servers with redundant hardware components (network interfaces, hard disks, hot swap power supplies, etc.) wherever possible, and the solution proposed has no single point of failure. The ECRF interfaces with the Location to Service Translation (LoST) protocol (RFC5222) and supports LoST queries via the ESRP, PSAP customer premise equipment (CPE), or any other permitted IP host.				

	The ECRF supports logging of all connections, connection attempts, data updates, ECRF query results, and LoST transactions. Errors are logged for reporting and analysis and directed to the NOC when immediate action is required.

Any additional documentation can be inserted here:

NGCS 42	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **High-Availability Design** Bidder shall supply an ECRF function that meets a minimum of 99.999 percent availability. Describe how the solution meets or exceeds the above requirements**.**	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: The redundant ECRF design and the overall redundant architecture of CenturyLink's NG9-1-1 solution allows for availability to meet or exceed 99.999%. The ECRFs exist within a highly available and geographically distributed application processing environment. A single hardware component failure at one of the application processing complexes will not interrupt processing of the ECRF. A single geographic site failure (either the communication to the site or elimination of the site itself) will not prevent further call processing from occurring. High availability is achieved through highly reliable, secure and diverse IP connections as well as high-availability software design, redundant ECRF instances, and transactions using dynamic client/server connections with ECRF serving entities. The ECRF(s) will only allow queries from trusted resources. When implementing the T-ESRP (CPE) onto the system, required configurations and procedures will be established within the various resources to allow for the appropriate amount of LoST traffic for ECRF queries. Standard operating procedures will be verified during interoperability (pre-live) testing. The geographically diverse ECRFs utilize redundant data stores to support high availability. These systems are monitored 24x7x365 by the Network Operating Center (NOC) and supported through the Incident Command System. All transactions are logged. Errors are logged for reporting and analysis and directed to the NOC when immediate action is required. With the ECRF architecture including two separate servers at each geographically diverse location, upgrades and other maintenance can be performed one server at a time so that at no time will the system be one-sided.				

Any additional documentation can be inserted here:

NGCS 43	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Accessibility by Outside Functional Elements** Contractors providing an ECRF shall ensure that it is accessible from outside the ESInet and that the ECRF permits querying by an IP client/endpoint, an LNG, an ESRP in a next-generation emergency services network, or by some combination of these functions. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: Interactions between the ECRF and the ESRP are secured within the ESInet. Interactions with external ECRFs or the PSAP CPE will utilize digital certificate-based authentication as defined by NENA and managed by the PSAP Credentialing Agency (PCA), once available. Until that time, CenturyLink will manage credentialing and the issuance of digital certificates to help ensure protection and security. This mechanism will also be utilized for PSAP access to systems within CenturyLink's NG9-1-1 solution, including access to the LIS interface, ADR interface and ECRF. If the ECRF receives a request for a location outside its coverage area, it will send a recursive (parent ECRF) or iterative (National Forest Guide) query to a parent/state ECRF or the National Forest Guide, once available. Absent a parent ECRF or the National Forest Guide, the ECRF can coverage areas for other ECRFs. When a request for a location that falls outside of its own coverage area is received, the ECRF will check to see if the location falls within another known coverage area and send a recursive query to that ECRF and per RFC 5222, pass that response along to the requesting system. Interactions between CenturyLink's NG9-1-1 solution ECRF and ECRFs outside CenturyLink's NG9-1-1 solution System also require credentialing/authentication.				

Any additional documentation can be inserted here:

NGCS 44	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Accessibility Inside the ESInet** Contractor shall provide an ECRF accessible inside an ESInet, which shall permit querying from any PSAP (or future entity authorized to connect to the ESInet) inside the ESInet. ECRFs provided by other entities may have their own policies regarding who may query them. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: Any system secured within CenturyLink's NG9-1-1 solution is considered safe, so the ECRF does allow LoST queries from any entity inside the ESInet. It is understood that ECRFs provided by other entities may have their own policies regarding who may query them and as such there is no guarantee that a query to another ECRF will provide a useful result. As a matter of practice, CenturyLink's NG9-1-1 solution ECRF should only be provisioned with coverage area for external ECRFs for which interoperability agreements and associated digital certificates for authentication have been provisioned for access into the different systems. Once the National Forest Guide and the PSAP Credentialing Agency (PCA) have been established, there will no longer be a need for CenturyLink to manage the digital certificates.				

Any additional documentation can be inserted here:

NGCS 45	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Origination Network ECRF** An origination network may use an ECRF, or a similar function within its own network, to determine an appropriate route—equivalent to what would be determined by the authoritative ECRF—to the correct ESInet for the emergency call. Describe the functionality of such an ECRF equivalent and document where this functional element resides within the proposed solution.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: The origination network ECRF would typically reside within its own network and at its own cost, as noted. CenturyLink can optionally provide an "external" ECRF available for LoST queries by authorized origination network providers to be used to determine emergency call routing to the correct ESInet. This function is dependent on Nebraska's ability to negotiate receipt of the authoritative boundaries for any non-CenturyLink's NG9-1-1 solution networks within the State.				

Any additional documentation can be inserted here:

NGCS 46	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Routing Query Interface** The ECRF shall support a routing query interface that can be used by an endpoint, ESRP or PSAP to request location-based routing information from the ECRF. Additionally, it shall support both iterative and recursive queries to external ECRF sources. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: The ECRF supports a routing query interface that can be used by an endpoint, ESRP or PSAP to request location-based routing information from the ECRF. Additionally, the ECRF supports both iterative and recursive queries to other LoST servers, such as an external ECRF or National Forest Guide, once available. Note the National Forest Guide, per NENA-INF-009.1-2014, only supports iterative queries.				

Any additional documentation can be inserted here:

NGCS 47	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **LoST Protocol Support** The ECRF shall interface with the Location-to-Service Translation (LoST) protocol (as described in IETF RFC 5222) and support LoST queries via the ESRP, PSAP CHE, or any other permitted IP host. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: In compliance with NENA i3 specifications, the ECRF supports the LoST protocol as defined in RFC 5222, with receipt of civic addresses, geo-coordinates, or both location elements as input. All queries from outside CenturyLink's NG9-1-1 solution system must be authenticated.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 48	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Query Rate-Limiting** The proposed ECRF shall allow for rate-limiting queries from sources other than the proposed ESRP(s), and provide logging of all connections, connection attempts, and LoST transactions. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: All transactions are logged. Errors are logged for reporting and analysis and directed to the NOC when immediate action is required. Additionally, transaction and error information are available to the authorized parties through the Customer Management Portal. The ECRF has been designed to handle extreme query loads. The ECRF tested to support a minimum of 100 queries per second for five (5) minutes, even if one node is down and can easily support this rate in all up conditions. Rate limiting of queries from sources other than the proposed ESRP(s) is a supported function. For obvious reasons, rate limiting any "call path" requests will not be allowed.				

Any additional documentation can be inserted here:

	Next Generation Core Services Elements (NGCS) **Emergency Call Routing Function (ECRF)** **Supported Functions** The ECRF shall support each of the following items. Describe how the solution meets or exceeds each of the requirements below:	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
NGCS 49	**Bidder Response:** The ECRF provides full i3 compliancy and contains the geographic boundaries provided by the jurisdiction(s) for 9-1-1 call routing and responder determination. The ECRF LoST protocol interface meets RFC 5222 and NENA 08-003v1 requirements. The ECRF has been supporting production Next Generation 9-1-1 call routing solutions since 2009, and the technology core has been supporting wireless and VoIP 9-1-1 call routing since 2003. The ECRF LoST interface was tested during the NENA Industry Collaboration Event (ICE 4), where it passed all scenarios tested. In addition, the ECRF meets the following requirements. **Logging of all connections, connection attempts, data updates, ECRF query results and LoST transactions:** All transactions are logged. Errors are logged for reporting and analysis and directed to the NOC when immediate action is required. **Location error identification:** The Spatial Interface can perform GIS validations, including validations to ensure routing integrity. The QA/QC processes provided during validation steps in the SI will prevent any unwanted data being provisioned in the ECRF that may introduce ambiguity in the data that would prevent the ECRF from being able to make a definitive response to certain requests. A change control system is established to monitor and manage data discrepancies and to track data change requirements. The SI validation engine refers errors back to the originating 9-1-1 Authority in comprehensive reports that are retrieved in the Enterprise Geospatial Database Management System (9-1-1EGDMS) portal. Validation errors must be corrected by the 9-1-1 Authority within their own GIS database and resubmitted to the Spatial Interface. Ongoing 9-1-1EGDMS validations include road centerline, address point, and polygon for each data upload. Features with critical errors cannot be loaded into CenturyLink's NG9-1-1 solution systems due to incompatibility or addressing errors that would result in inaccurate call routing. All critical errors should be resolved prior to switching to geospatial call routing. **Critical Errors:** Any features with critical errors will not be provisioned. Errors must be corrected and resubmitted to load to production ECRF and LVF and avoid default routes or failed validation. • Unique ID Duplicate: The feature's Unique ID is duplicated within the agency's layer • Geometry Error: A record exists in the attribute table that is not associated with a geographic feature or the geometry of a feature is in error.	X			

	• Attribute Duplicate: The feature's attributes are duplicated in multiple features, but each feature has a unique location • Address Range Overlap: An overlap exists in one or both sides of the address ranges between two connected and identically named road centerline segments. • Field Constraint: An attribute value is incompatible with the EGDMS database schema and cannot be loaded into the database. • Outside Authoritative Boundary: All or part of the feature falls outside the Authoritative Boundary. • Boundary - Neighbor – Gap: A gap exists between the boundary polygon and an adjacent data source's boundary polygon. • Boundary - Internal – Gap: A gap exists between the boundary polygon and another boundary polygon within the database. • Boundary - Neighbor – Overlap: The boundary polygon feature overlaps an adjacent data source's boundary polygon. • Boundary - Internal – Overlap: The boundary polygon feature overlaps another boundary polygon within the database. • Routing URI: The routing Uniform Resource Identifier (URI) is either missing or invalid within the service response boundary polygon **Updates from the SI in near real-time with no degradation of LoST services:** When time is critical, it is recommended that boundary updates are submitted independently of Site Structure/Address Point and Road Centerline updates as the validation process on these can take longer, depending on the number of changes that have been made since the previous data update. Each ECRF element maintains two copies of each map layer, an active one that processes the LoST queries and an inactive one. New updates are applied to the inactive directory. Once processing is complete for all ECRF computing elements (two per geographically diverse location), the ECRF system will notify the Spatial Interface that the load was successful and make the inactive map layer active. If for some reason the load was unsuccessful, alarm notifications will be sent to the NOC and relevant operations teams. If this occurs the previously active map layer will remain active. ECRF prescribed functions that are not directly related to call-time activities (e.g., gap/overlap detection) are performed on separate servers to prevent any "administrative" oriented ECRF functions from interfering with the call-time functions. Timing of updates is dependent on the data being updated. As is requested in another bullet point in this section (Validation of GIS updates before they are provisioned into the ECRF), validation of polygon feature sets occurs very quickly and subsequent provisioning to the ECRF system is near				

	real-time. It is always recommended that "urgent" updates to one or more polygon layers be provisioned without the Site Structure Address Points (SSAPs) or Road Centerlines (RCLs) as validation and provisioning of the SSAPs and RCLs can take a few or many minutes, depending on the size of the feature set being loaded. It is possible to reduce the number of validations performed on the data updates to decrease provisioning speed, but that is balanced by the increased risks of not performing all available validations. **Routing of calls based on geographic coordinates, geodetic shapes and civic addresses:** For expediency during call processing, the geodetic location, if available, is utilized by the ESRP for routing determination of using a point-in-polygon lookup. Latitude and longitude (XY) circle and sphere are the geodetic shapes currently supported. Other geodetic shapes will be considered in future developments as markets demand. Routing and other services can also be determined based on civic address when geodetic locations are unavailable. **Utilization of common GIS boundaries, including, but not limited to, PSAP, law enforcement, fire/rescue and emergency medical services (EMS):** The GIS data layer(s) that are used to identify the PSAP, emergency, and additional service types are configured on a per-service basis, e.g., urn:service:sos. When there is only a civic location element available in the PIDF-LO, the ECRF will follow the LoST protocol to locate a matching address point feature or, if one cannot be determined from the address point layer, the ECRF will attempt to locate a matching Road Centerline feature. If either is located, the ECRF will return the URI associated with the URN also specified in the LoST request. The ECRF supports provisioning of separate boundary layers for first responder service types for police, fire, and emergency medical services, if the polygon datasets are provided with the GIS data. The ECRF is not limited to these minimum data sets and will support additional boundary layers, each identified with a unique URN. The ECRF client may query the ECRF for additional service URNs associated with the location. **Permitting of LoST queries for find service request association with each layer:** The ECRF supports LoST query types. It also supports queries to retrieve Additional Data Repository (ADR) URIs that may be associated with a particular location. Hosting of the Location ADRs themselves are not the responsibility of the ECRF provider. **Compliance with NENA 02-010 and NENA 02-014:** NENA 02-014 addresses GIS data collection and maintenance standards. While certain layer collection does apply, any requirements in this document would be superseded by STA-010.2 and the [draft] NG9-1-1 GIS data model. Similarly, NENA 02-010 conflicts with STA-010.2 and the [draft] NG9-1-1 GIS data model. CenturyLink's NG9-1-1 solution ECRF complies with these documents, except where they conflict with STA-010.2 and the [draft] NG9-1-1 GIS data model, in which case the more recent standards are followed. **Dynamic updates to GIS without disruption of the ECRF:** Updates provisioned via the SI are applied with no degradation of LoST services. Each ECRF element maintains two copies of each				

	map layer, an active one that processes the LoST queries and an inactive one. New updates are applied to the inactive directory. Once processing is complete for all ECRF computing elements (two per geographically diverse location), the ECRF system will notify the Spatial Interface that the load was successful and make the inactive map layer active. If for some reason the load was unsuccessful, the ECRF system will pass that result along to the Spatial Interface which will send out alarm notifications. If this occurs the previously active map layer will remain active. As well, the ECRF and LVF are implemented independently even though they provide similar functions, due to the provisioning nature of the LVF function and the real-time call processing nature of the ECRF. This architecture ensures that the Location Validation Function does not interfere with the critical call routing functions provided by the ECRF. **Validation of GIS updates before they are provisioned into the ECRF:** Any updates to the GIS data within the ECRF, whether to correct errors within the current data set or enhance it for any other reason, will be uploaded through CenturyLink's NG9-1-1 solution Spatial Interface. The GIS updates are provisioned through the Spatial Interface which has the additional ability to perform GIS validations, including validations to ensure routing integrity. The QA/QC processes provided during validation steps in the SI will prevent any unwanted data being provisioned in the ECRF that may introduce ambiguity in the data that would prevent the ECRF from being able to make a definitive response to certain requests. A change control system is established to monitor and manage data discrepancies and to track data change requirements. Validated GIS updates are normalized and applied to the ECRF production instances in a manner that preserves availability and coordinates with other ESInet scheduled updates and activities.				

Any additional documentation can be inserted here:

	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
Logging of all connections, connection attempts, data updates, ECRF query results, and LoST transactions	X			
Location error identification.	X			
Updates from the SI in near real-time with no degradation of LoST services	X			
Routing of calls based on geographic coordinates, geodetic shapes, and civic addresses	X			
Utilization of common GIS boundaries, including, but not limited to, PSAP, law enforcement, fire and emergency medical services (EMS).	X			
Permitting of LoST queries for find service request association with each layer.	X			
Compliance with NENA 02-010 and NENA 02-014.	X			

Dynamic updates to GIS without disruption of the ECRF.	X			
Validation of GIS updates before they are provisioned into the ECRF.	X			

	Next Generation Core Services Elements (NGCS) **Emergency Call Routing Function (ECRF)** **User Interface and Provisioning** Define bidder's method for: 1. Provisioning the ECRF 2. updating the ECRF (including the frequency of updates) 3. validating data provisioning 4. performing error logging 5. performing gap and overlap analysis 6. supporting LoST queries from ESRPs, the PSAP CHE, and other authorized hosts within the ESInet. 7. Provide a clear description of the functionality of the ECRF; list features and capabilities 8. describe the error handling, default mechanisms, and logging 9. provide an overview of deployment recommendations to achieve 99.999 percent reliability	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
NGCS 50	**Bidder Response:** **1. Provisioning the ECRF** The Spatial Interface (SI) provisions updated GIS layers to ECRF via a fully automated process. Immediately upon successful completion of QA/QC processing, the SI provisions a .zip file containing the updated files to the ECRF system. The ECRF update process checks for updated files every minute, and when an update is available, the files are processed immediately. Once the update process has occurred, a results file containing information about the success / failure of the update is sent to the SI. If the update is successful, the updated data is applied immediately. Any update failure will be investigated and corrected, however the data in production prior to the failed update will remain in place **2. Updating the ECRF (including the frequency of updates)** When time is critical, it is recommended that boundary updates are submitted independently of Site Structure/Address Point and Road Centerline updates as the validation process on these can take longer, depending on the number of changes that have been made since the previous data update. Each ECRF element maintains two copies of each map layer, an active one that processes the LoST queries and an inactive one. New updates are applied to the inactive directory. Once processing is complete for all ECRF computing elements (two per geographically diverse location), the ECRF system will notify the Spatial Interface that the load was successful and make the inactive map layer active. If for some reason the load was unsuccessful, alarm notifications will be sent to the NOC and relevant operations teams. If this occurs the previously active map layer will remain active. ECRF prescribed functions that are not directly related to call-time activities (e.g., gap/overlap detection) are performed on separate servers to prevent any "administrative" oriented ECRF functions from interfering with the call-time functions. Timing of updates is dependent on the data being updated. As is requested in another bullet point in this section (Validation of GIS updates before they are provisioned into the ECRF), validation of polygon feature sets occurs very quickly and subsequent provisioning to the ECRF system is near real-time. It is always recommended that "urgent" updates to one or more polygon layers be provisioned without the Site Structure Address Points (SSAPs) or Road Centerlines (RCLs) as validation and provisioning of the SSAPs and RCLs can take a few or many minutes, depending on the size of the feature set being loaded. It is				

possible to reduce the number of validations performed on the data updates to decrease provisioning speed, but that is balanced by the increased risks of not performing all available validations.

Updates are processed upon receipt from the PSAP.

3. Validating data provisioning

Updates provisioned via the SI are applied with no degradation of LoST services. Each ECRF element maintains two copies of each map layer, an active one that processes the LoST queries and an inactive one. New updates are applied to the inactive directory. Once processing is complete for all ECRF computing elements (two per geographically diverse location), the ECRF system will notify the Spatial Interface that the load was successful and make the inactive map layer active. If for some reason the load was unsuccessful, the ECRF system will pass that result along to the Spatial Interface which will send out alarm notifications. If this occurs the previously active map layer will remain active.

4. Performing error logging

All transactions are logged. Errors are logged for reporting and analysis and directed to the NOC when immediate action is required.

5. Performing gap and overlap analysis

The EGDMS/Spatial Interface (SI) provisions updated GIS layers to ECRF via a fully automated process. Immediately upon successful completion of QA/QC processing, the SI provisions a .zip file containing the updated files to the ECRF system. The ECRF update process checks for updated files every minute, and when an update is available, the files are processed immediately. Once the update process has occurred, a results file containing information about the success / failure of the update is sent to the SI. If the update is successful, the updated data is applied immediately. Any update failure will be investigated and corrected, however the data in production prior to the failed update will remain in place. Data validations include Gap/Overlap detection, reporting and error logging

CenturyLink's NG9-1-1 solution Spatial Interface (SI) has configurable thresholds for triggering gap and overlap alarms/reports

The Spatial Interface performs GIS validations, including validations to ensure routing integrity. The QA/QC processes provided during validation steps in the SI will prevent any unwanted data being provisioned in the ECRF that may introduce ambiguity in the data that would prevent the ECRF from being able to make a definitive response to certain requests. A change control system is established to monitor and manage data discrepancies and to track data change requirements. Validated GIS updates are normalized and applied to the ECRF production instances in a manner that preserves availability and coordinates with other ESInet scheduled updates and activities. The Spatial Interface performs logging of uploads and any associated errors and provisioning status (succeeded/failed). The following are examples of gap and overlap assessments performed. Address Range Overlap: An overlap exists in one or both sides of the address ranges between two connected and identically named road centerline segments. Outside Authoritative Boundary: All or part of the feature falls outside the Authoritative Boundary.

Boundary - Neighbor – Gap: A gap exists between the boundary polygon and an adjacent data source's boundary polygon.

Boundary - Internal – Gap: A gap exists between the boundary polygon and another boundary polygon within the database.

Boundary - Neighbor – Overlap: The boundary polygon feature overlaps an adjacent data source's boundary polygon.

Boundary - Internal – Overlap: The boundary polygon feature overlaps another boundary polygon within the database.

6. Supporting LoST queries from ESRPs, the PSAP CHE, and other authorized hosts within the ESInet

LoST queries from ESRPs, the PSAP CPE, and other authorized hosts within the ESInet are supported.

The ECRF supports <findService>, <listServices> and <listServicesByLocation> LoST query types.

The ECRF supports provisioning of separate boundary layers for first responder service types for police, fire, and emergency medical services, if the polygon datasets are provided with the GIS data. The PSAP may query the ECRF for additional service URNs associated with the location. The PSAP may also query the ECRF for the URI associated with an Additional Data Repository (ADR), specific to the civic location provided in the LoST request. If that information is provisioned with the jurisdiction(s) Address Point data, the ADR URI will be returned. Additionally, if the ECRF receives a request for a location outside its coverage area, it will send an iterative query to the National Forest Guide, once available. Absent the National Forest Guide, the ECRF can store coverage areas for other ECRFs. When a request for a location that falls outside of its own coverage area is received, the ECRF will check to see if the location falls within another known coverage area and send a recursive query to that ECRF and per RFC 5222, pass that response along to the requesting system.

The ECRF also has the optional capability to provide National Forest Guide functions, in lieu of a National Forest Guide. Rate limiting of queries from sources other than the proposed ESRP(s) is a supported function. For obvious reasons, rate querying any "call path" requests will not be allowed. The ECRF supports both iterative and recursive queries to other LoST servers, such as an external ECRF or National Forest Guide, once available.

Support for both Geodetic Location elements and Civic Location elements.

Support for multiple service layers beyond PSAP, Police, Fire and EMS.

RFC 5222 compliance, including LoST error responses to LoST clients.

7. Provide a clear description of the functionality of the ECRF; list features and capabilities.

The ECRF provides full i3 compliancy and contains the geographic boundaries provided by the jurisdiction(s) for 9-1-1 call routing and responder determination. The ECRF LoST protocol interface meets RFC 5222 and NENA 08-003v1 requirements. CenturyLink's NG9-1-1 solution ECRF has been supporting production Next Generation 9-1-1 call routing solutions since 2009,

CenturyLink's NG9-1-1 solution ECRF LoST interface was tested during the NENA Industry Collaboration Event (ICE 4), where it passed all scenarios tested.

In addition, the ECRF meets the following requirements.

Logging of all connections, connection attempts, data updates, ECRF query results and LoST transactions:

All transactions are logged. Errors are logged for reporting and analysis and directed to the NOC when immediate action is required.

Location error identification: CenturyLink's NG9-1-1 solution Spatial Interface can perform GIS validations, including validations to ensure routing integrity. The QA/QC processes provided during validation steps in the SI will prevent any erroneous data to be provisioned in the ECRF that may introduce ambiguity in the data that would prevent the ECRF from being able to make a definitive response to certain requests.

	A change control system is established to monitor and manage data discrepancies and to track data changes. The SI validation engine refers errors back to the originating 9-1-1 Authority in comprehensive reports that are retrieved in the Enterprise Geospatial Database Management System (9-1-1EGDMS) portal. Validation errors must be corrected by the 9-1-1 Authority within their own GIS database and resubmitted to the Spatial Interface. Ongoing 9-1-1 EGDMS validations include road centerline, address point, and polygons for each data upload. Critical errors will not be loaded into the CenturyLink's NG9-1-1 solution. All critical errors should be resolved prior to switching to geospatial call routing. Critical Error Management: Following are examples of features with critical errors that will not be provisioned. These errors must be corrected and resubmitted to load to production ECRF and LVF resources. • Unique ID Duplicate: The feature's Unique ID is duplicated within the agency's layer • Geometry Error: A record exists in the attribute table that is not associated with a geographic feature or the geometry of a feature is in error. • Attribute Duplicate: The feature's attributes are duplicated in multiple features, but each feature has a unique location • Address Range Overlap: An overlap exists in one or both sides of the address ranges between two connected and identically named road centerline segments. • Field Constraint: An attribute value is incompatible with the EGDMS database schema and cannot be loaded into the database. • Outside Authoritative Boundary: All or part of the feature falls outside the Authoritative Boundary. • Boundary - Neighbor – Gap: A gap exists between the boundary polygon and an adjacent data source's boundary polygon. • Boundary - Internal – Gap: A gap exists between the boundary polygon and another boundary polygon within the database. • Boundary - Neighbor – Overlap: The boundary polygon feature overlaps an adjacent data source's boundary polygon. • Boundary - Internal – Overlap: The boundary polygon feature overlaps another boundary polygon within the database. • Routing URI: The routing Uniform Resource Identifier (URI) is either missing or invalid within the service response boundary polygon. **Updates from the SI in near real-time with no degradation of LoST services:** When time is critical, it is recommended that boundary updates are submitted independently of Site Structure/Address Point and Road Centerline updates as the validation process on these can take longer, depending on the number of changes that have been made since the previous data update. Each ECRF element maintains two copies of each map layer, an active one that processes the LoST queries and an inactive one. New updates are applied to the inactive directory.

Once processing is complete for all ECRF computing elements (two per geographically diverse location), the ECRF system will notify the Spatial Interface that the load was successful and make the inactive map layer active. If for some reason the load was unsuccessful, alarm notifications will be sent to the NOC and relevant operations teams. If this occurs the previously active map layer will remain active.

ECRF prescribed functions that are not directly related to call-time activities (e.g., gap/overlap detection) are performed on separate servers to prevent any "administrative" oriented ECRF functions from interfering with the call-time functions.

Timing of updates is dependent on the data being updated. As is requested in another bullet point in this section (Validation of GIS updates before they are provisioned into the ECRF), validation of polygon feature sets occurs very quickly and subsequent provisioning to the ECRF system is near real-time. It is always recommended that "urgent" updates to one or more polygon layers be provisioned without the Site Structure Address Points (SSAPs) or Road Centerlines (RCLs) as validation and provisioning of the SSAPs and RCLs can take a few or many minutes, depending on the size of the feature set being loaded. It is possible to reduce the number of validations performed on the data updates to decrease provisioning speed, but that is balanced by the increased risks of not performing all available validations.

Routing of calls based on geographic coordinates, geodetic shapes and civic addresses: For expediency during call processing, the geodetic location, if available, is used by the ESRP for routing determination by using a point-in-polygon lookup. Latitude and longitude (XY) circle, sphere, and ellipsoid are the geodetic shapes currently supported. Other geodetic shapes will be added in future releases as required by the market. Routing and other services can also be determined with civic address when geodetic locations are not available.

Utilization of common GIS boundaries, including, but not limited to, PSAP, law enforcement, fire/rescue and emergency medical services (EMS): The GIS data layer(s) that are used to identify the PSAP, emergency, and additional service types are configured on a per-service basis, e.g., urn:service:sos. When there is only a civic location element available in the PIDF-LO, the ECRF will follow the LoST protocol to locate a matching address point feature or, if one cannot be determined from the address point layer, the ECRF will attempt to locate a matching Road Centerline feature. If either is located, the ECRF will return the URI associated with the URN also specified in the LoST request.

The ECRF supports provisioning of separate boundary layers for first responder service types for police, fire, and emergency medical services, if the polygon datasets are provided with the GIS data. The ECRF is not limited to these minimum data sets and will support additional boundary layers, each identified with a unique URN. The ECRF client may query the ECRF for additional service URNs associated with the location.

Permitting of LoST queries for find service request association with each layer: The ECRF supports LoST query types. It also supports queries to retrieve Additional Data Repository (ADR) URIs that may be associated with a particular location. Hosting of the Location ADRs themselves is not the responsibility of the ECRF provider.

Compliance with NENA 02-010 and NENA 02-014: NENA 02-014 addresses GIS data collection and maintenance standards. While certain layer collection does apply, any requirements in this document would be superseded by STA-010.2 and the [draft] NG9-1-1 GIS data model. Similarly, NENA 02-010 conflicts with STA-010.2 and the [draft] NG9-1-1 GIS data model. CenturyLink's NG9-1-1 solution ECRF complies with these documents, except where they conflict with STA-010.2 and the [draft] NG9-1-1 GIS data model, in which case the more recent standards are followed.

Dynamic updates to GIS without disruption of the ECRF: Updates provisioned via the SI are applied with no degradation of LoST services. Each ECRF element maintains two copies of each map layer, an active one that processes the LoST queries and an inactive one. New updates are applied to the inactive directory.

Once processing is complete for all ECRF computing elements (two per geographically diverse location), the ECRF system will notify the Spatial Interface that the load was successful and make the inactive map layer active. If for some reason the load was unsuccessful, the ECRF system will pass that result along to the Spatial Interface which will send out alarm notifications. If this occurs the previously active map layer will remain active.

As well, the ECRF and LVF are implemented independently even though they provide similar functions, due to the provisioning nature of the LVF function and the real-time call processing nature of the ECRF. This architecture ensures that the Location Validation Function does not interfere with the critical call routing functions provided by the ECRF in compliance with NENA i3 specifications, the ECRF supports the LoST protocol as defined in RFC 5222, with receipt of civic addresses, geo-coordinates, or both location elements as input.

8. Describe the error handling, default mechanisms, and logging;

Any updates to the GIS data within the ECRF, whether to correct errors within the current data set or enhance it for any other reason, will be uploaded through the CenturyLink's NG9-1-1 solution Spatial Interface.

The GIS updates are provisioned through the Spatial Interface which has the additional ability to perform GIS validations, including validations to ensure routing integrity. The QA/QC processes provided during validation steps in the SI will prevent any unwanted data being provisioned in the ECRF that may introduce ambiguity in the data that would prevent the ECRF from being able to make a definitive response to certain requests. A change control system is established to monitor and manage data discrepancies and to track data change requirements. Validated GIS updates are normalized and applied to the ECRF production instances in a manner that preserves availability and coordinates with other ESInet scheduled updates and activities.

9. Provide an overview of deployment recommendations to achieve 99.999 percent reliability

CenturyLink's NG9-1-1 solution ECRFs exist within a highly available and geographically distributed application processing environment. A single hardware component failure at one of the application processing complexes will not interrupt processing of the ECRF. A single geographic site failure (either the communication to the site or elimination of the site itself) will not prevent further call processing from occurring. With the dual ESInet cores, multiple geographic site failures could occur without interrupting the ECRF from performing its critical functions. High availability is achieved through high availability software design, redundant ECRF instances, and transactions using dynamic client/server connections with multiple ECRF serving entities.

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 51	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Hierarchical Integration with Other ECRFs** The ESInet will be part of an overall hierarchical plan that includes interconnectivity to other regions and ECRFs. Provide details regarding bidder's vision for how this interconnection will include replicas of ECRF/LVF at different levels of the hierarchy, as well as access/origination networks.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: At the State's discretion, CenturyLink's NG9-1-1 solution ECRFs and LVFs can operate in various deployment models. There are two deployment models described in the current draft of NENA STA-005, NENA Standards for the Provisioning and Maintenance of GIS data to ECRFs and LVFs: • Coordinated, Intergovernmental Approach: Planned and coordinated deployments of NG9-1-1 capabilities that are governed by statewide 9-1-1 Authorities, regional Authorities, or informal mechanisms that enable a cooperative deployment. • Independent, Unilateral Approach: Decentralized deployments of NG9-1-1 capabilities by local jurisdictions through independent initiatives. CenturyLink's NG9-1-1 solution ECRFs and LVFs can be deployed to support both approaches. Using the coordinated, intergovernmental approach, coverage areas for any other ECRFs or LVFs would be provisioned into the CenturyLink's NG9-1-1 solution ECRF and LVF, and CenturyLink's NG9-1-1 solution ECRF and LVF coverage areas would be provisioned into other ECRFs and/or LVFs in the area. This allows the local ECRF to recursively query other known ECRFs when a location falls within the neighboring ECRF or LVF's region. Access to a National Forest Guide, when available, is not necessary using this approach unless the location falls outside of all the ECRF/LVF known regions. Using the Independent, unilateral approach, utilization of the National Forest Guide or a parent ECRF (statewide or multi-state) would be required to discover the correct ECRF or LVF to query for a response. CenturyLink's NG9-1-1 solution ECRF and LVF can potentially be utilized as a statewide or multi-state parent system to support this task. It is up to the access/origination networks to know how to direct 9-1-1 calls across a given region. As an optional service, CenturyLink can work with the Commission to explore the feasibility of providing an ECRF to direct access/origination network providers to the correct ESInet, assuming there may be multiple serving a multi-state region. CenturyLink looks forward to working with the Commission to develop a complete set of requirements and scope of work necessary for ESInet interconnection with regional and state level ECRFs. Pricing and lead time for implementation is to be determined pending future completion of engineering requirements discovery.				

Any additional documentation can be inserted here:

NGCS 52	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Forest Guide** Provide explanations of any tradeoffs between aggregations of data at higher-level ECRFs versus the use of Forest Guides (as defined in NENA-INF-009.1-2014) to refer requests between ECRFs that possess different levels of data. As part of that explanation, provide details on how the appropriate ECRF/LVF data will be managed and provisioned for use in overload and backup routing scenarios in the current environment, and any dependencies that might impact provisioning.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: NENA's general vision for ECRF hierarchy includes local ECRF implementations that have parent "state level" ECRFs, which know coverage areas for all local ECRFs within the state. Each state ECRF would use iterative requests to the National Forest Guide to find the URI for an ECRF serving the location provided in the request. There may be more or less hierarchical levels depending on a given state's implementation. Per the draft NENA document describing provisioning of GIS data to ECRF/LVFs, there is also a more cooperative approach that would allow ECRFs to share coverage regions with other ECRFs. If a request to an ECRF falls outside its coverage region, but it knows which ECRF has the data to respond to the request, the ECRF can send a recursive query to the secondary ECRF and pass the response along to the original LoST client without having to interface with the National Forest Guide. Either scenario is acceptable and meets the NENA guidelines and is supported by RFC 5222. It is arguable that the latter scenario is more efficient. Regardless, CenturyLink's NG9-1-1 solution ECRF can provide functionality to support either scenario in that it is capable of being provisioned with coverage areas for other ECRF systems as well as acting as a pseudo National Forest Guide until one has been established. The ECRF can be loaded with any number of polygon layers for multiple purposes. Polygon sets can be created, validated and provisioned for anticipated overload, backup routing, abandonment, special event and other routing scenarios as desired. Each would be provisioned with a unique URN. Using optional advanced PRF functions, when the ECRF returns a PSAP URI for routing, the PRF will evaluate it for special policy routing rules. The PSAP policy can direct the ESRP to query the ECRF again with the URN prescribed within the policy (e.g. geospatially distributed abandonment polygons which spread the abandonment load to multiple PSAPs depending on call location). Using the caller's location and the prescribed URN, the ESRP will query the ECRF, which will return the URI associated with the new URN and the location provided in the query.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 53	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** An LVF is a LoST protocol server where civic location information for every call originating endpoint is validated against the SI-provisioned GIS data Describe how the LVF solution interfaces with other LVF solutions which may interface with bidder's solution. Contractor shall coordinate with other LVF solution providers to ensure interoperability between the respective solutions.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution LVF will be a public-facing LVF provisioned for use by service providers outside the ESInet. Since PSAP access to validate locations will be limited, the PSAP CPE can be pointed to the public-facing LVF or optionally, the ESInet ECRF, which can be configured to respond to LVF queries as well as ECRF. This choice will be left to the State.				

Any additional documentation can be inserted here:

	Next Generation Core Services Elements (NGCS) **Location Validation Function (LVF)** **LVF Description** The SI is responsible for provisioning and updating the information used for location validation in the LVF, which shall contain a standardized interface to the SI. Describe how the LVF solution meets the above requirements**.**	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
NGCS 54	**Bidder Response:** As part of CenturyLink's NG9-1-1 solution i3 solution, the Location Validation Function (LVF) is available to TSPs operating in the region via the LoST protocol (RFC 5222). This will allow them to pre-validate customer records against the GIS data to ensure that the civic addresses are 9-1-1 valid and will route and plot properly. The LVF is functionally almost identical to the ECRF but implemented 100% independently from the ECRF as to not interfere with the critical call path functions of the ECRF. Since the ECRF and LVF share a common code base, the customer is ensured that a location that has passed LVF validation will also route properly when the civic location element is presented to the ECRF because the exact same logic is used for both purposes. This assumes the LIS operator properly provisions their LIS with the subscriber's location. Functionally, the address elements that are presented in the LoST request are validated against the GIS data provisioned to the LVF. The LVF can be configured to look at the Address Point layer followed by the Road Centerline layer to locate a match OR to only look at the Address Points. The LVF fully meets the requirements defined in RFC 5222. In order to assist carriers in their transition CenturyLink has developed a LoST interworking specification which identifies the specifics of CenturyLink's NG9-1-1 solution implementation along with LoST Request and Response examples to aid the carriers with their LVF client implementations. CenturyLink's NG9-1-1 solution LVF is secure. In lieu of the NENA PSAP Credentialing Agency (PCA), which does not exist at this time, CenturyLink will issue digital certificates to LVF clients for authenticated access to the LVF. Provisioning of the LVF is identical to the ECRF provisioning. It is simply another provisioning target of the Spatial Interface. As such, it will always contain the same GIS data as the ECRF. Note that any User Interface or LoST client required to interact with the LVF will be the responsibility of the Carrier making the LVF LoST requests.				

Any additional documentation can be inserted here:

NGCS 55	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** **Location Validation** The LVF shall be available to validate civic locations at the time a wireline device is ordered— e.g., Service Order Interface (SOI) validation—when a nomadic device is connected to the network, and when a PSAP or other authorized entity makes a civic location validation request. The LIS/LDB shall be allowed to periodically revalidate the civic location information against the GIS data contained within the LVF. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: The LVF is available for civic location validations and subsequent revalidations for authorized LVF clients. It is the responsibility of the LIS / LDB operators to validate and periodically revalidate their subscriber records using the LVF.				

Any additional documentation can be inserted here:

NGCS 56	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** **High-Availability Design** The LVF shall support all functionality as defined in NENA-STA-010.2-2016, shall be designed with resiliency and redundancy to provide a minimum of 99.999 percent availability, and shall be provisioned with the same data as the ECRF. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: The standard LVF utilized for service provider validation of their subscriber records is provided in a 99.999+% environment due to the provisioning nature of the LVF, as opposed to the 99.999+% requirement of the ECRF due to it being in the call path. It is implemented the same way the ECRF is, but is only available from two geodetically diverse locations, each with redundant processing elements. Optionally and at an additional price, the public-facing LVF can be implemented in an environment mirroring the ECRF implementation to provide 5-9s of availability. Provisioning of the LVF is identical to the ECRF provisioning. It is simply another provisioning target of the Spatial Interface. As such, it will always contain the same GIS data as the ECRF.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 57	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** **Public-Facing LVF** Outline options for a public-facing LVF provisioned for use by service providers outside the ESInet.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: The Proposed solution's LVF will be a public-facing LVF provisioned for use by service providers outside the ESInet. Since PSAP access to validate locations will be limited, the PSAP CPE can be pointed to the public-facing LVF or optionally, the ESInet ECRF, which can be configured to respond to LVF queries as well as ECRF. This choice will be left to the State.				


Any additional documentation can be inserted here:

NGCS 58	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** **User Interface and Security** Describe the functionality of the proposed LVF solution in sufficient detail to address the requirements outlined in NENA-STA-010.2-2016, with particular attention to: 1. the arrangement of the proposed components 2. user interface and features 3. and security aspects	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

As part of CenturyLink's NG9-1-1 solution i3 solution, the Location Validation Function (LVF) is available to TSPs operating in the State via the LoST protocol (RFC 5222), allowing them to pre-validate customer records against the GIS data to ensure that the civic addresses are 9-1-1 valid and will route and plot properly.

1. Below is the arrangement of the proposed components.

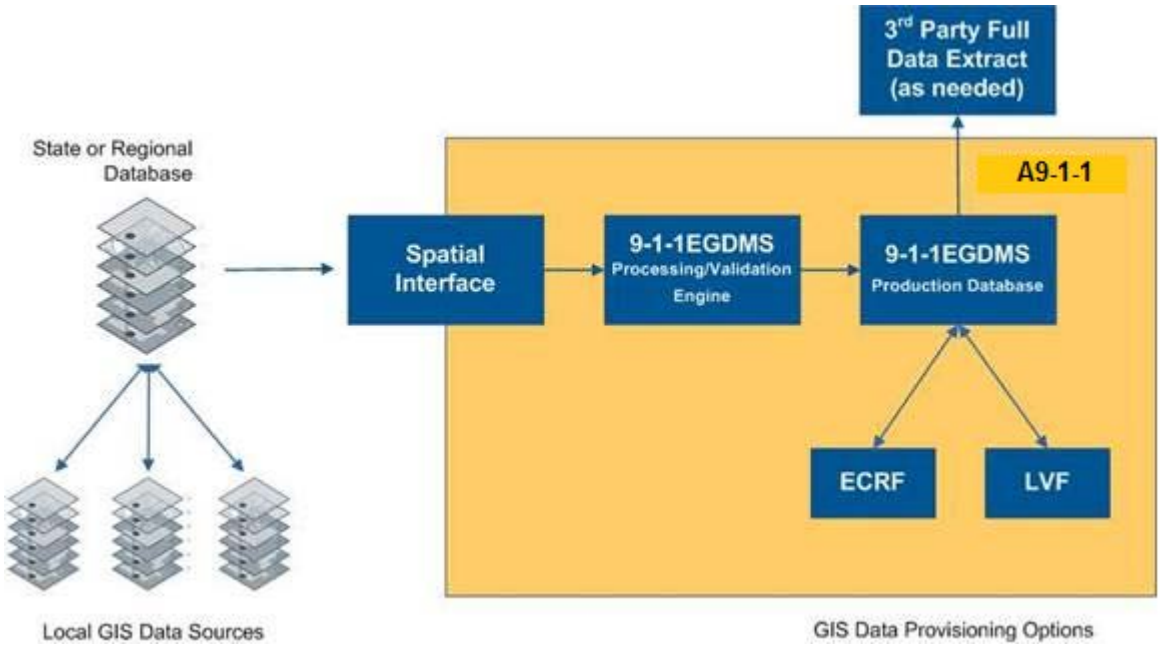

	Functionally, the address elements that are presented in the LoST request are validated against the GIS data provisioned to the LVF. The LVF can be configured to look at the Address Point layer followed by the Road Centerline layer to locate a match OR to only look at the Address Points. 2. CenturyLink's NG9-1-1 solution is a public-facing resource available for use by service providers and other Public Safety participants that operate outside the ESInet. CenturyLink's NG9-1-1 solution fully meets the requirements defined in RFC 5222. To assist carriers in their transition to i3, CenturyLink has developed a LoST interface specification which outlines the specifics of the CenturyLink's NG9-1-1 solution implementation along with LoST Request and Response examples to aid the carriers with their LVF client implementations. The LoST queries are anticipated to be machine to machine with supporting reports identifying successful queries and unsuccessful queries (errors). Each carrier is anticipated to develop an LVF client to enable their ability to query an LVF. Should a real-time user interface be desired, the CenturyLink GIS Director is an LFV UI that can be used for single address validation and error resolution. PSAPs have found this to be a valuable editing tool while they transition from MSAG to LFV address validations. As indicated in the NENA documentation, it is expected the OSP will be responsible for maintaining i3 location data. If the OSP prefers not to develop an internal i3 validation application, Intrado can provide a solution at an additional/optional charge. CenturyLink adheres to the features and functions of the LVF interface as defined in NENA-STA-010.2-2016. Until the OSP is ready to deploy this i3 function, CenturyLink will continue to support the transitional/legacy SOI validation and error resolution processes and procedures against the traditional MSAG. 3. The CenturyLink's NG9-1-1 solution LVF is secure. In lieu of the NENA PSAP Credentialing Agency (PCA), which does not exist at this time, CenturyLink will issue digital certificates to LVF clients for authenticated access to the LVF. Provisioning of the LVF is also identical to the ECRF provisioning. It is simply another provisioning target of the SI. As such, it will always contain the same GIS data as the ECRF. Note that any User Interface required to interact with the LVF will be the responsibility of the service provider making the LVF LoST requests.

Any additional documentation can be inserted here:

NGCS 59	**Next Generation Core Services Elements (NGCS)** **Spatial Interface (SI)** **SI Description** The SI is responsible for provisioning and updating authoritative GIS data to the ECRF, the LVF, the map viewer, the PSAP tactical map display, CAD systems, and similar applications that consume GIS data. GIS data provisioned by the SI shall undergo data-quality and data-integrity checks to ensure that the data complies with all applicable requirements of NENA 02-010, NENA 02-014, and Attachment B of NENA-STA-010.2-2016. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution provides the NENA Spatial Interface (SI) as a function of the 9-1-1 Enterprise Geospatial Database Management System (9-1-1EGDMS). The SI is a fully hosted, managed service that encompasses all necessary processes to receive GIS data from a single source. Data can be submitted in a GIS database managed by a vendor or by the state itself. The SI provides data validation, error reporting, and provisioning to the Emergency Services Network (ESInet) functional elements including Emergency Call Routing Function (ECRF) and Location Validation Function (LVF). The SI provides: • NG9-1-1 GIS data compliancy checks • Ongoing GIS data accuracy validation (QA/QC) • GIS data error reporting • Provisioning to i3 systems (ECRF/LVF) The SI undergoes data quality and data integrity checks that ensures that the data complies with all applicable requirements of NENA 02-010, NENA 02-014 and Attachment B of NENA 08-003. Where these requirements conflict with STA-010.2 and the NG9-1-1 GIS Data Model (draft), the newer requirements documents will be utilized. There are currently no NENA guidelines describing any protocols for the SI updates to external systems. The original 08-003 defined use of a Web Feature Service (WFS) to do such, but it has been removed in the current version of the specification (STA-010.2). Section 4.6 of STA-010.2 states the following: "Note: OGC 10-069r2 is an OGC Public Engineering Report, not a standard. OGC 10- 069r2 is not believed to be definitive enough to enable multiple interoperable implementations. A future OGC specification or a future revision of this document is needed to describe the protocol definitively. As with any standardized interface in this document, implementations may provide alternatives to the SI interface in addition to the standard interface defined in this section. A standard NENA schema for WFS as used in the i3 SI layer replication protocol will be provided in a future revision of this document." While the SI provides a consistent means to update the ECRF and LVF, a means to update other vendor's systems must be collaboratively decided upon (e.g., furnish the third-party systems with full data extracts) until such time that the NENA requirements have been created to describe these provisioning functions.				

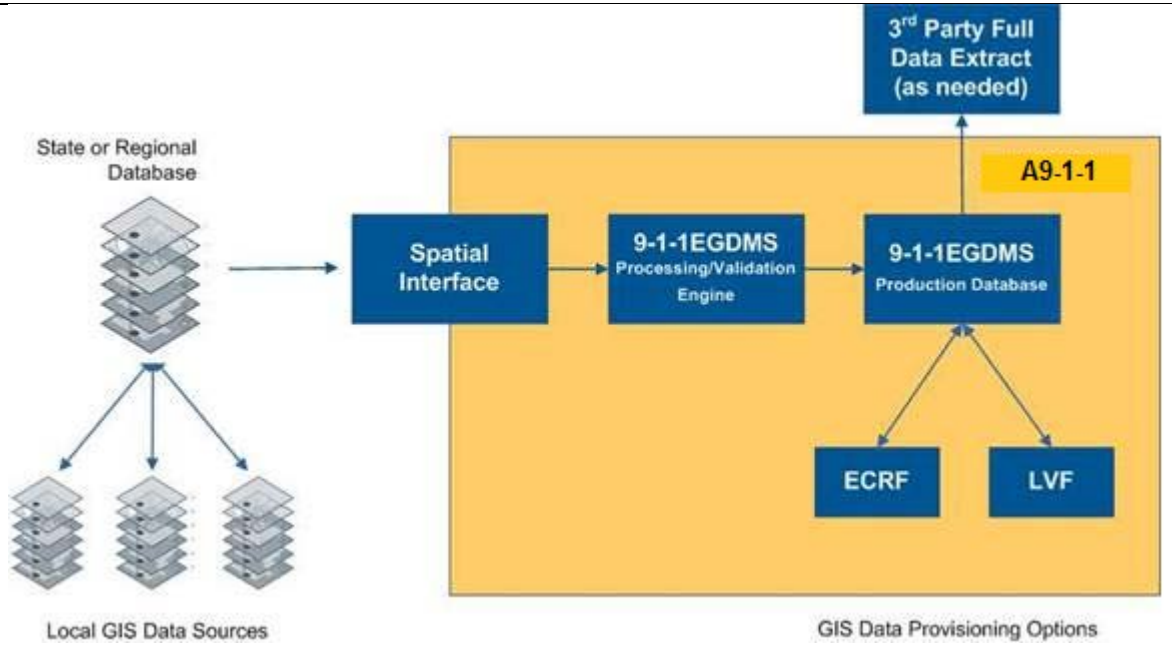


Figure 1: Spatial Interface*

GIS updates are provisioned through the Spatial Interface which performs GIS validations, including validations to ensure routing integrity. The QA/QC processes provided during validation steps in the SI will prevent any unwanted gaps or overlaps from being provisioned in the ECRF. A change control system is established to monitor and manage data discrepancies and to track data change requirements.

Validated GIS updates are normalized, re-projected, if necessary, to WGS84 and applied to the ECRF production instances in a manner that preserves availability and coordinates with other ESInet scheduled updates and activities. Each ECRF element maintains two copies of each map layer, an active one that processes the LoST queries and an inactive one. New updates are applied to the inactive directory. Once processing is complete for all ECRF computing elements (two per geographically diverse location), the ECRF system will notify the Spatial Interface that the load was successful and make the inactive map layer active. If for some reason the load was unsuccessful, the ECRF system will pass that result along to the Spatial Interface which will send out alarm notifications. If this occurs the previously active map layer will remain active. It is recommended that new updates not be sent until the notification has been received from the Spatial Interface that the previous update has finished processing. This timing can vary greatly depending on the feature sets updated and the number of changes within the feature sets.

Currently the 9-1-1 EGDMS Data Upload application supports file upload in the following formats:

- File geodatabase

	• Shape file All GIS layers must be in the same coordinate system/projection.

Any additional documentation can be inserted here:

NGCS 60	**Next Generation Core Services Elements (NGCS)** **Spatial Interface (SI)** **Web Feature Service and Updates** The SI shall convert the GIS data into the format (data structure and projection) used by the ECRF and LVF, in real-time or near real-time, using a web feature service. The SI shall be able to provision and perform incremental updates, in near real-time, to the ECRF, LVF, the map viewer service, the PSAP tactical map display and similar applications that consume GIS data. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: The SI will normalize the GIS data, converting it into a consistent format, which will meet the ECRF/LVF Lost protocol requirements. There are currently no NENA guidelines describing any protocols for the SI updates to external systems. The original 08-003 defined use of a Web Feature Service (WFS) did such, but it has been removed in the current version of the specification (STA-010.2). Section 4.6 of STA-010.2 states the following: "Note: OGC 10-069r2 is an OGC Public Engineering Report, not a standard. OGC 10- 069r2 is not believed to be definitive enough to enable multiple interoperable implementations. A future OGC specification or a future revision of this document is needed to describe the protocol definitively. As with any standardized interface in this document, implementations may provide alternatives to the SI interface in addition to the standard interface defined in this section. A standard NENA schema for WFS as used in the i3 SI layer replication protocol will be provided in a future revision of this document." While the SI provides a consistent means to update the ECRF and LVF, a means to update other vendor's systems must either be collaboratively decided upon (e.g. furnish the third-party systems with full data extracts) until such time that the NENA requirements have been created to describe these provisioning functions. Timing of updates is dependent on the data being updated. Validation of polygon feature sets occurs very quickly and subsequent provisioning to the ECRF system is near real-time. It is always recommended that "urgent" updates to one or more polygon layers be provisioned without the Site Structure Address Points (SSAPs) or Road Centerlines (RCLs) as validation and provisioning of the SSAPs and RCLs can take a few or many minutes, depending on the size of the feature set being loaded. It is possible to reduce the number of validations performed on the data updates to decrease provisioning speed, but that is balanced by the increased risks of not performing all available validations.				

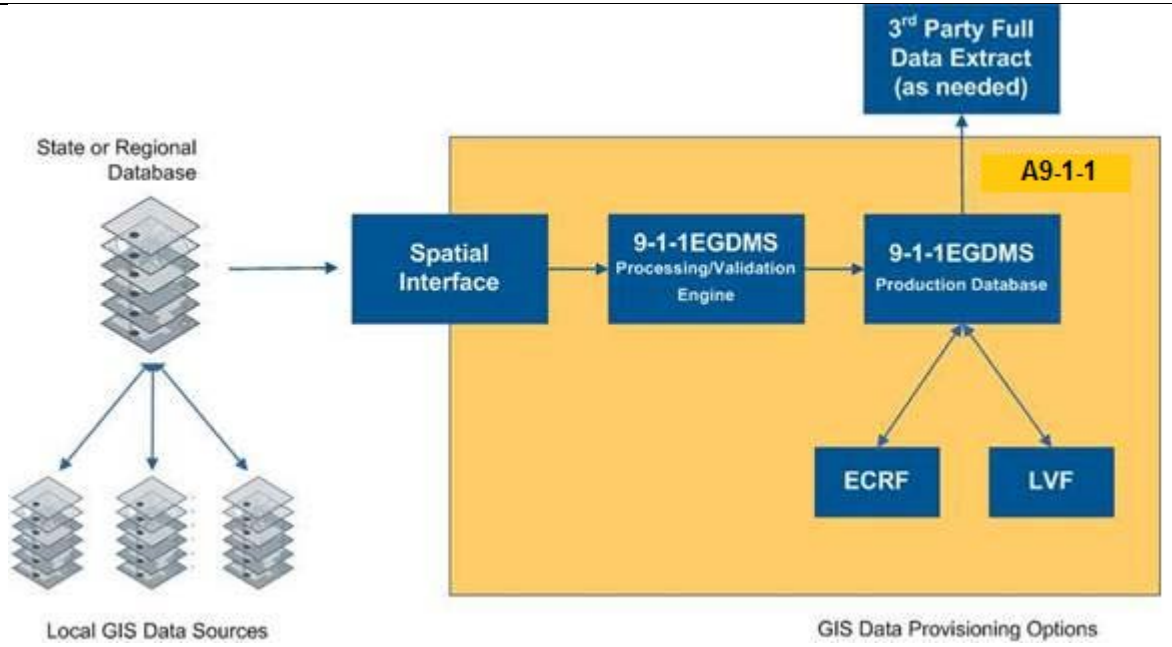


Figure 9. Spatial Interface

GIS updates are provisioned through the Spatial Interface which performs GIS validations, including validations to ensure routing integrity. The QA/QC processes provided during validation steps in the SI will prevent any unwanted gaps or overlaps from being provisioned in the ECRF. A change control system is established to monitor and manage data discrepancies and to track data change requirements.

Validated GIS updates are normalized, re-projected if necessary, to WGS84 and applied to the ECRF production instances in a manner that preserves availability and coordinates with other ESInet scheduled updates and activities. Each ECRF element maintains two copies of each map layer, an active one that processes the LoST queries and an inactive one. New updates are applied to the inactive directory. Once processing is complete for all ECRF computing elements (two per geographically diverse location), the ECRF system will notify the Spatial Interface that the load was successful and make the inactive map layer active. If for some reason the load was unsuccessful, the ECRF system will pass that result along to the Spatial Interface which will send out alarm notifications. If this occurs the previously active map layer will remain active. It is recommended that new updates not be sent until the notification has been received from the Spatial Interface that the previous update has finished processing. This timing can vary greatly depending on the feature sets updated and the number of changes within the feature sets.

Any additional documentation can be inserted here:

NGCS 61	**Next Generation Core Services Elements (NGCS)** **Spatial Interface (SI)** **Data Provisioning and Validation** Describe the functionality of the proposed SI solution in sufficient detail to explain the validation of GIS data and data updates prior to provisioning into the ECRF and LVF, along with the means of real-time or near real-time provisioning of incremental updates to the GIS data provisioned to the ECRF and LVF.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply

Bidder Response:

The GIS updates are provisioned through the Spatial Interface (SI) which performs GIS validations, including validations to ensure routing integrity. The QA/QC processes provided during validation steps in the SI will prevent any unwanted data being provisioned in the ECRF that may introduce ambiguity in the data that would prevent the ECRF from being able to make a definitive response to certain requests. A change control system is established to monitor and manage data discrepancies and to track data change requirements. Validated GIS updates are normalized and applied to the ECRF production instances in a manner that preserves availability and coordinates with other ESInet scheduled updates and activities. Each ECRF element maintains two copies of each map layer, an active one that processes the LoST queries and an inactive one.

New updates are applied to the inactive directory. Once processing is complete for all ECRF computing elements (two per geographically diverse location), the ECRF system will notify the Spatial Interface that the load was successful and make the inactive map layer active. If for some reason the load was unsuccessful, the ECRF system will pass that result along to the Spatial Interface which will send out alarm notifications. If this occurs the previously active map layer will remain active. It is recommended that new updates not be sent until the notification has been received from the Spatial Interface that the previous update has finished processing. This timing can vary greatly depending on the feature sets updated and the number of changes within the feature sets

The SI validation engine refers errors back to the originating 9-1-1 Authority in comprehensive reports that are retrieved in the 9-1-1EGDMS portal. Validation errors must be corrected by the 9-1-1 Authority within their own GIS database. Updates are submitted and processed on an on-going basis. Ongoing 9-1-1EGDMS validations include road centerline, address point, and polygon for each data upload.

Features with critical errors cannot be loaded into CenturyLink's NG9-1-1 solution systems due to incompatibility or addressing errors that would result in inaccurate call routing. All critical errors should be resolved prior to switching to geospatial call routing.

Critical Error Description

Any features with critical errors will not be provisioned. Errors must be corrected and resubmitted to load to production ECRF and LVF and avoid default routes or failed validation.

- Unique ID Duplicate: The feature's Unique ID is duplicated within the agency's layer
- Geometry Error: A record exists in the attribute table that is not associated with a geographic feature or the geometry of a feature is in error.
- Attribute Duplicate: The feature's attributes are duplicated in multiple features, but each feature has a unique location
- Address Range Overlap: An overlap exists in one or both sides of the address ranges between two connected and identically named road centerline segments.
- Field Constraint: An attribute value is incompatible with the EGDMS database schema and cannot be loaded into the database.

	• Outside Authoritative Boundary: All or part of the feature falls outside the Authoritative Boundary. • Boundary - Neighbor – Gap: A gap exists between the boundary polygon and an adjacent data source's boundary polygon. • Boundary - Internal – Gap: A gap exists between the boundary polygon and another boundary polygon within the database. • Boundary - Neighbor – Overlap: The boundary polygon feature overlaps an adjacent data source's boundary polygon. • Boundary - Internal – Overlap: The boundary polygon feature overlaps another boundary polygon within the database. • Routing URI: The routing Uniform Resource Identifier (URI) is either missing or invalid within the service response boundary polygon. Timing of updates is dependent on the data being updated. Validation of polygon feature sets occurs very quickly and subsequent provisioning to the ECRF system is near real-time. It is always recommended that "urgent" updates to one or more polygon layers be provisioned without the Site Structure Address Points (SSAPs) or Road Centerlines (RCLs) as validation and provisioning of the SSAPs and RCLs can take a few or many minutes, depending on the size of the feature set being loaded. It is possible to reduce the number of validations performed on the data updates to decrease provisioning speed, but that is balanced by the increased risks of not performing all available validations.

Any additional documentation can be inserted here:

<table>
<tr><td rowspan="2">NGCS 62</td><td>Next Generation Core Services Elements (NGCS)
Spatial Interface (SI)
Use of the Commission's GIS Data Model
1. Describe how the bidder's solution will use the Commission's GIS data model (Attachment B) without modification to the schema.
2. Define bidder's processes and methods to receive and incorporate the updated SI datasets.
3. Describe bidder's proposed workflow for receiving GIS updates from regions to allow for a smooth transition.
4. Describe all security and monitoring aspects, and any additional features supported by the proposed SI.</td><td>Comply</td><td>Partially Comply</td><td>Complies with Future Capability</td><td>Does Not Comply</td></tr>
<tr><td></td><td>X</td><td></td><td></td><td></td></tr>
<tr><td colspan="5">Bidder Response:

1. GIS updates are provisioned through the SI. The SI provides a field mapping service which allows the Commission's data model to be mapped to the corresponding fields in the ESInet GIS data model, without any adjustment to customer's data model. Unless the local data model changes, this is a one-time operation.

2. Data can be loaded by full feature set or can optionally be updated via delta updates. Shapefile and File Geodatabase are the current supported formats.

3. CenturyLink's NG9-1-1 solution provides the NENA Spatial Interface (SI) as a function of the 9-1-1 Enterprise Geospatial Database Management System (9-1-1EGDMS). The SI is a fully hosted, managed service that encompasses all necessary processes to receive GIS data from single or multiple data sources. Data can be submitted in a GIS database managed by a vendor or by the state itself. Updates are made via a secured portal that requires two-factor authentication for access.

4. The SI provides data validation, error reporting, and provisioning to the Emergency Services Network (ESInet) functional elements including Emergency Call Routing Function (ECRF) and Location Validation Function (LVF).

The SI provides:

• NG9-1-1 GIS data compliancy checks
• Ongoing GIS data accuracy validation (QA/QC)
• GIS data error reporting
• Provisioning to i3 systems (ECRF/LVF)

The SI performs GIS validations, including validations to ensure routing integrity. The QA/QC processes provided during validation steps in the SI will prevent any unwanted gaps or overlaps from being provisioned in the ECRF. A change control system is established to monitor and manage data discrepancies and to track data change requirements. Validated GIS updates are normalized and applied to the ECRF production instances in a manner that preserves availability and coordinates with other ESInet scheduled updates and activities. A change control model is implemented to track changes between the GIS provisioning platform and the production ECRF instances.

The GIS layers supported include:

• Street Centerlines - Street centerline data for your agency's jurisdiction.</td></tr>
</table>


	• Fire Response Boundary - Fire response boundary polygons for your agency's jurisdiction. • Site/Structure Address Point - Site/structure address points for your agency's jurisdiction. • Law Response Boundary - Law response boundary polygons for your agency's jurisdiction. • PSAP Area Boundary - Public Safety Answering Point boundary polygons for your agency's jurisdiction. • EMS Response Boundary - EMS/medical response boundary polygons for your agency's jurisdiction. • Emergency Service Zone - Service response boundary (ESN boundary) polygons that include Fire, Law, and EMS response agencies in your jurisdiction. • Municipal Boundary - Municipal boundary polygon(s) for your agency's jurisdiction. • Authoritative Boundary - Authoritative boundary polygon that covers the geographic region for which your agency has jurisdiction.

Any additional documentation can be inserted here:

NGCS 63	**Next Generation Core Services Elements (NGCS)** **Location Database (LDB)** Describe how the solution interfaces with other LDB solutions which may participate in or interface with bidder's solution. Contractor shall coordinate with other LDB solution providers to ensure interoperability between the respective solutions. Also explain how the proposed solution would deal with multiple ALI/MSAG databases and the locations where ALI steering may be in place.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink strongly encourages all carriers to move to the i3 specified standards. With the i3 model, carriers will maintain their own LIS/ADR in which they provide customer location information by reference or value at the time of the call. CenturyLink understands that for some carriers this option is not yet available. During the time of transition to i3 CenturyLink's preferred methodology, in order to maintain reliability and dependability of location data, is for carriers to utilize the already available and deployed centralized LDB/ALI database managed by CenturyLink. CenturyLink's NG9-1-1 solution LDB/ALI database is a transitional system which allows for: • Established OSP's service order address input, processes, and error management to be maintained • Established interaction and error resolution with MSAG coordinators to remain in place • Translating the CenturyLink validated location data, real time, into i3 compliant protocols to use for PSAP in any state of readiness for Next Gen Services. If the carrier has a strong preference to utilize a non-i3 LDB provided by themselves or a third party, CenturyLink's NG9-1-1 solution system can support that solution. Additional resources, processes and procedures will need to be established in order to create a reliable, redundant, and dependable solution for the state of Nebraska. CenturyLink will be available to complete interoperability with other LDB solution providers including setting up connectivity, having a highly reliable and redundant solution, network monitoring and alarming, as well as interoperability testing in a pre-production environment. These solutions would need to be examined on a case-by-case basis.				

Any additional documentation can be inserted here:

	Next Generation Core Services Elements (NGCS) **Location Database (LDB)** **LDB Description** An LDB serves as both a legacy ALI database and as a LIS in an i3-compliant NG911 environment. The LDB retains all of the current information, functionality, and interfaces of today's ALI, but also can utilize the new protocols required in an NG911 deployment. The LDB supports the protocols for legacy ALI query and ALI query service, the protocols required to obtain information for wireless calls by querying the mobile positioning center (MPC) or Gateway Mobile Location Center (GMLC), and the protocols required for i3 location information retrieval and conveyance, such as HTTP-Enabled Location Delivery (HELD) or other proprietary protocols. Describe the functionality of the proposed LDB, including additional features and capabilities, error handling, FoCR capabilities, logging and deployment recommendations in detail to address the requirements outlined, with particular attention to the arrangement of the proposed components, user interface, and features, and security aspects.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
NGCS 64	**Bidder Response:** CenturyLink's Location Database Services provides a suite of feature-rich services that allows for the eventual replacement of legacy ALI services, while continuing to support all legacy ALI services in the interim. CenturyLink Location Database Services, in conjunction with CenturyLink's NG9-1-1 solution, provides all the necessary services to eliminate any need for a fully featured i3 end point to interface with a legacy ALI database. Transitional LIS solution supports HELD queries in conformance with RFC 5985 as well as Additional Data queries in conformance with RFC 7852. It leverages the legacy ALI database, which also functions as the LDB by providing the location information to the LIS Interface, which formats the HELD response to the LNG or PSAP CPE. Connectivity for E9-1-1 PSAPs remains unchanged. The LIS Interface receives and responds per the HELD protocol for i3-compliant CPE, allowing simultaneous support for both NG9-1-1/i3 and legacy standards for PSAPs throughout the migration timeline. The LIS interface provides all of the i3 logs for HELD per NENA-STA-010.2-2016. While the CenturyLink ALI/LDB previously supported NENA 04-005 which defines ALI Query Service (AQS), that service has been retired due to lack of market demand and increased demand for support of the i3 protocols. The LDB also supports all data retrieval protocols required to obtain information for wireless calls by querying the MPC, GMLC or VPC and returning the information retrieved in the format required by the PSAP CPE.	X			

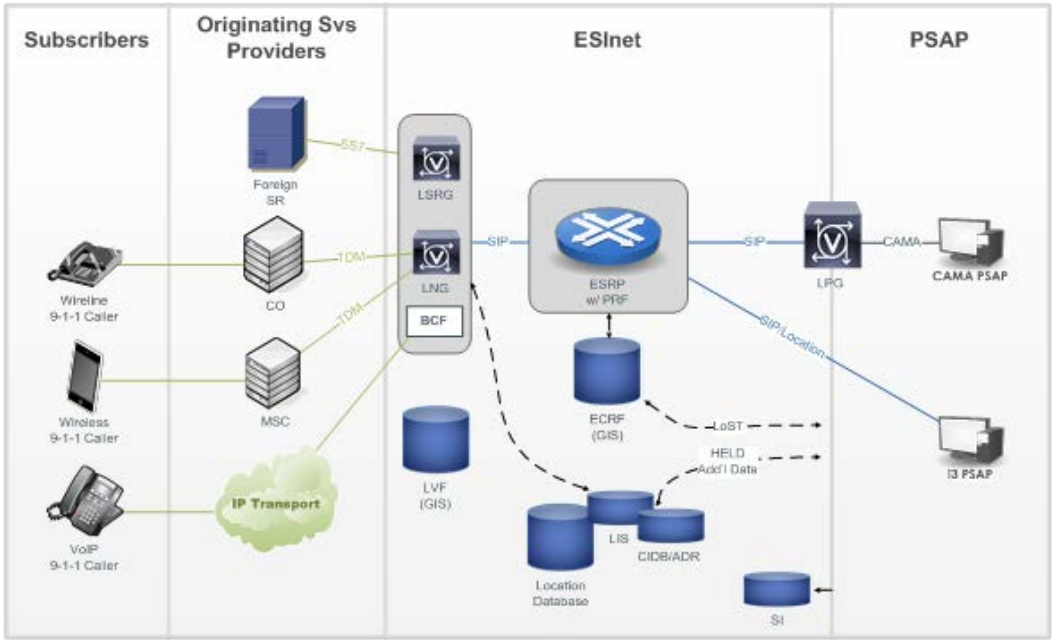	Regardless of the legacy data source, the LIS Interface follows Appendix A of NENA STA-010.2-2016 describing the mapping of data elements between legacy and NG9-1-1 when forming a HELD response for delivery to i3 compliant CPE. Currently, the LDBs used for CenturyLink's NG9-1-1 solution Service are located outside of the ESInet – they are the legacy ALI systems managed by our existing ALI DB Partner, and they do not need any further deployment work to be utilized. The LIS interfaces within the ESInet, which communicate with the LDB, do reside in the ESInet: they have already been deployed and tested as part of the CenturyLink's NG9-1-1 solution platform buildout and acceptance.  **Figure 2: i3 Transitional State with Location Database Components** **Support for LIS Functionality and NENA i3 Interfaces**				

	CenturyLink's NG9-1-1 solution Service uses a Legacy Network Gateway (LNG) that provides a mechanism to obtain the caller's location at the time of the call by using the Location Interwork Function (LIF) to query the caller's appropriate Location Information Server (LIS) database. Interactions between the LIS interface (transitional) and the LNG are secured within the ESInet. Interactions with external LIS systems will utilize digital certificate-based authentication as defined by NENA and managed by the PSAP Credentialing Agency (PCA), once available. Until that time, CenturyLink will manage credentialing and the issuance of digital certificates to help ensure protection and security. This mechanism will also be utilized for PSAP access to systems within the CenturyLink ESInet, including access to the LIS interface, ADR interface, and ECRF. During carrier transition to NENA i3 compliance, CenturyLink will maintain the HELD interface into the ALI platform to simultaneously support legacy PSAPs and i3 PSAPs. The HELD interface into the CenturyLink Location Database is leveraged by the LNG to retrieve PIDF-LO, by value and/or reference, to be delivered to the PSAP within the SIP messaging. The HELD interface is also presented to the PSAP CPE to provide dereferencing services and/or provide location updates for wireless calls. Note that not all ALI fields map to PIDF-LO, for example, Class of Service and Customer Name. As such, CenturyLink will also provide an ADR interface to retrieve this information to be included in the SIP signaling. For these fields, the LNG supports the Additional Data protocol (draft-ietf-ecrit-additional-data-28) to provide these data fields via the Call Additional Data Repository (ADR), formerly known as the Call Information Database (CIDB). The Additional Data specification was recently finalized as RFC 7852. The differences between draft 28 and the final RFC are minor and updates will be placed on the roadmap, as it is critical that the implementations are coordinated with the different i3 functional elements (ADR, LNG, Terminating ESRP) that leverage this protocol. Carriers providing their own LIS services must continue to send their SOI records to CenturyLink to be validated and provisioned to the CenturyLink ALI system until all PSAPs in the State are served by i3-compliant TSPs. Once compliant, all calls originating from their network will leverage their LIS to provide location information server functions, including dereferencing of locations provided by reference to the LNG or PSAP. At this time, the ALI database will no longer be needed and carriers providing their own LIS will no longer have to send SOI to CenturyLink for ALI provisioning, though they will be required to utilize the ESInet LVF for location validation before provisioning records to their LIS. Carriers who still do not have a LIS will continue to send SOI records for validation and provisioning into the ALI database. A carrier LIS is considered outside of the ESInet, while the jurisdiction's ALI and its associated LIS interface is located inside the ESInet within the secured zone protected by firewalls and authentication. **Support for Legacy Interfaces** The CenturyLink ALI database systems are deployed in a redundant, geographically diverse configuration to ensure the highest reliability and survivability. All critical system components are				

	redundant, and the application employs application level monitoring and automated failover to recover from system failures without impact to 9-1-1 call processing. The CenturyLink ALI database systems meet or exceed legacy interface standards including relevant sections of NENA 02-010, 02-011, 02-015, 04-005, 08-501 and 08-502 related to ALI DBMS and NENA standards (J-036, E2, E2+, NCAS, CAS). The CenturyLink ALI database systems include the following features: • Query response verification messaging between ALI systems and heart beating/application monitoring systems are employed to ensure high availability. Dynamic ALI updates retrieved from selective routers and wireless/VoIP Mobile Positioning Center (MPC)/ VoIP Positioning Center (VPC) systems are shared between ALI systems to help prevent network and system outages. • Retrieval of wireless and Voice over Internet Protocol (VOIP) location updates via the E2 or PAM (PSAP to ALI Message specification) interfaces. • Steering to retrieve location information for Wireline calls from multiple external database systems. ALI steering is highly configurable and supports Function of Code R (FOC-R) steering, trunk steering, Telephone Number (TN) range steering, and No Record Found (NRF) steering. • A highly configurable ALI format editor and services to support customized ALI formats. CenturyLink will provide a feature-rich, highly configurable web-based data management system that allows PSAPs to fully self-manage their private MSAG and ALI DB records and to resolve any error fallout. 9-1-1 NET functionality includes MSAG Query and MSAG Change Requests (CRs) allowing users to make changes to the MSAG for their jurisdiction/region. 9-1-1 NET also allows users to manage ALI discrepancy requests including No Record Found (NRF), incorrect address, and other discrepancies associated to an entry that is loaded in the LDB. The enterprise service is accessed via a web-based portal following secure sign-on. **Synchronization of GIS and LDB** CenturyLink's NG9-1-1 solution utilizes a database management system that performs validation of Carrier SOI records before records can be placed in the LDB/ALI. In this model, there is no need for revalidation of records in the LDB using the LVF, as advanced validation mechanisms are utilized in the database management system that surpass the current capabilities of the LVF. For Carriers who are providing their own LIS, the LVF is available for validations and subsequent revalidations. Authentication of any server accessing the LVF will be required. CenturyLink also offers optional Transitional Data Management Services that will allow GIS data to serve as the authoritative source for 9-1-1 address validation. With this service, CenturyLink will replace the jurisdiction's legacy tabular MSAG with a GIS-derived validation to ensure continuous				

synchronization of carrier subscriber records submitted for SOI validation against the jurisdiction's GIS data. This approach ensures continuous ongoing synchronization with GIS updates submitted by the jurisdiction through CenturyLink's Spatial Interface and simultaneous support for NG9-1-1 GIS and legacy address standards. No pricing included in this proposal for this option. CenturyLink can provide optional pricing for this solution if required by the State.

CenturyLink's NG9-1-1 Transitional Data Management provides the following benefits:

- Operational efficiency – 9-1-1 address management using GIS data
- Highest NG9-1-1 data accuracy - continuous GIS to ALI synchronization
- No changes required for carriers - support of legacy TSP provisioning and ALI
- Full i3 readiness – Streamlines deployment to CenturyLink's NG9-1-1 solution Services

This service includes a map-based web tool (GIS Director) that allows customers to review their 9-1-1 data through a map interface, request changes to resolve errors and discrepancies, and GIS validate addresses against the CenturyLink LVF.

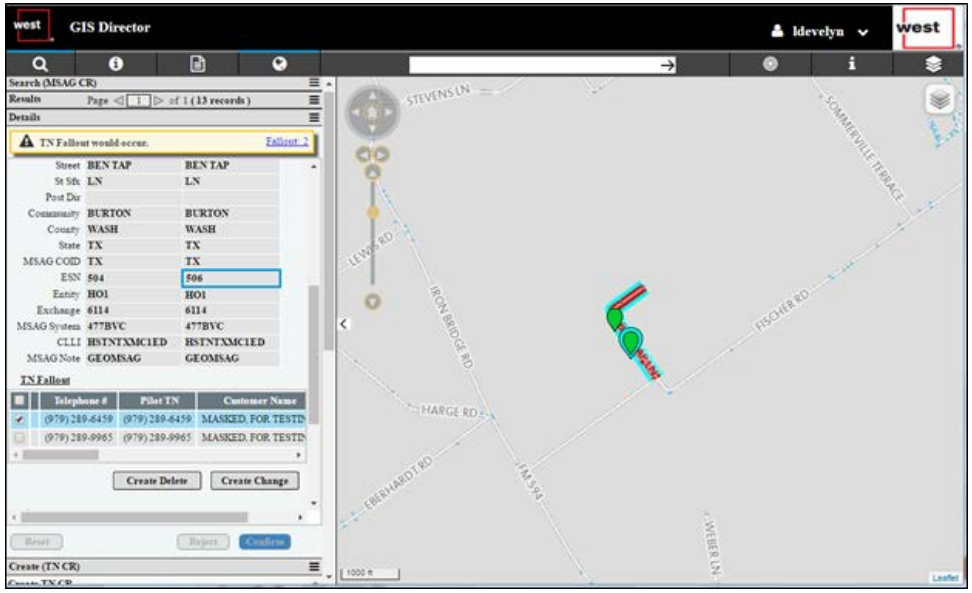


Figure 3: GIS Director - geoMSAG Error Resolution

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

Any additional documentation can be inserted here:

The LDB shall meet the following requirements:	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
Shall support all relevant sections of NENA 02-010, 02-011, 02-015, 04-005, 08-501 and 08-502 related to ALI Database Management System (DBMS).	X			
Shall be capable of assuming the role of a location DBMS as defined in NENA-INF-008.2-2013, NENA NG9 1-1 Transition Plan Considerations.	X			
Shall support NENA standards J-036, E2, E2+, non-call-associated signaling (NCAS) and call-associated signaling (CAS).	X			
Shall be able to provide LIS functionality and interfaces as defined in NENA-STA-010.2-2016	X			
Shall be able to seamlessly interact with a NENA i3-compliant ECRF, as described in NENA-STA-010.2-2016.	X			
Shall be able to dereference a location by reference, as defined in NENA-STA-010.2-2016.	x			
Shall be able to dereference requests for additional information, as defined in NENA-STA-010.2-2016.	X			
Shall be able to interface simultaneously with multiple wireless callers.	X			
Shall be able to interface simultaneously with multiple remote ALI databases.	x			
Shall automatically detect, import and validate customer records (SOI records).	X			
Shall have the ability to be used simultaneously by both NG911-capable and E911 capable PSAPs.	X			
Shall allow different PSAPs to use different ALI formats based on individual needs.	X			
Shall utilize LVFs to validate civic addresses.	X			
Shall support PIDF-LO location data formatting as defined in NENA-STA-010.2-2016.	X			
Shall periodically reevaluate the location information using LVF functions within the system.	X			
Shall be able to communicate with NG911 functional elements using the SIP and HELD protocols.	X			
Shall be able to provide a PIDF-LO based on both the wireless and VoIP E2 response.	X			
Shall be able to dereference additional data requests.	X			
Shall consistently respond to all requests within 400 milliseconds (ms).	X			

NGCS 65	**Next Generation Core Services Elements (NGCS)** **Location Database (LDB)** **Integration of Multi-Line Telephone System Data** The LDB shall support the Integration of Multi-Line Telephone System (MLTS) databases. As part of this migration, Contractor shall be responsible for migrating records from the current MLTS databases to the LDB. Provide details on the database migration process and the user interface for management of these MLTS data records.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: As the State is currently utilizing CenturyLink's ALI databases, no migration of MLTS records would be required. CenturyLink offers enterprise services that allow records to be submitted with a detailed location description for each end user behind a PBX or Call Server. Both batch record submission and a web-based tool for managing and submitting individual location detail updates are offered for a fee to our customers. Additionally, enterprise customers can utilize a web-based application to manage records in the DMBS, as the application allows view of records and manual manipulation limited to user's access. Use of the web-based application for enterprise record management does require the end-user customer acquire a NENA ID in order to identify with their records and limit change access.				

Any additional documentation can be inserted here:

NGCS 66	**Next Generation Core Services Elements (NGCS)** **Discrepancy Reporting** 1. Provide details regarding the proposed solution's report functions for notifying PSAPs any time a discrepancy is detected concerning the BCF, ESRP, PRF, ECRF, LVF, and SI. As part of the detail, explain how a report will be sent for the purpose of reporting the discrepancy to multiple responding PSAPs, as determined by the Commission. Discrepancy reporting is outlined in Section 4.7 of NENA-STA-010.2-2016. 2. Describe the functionality of the proposed discrepancy reporting function in sufficient detail to address the requirements outlined, with particular attention to the user interface and features, and the security aspects.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:

CenturyLink has a full-featured solution for Discrepancy Reporting for legacy and Next Generation PSAPs. Once the NENA requirements are hardened, we will review for buildability and market demand. It is expected that i3-compliant discrepancy reporting will be a future development.

Until such time, CenturyLink's NG9-1-1 solution supports equivalent discrepancy reporting using a combination of 9-1-1 NET for the reporting of ALI Discrepancies (DRs) and MSAG Change Requests (CRs) and EGDMS for the reporting of GIS-related validation errors. Misroutes, Policy Routing discrepancies, incomplete/incorrect PIDF-LO, and incomplete/incorrect Additional Data are reported via ALI DRs.

Because of the integrated nature of the BCF, ESRP, and PRF, discrepancies are identified in logs and the logs are actively monitored. Alarms are programmatically set to identify specific discrepancies and automatically provide notifications when the specified events occur. Further, CenturyLink's NG9-1-1 solution ESRP and PRF provide safeguards around how routing policies are entered to help ensure that only valid policies are configured to prevent the need for discrepancy reporting. Policies and rules are tested prior to enabling in production. Fall-back routing (e.g., default trunk group routing) due to policy rules inaccurate data such as no record found is reported via a 9-1-1 NET ALI DR for research and correction.

ECRF, LVF, and SI discrepancies are handled via data validation reports each time GIS data is provisioned via the SI. Routing discrepancies are reported via an ALI DR using 9-1-1 NET. Any misroutes are individually investigated as the cause may be in one of several places: incorrect GIS provisioned to the ECRF/LVF, incorrect policy routing rules, etc.

Access to 9-1-1 NET requires two factor authentication for all users.

The following list, as provided in STA-010.2, lists the types of discrepancies that will need to be addressed in i3. Note that almost all discrepancies begin with a human; very few can be automatically generated. The list also includes how the discrepancies would be initiated using current applications as noted above.

- The LIS needs to file a Discrepancy Report on the LVF.
  - Customers with ALI Location Data Management services would create a MSAG CR through 9-1-1 NET.
- The ECRF/LVF may be receiving data from another ECRF/LVF and thus will file a DR on its upstream provider.
  - When talking about receiving coverage area data, that would allow one ECRF to recurse to another ECRF; that coverage area would be provisioned through the SI, which will generate any reports regarding discrepancies in the data.
- The ECRF/LVF needs to file a DR on the GIS.

	– At the time of provisioning via the SI, error reporting would identify these discrepancies. • The ESRP needs to file a DR on the owner of a routing policy (PSAP, ESRP) that has a problem. – CenturyLink's NG9-1-1 solution ESRP and PRF are integrated and safeguards exist on how routing policies are entered to help ensure only valid policies can be configured. • The PSAP needs to file a DR on an ESRP if a call is misrouted. – ALI Location Data Management customers would create an ALI DR through 9-1-1 NET to be investigated by an analyst. As with any misroute, the cause of the misroute could be in multiple places. • The PSAP needs to file a DR on the GIS when issues are found in a map display. – Not applicable for the services requested in this RFP. • Any client of an ECRF needs to file a DR on the routing data. – ALI Location Data Management customers would create an ALI DR through 9-1-1 NET to be investigated by an analyst. As with any misroute, the cause of the misroute could be in multiple places. • A PSAP or ESRP needs to file a DR on a LIS. – Customers with CenturyLink ALI Location Data Management services would create an ALI DR through 9-1-1 NET. • A PSAP or ESRP needs to file a DR on an ADR/IS-ADR. – Customers with CenturyLink ALI Location Data Management services would create an ALI DR through 9-1-1 NET. • A BCF, ESRP, or PSAP needs to file a DR on an originating network sending it a malformed call. – Future capability. • Any client may need to file a DR on the ESInet operator. – This requirement will require further explanation in a future release of NENA STA-010. • One PSAP needs to file a DR on another PSAP that transferred a call to it. – Not applicable for the services requested in this RFP. • A data user may need to file a DR on a data owner due to rights management issues. – This requirement will require further explanation in a future release of NENA STA-010. • A log client (logging entry or query) may need to file a DR on the Logging Service – Future capability. • Any entity may have to file a DR on another entity due to authentication issues. – These discrepancies would currently be reported by opening a trouble ticket. • An ESRP or PSAP may need to file a DR on a Border Control Function.

	– This requirement will require further explanation in a future release of NENA STA-010. Interactions between the ESRP and BCF would be logged and alarmed upon if discrepancies cause interoperability issues. A PSAP may file a suspected DR using a trouble ticket. • Any Policy Enforcement Point may need to file a DR on a Policy owner due to formatting, syntax, or other errors in the policy. – This requirement will require further explanation in a future release of NENA STA-010. Depending on where an error takes place, it would typically be via an ALI DR in 9-1-1 NET or a trouble ticket.

Any additional documentation can be inserted here:

NGCS 67	**Next Generation Core Services Elements (NGCS)** **Event Logging and Management Information System (MIS)** PSAPs may have a variety of logging recorders capable of recording SIP traffic and associated media. PSAPs will use the Emergency Call Tracking System (ECaTS) for call logging and capture event details. The Commission will gather statistical data from PSAPs through ECaTS. Describe how the solution interfaces with logging recorders and ECaTS.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink will provide ECaTS with a near real-time feed of NGCS elements from the CenturyLink-managed i3 logger for the State of Nebraska. The interconnection between the NGCS platform and ECaTS data servers is already in place and in operation. i3 element data follows NENA defined specifications. Dedicated redundant and diverse connectivity between the CenturyLink's NG9-1-1 solution NGCS i3 logger and the ECaTS server architecture is already established and actively monitored.				

Any additional documentation can be inserted here:

NGCS 68	**Next Generation Core Services Elements (NGCS)** **Event Logging and Management Information System (MIS)** **Event Logging Description** Extensive logging of NG911related events, transactions, media, and operations is required. All log entries shall be accurately time stamped. Logging must include all elements in the call flow including logging of NG911related events within ESInets, the NGCS, the PSAP, and related operations, and is a standardized function used throughout ESInets, NG911 functional elements, and PSAPs. Logged events include ingress and egress to an ESInet, ingress, and egress to a PSAP, all steps involved in call processing, and processing of all forms of media. Describe how the solution meets or exceeds the above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution logs hundreds of data points for each call that traverses the system to assist in tracking and troubleshooting calls. Events are logged 24x7x365 and include ingress and egress to an ESInet, ingress and egress to a PSAP, all steps involved in call processing, and processing of all forms of media. Only authorized processes have write access. CenturyLink's NG9-1-1 solution Customer Management Portal (CMP) provides participating PSAPs and approved personnel 24x7 access to call detail records through a secure, web-based portal. The call detail records provide the user with all of the pertinent information for each call. A drop-down in the CMP allows the user to choose the time zone for the timestamps. Users have a predetermined PSAP or set of PSAPs for which they are able to view statistics. For example, some users will only be able to view their own PSAP's statistics, while another user may be provided authorization to view all PSAPs in a county, region, state, or other appropriate grouping. Event data is time stamped upon ingress of payload entry through the LNG or BCF and at the time of answer and disconnect at the PSAP. Event data also tracks the time for each functional element to perform routing and PSAP assignment, by tracking the time it takes to traverse from the selective router to be delivered to the PSAP. This event data tracking by functional element allows for call diagnostics. Event data is archived for seven years. CenturyLink's NG9-1-1 solution's standard reporting suite provides the following reports through a web-based interface. • Event Count Reports per Hour– provides metrics for total calls by hour for a day, week or month. • Event Count by Routing Reason and Destination – Provides metrics for total calls in which the Customer PSAP participated as the Primary versus Alternate route per route type, broken out by hour for day, week, or month. • Event Count by Type – Provides metrics for total calls by call type (wireless, wireline, VoIP) broken out by hour for day, week, or month. • Event Count by Incoming Trunk Group – Provides metrics for total calls by trunk group with an hourly breakout. • Bridge Call Summary – Provides metrics for calls bridged in or out by bridge type (fixed, selective, manual). Call detail is available for each bridged call. • Routing Database Processing – provides a breakout of initial calls where the Customer PSAP was Primary by selectively routed versus default routed with a No Record Found (NRF) breakout. • Event Setup Time – provides statistics on the time to route and deliver calls where the Customer PSAP is Primary, including the minimum, maximum, median and average times				

	Event Count Reports per Hour– provides metrics for total calls in which Customer's PSAP participated by hour for a day, week or month

Any additional documentation can be inserted here:

NGCS 69	**Next Generation Core Services Elements (NGCS)** **Event Logging and Management Information System (MIS)** **Integration with Call-Handling Equipment** 1. Describe how bidder's event-logging solution may integrate with the each PSAP's call-handling equipment, to provide a complete, end-to-end view of a call. 2. Describe how the Commission can gain access to information in the event-logging solution. 3. Describe the requirements of the PSAP's call-handling equipment, software license agreements, and interfaces required to support integration with the bidder's event-logging solution.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			

Bidder Response:


1. CenturyLink's NG9-1-1 solution provides an i3 logging capability per the NENA STA-010.2 specification. CenturyLink can support near real-time log delivery and web service interfaces for log retrieval from authorized clients. CenturyLink will provide ECaTS with a near real-time feed of NGCS elements from the CenturyLink-managed i3 logger for the State of Nebraska. The interconnection between the NGCS platform and ECaTS data servers is already in place and in operation. i3 element data follows NENA defined specifications.
2. In addition to the ECaTS solution already contracted to the State directly (and the new reports that ECaTS will provide with the availability of the i3 information made available from CenturyLink) CenturyLink's NG9-1-1 solution Customer Management Portal (CMP) provides participating PSAPs and approved personnel 24x7x365 access to a reporting suite including call detail records through a secure, web-based portal. Call detail records provide the user with all of the pertinent information for each call.

The CMP web-based reporting suite is a business intelligence reporting tool for metrics reporting supplies authorized users with CenturyLink's NG9-1-1 solution Routing and Location Data Management reports. Access is available to authorized users via two-factor verification.

CMP provides access to the following information:

- Operation State of PSAP(s)
  - Current status
  - History of changes in status including who made the change and when
  - Resource Counts (available TDM trunks or IP Contacts)
  - Operation State color-coded with indications for In Service/Out of Service
- PSAP Route Lists
  - Primary
  - Alternative
  - Abandonment
  - Backup
- Fixed Transfer/Bridge List
- Statewide PSAP Directory

	• Call Detail Records/Call Trace Tool – Call Detail Records provide PSAPs information including alternately routed calls, i3 to ESN fallback, and transferred calls – CDRs will display call-specific timing from a NGCS perspective. This includes. Call Delivery Time, Processing Time between Elements, – CDR will also allow real-time access to call volumes – general or by call type, and alternate routed calls. – The Call Trace tool (located within the CMP application) will allow the user to inspect virtually every element of a specific call. This will include initial call delivery from the LNG, Location database lookups, ECRF queries, PSAP call delivery, specific log data and call traces. Users can view summary data for a "big picture" view, and in many cases, drill down to the detail for a more "granular" view. Users can also download a report as a comma-delimited file, which can be imported into Excel or another database application. CenturyLink's NG9-1-1 solution tool gives users the ability to drill down and capture additional contextual information that can be used to more efficiently manage ongoing 9-1-1 operations. A secure web portal in a standardized HTML format, customized to each authorized user's profile, access level, and preferences, provides access to more than 270 compliance reports and other existing reports. Users can create customized reports and perform real-time data and trend analysis, including graphing, based on daily data updates. The web-based tool gives 9-1-1 officials the ability to convert static data into actionable information anywhere and at any time. As shown in the following sample screenshots of the reporting tool, hyperlinks allow the user to easily drill down to further levels of detail. For example, clicking on the Company A link in the second example below, allows the user to see further detail on Service Order processing. The results are typically returned within one second.

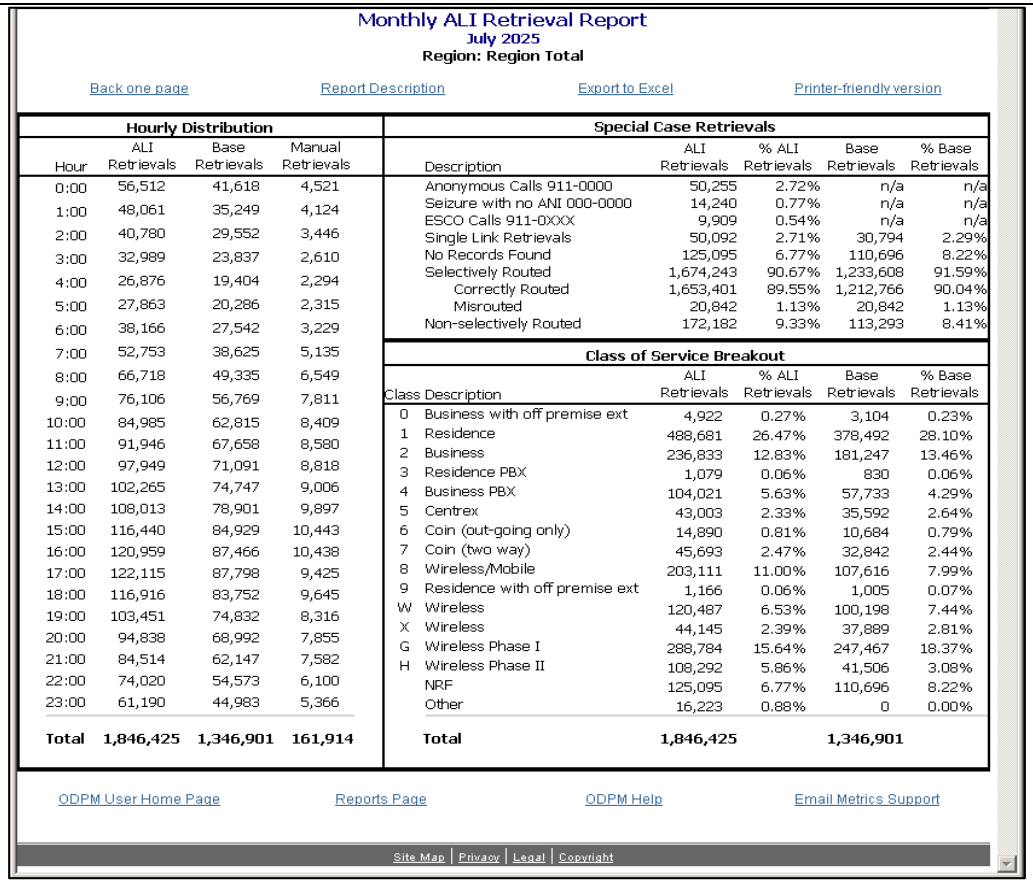

Monthly ALI Retrieval Report
July 2025
Region: Region Total

Back one page | Report Description | Export to Excel | Printer-friendly version

Hourly Distribution

Hour	ALI Retrievals	Base Retrievals	Manual Retrievals
0:00	56,512	41,618	4,521
1:00	48,061	35,249	4,124
2:00	40,780	29,552	3,446
3:00	32,989	23,837	2,610
4:00	26,876	19,404	2,294
5:00	27,863	20,286	2,315
6:00	38,166	27,542	3,229
7:00	52,753	38,625	5,135
8:00	66,718	49,335	6,549
9:00	76,106	56,769	7,811
10:00	84,985	62,815	8,409
11:00	91,946	67,658	8,580
12:00	97,949	71,091	8,818
13:00	102,265	74,747	9,006
14:00	108,013	78,901	9,897
15:00	116,440	84,929	10,443
16:00	120,959	87,466	10,438
17:00	122,115	87,798	9,425
18:00	116,916	83,752	9,645
19:00	103,451	74,832	8,316
20:00	94,838	68,992	7,855
21:00	84,514	62,147	7,582
22:00	74,020	54,573	6,100
23:00	61,190	44,983	5,366
Total	**1,846,425**	**1,346,901**	**161,914**

Special Case Retrievals

Description	ALI Retrievals	% ALI Retrievals	Base Retrievals	% Base Retrievals
Anonymous Calls 911-0000	50,255	2.72%	n/a	n/a
Seizure with no ANI 000-0000	14,240	0.77%	n/a	n/a
ESCO Calls 911-0XXX	9,909	0.54%	n/a	n/a
Single Link Retrievals	50,092	2.71%	30,794	2.29%
No Records Found	125,095	6.77%	110,696	8.22%
Selectively Routed	1,674,243	90.67%	1,233,608	91.59%
Correctly Routed	1,653,401	89.55%	1,212,766	90.04%
Misrouted	20,842	1.13%	20,842	1.13%
Non-selectively Routed	172,182	9.33%	113,293	8.41%


Class of Service Breakout

Class	Description	ALI Retrievals	% ALI Retrievals	Base Retrievals	% Base Retrievals
0	Business with off premise ext	4,922	0.27%	3,104	0.23%
1	Residence	488,681	26.47%	378,492	28.10%
2	Business	236,833	12.83%	181,247	13.46%
3	Residence PBX	1,079	0.06%	830	0.06%
4	Business PBX	104,021	5.63%	57,733	4.29%
5	Centrex	43,003	2.33%	35,592	2.64%
6	Coin (out-going only)	14,890	0.81%	10,684	0.79%
7	Coin (two way)	45,693	2.47%	32,842	2.44%
8	Wireless/Mobile	203,111	11.00%	107,616	7.99%
9	Residence with off premise ext	1,166	0.06%	1,005	0.07%
W	Wireless	120,487	6.53%	100,198	7.44%
X	Wireless	44,145	2.39%	37,889	2.81%
G	Wireless Phase I	288,784	15.64%	247,467	18.37%
H	Wireless Phase II	108,292	5.86%	41,506	3.08%
	NRF	125,095	6.77%	110,696	8.22%
	Other	16,223	0.88%	0	0.00%
	Total	**1,846,425**		**1,346,901**	

ODPM User Home Page | Reports Page | ODPM Help | Email Metrics Support

Site Map | Privacy | Legal | Copyright

Figure 10. Sample ALI Retrieval Report

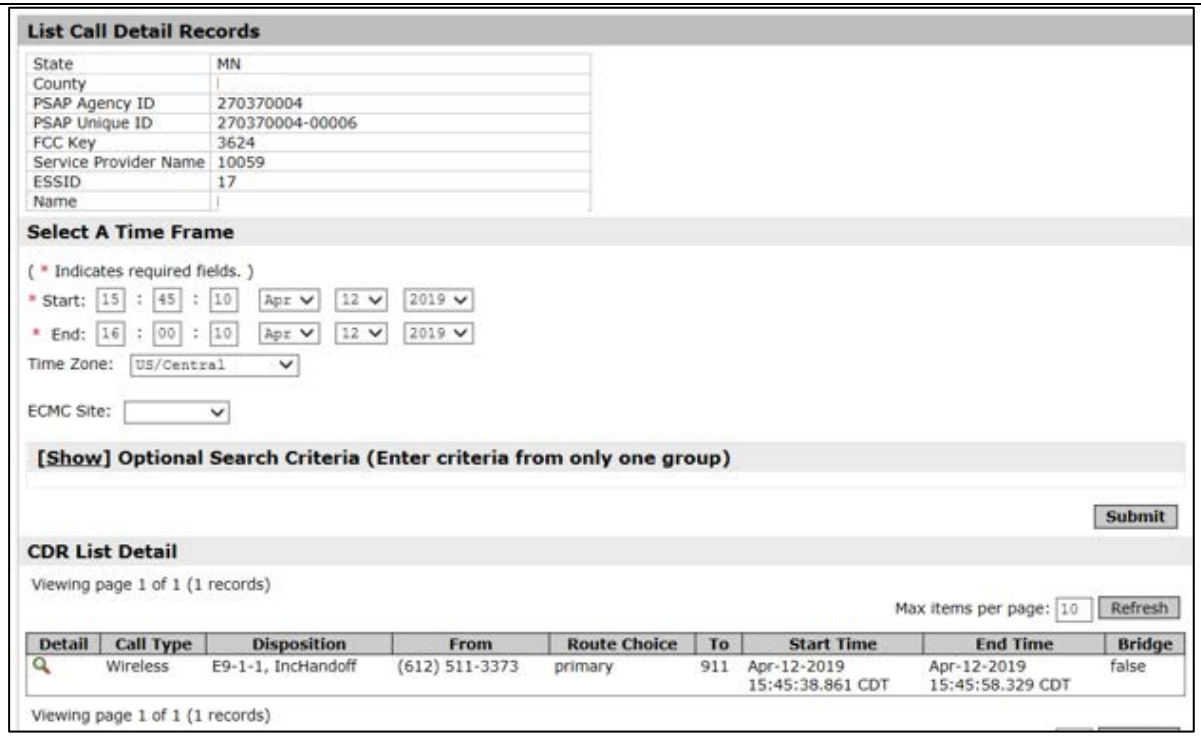

List Call Detail Records

State	MN
County	
PSAP Agency ID	270370004
PSAP Unique ID	270370004-00006
FCC Key	3624
Service Provider Name	10059
ESSID	17
Name	

Select A Time Frame

(* Indicates required fields.)

* Start: 15 : 45 : 10 Apr 12 2019

* End: 16 : 00 : 10 Apr 12 2019

Time Zone: US/Central

ECMC Site:

[Show] Optional Search Criteria (Enter criteria from only one group)

Submit

CDR List Detail

Viewing page 1 of 1 (1 records)

Max items per page: 10 Refresh

Detail	Call Type	Disposition	From	Route Choice	To	Start Time	End Time	Bridge
	Wireless	E9-1-1, IncHandoff	(612) 511-3373	primary	911	Apr-12-2019 15:45:38.861 CDT	Apr-12-2019 15:45:58.329 CDT	false

Viewing page 1 of 1 (1 records)

Figure 11. Sample CDR Report

At every level of each report the user can:

- Click on the "Export to Excel" hyperlink to produce an Excel version of the data displayed on the screen.
- Click on the "Printer-friendly version" hyperlink to produce an HTML version of the data as displayed on the screen without headers and footers for printing simplicity.

3. The ECaTS solution, which will have the interaction with the local CHE equipment for MIS purposes, will handle the individual licensing and software agreements with the State of Nebraska. The interconnection and data spills provided to the ECaTS platform is included as part of CenturyLink's NG9-1-1 solution. The standard reporting and CMP capabilities listed previously in the response will be made available to any/all parties that the State grants permission. No additional licensing and or interconnection interfaces are required by the CenturyLink.

Any additional documentation can be inserted here:

NGCS 70	**Next Generation Core Services Elements (NGCS)** **Event Logging and Management Information System (MIS)** **Access to Event Logging Data** 1. Describe how the PSAPs and the Commission will gain access via role-based authentication to the event-logging solution data and run statistical and other MIS reports. The PSAP is the custodian of such data for purposes of the Nebraska Public Records Statutes, Neb. Rev. Stat. §§ 84-712 to 84 712.09. The PSAP is responsible for maintaining such data pursuant to the PSAP record-retention schedule applicable to such data as provided in the Nebraska Public Record Statutes, Neb. Rev. Stat. §§ 84 1201 to 84 1229. The state is implementing the ECaTS MIS solution statewide. Upon deployment, the Contractor shall coordinate with ECaTS, the state, and the PSAPs to deliver event logging data to the ECaTS solution. An existing data-sharing agreement (DSA) between the state and the PSAPs governs what data the state may access along with notifications of records requests. This DSA will govern data collected by the NGCS and ESInet provider whether that data is delivered to ECaTS or directly to the state or PSAPs. 2. Describe the reports, MIS tools, and performance metrics made available to each PSAP, the user interface for retrieving or receiving reports, role-based authentication to limit access to data and reports, and the ability to customize reports based on individual PSAP needs. These reports may be used as a basis for changes to bandwidth and capacity. The required reports and metrics will include, but is not limited to: a. Timing b. Call-delivery time c. Call-processing time between elements d. Volumes e. Call volumes by call type f. Alternate-routed calls g. Text-to-911 h. All NGCS element usage volumes i. Bandwidth/trunk utilization j. Calls per trunk k. Trunk utilization l. Circuit utilization	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
			X		
	Bidder Response: 1. The PSAPs and Commission can gain access to event logging data through the web-based CenturyLink's NG9-1-1 solution Customer Management Portal (CMP) available via role-based, two-factor authentication. Users have a predetermined PSAP or set of PSAPs for which they				

are able to view statistics. For example, some users will only be able to view their own PSAP's statistics, while another user may be provided authorization to view all PSAPs in a county, region, state, or other appropriate grouping.

CenturyLink will coordinate with ECaTS, the State, and the PSAPs to deliver event logging data to the ECaTS solution.

2. CenturyLink's NG9-1-1 solution service provides an i3 logging capability per the NENA STA-010.2 specification. CenturyLink can support near real-time log delivery and web service interfaces for log retrieval from authorized clients. CenturyLink's NG9-1-1 solution logs hundreds of data points for each call that traverses the system to assist in tracking and troubleshooting calls. Logged events include ingress and egress to an ESInet, ingress and egress to a PSAP, all steps involved in call processing, and processing of all forms of media.

The Customer Management Portal provides participating PSAPs and approved personnel 24x7 access to call detail records through a secure, web-based portal. The call detail records provide the user with all of the pertinent information for each call.

Users have a predetermined PSAP or set of PSAPs for which they are able to view statistics. For example, some users will only be able to view their own PSAP's statistics, while another user may be provided authorization to view all PSAPs in a county, region, state, or other appropriate grouping.

Event data is time stamped upon ingress of payload entry through the LNG or BCF and at the time of answer and disconnect at the PSAP. Event data also tracks the time for each functional element to perform routing and PSAP assignment, by tracking the time it takes to traverse from the selective router to be delivered to the PSAP. This event data tracking by functional element allows for call diagnostics.

Reporting

CenturyLink's NG9-1-1 solution standard reporting suite provides the following reports through a web-based interface.

- **Event Count Reports per Hour.** Provides metrics for total calls by hour for a day, week or month.
- **Event Count by Routing Reason and Destination.** Provides metrics for total calls in which the Customer PSAP participated as the Primary versus Alternate route per route type, broken out by hour for day, week, or month.
- **Event Count by Type.** Provides metrics for total calls by call type (wireless, wireline, VoIP) broken out by hour for day, week, or month.
- **Event Count by Incoming Trunk Group.** Provides metrics for total calls by trunk group with an hourly breakout.
- **Bridge Call Summary.** Provides metrics for calls bridged in or out by bridge type (fixed, selective, manual). Call detail is available for each bridged call.
- **Routing Database Processing.** Provides a breakout of initial calls where the Customer PSAP was Primary by selectively routed versus default routed with a No Record Found (NRF) breakout.
- **Event Setup Time.** Provides statistics on the time to route and deliver calls where the Customer PSAP is Primary, including the minimum, maximum, median and average times
- **Event Count Reports per Hour.** Provides metrics for total calls in which Customer's PSAP participated by hour for a day, week or month

CenturyLink's NG9-1-1 solution tool gives users the ability to drill down and capture additional contextual information that can be used to more efficiently manage ongoing 9-1-1 operations. A secure web portal in a standardized HTML format, customized to each authorized user's profile, access level, and preferences, provides access to more than 270 compliance and other existing reports.

CMP also provides the PSAP with the ability to download the audio stream associated to a call. The PSAP can either download only the caller's audio or the conference audio of all the participants (up to 10). Both types of audio streams can be used for troubleshooting the service. Audio recordings are available to download for up to 14 days.

For ALI management, users can create customized reports and perform real-time data and trend analysis, including graphing, based on daily data updates. CenturyLink's NG9-1-1 solution gives 9-1-1 officials the ability to convert static data into actionable information anywhere and at any time.

Hyperlinks allow the user to easily drill down to further levels of detail. For example, clicking on the Company A link in the example below, allows the user to see further detail on Service Order processing. The results are typically returned within one second.

Users can create customized reports and perform real-time data and trend analysis, including graphing, based on daily data updates. CenturyLink's NG9-1-1 solution gives 9-1-1 officials the ability to convert static data into actionable information anywhere and at any time.

At every level of each report the user can:

- Click on the "Export to Excel" hyperlink to produce an Excel version of the data displayed on the screen.
- Click on the "Printer-friendly version" hyperlink to produce an HTML version of the data as displayed on the screen without headers and footers for printing simplicity.

CenturyLink has provided some additional management reports that would be available to the State below.

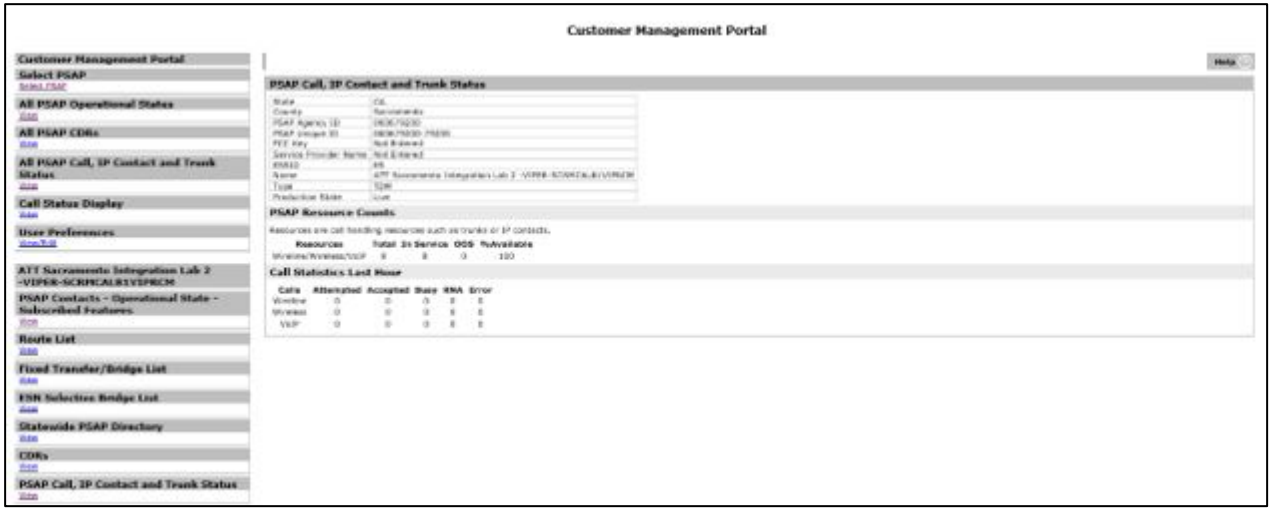


Figure 4: PSAP Resource Availability and Statistics

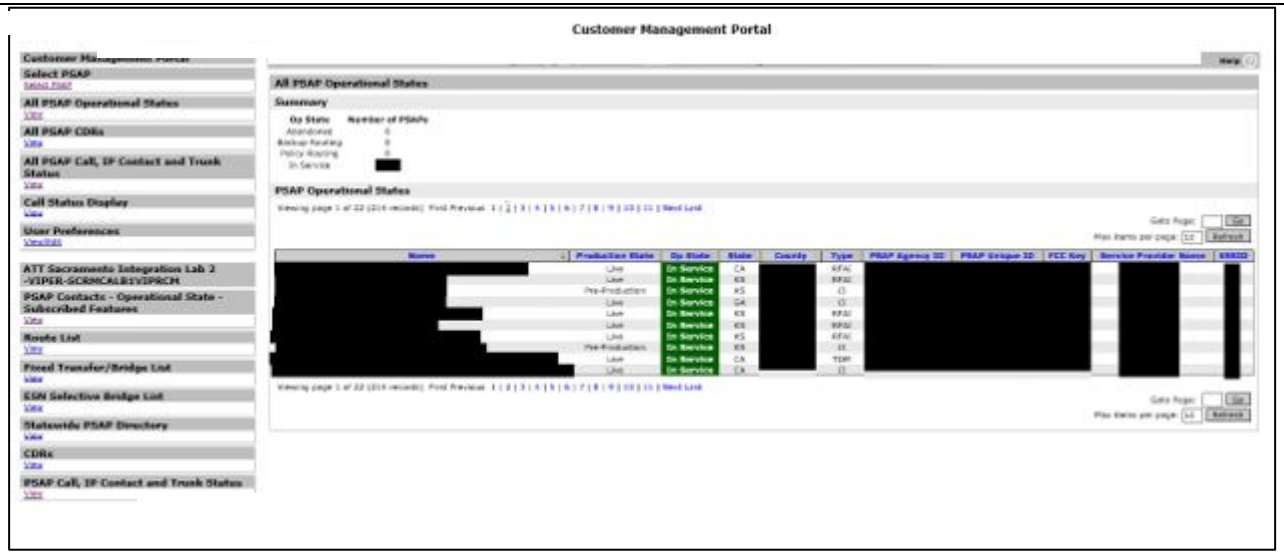


Figure 5: PSAP Operation State & Subscribed Features

Any additional documentation can be inserted here:

NGCS 71	**Next Generation Core Services Elements (NGCS)** **Event Logging and Management Information System (MIS)** **NENA Standards Compliance** The bidder's proposed logging solution shall meet the requirements set forth in NENA-STA-010.2-2016. **Third-Party Certification Fees** Bidder is responsible for any third-party certification fees. Describe how the solution meets or exceeds these above requirements.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: **NENA Standards Compliance** CenturyLink's NG9-1-1 solution service provides an i3 logging capability per the NENA STA-010.2 specification. Additionally, i3 logs from all ESInet i3 components will be available per the NENA STA-010.2 specification. **Third-Party Certification Fees** CenturyLink's NG9-1-1 solution service includes third-party certification fees.				

Any additional documentation can be inserted here:

NGCS 72	**Next Generation Core Services Elements (NGCS)** **Network Time Protocol (NTP) and Time Source** Bidder's solution shall sync with existing time sources to maintain consistent time stamps across the network and systems. Describe how bidder's solution complies with this requirement.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: CenturyLink's NG9-1-1 solution supports PSAP interfaces specified in NENA STA-010.2-2016, Section 4, including the NTP time services interface, accurate to 1 millisecond. CenturyLink will work with the Commission and PSAPs to assess how to support interoperability with CenturyLink's NG9-1-1 solution integrated time source.				

Any additional documentation can be inserted here:

NGCS 73	**Next Generation Core Services Elements (NGCS)** **Network Time Protocol (NTP) and Time Source** **Master Clock Description** The bidder shall provide redundant, resilient network-attached Stratum 2-time sources ("master clocks") capable of supplying standard time to all systems, network devices, and functional elements that comprise the ESInet and the NGCS. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution processing elements achieve time synchronization via Network Time Protocol (NTP) from redundant and geographically distributed sources within e CenturyLink's NG9-1-1 solution sphere. Time stamps are included in logs, system traces, and user reports.				

Any additional documentation can be inserted here:

NGCS 74	**Next Generation Core Services Elements (NGCS)** **Network Time Protocol (NTP) and Time Source** **Accessibility by PSAP Equipment** The master clock time source(s) shall be accessible to the PSAPs for synchronizing call-handling systems and other related systems. All systems, network devices, and functional elements shall support the use of the NTP for maintaining system clock accuracy. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink's NG9-1-1 solution processing elements achieve time synchronization via Network Time Protocol (NTP) from redundant and geographically distributed sources within CenturyLink's NG9-1-1 solution realm. PSAPs will be offered use of the NTP service to synchronize the clocks on their 9-1-1 CPE, workstations, etc. CenturyLink's NG9-1-1 solution supports PSAP interfaces specified in NENA STA-010.2-2016, Section 4, including the NTP time services interface, accurate to 1 millisecond.				

Any additional documentation can be inserted here:

NGCS 75	**Next Generation Core Services Elements (NGCS)** **NG911 Application Integration** Bidder shall describe other NG911 applications, additional data integrations, and personal safety applications that may be integrated with the NGCS solution. The bidder's system must be capable of integration with Additional Data Repositories (ADR), Identity-Searchable Additional Data Repositories (IS-ADR) or commercial third-party LIS, as described in NENA STA-010.2-2016, within two years of the deployment of the first PSAP. Describe how the solution will accomplish integration, information storage, and use/transmission of data to PSAP CHE.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response: Please see this response filed with the PROPRIETARY INFORMATION Please reference the following interface specifications attachments for additional detail. • ECRF-LoST Interface Specification v1.4.2 provided in the PROPRIETARY INFORMATION" as the file named "NCGS_**75_ECRF-LoST Interface Specification_v1.4.2_PROPRIETARY**" • LIS-Held Interface Specification v1.4 provided in the PROPRIETARY INFORMATION" as the file named "**NGCS_75_LIS-HELD Interface Specification_v1.4 PROPRIETARY"** • ADR-Additional Data Interface Specification v1.3.1 provided in the PROPRIETARY INFORMATION" as the file named "NGCS_**75_ADR-AdditionalData Interface Specif_v1.3.1docx_PROPRIETARY"**				

Any additional documentation can be inserted here:

<table>
<tr><td rowspan="2">NGCS 76</td><td>Next Generation Core Services Elements (NGCS)
Message Session Relay Protocol Text (MSRP) Integration
The PSAPs have deployed short messaging service (SMS)-to-911 service.
1. Describe the ability to integrate existing web-based and MSRP-integrated SMS-to-911 and Real-Time Text (RTT) services into the solution.
2. Explain whether the solution supports location-by-reference and/or location-by-value. This requirement is for the integration of text messaging with MSRP and not a requirement for procuring text services.</td><td>Comply</td><td>Partially Comply</td><td>Complies with Future Capability</td><td>Does Not Comply</td></tr>
<tr><td></td><td>X</td><td></td><td></td><td></td></tr>
<tr><td colspan="5">Bidder Response:
1. CenturyLink's NG9-1-1 solution supports TCC interfaces to deliver "SMS to 9-1-1" services to Nebraska PSAPs. The three industry-defined methods of SMS delivery to PSAPs are supported. Existing PSAP TCC services can co-exist with CenturyLink's NG9-1-1 solution implementation and can transition to utilize the ESInet IP transport and/or NGCS services as individual PSAPs are deployed on the ESInet. As a PSAP's CPE provides support, PSAPs can have their "SMS to 9-1-1" SIP signaling, or call control messaging, pass through the ESInet ESRP functions and benefit from a common and centrally controlled set of PSAP routing policies, such as PSAP Abandonment/Evacuation routing.

CenturyLink's NG9-1-1 solution - managed TCC has interconnections to all current TCC providers and their respective customers. Carrier initiated emergency text messages can be aggregated at the managed TCC and integrated with ESInet transport and NGCS. At that time, any ancillary transport provided to PSAP CPE demarcation sites just for the purpose of "SMS to 9-1-1" service delivery can be retired in lieu of utilizing ESInet transport.

"SMS to 9-1-1" industry defined service delivery mechanisms are:
• TTY calls are sent into CenturyLink's NG9-1-1 solution system and handed off to the PSAP CPE from the Legacy PSAP Gateway (LPG). The PSAP CPE needs to support TTY in order to have a text conversation through this method.
• Web Browser – The Web Browser provides a GUI interface which allows the end PSAP user to communicate with the text initiator over the public internet. Since this workstation is connected to the public internet, it is typically a standalone workstation and uses the "swivel chair" approach.
• MSRP – CenturyLink has established redundant connections between our partners managed TCC and CenturyLink's NG9-1-1 solution. When a text is initiated, the text will traverse the ESInet infrastructure. The ESRP/PRF will be used to determine and route any text traffic. All PRF rules will be applied when routing to the PSAP. The message will traverse the established ESInet redundant paths and be handed off to the Terminating ESRP/CPE. It will be the PSAP's responsibility to procure a solution with their CPE vendor. Protocol specifications can be provided upon request.

Regarding MSRP, redundant connections exist between our partners managed TCC and the ESInet. When a text is initiated, the text will traverse the ESInet infrastructure. The ESRP/PRF will be used to determine and route any MSRP traffic for calls that ingress in an i3 compliant format. All PRF rules will be applied when routing to the PSAP. The message will traverse the established ESInet redundant paths and be handed off to the Terminating ESRP/CPE. It will be the PSAP's responsibility to procure a solution with their CPE vendor. Protocol specifications can be provided upon request.</td></tr>
</table>

	Support for Real Time text (RTT) is road-mapped for 1H 2020. Native RTT calls will be supported at ingress to the CenturyLink NG Routing service. IP ingress from the OSP is required. RTT calls will be delivered to RTT-capable PSAPs and PSAPs that support TTY. CenturyLink will transcode the RTT call to TTY as required. The service includes the following elements. • Redundant interconnection with TCC • Redundant, secure IP connectivity between the end user PSAP and CenturyLink's NG9-1-1 solution • The ability to transfer a text session to another PSAP on the network • SIP-based communication protocol compliant to existing standards, NENA i3 and ATIS J-STD-110 MSRP protocol • Ability to display Request Initiator (RI) cell sector location and Carrier Identifier as an in-band message • Log retention of text dialogues The following diagram illustrates "SMS to 9-1-1" interconnection between TCC, CenturyLink's NG9-1-1 solution, and each of the three "SMS to 9-1-1" service delivery types.

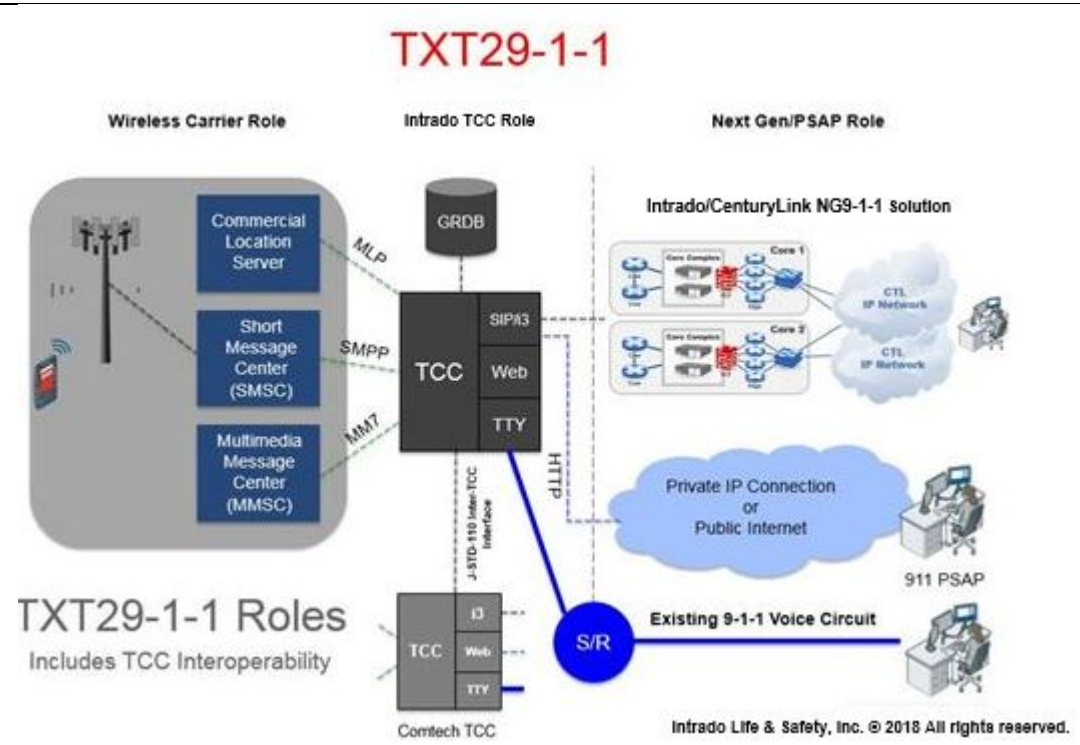


Figure 12: Text29-1-1 Diagram

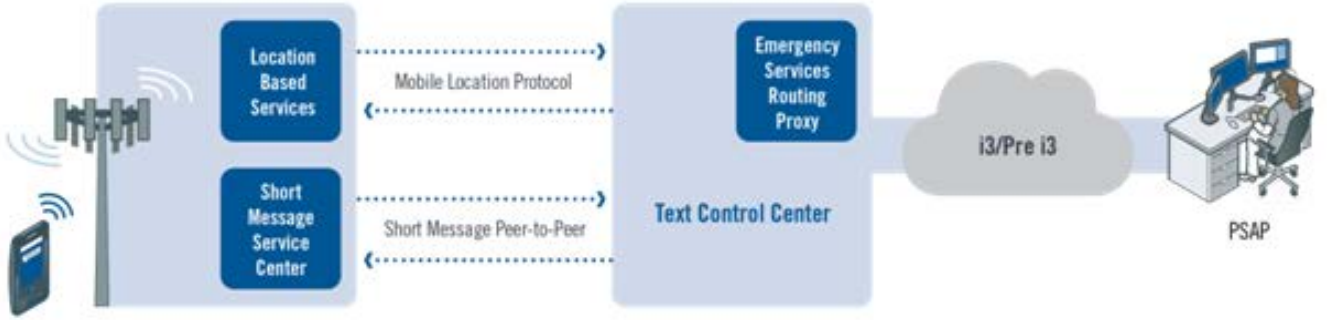


Figure 13: Integrated TXT29-1-1 Architecture Overview

Sample Message Flow

1. An RI sends a text message to 9-1-1.
2. The text request is routed through the wireless carrier's network to the TCC.
3. TCC determines location of the RI via a Mobile Location Protocol (MLP).
4. TCC determines the ESInet by using the cell sector or caller's latitude and longitude and sends the call to CenturyLink's NG9-1-1 solution or the PSAP Web Browser interface.
5. If using a TTY or Integrated solution, CenturyLink's NG9-1-1 solution determines the PSAP by querying the ECRF. CenturyLink's NG9-1-1 solution sends the call to the PSAP where tones are recognized and converted into displayable characters.

2. For location, a call will include either location-by-value or location-by-reference when passed to the NG Service Provider (CenturyLink). If a location-by-reference is provided, CenturyLink's NG9-1-1 solution will query for location using the HELD protocol as required. CenturyLink's NG9-1-1 solution will pass the ADR URI to the PSAP so that they can query the ADR resource for additional data. The PSAP will use the ADR protocol to do so.

If location-by-value is provided, that value will be passed to the PSAP.

Any additional documentation can be inserted here:

	Next Generation Core Services Elements (NGCS) **1. Make-Busy Functionality** Some PSAPs have a physical make-busy switch that can be activated in the event of an emergency evacuation. Bidder's solution shall support this functionality to all PSAPS.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	2. Ringdown Functionality Bidders' solution shall support ringdown functionality, either through the call-handling system or through the NGCS.	X			
	3. Near-Simultaneous Transfer The solution shall support near-simultaneous conference and transfer capability, with up to at least 12 parties in the conference. This feature shall allow transfer or conference buttons to be programmed to automatically establish a conference with multiple parties. For instance, one button at a police department might establish a conference between the police, fire, and EMS PSAPs and the original caller, without having to add each additional party individually. Describe how bidder's solution meets or exceeds these requirements.	X			
NGCS 77	**Bidder Response:** 1. **Make Busy Functionality** CenturyLink supports make-busy functionality with a variety of solutions. 1. A call to the CenturyLink NOC. 2. The web-based Customer Management Portal provides authorized PSAP representative(s) with the real-time ability to invoke abandonment themselves for a specific PSAP via internet access. 3. Physical equipment can be provided at the host and/or remote PSAP location at an additional cost. Since the third option requires specific equipment and secured and sometimes independent network support (for remote PSAP locations), the recommended path is for PSAPs to utilize the already included web portal or CenturyLink NOC to activate the "make busy" functionality. 2. **Ringdown Functionality** CenturyLink's NG9-1-1 solution supports ring down functionality with the appropriate call handling system. Understanding that there may be various technical solutions to support this legacy functionality, CenturyLink looks forward to discussing which solution best fits the State of Nebraska's needs 3. **Near Simultaneous Transfer** CenturyLink's NG9-1-1 solution supports 12-way bridging and call transfers using i3 SIP REFER and subscribe/notify messaging. i3 PSAPs can transfer and conference calls to both i3 and non-i3 PSAPs.				

Any additional documentation can be inserted here:

		Comply	Partially Comply	Complies with Future Capability	Does Not Comply
NGCS 78	**Next Generation Core Services Elements (NGCS)** **PSAP Interfaces and Backroom Equipment Requirements** **Support of PSAP Interfaces** Bidder's solution shall have the ability to support PSAP interfaces specified in NENA STA-010.2-2016, Section 4, including the following:				
	a. SIP calls	X			
	b. NGCS call delivery	X			
	c. Web services	X			
	d. All baseline media and multimedia (as described in NENA STA-010.2-2016, Section 4)	X		X	
	e. NTP time services interface, accurate to 1 ms	X			
	f. Transport layer security			X	
	g. Discrepancy reporting				
	Describe the functionality of the PSAP interfaces in detail to address the requirements outlined above, with particular attention to the user interface, additional features, and security aspects.				
	Bidder Response: Please see this response filed with the PROPRIETARY INFORMATION • *ESRP-Terminating ESRP Interface for ESInet Specification v1.4.1* provided in the PROPRIETARY INFORMATION" as the file named "**NGCS_78_ESRP-Term ESRP Interface Specification_v1.4.1_PROPRIETARY**" • ECRF-LoST Interface Specification v1.4.2 provided in the PROPRIETARY INFORMATION" as the file named "NCGS_**75_ECRF-LoST Interface Specification_v1.4.2_PROPRIETARY**" • LIS-Held Interface Specification v1.4 provided in the PROPRIETARY INFORMATION" as the file named "**NGCS_75_LIS-HELD Interface Specification_v1.4 PROPRIETARY"** • ADR-Additional Data Interface Specification v1.3.1 provided in the PROPRIETARY INFORMATION" as the file named "**NGCS_75_ADR-AdditionalData Interface Specif_v1.3.1docx_PROPRIETARY**" • 9-1-1 EGDMS User Guide v3.4 provided in the attachments as the file named "**NGCS_78_Intrado 9-1-1EGDMS User Guide_3.4**"				

Any additional documentation can be inserted here:

NGCS 79	**Next Generation Core Services Elements (NGCS)** **PSAP Interfaces and Backroom Equipment Requirements** **Support of Call Handling Equipment (CHE) Platforms** 1. Provide a list of CHE platforms for which bidder has successfully implemented the interfaces listed above in a live production environment, noting any interfaces that have not yet been tested with each CHE vendor/model. 2. Where interfaces with CHE vendors/models have yet to be deployed and/or tested, please describe the integration testing process that the bidder will perform prior to acceptance testing of the solution. 3. Describe the physical interface handoff required at the PSAP CHE demarcation point.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		x			
	Bidder Response: Please see this response filed with the PROPRIETARY INFORMATION All interface specification documentation below is included as an attachment to this RFP. • ECRF-LoST Interface Specification v1.4.2 provided in the PROPRIETARY INFORMATION" as the file named "NCGS_**75_ECRF-LoST Interface Specification_v1.4.2_PROPRIETARY**" • LIS-Held Interface Specification v1.4 provided in the PROPRIETARY INFORMATION" as the file named "**NGCS_75_LIS-HELD Interface Specification_v1.4 PROPRIETARY"** • ADR-Additional Data Interface Specification v1.3.1 provided in the PROPRIETARY INFORMATION" as the file named "**NGCS_75_ADR-AdditionalData Interface Specif_v1.3.1docx_PROPRIETARY**"				

Any additional documentation can be inserted here:

NGCS 80	**Next Generation Core Services Elements (NGCS)** **Transfer to 7/10-Digit Numbers** The bidder's solution shall be capable of transferring 911 calls to 7 or 10-digit numbers with the Calling Party Number (CPN). Describe how the solution meets or exceeds this requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink understands and complies. CenturyLink can transfer 9-1-1 calls in various fashions which will include with the 7- or 10-digit Calling Party number. These transfer methods include fixed transfer, PSAPDN transfer, star code transfer, and PSTN transfer. Additionally, for i3, CenturyLink will follow the appropriate NENA-STA-010.2-2016 protocols for transfers and is doing so in live i3 environments today.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SVAL-1	**Service Validation** Throughout the life of the contract, upon request of the Commission, Bidder shall allow for network testing and validation by a third-party entity, to verify that the service(s) and/or solution(s) are in compliance with the contract's scope.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
		X			
	Bidder Response: CenturyLink will allow for this type of connection and testing/validation. CenturyLink will work with the Commission to understand and establish scope, timelines and potential impact. After agreement by all parties, testing/verification will be planned and implemented.				

OPTIONAL SERVICE

	Next Generation Core Services Elements (NGCS) **OPTIONAL SERVICES** **NG911 Applications and Alarm Integration** **Alarm Integration Description** NG911 provides for the capability to have alarm companies integrate directly with the ESInet and use the NGCS for routing of the alarm and associated data. Describe bidder's experience with integrating alarms, sensors, and other non-interactive call types with bidder's NGCS solution and include separate pricing.	Comply X	Partially Comply	Complies with Future Capability	Does Not Comply
NGCS 81	**Bidder Response:** CenturyLink has had experience integrating multiple "non-traditional" systems into the NGCS infrastructure. These include, but are not limited to, Telematics, VoIP Services, Text, Multimedia, and Gunshot Detection. If the participating technologies can use traditional TDM/ALI protocols or NENA standard i3 protocols to connect and provide address information to the NGCS infrastructure, then the solution and interoperation should be seamless. With the information available today, it seems as though alarm data and call center support would fit the NG mold well. In order to fully understand the support (and therefore financial) impacts, CenturyLink would need to know the interoperability requirements from the Alarm Provider, as well as the expectation for the end result from the PSAP. If alarm companies provide either legacy TDM/ALI or i3 standard protocols, the integration would be seamless, and the call flow should be identical to that of a typical legacy and/or i3 call. If for some reason, the alarm company is unable to provide the voice and location information in an industry-standard format, additional resources would need to be expended to design, test and implement a non-standard solution. ASAP is a is an alarm-based protocol that is tied to the INLETS message switch with INLETS assigned IDs and is how alarm companies route alarm calls to the appropriate PSAP CAD. These IDs are not transferable or usable in/on an ESInet or with NGCS because they are not defined in the NENA specification. Until APCO ratifies the protocol to be used on a common IP transport and uses common NGCS services for routing of calls based on location elements, ASAP cannot be used on an ESInet. That being said, CenturyLink is working with Alarm and IOT companies to standardize calls for service in an i3 methodology. If there is an expectation to provide functionalities or capabilities that are not currently supported by the legacy and/or NENA i3 model, CenturyLink would need to fully understand the requirements from both the OSP in question as well as the Commission to establish a support model to satisfy the end user's needs. CenturyLink can work through engineering requirements discovery with the Commission to develop a mutually agreed upon scope of work that would be priced separately upon completion of functional requirements analysis.				

Any additional documentation can be inserted here:

ADDENDUM NINE – REVISED SCHEDULE OF EVENTS

Date: June 22, 2020

To: All Bidders

From: Annette Walton / Nancy Storant, Buyers
Nebraska State Purchasing Bureau

RE: Addendum for RFP Number 6264 Z1 to be opened June 3, 2020 at 2:00:00 P.M. Central

Revised Schedule of Events

ACTIVITY		DATE/TIME
11.	Evaluation period	June 8, 2020 Through July 13, 2020 ~~June 29, 2020~~
12.	"Oral Interviews/Presentations and/or Demonstrations" (if required)	TBD ~~July 13-17~~
13.	Post "Notification of Intent to Award" to Internet at: http://das.nebraska.gov/materiel/purchasing.html	TBD
14.	Contract finalization period	TBD
15.	Contract award	TBD
16.	Contractor start date	TBD

This addendum will become part of the ITB/proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM EIGHT

Date: March 26, 2020

To: All Bidders

From: Annette Walton / Nancy Storant, Buyers
Nebraska State Purchasing Bureau

RE: Addendum for RFP Number 6264 Z1 to be opened June 3, 2020 at 2:00:00 p.m. Central

---

The Change in Procurement Procedure allowing for electronic submission of bids through ShareFile has the following change:

Please use the following Link to upload proposal documents:
https://nebraska.sharefile.com/r-raf2c2386e6b4c57a

This addendum will become part of the ITB/proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM SEVEN FOR QUESTIONS AND ANSWERS, ADDITIONAL QUESTIONS

Date: May 14, 2020

To: All Bidders

From: Annette Walton/Nancy Storant, Buyers
AS Materiel State Purchasing Bureau (SPB)

RE: Addendum for RFP 6264 Z1 to be opened June 3, 2020, 2:00 P.M. Central Time

Following are the changes made to the above mentioned RFP. The changes are to be considered as part of the RFP. It is the Bidder's responsibility to check the SPB website for all Addenda or Amendments.

Question Number	RFP Section Reference	RFP Page Number	Question	State Response
1.	6264 Z1 Cost Proposals Option A ESInet Revision Two; 6264 Z1 Cost Proposal Option B NGCS Revision Two; 6264 Z1 Cost Proposal Option C ESInet and NGCS Revision Two		The revision two version of the cost workbooks corrected the 2019 estimates of population for the first two regions. However, in doing so, the calculation of the MRC for Regions One and Region Two is now pulling the incorrect population figure (i.e. the Region One MRC is multiplying the price per pop. by Region Two's population and vice versa). This is making the MRC for Region One larger than the MRC for Region Two when using the same per pop price because the formulas in "NRC/MRC Region 1 Total" and "NRC/MRC Region 2 Total" on all input tabs have an incorrect cell reference. Will the State be issuing revision three?	Yes. Please use 6264 Z1 Cost Proposal Option A ESInet Revision Three; 6264 Z1 Cost Proposal Option B NGCS Revision Three; 6264 Z1 Cost Proposal Option C ESInet and NGCS Revision Three.

This Addendum will become part of the RFP and should be acknowledged with the RFP.

ADDENDUM SIX FOR QUESTIONS AND ANSWERS, ROUND TWO

Date: May 7, 2020

To: All Bidders

From: Annette Walton/Nancy Storant, Buyers
AS Materiel State Purchasing Bureau (SPB)

RE: Addendum for RFP 6264 Z1 to be opened June 3, 2020, 2:00 P.M. Central Time

Following are the changes made to the above mentioned RFP. The changes are to be considered as part of the RFP. It is the Bidder's responsibility to check the SPB website for all Addenda or Amendments.

Question Number	RFP Section Reference	RFP Page Number	Question	State Response
1.	6264 Z1 Attachment C Technical Requirements Option B: Requirement #NGCS 62, and Addendum Four – Questions & Answers; Question #68	6264 Z1 Attachment C Technical Requirements Option B NGCS, page 53; Addendum Four – Questions & Answers, page 25	Will the selected vendor be required to provide a solution and/or workflow for receiving GIS updates from the regions and aggregating the data into a statewide dataset? Or rather, will the State receive GIS data updates from the regions and deliver an aggregated statewide dataset to the selected vendor for ingestion into the ECRF and LVF via the SI? If this is the State's preferred method, how often does the State anticipate providing a statewide aggregated data set to the selected vendor? Further, if the State plans to deliver the statewide aggregated dataset for ingestion into the ECRF and LVF via the SI, will the State be	The Contractor will work directly with the State. The State will provide an aggregated statewide dataset for each of the required layers. Yes. The State anticipates providing data updates monthly. The State updates will be validated against topological errors and missing attribution. The Contractor will be required to provide their own

			performing any quality control and error checks prior to transmission to the selected vendor? If so, please elaborate on the planned checks.	validation prior to populating or updating the NGCS.
2.	6264 Z1 EsiNet and Core Services RFP final SONYAS Section II, H. Vendor Performance Reports	Page 11	The following requirement is in the terms and conditions: The State may document any instance(s) of products or services delivered or performed which exceed or fail to meet the terms of the purchase order, contract, and/or solicitation specifications. The State Purchasing Bureau may contact the Vendor regarding any such report. Vendor performance report(s) will become a part of the permanent record of the Vendor. What permanent record is the State referring to? Are these records available to the public?	Procedures for Vendor Performance Reports can be found in the Vendor manual at: http://das.nebraska.gov/materiel/purchase_bureau/vendor/vendor-info.html All performance reports received are kept on file. Yes.
3.	6264 Z1 Cost Proposal Option B-NGCS revision one.xlsx, 6264 Z1 Cost Proposal Option C ESInet and NGCS revision one.xlsx NRC Milestones tab	NRC Milestones tab	The total on the NRC Milestones tab of both the Option B (C11) and Option C (Cell C9 for ESInet and cell C19 for NGCS) workbooks is omitting the total NRC from Region 7. All totals are ignoring the region 7 value on NRC Milestones tab only. Is this an intentional omission or is this a formula error given that the instructions specify	Formula error. Please use 6264 Z1 Cost Proposal Option B Revision Two, 6264 Z1 Cost Proposal Option C Revision Two.

			NRC payments will be made as structured on the NRC milestones tab?	
4.	Document: 6264 Z1 Attachment A - PSAP HOST Endpoints equipment and selective router locations	Page. 1	Can the State verify the address for the Douglas County Call handling Host Site. Attachment A shows the address to be 151335 West Maple, Omaha. Douglas County Treasury is at 15335 W Maple. Can the State confirm that Douglas County Sheriff is on same property but faces west and has a 3601 N 156th St. address?	The address of the PSAP is 15335 West Maple, Omaha, NE. Please see Attachment A Revision Two – PSAP Host endpoints equipment and select router locations. The demarc for the back office/technology equipment is located at 3603 N 156 St, Omaha, NE.
5.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS.docx Section: ESI-9 and NGCS-1 Subsection: Network Design Documentation	Page. 32 and Page. 34	The RFP mentions transitional and end states for the NGCS network. What are the state's expectations regarding what defines the transitional state(s) and the end-state?	The transitional and end states apply to the NGCS only, not the ESInet. The transition state is the time when the NGCS is routing based on tabular data or a combination of tabular and geospatial data. The end state is the time at which all entities are routing based on geospatial data.
6.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS.docx Section: NGCS-4	Page. 36	Does the state expect the NGCS network to receive calls directly from TDM trunks (i.e. is the contractor expected to provide the necessary gateways in this case)?	Yes, the Contractor is required to provide a complete solution, including any necessary gateway functionality.

	Subsection: Next Generation Core Services Elements (NGCS), Legacy Network Gateway (LNG), LNG Description			
7.	General	General	Can the state provide detailed information on the downstream connection (i.e. PSAPs and regions) as to what terminating equipment is available at the regions, which PSAPs require direct connections and which directly connected PSAPs are IP-capable?	The call handling equipment for the regional host sites is included in Attachment A Revision Two – PSAP Host endpoints equipment and select router locations. There will not be any standalone PSAPs directly connected to the ESInet. All PSAPs will be part of a region. All connections to the ESInet will be from the host locations.
8.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS.docx Section: NGCS-14 Subsection: Next Generation Core Services Elements (NGCS), Legacy Network Gateway (LNG), Extraction of Log Files	Page. 39	Requires the LNG to generate reports that can be loaded into a spreadsheet. Is it necessary for the LNG to do this directly or can this be done through a central reporting function?	This can be done through a central reporting function.

9.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS.docx Section: NGCS-32 Subsection: Next Generation Core Services Elements (NGCS), Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF), Transition to Geospatial Routing	Page. 45	Can the state provide more information on how many PSAPS – and for how long – tabular routing will be required? What is the limitation driving the need for tabular routing?	The number of PSAPs is not known, each PSAP is controlled at the local level. It is the State's intent to transition to geospatial routing as soon as all PSAPs in a region are ready for geospatial routing. The limitation driving the need for tabular routing is that regional and statewide data still requires preparation.
10.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS.docx Section: NGCS-67 to NGCS-71 Subsection: Multiple	Pages. 59-61	The RFP calls for both ECaTS and NENA i3 event reporting. Can the state provide any detail on how these are expected to interwork?	The requirements call for the proposed solution to interface with ECaTS. The Contractor will be required to work with ECaTS to achieve this.
11.	Document: 6264 Z1 Attachment C Technical Requirements Option C - ESInet and	Page. 62	What is the current situation with PSAPs in the State of Nebraska and Text-to-9-1-1? Do all PSAPs support integrated text handling	There are approximately 42 PSAPs that have text-to-911 capabilities. No, not all PSAPs support integrated text, some rely

	NGCS.docx Section: NGCS-76 Subsection: Next Generation Core Services Elements (NGCS), Message Session Relay Protocol Text (MSRP) Integration		capabilities, or do some still rely on an Over-the-Top solution? Will the new NGCS network be required to support the OTT approach? Will the existing OTT solution (if any) be left in place?	on an OTT solution. The State intends to integrate text-to-911 into NGCS and have text available to all PSAPs. NGCS will not be required to support OTT. No OTT solutions will not remain.
12.			Are ISPs allowed to bid this RFP with/through partners?	Yes.
13.	Attachment C, Option, Option B Revision One Attachment C, Option C Revision One	59 62	NGCS 76 - How is (SMS)-to-911 service delivered to PSAPs today? What integration to existing service is expected to be provided by the ESInet provider? Is the intent for the NGCS and/or ESInet provider to become the primary SMS-to-911 provider for PSAPs in Nebraska?	See question 11. Integration to existing service is not required. Yes.
14.	Cost Proposal Option A ESInet Revision One Cost Proposal Option B NGCS Revision One Cost Proposal Option C ESInet Revision One	1 1 1	Within the revised Cost Proposal spreadsheets, regions were adjusted to match the Nebraska PSAP Regionalization map (Figure 1) within the 6264 Z1 EsiNet and Core Services RFP Revision One. Regions 1 and 2 were switched to reflect the desired project schedule. However, in doing so, the associated	Yes. Please use 6264 Z1 Cost Proposal Option A Revision Two; 6264 Z1 Cost Proposal Option B Revision Two; and/or 6264 Z1 Cost Proposal Option C revision Two.

			populations were not adjusted. Will the state modify the Cost Proposal spreadsheets to reflect the correct populations? Or, should Bidder's work from the existing Cost Proposals (Options A, B, and C)?	
15.	6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS, NGCS 77	63	Please provide a full definition of the NGCS requirement to provide ringdown circuits. Traditional Ringdown functionality typically involves legacy technological solutions not provided within a typical IP network. Please describe the functionality requested so that the ESInet vendor can describe the IP and NGCS infrastructures capability to support requirement.	The requirement is that the NGCS support Ringdown functionality in the event that one or more CHE systems do not support it.
16.	6264 Z1 Attachment CTechnical Requirements Option C - ESInet and NGCS, NGCS 67	59	Please clarify the i3 Logging request of the ESInet provider. It is generally understood that delivery of the State/PSAP facing report is the responsibility of the MIS vendor. The process of establishing these reports typically occurs in two stages. a. Aggregation of i3 element record logs and delivery of that data (interface) to the MIS reporting vendor (EcATS) b. Establishment of reports of specified i3 elements on ECaTS	

			platform. It is the understanding of the ESInet vendor that the solution will include the resources/time/effort for item a.. For Item b. it is understood that the resources, time effort and pricing would be a separate agreement between the state/PSAP and ECaTS and the ESINET vendor should not account for additional cost of ECaTS to support those reports. Please confirm	The requirement is only for the delivery of the data to ECaTS. The ESInet/NGCS contractor must coordinate this with ECaTS. For item 'b,' the State works directly with ECaTS for the reports and formatting of the reports, so yes, the ESInet vendor should not account for additional cost to support these reports.
17.	Attachment A, Attachment D	All	Please identify which potential Host Region the following PSAP's will be affiliated with: • Scottsbluff County Custer County	Scottsbluff County will become a part of the South Central region. The State anticipates that Custer County will become a part of the East Central region.
18.	Attachment A	1	Please confirm the address for the Douglas County PSAP Host location.	See response to Question 4.
19.	Attachment C, Option C	6	SEC 5 – Please provide use case of a device/carrier outside of the IP network not provided credentials.	The State wants to ensure that a network that connects to the ESInet or NGCS has a valid reason for interconnection. If that is the case, credentials are issued. The State requires that if no valid reason for interconnection exists, credentials are not issued.
20.	Attachment C,	63	NGCS 77 – Will the	The State is not looking

	Option C		PSAPs be providing ringdown phones if their CPE does not support this functionality?	for any party to provide equipment. We are looking for support of the functionality via the NGCS.

This Addendum will become part of the RFP and should be acknowledged with the RFP.

ADDENDUM FIVE – REVISED SCHEDULE OF EVENTS

Date: April 22, 2020

To: All Bidders

From: Annette Walton / Nancy Storant, Buyers
Nebraska State Purchasing Bureau

RE: Addendum for RFP Number 6264 Z1 to be opened June 3, 2020 at 2:00:00 P.M. Central

Revised Schedule of Events

ACTIVITY		DATE/TIME
7.	Last day to submit second round written questions.	April 30, 2020
8.	State responds to second round written questions through Solicitation "Addendum" and/or "Amendment" to be posted to the Internet at: http://das.nebraska.gov/materiel/purchasing.html	May 7, 2020
9.	Proposal Opening Location for mailed/hand delivered submissions: State Purchasing Bureau 1526 K Street, Suite 130 Lincoln, NE 68508 Electronic submissions: https://nebraska.sharefile.com/r-r11ba33e3ee24b63b	June 3, 2020 2:00: 00 PM Central Time
10.	Review for conformance to solicitation requirements	June 8, 2020
11.	Evaluation period	June 8, 2020 through June 29, 2020
12.	"Oral Interviews/Presentations and/or Demonstrations" (if required)	TBD –July 13-17
13.	Post "Notification of Intent to Award" to Internet at: http://das.nebraska.gov/materiel/purchasing.html	TBD
14.	Contract finalization period	TBD
15.	Contract award	TBD
16.	Contractor start date	TBD

This addendum will become part of the ITB/proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM FOUR, QUESTIONS and ANSWERS

Date: April 22, 2020

To: All Bidders

From: Annette Walton/Nancy Storant, Buyers
AS Materiel State Purchasing Bureau

RE: Addendum for Request for Proposal Number 6264 Z1 to be opened June 3, 2020 at 2:00 P.M. Central Time

Questions and Answers

Following are the questions submitted and answers provided for the above-mentioned Request for Proposal. The questions and answers are to be considered as part of the Request for Proposal. It is the Bidder's responsibility to check the State Purchasing Bureau website for all addenda or amendments.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
1.	6264 Z1 Attachment C Technical Requirements Option A, B and C (Word doc)	SLA 1 through 9	General Operations - Service Level Agreements System Capacities and Performance	16	Option A, B, and C have the same SLA requirements; could the Commission please clarify how the SLA's apply to each option individually?	The SLA requirements apply as written. Even if a bidder is only responding to the NGCS, there is still a network component to that. The SLAs related to devices and capacity apply equally to network and NGCS devices.
2.	6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS (Word doc)	GEN SCEN 3	Scenario 3	25	Can the Commission clarify whether this scenario is referring to an SI or LDB change?	The reference is to a spatial interface (SI) change, but it could be either an SI or location database (LDB) in a transitional environment. The errors were discovered in the Contractor's validation process prior to updating either the SI or the LDB, with the understanding that the state will upload data to the Contractor and never have direct access to either the SI or the LDB.
3.	6264 Z1 ESInet and Core Services RFP Revision One and Cost Proposal (Word doc)	V.A	Background and Project Scope	28	Regions 1-6 are defined differently in Section V.A and in the Cost Proposal Summary; for example, Region 1 is defined as the South Central / Panhandle in RFP Section V.A and defined as SE in the Cost Proposal Summary. Could the Commission please clarify?	Section V.A. of the RFP is Correct. Please use the revised posted documents: 6264 Z1 Cost Proposal Option A ESInet Revision One, 6264 Z1 Cost Proposal Option B NGCS Revision One, and 6264 Z1 Cost Proposal Option C ESInet and NGCS Revision One.
4.	6264 Z1 ATTACHMENT A	PSAP Host Locations	-	-	Based on the description of each RFP element in section V.B of the main RFP document, the initial RFP solution will connect each regional host to the statewide ESInet. What does the Commission intend for the Standalone PSAPs and Regions 6 and 7 that do not have a host location defined in Attachment A? Can the Commission identify hosted location(s) for Regions 6	The creation and composition of PSAP regions is under local control. However, it is the State's expectation that the remaining standalone PSAPs will join either an existing region or one of two new regions, at the PSAPs discretion. The State anticipates that regions 6 & 7 will be comprised of PSAPs in the northeast corner of the state. The two regions are expected to form by mid-2021 and anticipated host locations have been added to Attachment A Revision One.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					and 7 to maintain consistency with pricing for Regions 1-5? Can the Commission indicate which Region the Standalone PSAPs intend to join?	For purposes of responding to this RFP, please assume the following: The State is of the understanding that the PSAPs in Custer and those included in 'Region 26' (Thomas, Blaine, Loup, Garfield, Wheeler, Valley, Greely and Sherman counties) will become a part of the East Central Region. ***Region 6 (Northeast)** Knox, Cedar, Dixon, Dakota, Thurston, Stanton, Madison (Host), Wayne, Pierce, and Antelope **Region 7 (Metro West)** Dodge (Host), Colfax (Host), Cuming and Burt *The Northeast region is finalizing host locations. Norfolk (Madison County) will be one host, while the second host may be one of the following three locations: South Sioux City (Dakota County), Wayne, or Hartington (Cedar County). The State anticipates that the second host will be known prior to the opening of the RFP and an Addendum will be posted once the locations are finalized.
5.	6264 Z1 ATTACHMENT A	PSAP Host Locations	-	-	Is there a timeframe that should be assumed for the deployment of the host locations for Regions 6 and 7 for purposes of developing the project implementation plan?	The State anticipates completion of regions 6 and 7 by the end of 2021. It is expected that all regions are transitioned to the statewide NG911 system by 2023.
6.	6264 Z1 ATTACHMENT A	PSAP Host Locations	-	-	If the requirement is for bidders to provide network to standalone PSAPs, what is the requirement for last-mile diversity and redundancy for standalone PSAPs?	All PSAPs on the NG911 system will be a part of a region. There will not be standalone PSAPs.
7.	6264 Z1 ATTACHME	PSAP Equipm	-	-	Can the Commission provide the call-handling position count at each PSAP?	See Attachment D Nebraska PSAP Trunk, Position, and Call Volume Information.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	NT A	ent				
8.	6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS (Word doc)	ESI 1	Emergency Services IP Network Diversity	30	Can the Commission please clarify whether diverse entrances already exist at any of the identified host locations due to the likelihood that bidders will not be able to perform site walks of the locations prior to bid submission? For sites that have diverse entrances, can the Commission provide information on which carriers are providing IP connectivity through those entrances?	It is the state's understanding that the majority of the host locations do not have diverse entrances into their facilities. The host locations that have diverse entrances are those serving the South East Region, with Windstream serving as the primary carrier in both host locations and the Metro Region, with CenturyLink serving as the primary carrier into both host locations. The North Central, South Central, East Central, Metro West, and North East do not have diverse entrances. The State asks that Bidders differentiate between primary and secondary connections both in the response and pricing matrix.
9.	6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS (Word doc)	NGCS 9	Next Generation Core Services Elements (NGCS) Legacy Network Gateway (LNG) Location Information	37	Are NGCS 8 and NGCS 9 duplicates?	Yes, NGCS 8 and NGCS 9 are duplicates NGCS 9 has been deleted in its entirety. Please see; Attachment C Option B Revision One, and Attachment C Option C Revision One.
10.	6264 Z1 Attachment C Technical	NGCS 67	Next Generation Core	59	What expectations does the Commission have for the interface between audio logging recording and i3 Event logging?	At this time, there is no requirement of audio logging occurring within NGCS. Audio logging is done at the host or PSAP level. i3 event logging must interface

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	Requirements Option C - ESInet and NGCS (Word doc)		Services Elements (NGCS) Event Logging and Management Information System (MIS)			with ECaTS.
11.	6264 Z1 Attachment C Technical Requirements Option C - ESInet and NGCS (Word doc)	NGCS 62	Next Generation Core Services Elements (NGCS) Spatial Interface (SI) Use of the Commission's GIS Data Model	56	1. Describe how the Bidder's solution will use the Commission's GIS data model (Attachment D) without modification to the schema. Can the Commission confirm that this is actually referencing Attachment B?	Yes .NGCS 62 has been corrected. Please use: Attachment C Option B - NGCS Revision One and Attachment C Option C – ESInet and NGCS Revision One.
12.	6264 Z1 ESInet and Core Services RFP Revision One	-	Scope of Service	1	"The bidder must identify the proprietary information, mark the proprietary information according to state law, and submit the proprietary information in a separate container or envelope marked conspicuously using an indelible method with the words "PROPRIETARY INFORMATION" or if submitting the proposal or response electronically, as a separate electronic file that is named "PROPRIETARY INFORMATION". " As the proprietary information in bidder's responses may be in a number of	

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					different areas of the response and if bidders provide the bid as requested above, this would oblige the State evaluation team to reference back and forth between two documents as they go through the review of the completed responses. We would like to suggest for the benefit of the evaluation team that bidders provide two full set of response documents; One copy of the full submission for the evaluation team (not to be published publicly) and one redacted version of the completed response (for public publication).	Please submit all proprietary information as required in the RFP.
13.	Addendum 1	-	-	-	Can the State provide what the file size limitation are for bid submission via ShareFile, if any?	None known at this time.
14.			Attachment A	2,3	Will PSAP CPE be upgraded to be i3 capable or will this be an initial RFAI deployment?	The PSC will work with the regions to encourage i3 compatibility, but Bidders shall assume connectivity to CHE with the software versions noted in Attachment A Revision One.
15.			Attachment C	Page 65, SVAL-1	Can the State please confirm that SVAL-1 is an optional requirement?	SVAL-1 is not an optional requirement. Attachment C Option B NGCS - Revision One Attachment C Option C ESInet and NGCS - Revision One.
16.			6264 Z1 ESInet and Core Services RFP Revision	Page 29	Is the intent of the “Option A” network to be a standalone WAN for all host locations to communicate and share data; or is the “Option A” network exclusive to provide connectivity from the NGCS’s to the host locations?	It could potentially allow for traffic between PSAPs associated with different hosts; however, 911 requests for assistance shall have priority. The regional ESInets will handle traffic between PSAPs in the respective regions. Any non-911 traffic must be public-

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			One			safety-related (CAD, MIS, etc.). The State recognizes that there would need to be traffic engineering discussions before additional traffic could be added to the network.
17.			Attachment A	2-3	Can the State provide physical addresses for all the Stand Alone PSAPs so that vendors can determine diversity availability to each?	See response to Question 4.
18.			Attachment A	all	Can the State confirm there are no secondary PSAPs that will be connected to the ESInet/NGCS?	At this time, no secondary PSAPs will be connected to the ESInet/NGCS. If they connect in the future, they will connect via a regional host.
19.			Attachment C, Option C	10	NOC/SOC 10 - Does this requirement only apply to ESInet as NGCS is not indicated in this requirement?	It is a general requirement and applies to both ESInet and NGCS. Please use Attachment C – Option A ESInet Revision One; Attachment C Option B NGCS Revision One; and Attachment C Option C ESInet and NGCS Revision One.
20.			Attachment C, Option C	18	SLA 9 – Will the State please reference the Standards Document the 54ms network traffic convergence requirement is derived from?	ITU-T G.8031 and G.8032 implement sub-50ms failover in ethernet networks. Additionally, MPLS networks support Fast Re-Route (FRR) which also is sub-50ms.
21.			Attachment C, Option C	32	ESI 9 - Can the State provide additional documentation on the microwave network and other local/state-owned networks that are being proposed? Are these public safety grade	This requirement was to raise awareness of other networks in the state. Bidders should research all possible providers to provide service to the State. The PSC is unable to provide additional

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					networks?	information specific to the networks.
22.			Attachment C, Option C	33	ESI 11 - Can the state clarify the difference between ESI 10 and ESI 11?	ESI 10 specifies that the Contractor will support ESInet-to-ESInet interconnections. ESI 11 specifies that the Contractor will implement ESInet-to-ESInet and NGCS interconnections as the need arises.
23.			Attachment C, Option C	47	NGCS 38 - SCTP is listed as optional. NGCS 27 includes this and does not state as optional. Can the State clarify?	NGCS 27 refers to the border control function (BCF) and requires that the BCF be able to accept stream control transmission protocol (SCTP) traffic from outside. NGCS 38 refers to the emergency services routing proxy (ESRP), where SCTP traffic is desirable but not required.
24.			Attachment C, Option C	56	NGCS 62 - Reference to Attachment D. Currently no attachment D on the State's website, can the State provide?	See response to Question 11.
25.			Attachment C, Option C	59	NGCS 69 - State references MIS which is usually associated with CPE. Is the State asking for the NGCS provider to manage MIS or continue using the current ECaTs solution with their loggers for CPE?	The requirement is for the event logging in the NGCS to feed into the PSAPs' event logging (ECaTS) to provide a complete record of the call event.
26.			Attachment C, Option C	63	NGCS 77 - Can the State clarify the Ringdown Functionality. Ringdown is currently part of CPE, how does the State propose this be integrated with ESInet?	The requirement is that the NGCS support Ringdown functionality in the event that one or more CHE systems do not support it.
27.			Attachment A	2,3	Will you please add a "Total Position Count" column to the PSAP Table in	See response to Question 7.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					Attachment A?	
28.			6264 Z1 ESInet and Core Services RFP Revision One	all	What changes were made with the release of Revision One?	1. The Opening Date and time was corrected to: June 3, 2020 2:pm CT 2. Added to the Proprietary Paragraph on Page i. “if submitting the proposal or response electronically, as a separate electronic file that is named “PROPRIETARY INFORMATION”. 3. Schedule of Events Activity 2 added “Form B” 4. Schedule of Events, Activity 8 added “.00 (seconds)” to the time that bids are due.
29.			Attachment C, Option A, B, and C	all	Are there any Mandatory Requirements in Options A, B, or C?	Optional service is called out at NGCS 81. It is understood that Bidders may not have 100% compliance. The evaluation process is designed to select the best solution from those submitted.
30.			Attachment C, Option C	15	NOC/SOC 23 – State indicates they maybe find it beneficial to have a third party NOC/SOC service. Can the State provide additional details such as location, software used, and other technical capabilities on the 3rd party to allow vendors to price connecting to a 3rd party NOC/SOC?	This is a requirement to support such a connection in the future should the State determine it is in the State’s best interest. Bidders should describe their capabilities for establishing a data-sharing connection.
31.			Attachment C, Option C	25	GEN SCEN 3 – Can the state expand on the scenario described? What kind of changes has the bidder uploaded? Are these software updates? The assumption is that the	See response to Question 2. The reference is to a spatial interface (SI) change,

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					State is responsible for both MSAG and GIS data so they would be responsible for making updates to these. Not sure what kind of bidder updates would result in 15,000 errors being generated.	
32.			6264 Z1 ESInet and Core Services RFP Revision One, Section V.B.2.b	29	Can the State provide status of GIS data for the PSAP's throughout Nebraska? Will the State be going to i3 with geospatial day 1 or will it be a slower transition?	The statewide street centerline data is available for download from nebraskamap.gov (search 911) The State is currently working with each PSAP to create the statewide PSAP layer. This is a work in progress and the data is currently out to the PSAPs for input and updates. The State is looking to implement NG911 services as quickly as possible, so it is not required that geospatial routing be available with the initial deployments.
33.			Attachment A	2,3	Can you please provide the number of concurrent calls that each PSAP can currently support? As a follow on, is it the State's desire to maintain this capacity or is there a need to increase the number of concurrent calls for each PSAP? If so, please provide the desired number of concurrent calls by PSAP.	The number of concurrent calls that each PSAP can support is unknown. Please see Attachment D. At this time, it is the expectation of the State that the capacity for concurrent calls remains the same. As greater functionality becomes available (video, images, etc.), it is expected that network capacity can be adjusted to accommodate the additional traffic. Please refer to Req. GEN-4 and SLA-1.
34.			Attachment C	63	Make-Busy Functionality: Is the requirement to continue to use a	The functionality can be provided either way. Some PSAPs may desire the option of a

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					physical device for make-busy operation or can this capability be provided through a portal that would add more functionality and options for make-busy scenarios?	physical switch.
35.			Attachment A	3	Is it the intent of the State to connect each of the individual PSAPs (not currently part of a regional system) to the NGCS via ESInet or will those PSAPs remain on legacy routing until such time that they become part of an existing or new regional system?	See response to Question 4.
36.			6264 Z1 Cost Proposal Option A ESInet Final, 6264 Z1 Cost Proposal Option B-NGCS FINAL3.10.20, 6264 Z1 Cost Proposal Option C ESInet and NGCS final		The cost proposal worksheets require the breakout of fees to seven (7) regions. Section V. A of the Request for Proposal for Contractual Services (6264 Z1 ESInet and Core Services RFP final SONYAS.docx) and "Attachment A PSAP Host endpoints equipment and selective router locations" indicate the makeup of the seven (7) regions. Between those two data sources, twelve (12) of the "stand-alone" counties / PSAP locations from Attachment A are not accounted for in one of the seven (7) regions. How should fees for these twelve (12) unaccounted locations be included in the cost proposal? 1. Antelope County	See response to Question 4.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					2. Cedar County 3. City of South Sioux City 4. City of Wayne/Wayne County 5. Dawes County 6. Dixon County 7. Knox County 8. Mid Rivers 911 Center 9. Pierce County 10. Region 26 Council 11. Scottsbluff County 12. Thurston County	
37.			6264 Z1 Cost Proposal Option A ESInet Final, 6264 Z1 Cost Proposal Option B-NGCS FINAL3.10.20, 6264 Z1 Cost Proposal Option C		When will the remaining "stand-alone" entities join a specific region? Are there any circumstances that would allow a stand-alone to NOT be in a region, and if so, will each stand-alone be their own 'region'?	See response to Question 4.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			ESInet and NGCS final			
38.			6264 Z1 ESInet and Core Services RFP final SONYAS *Scope of Services I.J. Submission of Proposals*	i	How should bidders delineate proprietary information? Can bidders submit redacted copies to be used for FOIA requests? The RFP states that The Technical Proposal, Cost Proposal, and Proprietary information should be uploaded as separate files. We are concerned that by separating proprietary details from the Technical Proposal the full response context will not be understood and will therefore make proposal evaluation more difficult.	See response to Question 12.
39.			6264 Z1 ESInet and Core Services RFP final SONYAS *I.P. Request for Proposal / Proposal Requirements*	5	Should item #4 "Completed Sections II through IV" read "through VI" instead?	No. Please use the most recent version of the RFP: "6264 Z1 ESInet and Core Services RFP Revision One".
40.			6264 Z1 ESInet and Core	9-27	Are bidders required to indelibly initial the "Accept" or "Reject" boxes in ink, or can bidders type the company	Either is acceptable.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			Services RFP final SONYAS *II. Terms and Conditions* *III. Contractor Duties* *IV. Payment*		officer's initials?	
41.			6264 Z1 ESInet and Core Services RFP final SONYAS *V.B. Composition of the Request for Proposal*	29	The Commission's intent is to release an RFP soon after the release of the ESInet/NGCS RFP that addresses the connectivity from the host locations to the regional PSAP locations. Please provide the status of the intended RFP, and what the expected relationship with these services providers will be?	The status of releasing an RFP to address Host/Remote connectivity is still in discussion and a decision has not been finalized on the need for releasing such an RFP. Each region has a regional IP network today, and the expectation is that a possible Host/Remote RFP will not change the interaction between the Bidders and these regional IP providers. It is anticipated that the various service providers of the state and regional ESInets will advise one another of outages within their respective networks.
42.			6264 Z1 ESInet and Core Services RFP final SONYAS	29	Are there any plans to upgrade call handling equipment to NENA i3-ready call handling?	The PSC will work with the regions to encourage i3 compatibility, but Bidders shall assume connectivity to CHE with the software versions noted in Attachment A Revision One.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			V.B. Composition of the Request for Proposal			
43.			6264 Z1 Attachment C Technical Requirements Option C *GEN SCEN 4, Scenario 4*	25	Since the connectivity from the regional host controller to the PSAP's will be part of another RFP, what are the responsibilities of the service provider for this connectivity regarding monitoring, reporting, and maintenance actions?	The Regional IP network and monitoring of such networks is the responsibility of the Regional network service provider. It is anticipated that the various service providers of the State and regional ESInets will advise one another of outages within their respective networks.
44.			6264 Z1 Attachment C Technical Requirements Option C *ESI 9, Emergency Services IP Network (ESInet); Special Construction*	32	Can the State provide diagrams or schema for the existing network assets so bidder's understand what can be leveraged?	See response to Question 21.
45.			6264 Z1 Attachment C Technical	60	Please provide a copy or link to the existing data-sharing agreement (DSA).	Please see new 6264 Z1 Attachment E Nebraska ECaTs Data Sharing Agreement

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			Requirements Option C *NGCS 70, Next Generation Core Services Elements (NGCS)* *Event Logging and Management Information System (MIS); Access to Event Logging Data*			
46.			6264 Z1 Attachment C Technical Requirements Option C NGCS 71, Next Generation Core Services Elements	61	What needs to be provided for third-party certification proof?	Certification documents are not required. Please see NGCS 71.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			(NGCS) Event Logging and Management Information System (MIS); NENA Standards Compliance			
47.			RFP document, title page, top section:	Page i	The opening date and time says: "June 3, 3030, 2:00 P.M. Central Time". **Question**: Should the year be changed to 2020 instead of 3030? Or is there a reason its titled 3030?	See response to Question 28.
48.			RFP document, Section I. Procurement Procedure, part J. Submission of Proposals subsection 2 and Section VI Proposal	Pages 4 and 35	At section 1.J.2 of the RFP, the bid says: "The Technical, Cost Proposals, and Proprietary information should be uploaded as separate files." Additionally, section VI., Proposal Instructions, Part A Proposal Submission, number 2 Technical Approach says: " The technical approach section of the Technical Proposal should consist of the following subsections, which includes subpart f titled "Cost	

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			Instructions, Section 2.f		Proposal". **Question**: Should the cost proposal be included as subpart f in the Technical Approach/Technical Proposal electronic file document, or should it be submitted as a totally separate file?	Please submit the cost proposal as a separate excel file. VI.A.2.f. is hereby deleted.
49.			RFP document, Section I. Procurement Procedure, part P. Request for Proposal/Proposal Requirements, Subpart 4 and Section VI A. Proposal Instructions, Section 1 Corporate Overview & 2 Technical Approach	Pages 5 and 35	At Section 1.P.4, the proposal requirements say The proposals will first be examined to determine if all requirements listed below have been addressed and whether further evaluation is warranted. It goes on to include # 4 "Complete Sections II through IV." **Questions**: 1. In section VI Proposal Instructions, the location to include sections II through IV is not mentioned. Should those sections be included in Section VI, Part 1 for Corporate Overview, or in section VI part 2 for Technical Approach? 2. If in section VI.A.1, Corporate Overview, should the sections be in the order presented in the RFP, or do you want the	The State lists all required items in section I.P. The order of documents is not prescribed in the RFP document.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					Sections ii through IV after VI.A.1.j? 3. .If in Section VI.A.2 Technical Approach, where in the letter sequence a. to f. should sections II through IV be inserted?	
50.			ESInet & Core Services RFP Revision One	4	The RFP requests one hard copy labeled "original," but does not specify the number of hard copies. If bidders intend to submit hard copies, how many copies should be provided?	If a bidder chooses to submit a paper document, only one (1) copy marked “original” is needed.
51.			ESInet & Core Services RFP Revision One	20	If the primary contractor lists their subcontractors as additional insured on their insurance policy, does this satisfy the requirements in section G for subcontractors?	Yes, if the Contractor provides equivalent insurance for each subcontractor and verifies the coverage meets the requirements of the RFP.
52.			ESInet & Core Services RFP Revision One	15	Within Section VI. Proposal Instructions, Item 2. Technical Approach provides a list of the subsections that should be included in the Technical Proposal. Item c. states "Attachment C - Technical Requirements Option A, B, and/or C." If a bidder intends to submit a response for Technical Requirements Options A, B, and C, how does the state prefer all three options be submitted?	

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					Does the state want bidders to complete/return separate responses for Option A, B, and C? Or, does the state want only a response submitted for Option C and a separate cost proposal for each option? Please provide clarification. If the state does prefer bidders submit each option separately, should they be provided as separate binders?	Please submit a complete, separate response if responding to more than one option. Yes. Or if submitted electronically, as separate files using the naming convention stated in the RFP.
53.			Attachment C Option A / Attachment C Option B /Attachment C Option C	1	The instructions for Attachment C, Options A, B, and C include instructions indicating "the narrative should provide The Public Service Commission (PSC) with sufficient information to differentiate the bidder's business solution from other bidders' solutions. Bidder shall not refer to other sections as a response. Even if the response is an exact duplicate of a previous response, the details shall be provided in the same paragraph as the requirement." However, ESInet & Core Services Revision One, page 29 indicates "The Bidder may include appendices and reference them from within the proposal response. This is particularly appropriate for lengthy responses on a single subject." The bidder believes this information is contradicting. Please provide clarification as to whether it is	Each Option being bid must include a response to each requirement. Bidders cannot reference a response submitted in another Option. While individual requirement responses may refer to additional documentation in appendices, attachments, etc., an answer may not be scored if it simply refers the reader to the response to an attachment or another requirement.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					acceptable for bidders to refer to appendixes within their response that are included later within the proposal?	
54.			Attachment C Option B Attachment C Option C	34 37	Req Identifier NGCS 8 and NGCS 9 are identical. Does the state want bidders to answer both requirements or will one be removed?	See response to Question 9.
55.			Attachment C Option B Attachment C Option B	35 38	Req Identifier NGCS 11 states "The bidder's BCF solution shall support transcoding of Baudot tones to real-time text (RTT), as described in IETF RFC 4103. Describe how the solution meets or exceeds the above requirements." Generally, this function is normally conducted by the legacy network gateway (LNG). Can the state please provide clarification on this requirement?	Describe how this functionality is implemented in the proposed solution, including the functional element or elements involved.
56.			Attachment C Option B Attachment C Option C	47 50	Regarding Req Identifier NGCS 45 “An origination network may use an ECRF, or a similar function within its own network, to determine an appropriate route—equivalent to what would be determined by the authoritative ECRF—to the correct ESInet for the emergency call. Describe the functionality of such an ECRF equivalent and document where this functional element resides within the proposed solution." If an origination network is using their own ECRF not provided by the bidder, how is the	This is in reference to originating service providers (OSPs) needing some means of making an initial routing decision. Whether this is implemented by the NGCS provider as an external (to the ESInet) ECRF or by the respective OSP depends on the bidder’s interop agreement with the OSP. Describe how the ECRF solution operates in a hierarchical environment.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					bidder expected to describe the functionality of said ECRF? Additionally, if it is in the origination network, how can the NGCS bidder document where this functional element resides? This same requirement is included in	For the remainder of the question, there is missing information. The State is unable to provide a response.
57.			Attachment C Option B Attachment C Option C	47 51	Part of Req Identifier NGCS 49 is a duplicate of NGCS 48. Both contain, at least in part, “Logging of all connections, connection attempts, data updates, ECRF query results, and LoST transactions.” Please provide clarification.	Req Identifier NGCS 48 deals specifically with rate-limiting queries and logging when those limits are exceeded. Req Identifier NGCS 49 is a more general list of requirements based on NENA-STA-010.2.
58.			Attachment C Option B Attachment C Option C	47 51	Part of Req Identifier NGCS 49 includes “Location error correction." It is the bidders belief that the ECRF should consume data and optionally detect errors, allowing the GIS staff to act on detected errors and resolve them in the source GIS data. An ECRF can’t, and should not, attempt to correct errors as this can introduce a number of problems. Can this requirement please be removed?	This requirement remains and should read, “location error identification.” Please use Attachment C Option B NGCS Revision One; and Attachment C Option B ESInet and NGCS Revision One.
59.			Attachment C Option B Attachment C Option C	41 51	Part of Req Identifier NGCS 49 includes “Compliance with NENA 02-010 and NENA 02-014." NENA 02-010 is a legacy schema for GIS and is incompatible with the NG9-1-1 GIS Data Model that is specified in	Bidder must be compliant with all current NENA standards, other industry standards and best practices.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					Attachment B. NENA 02-014 refers to GIS data collection and maintenance standards, of which the ECRF does not do. Can both of these requirements be removed, or updated, to reflect new NENA standards (such as the NG9-1-1 GIS Data Model)?	
60.			Attachment C Option B Attachment C Option C	51 51	Req Identifier NGCS 59 references legacy standards NENA 02-010 and NENA 02-014. Neither of these should apply to the SI. Can these be changed to the CLDXF standard and NG9-1-1 GIS Data Model?	Please see response to Question 59.
61.			Attachment C Option B Attachment C Option C	52 56	Req Identifier NGCS 63 states "Describe how the solution interfaces with other LDB solutions which may participate in or interface with bidder's solution." Please elaborate on how, and more importantly why, one LDB will need to interface with another? There is currently no NENA standard in place for this.	There will be a transition period between legacy routing and geospatial routing. Explain how the proposed solution would deal with multiple ALI/MSAG databases and the locations where ALI steering may be in place.
62.			Attachment C Option B Attachment C Option C	57 57	Req Identifier NGCS 64 states the LDB shall "Shall automatically detect, import and validate customer records (SOI records)." In order to load a legacy SOI record into an LDB, it must be converted to CLDXF. The NENA standards specify using an MSAG Conversion Service (MCS) functional element for this. Is an MCS part of the	The RFP seeks a complete solution. Please submit a response that best meets all current NENA and industry standards.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					requirements of this RFP?	
63.			Attachment C Option B Attachment C Option C	53 56	Req Identifier NGCS 62 refers to the Commission's GIS data model (Attachment D). Can the state please clarify if the GIS Data Model is Attachment B or D?	See response to Question 11.
64.			Cost Proposal Option C ESInet & NGCS Final	1	Each of the three pricing workbooks (including Cost Proposal Option A ESInet Final, Cost Proposal Option B NGCS Final, and Option C ESInet & NGCS Final) define seven regions. However, the diagram in ESInet & Core Services RFP Revision One, Section V. Project Description and Scope of Work (pg. 28) and Attachment A - PSAP Host EndPoints, Equipment, and Selective Router Locations do not definitively define or illustrate the regions to allow for pricing. Can the state please provide clarification as to how the regions should be defined including where the hosts are to be located for the Metro West and Northeast regions?	Please see response to Question 4.
65.			Attachment A - PSAP Host EndPoints, Equipment, and Selective Router	Page not numbered	Eighteen PSAPs are listed as "Stand Alone" in Attachment A. If anticipated regional hosts are not defined for the Metro West and Northeast regions, will ESInet providers be required to bid/provide layer 2 circuits to each of these PSAPs that are not part of a region? How will the state handle the	See response to Question 4.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			Locations		circuit costs for these sites if/when they join a region?	
66.	Optional Pre-Proposal Conference - Link to Listen to Conference			Media, Slide 5	Slide 5 of the pre-proposal conference presentation lists the proposal due date as June 2, 2020. All RFP documents and the procurement website lists June 3, 2020. Please confirm June 3, 2020 is the proposal due date.	See response to Question 28.
67.	Optional Pre-Proposal Conference - Link to Listen to Conference			Media, Slide 14	During the discussion of slide 14 of the pre-proposal conference presentation, MCP representative Milton Schober stated the RFP lists some older standards and bidders should state their compliance or non-compliance based upon the most current standards. Since the RFP will likely become part of resulting contract we ask that the State update the RFP to list the published standards that are required for compliance. We assume Mr. Schober was referring to Section V, D. General Requirements - Technical.	Please see response to Question 59.
68.			6264 Z1 Attachment C Technical Requirements Option B NGCS 62	53	Does the State plan to leverage the GeoComm Data Hub in place today for most of the regions?If so, how does the State envision GeoComm's Data Hub will interconnect to the required Spatial Interface (SI)?	The State intends to use the statewide aggregated data and will work directly with the PSAPs (or their designated GIS representative) to maintain this layer.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			Next Generation Core Services (NGCS) Spatial Interface (SI) Use of the Commission 's GIS Data Model			
69.	6264 Z1 ESInet and Core Services RFP Revision One Schedule of Events			2	Will vendors have the opportunity to ask follow-up questions to those answers released on or about April 16? If so, what is the deadline?	Bidders will be given an opportunity to ask question during a second round of Q&A. Please see posted Revised Schedule of Events.
70.	6264 Z1 ESInet and Core Services RFP Revision One Section I,			Page 6 and Page 11	Are the reference Vendor Performance Reports part of the RFP response evaluation process? If so, what is the derivation of the reports?	Vendor Performance Reports may be used for evaluation.. Bidders who have had a contract with the State of Nebraska may be evaluated on any performance reports submitted to State Purchasing Bureau.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	R. Evaluation of Proposals; and Section II, H. Vendor Performance Reports					
71.	V. PROJECT DESCRIPTION AND SCOPE OF WORK			Page 28	In order to assure proper sizing for traffic engineering, network bandwidth and data throughputs, we will need data on busy hour call attempts and average call durations. Can the State please provide this information?	The State is unable to provide this information at this time. The State is in the process of receiving 2019 call volume numbers from PSAPs statewide and will post the data with the 2nd round of Q&A.
72.	V. PROJECT DESCRIPTION AND SCOPE OF WORK			Page 28	During the pre-bid meeting there was mention of a new Metro West region with Colfax and Dodge Counties as participants. Can the State please provide a list of all the members that will be participating in this new region?	See response to Question 4.
73.	V. PROJECT DESCRIPTION AND SCOPE OF WORK			Page 28	During the pre-bid meeting there was mention of a new North East region with Wayne County, City of South Sioux City and City of Norfolk as participants. Can the State please provide a list of all the members that will be participating in this new	See response to Question 4.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					region?	
74.	Attachment C Technical Requirements – Option C			Requirement Identifier ESI 9 Page 32	Can the State please provide details and/or a diagram of the meet points of this microwave network?	See response to Question 21.
75.	Attachment C Technical Requirements – Option C			Requirement Identifier ESI 10 Page 33	Are there any plans or knowledge to support the connection to prospective neighboring ESInet's?	The State intends to implement this requirement in the future.
76.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 8 Page 37	Requirement Identifier NGCS 8 and NGCS 9 appear to be the same requirement. Are these duplicate requirements?	See response to Question 9.
77.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 32	Is there, or will there be, a Statewide geospatial project to position the PSAPs for true i3 geospatial routing? If yes, can you share those details relating to schedules, milestones,	See response to Question 32.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
				Page 45	etc.?	
78.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 1 Page 34	The RFP mentions transitional and end states for the NGCS network. What are the State's expectations regarding what defines the transitional state(s) and the end state?	The transitional period is the time between the start of routing on tabular data and the migration of the last region on tabular routing to full geospatial routing. Full geospatial routing is the end state.
79.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 1 Page 34	Does the State expect the NGCS network to receive calls directly from TDM trunks (i.e., is the contractor expected to provide the necessary gateways in this case)?	The State requires a complete solution. If gateways are necessary, the contractor must provide all equipment.
80.	Attachment A – PSAP Host EndPoints, Equipment and Selective Router Locations			Attachment A	Can the State provide detailed information on the downstream connection (i.e., PSAPs and regions) as to what terminating equipment is available at the regions, which PSAPs require direct connections and which directly connected PSAPs are IP-capable?	Only regions will be connecting to the statewide ESInet. The known call handling equipment type and model for each region is the level of detail that the State has listed on Attachment A – Revision One
81.	Attachment C Technical			Requirement	NGCS-14 requires the LNG to generate reports that can be loaded	This can be done through a central reporting function.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	Requirements – Option C			Identifier NGCS 14 Page 39	into a spreadsheet. Is it necessary for the LNG to do this directly or can this be done through a central reporting function?	
82.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 32 Page 45	Can the State provide more information on how many PSAPS – and for how long – tabular routing will be required? What is the limitation driving the need for tabular routing?	The State intends to transition to geospatial routing as soon as possible. The limiting factor at the moment is the current status of the statewide PSAP layer.
83.	Attachment C Technical Requirements – Option C			Requirement Identifier NGCS 70 Page 60	The RFP calls for both ECaTS and NENA i3 event reporting. Can the State provide any detail on how these are expected to interwork?	The RFP requires bidders to comply with NENA i3 event reporting. The requirements call for the proposed solution to interface with ECaTS. The contractor will be required to communicate with ECaTS to achieve this functionality.
84.	Attachment C, Option A Attachment C, Option B			12	Req Identifier NOC/SOC 15 describes that a NMIS – Management System should interface with the Incident Management System, and that the	Historical data includes but is not limited to, network and system performance data, bandwidth utilization, latency, jitter, packet loss, MOS scores, CPU and memory utilization, and outage-related data.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	Attachment C, Option C				Contractor shall maintain historical information for the term of the contract and provide copies of the data to the Commission at the end of the contract. Can the Commission clarify the scope of the historical information? Are we correct in interpreting this to mean the historical incident management information and related logging errors and not all logs?	
85.	Attachment C, Option B Attachment C, Option C			53 56	Req Identifier 62 refers to "regions." How many different regional GIS datasets can we expect to receive? Does the state envision these regional GIS datasets to be aggregated into a single statewide dataset for use in the ECRF/LVF?	The State currently anticipates 7 regions as part of the statewide ESInet. The State envisions these datasets will be aggregated into a statewide dataset. The State will provide the aggregated dataset to the Contractor.
86.	6264 Z1 Cost			summary	For clarification, will the five year total cost (cell	Yes.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	Proposal Option A, B, C Excel Workbooks			tab	B20 in the option C pricing workbook) be the figures that are used for cost comparison between vendors?	
					Or, does the renewal pricing also play a part in the cost scoring?	No.
				N/A	Will a faster implementation schedule save the State money on legacy costs? If so, are those cost savings going to be considered as part of the evaluation process when scoring the proposals? If it will be considered in scoring the proposals, will that be considered in the points awarded under Part 2 – Technical Approach or under Part 3 – Cost Proposal Points?	Cost evaluation is not weighted to include implementation timeline. The implementation timeline is evaluated on the technical response. N/A. Please see response above.
				N/A	Additionally, it is our interpretation that if these legacy cost	

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					savings are not factored in, the vendor with the slowest implementation schedule is likely to have the lowest cost proposal allowing them to score the maximum points in pricing. Is this interpretation correct?	
87.	Attachment A			page 1	Will the State provide location information for the 2 host sites for the Northeast Region? Locations of the host sites will both determine diversity and connection types that can be used to connect the ESInet to this region	See response to Question 4.
88.	Attachment C, Option C, SEC-3			pages 4-5	This requirement states: "The matrix shall identify whether the bidder's proposed solution Complies (C), Complies Partially (CP), Complies with Future Capability (CFC) or Does Not Comply (DNC), or Not Applicable (N/A) (as indicated in the NENA checklist) with the identified requirement(s) for each category included in the checklist." Each category contains varying numbers of requirements. Please explain how the	Please see Attachment C – Option A ESInet Revision One, Attachment C – Option B NGCS Revision One, and Attachment C – Option C ESInet and NGCS Revision One.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					State would like the bidders to determine the response. For example, suppose **Section 3. Authentication/Password Policy** has 54 requirements: 30 are Complies, 8 are Complies Partially , 0 are Complies with Future Capability, 1 is Does Not Comply, and 15 are N/A. For this example, can the State explain how bidders should determine which category to check for Section 3 in the checklist?	
89.	Attachment C, Option C, SEC-3			pages 4-5	This requirement states: "Bidder shall provide details to support the responses for each category in the response box below." What kind of details is the State requesting? Does the State want an explanation for each requirement in a section? Does the State want a breakdown of how many of each type of response is in each section? Please explain.	See response to Question 88.
90.	6264 Z1 Technical Requirements Option B NGCS 49 -	NGCS 49	Next Generation Core Services Elements (NGCS) Emergency Call Routing Function	51	When logging of all connections, connection attempts, data updates, ECRF query results, and LoST transactions: What format of log file is required as well as any duration for retention, or settings to support such, requirements that may exist for the	The file format is not specified. The tools provided for viewing logs should be capable of reading the native format of each device, be it text, XML, JSON, or something else, and displaying the output in human-readable format. Records must be maintained for the length of the contract including all renewals and extensions. Please also see Section II.U. Contract Closeout.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
			(ECRF) Supported Functions		State?	
91.	6264 Z1 ATTACHMENT A	PSAP Equipment			Would the Commission provide the following 9-1-1 call volumes for each PSAP; Avg. Busy Hour, Peak Call Volume and and Annual Call Volume?	See response to Question 71.
92.	6264 Z1 ESInet and Core Services RFP Revision One and Cost Proposal (Word doc)	I.C	Schedule of Events	2	Please confirm that the bid due date is 6/3/20 per the RFP. 6/2/20 was shown during the pre-bid meeting.	See response to Question 66.
93.	6264 Z1 Attachment C Technical Requirements Option C -ESInet and NGCS (Word doc)	Gen SCEN	GEN SCEN 4	25	Vendors were request to provide connectivity to Host Sites for each of the regions. The scenario specifies connectivity to a PSAP. Would the State want to modify the Scenario using host site rather than a PSAP?	Yes, replace “PSAP” in Scenario 4 with “Host A”. Please use Attachment C Option A – ESInet, Attachment C Option B – NGCS, and/or Attachment C Option C – ESInet and NGCS.
94.	6264 Z1 Attachment C Technical Requiremen	NGCS 39	Next Generation Core Services Elements	47	Our understanding is that the i3 standard will soon be updated from i3 v2 to i3 v3, and furthermore that there are significant differences	Please see response to Question 59.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
	ts Option C -ESInet and NGCS (Word doc)		(NGCS) NENA Compliance Chart		between the two standards. Since no PSAP CPE supports v2 at this time, our expectation is that the State would prefer vendors be able to support i3 v3 once ratified, and therefore vendors could also address compliance to i3 v3 as an option?	
95.	Attachment C, Option C			Page 10	NOC/SOC 10: Does this requirement only apply to ESInet as NGCS is not indicated in this requirement?	See response to Question 19.
96.	Attachment C, Option C			Page 47	NGCS 38: Is SCTP a protocol which is optional or required?	See response to Question 23.
97.	Attachment C, Option C			Page 56	NGCS 62-1: Please provide or direct as to where Attachment D is located	See response to Question 11.
98.	Attachment C, Option C			Page 63	NGCS 77-2: Please provide the requirements and definition of an NGCS “ringdown” feature. This is typically a feature in Call Handling and in order to understand the request, please provide desired functionality.	See response to Question 26.
99.	6264 Z1 Cost Proposal Option C - ESInet and NGCS				Is it understood that complete pricing may not be provided until all locations are identified?	See Response to Question 4.
100.	Attachment C, Option C				There is no reference to the number of POI’s required. Can the State	Please provide a response that best meets the requirements of the RFP.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					provide guidance on this requirement?	
101.	Attachment C, Option C				Please provide a position count and/or concurrent call counts that need to be supported per Aggregated Call Handling location.	See Attachment D
102.	PROCUREMENT PROCEDURE, J. SUBMISSION OF PROPOSALS			4	The State is accepting either electronically submitted responses or paper responses for this RFP. For bidders submitting electronic responses: 1. Bidders submitting electronically can upload the response here: a. https://nebraska.sharefile.com/r-r11ba33e3ee24b63b **Questions:** In sections J. it discusses submitting each section of the RFP as well as lists the separate solutions Option A (ESInet), Option B (NGCS), and Option C (ESInet, & NGCS). 1. Will the state accept two solutions of the same service? How should a vendor submit these options? 2. Should there be two separate	Yes. Submit a complete, separate, response, cost proposal, and Technical response for each. Yes.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					RFP submissions and two separate pricing options? 3. How do you want the separate RFP's named? 4. If a Vendor submits two options will the scoring be a weighted average or seen as a completely separate submission?	 Please see Section I.J.3. "Submission of Proposals" of RFP 6264 Z1 ESInet and Core Services RFP Revision One. Each proposal will be scored independently.
103.	**I. SUMMARY OF BIDDER'S PROPOSED PERSONNEL/MANAGEMENT APPROACH**			35	The bidder should identify the specific professionals who will work on the State's project if their company is awarded the contract resulting from this solicitation….. ……..Resumes should not be longer than three (3) pages. Resumes should include, at a minimum, academic background and degrees, professional certifications, understanding of the process, and at least three (3) references (name, address, and telephone number) b. SUBCONTRACTORS If the bidder intends to subcontract any part of its performance hereunder, the bidder should provide: i. name, address, and telephone number of the	

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					subcontractor(s); i. specific tasks for each subcontractor(s); ii. percentage of performance hours intended for each subcontract; and iii. total percentage of subcontractor(s) performance hours. **Questions:** **1.** In section I. as apart of the resume section it states that you are requesting 3 personal references for each resume submitted. (name, address, and telephone number), this would be considered personal confidential information to these individuals. Knowing that the RFP is considered public information these individuals may not want their personal information publicized and attached to the RFP. Would the state accept the name of the reference omitting address, telephone number and upon award the vendor would provide additional information about the references so they may be contacted if the state feels it is	Question1:) The address and telephone numbers do not need to be submitted with the proposal, but must be submitted by the selected vendor upon award.

Question Number	Reference Document	RFP Section Reference	RFP Page Number	RFP Page Number	Question	State Response
					necessary? **2.** In the section outlined above "SUBCONTRACTORS If the bidder intends to subcontract any part of its performance hereunder, the bidder should provide:" name, address, and telephone number of the subcontractor(s). This too would be considered personal confidential information to these individuals. Knowing that the RFP is considered public information these individuals may not want their personal information publicized and attached to the RFP. Would the state accept the name of the reference omitting address, telephone number and upon award the vendor would provide additional information about the references so they may be contacted if the state feels it is necessary? **3.** Would the state accept the general corporate address and phone number of the subcontractors company to fulfill the requirement of this RFP in the outlined section.	Question 2:) The address and telephone numbers of subcontractors do not need to be submitted with the proposal, but must be submitted by the selected vendor upon award. Question 3: Yes, if the State would be able to contact the actual subcontractor(s) to be used to fulfill this contract using the given address and phone number.

This addendum will become part of the proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM THREE – REVISED SCHEDULE OF EVENTS

Date: April 16, 2020

To: All Bidders

From: Annette Walton / Nancy Storant, Buyers
Nebraska State Purchasing Bureau

RE: Addendum for RFP Number 6264 Z1 to be opened June 3, 2020 at 2:00:00 P.M. Central

Revised Schedule of Events

	ACTIVITY	DATE/TIME
6.	State responds to written questions through Solicitation "Addendum" and/or "Amendment" to be posted to the Internet at: http://das.nebraska.gov/materiel/purchasing.html	April 22, 2020 ~~April 16, 2020~~
7.	Proposal Opening Location for mailed/hand delivered submissions: State Purchasing Bureau 1526 K Street, Suite 130 Lincoln, NE 68508 Electronic submissions: https://nebraska.sharefile.com/r-r11ba33e3ee24b63b	June 3, 2020 2:00: 00 PM Central Time
8.	Review for conformance to solicitation requirements	June 8, 2020
9.	Evaluation period	June 8, 2020 through June 29, 2020
10.	"Oral Interviews/Presentations and/or Demonstrations" (if required)	TBD –July 13-17
11.	Post "Notification of Intent to Award" to Internet at: http://das.nebraska.gov/materiel/purchasing.html	TBD
12.	Contract finalization period	TBD
13.	Contract award	TBD
14.	Contractor start date	TBD

This addendum will become part of the ITB/proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM TWO

Date: March 27, 2020

To: All Bidders

From: Annette Walton / Nancy Storant, Buyers
Nebraska State Purchasing Bureau

RE: Addendum for RFP Number 6264 Z1 to be opened June 3, 2020 at 2:00:00 p.m. Central

Due to concerns around COVID-19, the State of Nebraska is allowing attendance of the Optional Pre-Proposal Scheduled for April 1, 2020 from 10am-12pm to only be via Skype. Please submit an Intent to Attend Form B for meeting information.

This addendum will become part of the ITB/proposal and should be acknowledged with the Request for Proposal response.

ADDENDUM ONE

Date: March 25, 2020

To: All Bidders

From: Annette Walton / Nancy Storant, Buyers
Nebraska State Purchasing Bureau

RE: Addendum for RFP Number 6264 Z1 to be opened June 3, 2020 at 2:00:00 p.m. Central

The Change in Procurement Procedure allowing for electronic submission of bids through ShareFile has the following change:

The previous link did not request email information in order to send a confirmation email listing the items uploaded by a vendor for this RFP.

Please use the following Link to upload proposal documents:
https://nebraska.sharefile.com/r-r7e7e4b7a0264303a

This addendum will become part of the ITB/proposal and should be acknowledged with the Request for Proposal response.

State of Nebraska State Purchasing Bureau
REQUEST FOR PROPOSAL FOR CONTRACTUAL SERVICES

RETURN TO:
Name: State Purchasing Bureau
Address: 1526 K St. Suite 130
City/State/Zip: Lincoln, NE 68508
Phone: 402-471-6500

SOLICITATION NUMBER	RELEASE DATE
RFP 6264 Z1	March 17, 2020
OPENING DATE AND TIME	**PROCUREMENT CONTACT**
June 3, 2020, 2:00 P.M. Central Time	Annette Walton / Nancy Storant

PLEASE READ CAREFULLY!

SCOPE OF SERVICE

The State of Nebraska (State), Department of Administrative Services (DAS), Materiel Division, State Purchasing Bureau (SPB), is issuing this Request for Proposal (RFP) Number 6264 Z1 for the purpose of selecting a qualified bidder to provide a Next Generation 911 Emergency Services IP Network (ESInet) and Next Generation Core Services (NGCS). A more detailed description can be found in Section V. The resulting contract may not be an exclusive contract as the State reserves the right to contract for the same or similar services from other sources now or in the future.

The term of the contract will be five (5) years commencing upon notice to proceed. The Contract includes the option to renew for five (5) additional one (1) year periods upon mutual agreement of the Parties. The State reserves the right to extend the period of this contract beyond the termination date when mutually agreeable to the Parties.

ALL INFORMATION PERTINENT TO THIS REQUEST FOR PROPOSAL CAN BE FOUND ON THE INTERNET AT: **http://das.nebraska.gov/materiel/purchasing.html**.

An optional Pre-Proposal Conference will be held on April 1, 2020 from 10:00 AM – 12:00 PM at 1526 K St. Lincoln, NE 68508.

IMPORTANT NOTICE: Pursuant to Neb. Rev. Stat. § 84-602.04, State contracts in effect as of January 1, 2014, and contracts entered into thereafter, must be posted to a public website. The resulting contract, the solicitation, and the awarded bidder's proposal or response will be posted to a public website managed by DAS, which can be found at http://statecontracts.nebraska.gov.

In addition and in furtherance of the State's public records Statute (Neb. Rev. Stat. § 84-712 et seq.), all proposals or responses received regarding this solicitation will be posted to the State Purchasing Bureau public website.

These postings will include the entire proposal or response. Bidders must request that proprietary information be excluded from the posting. The bidder must identify the proprietary information, mark the proprietary information according to state law, and submit the proprietary information in a separate container or envelope marked conspicuously using an indelible method with the words "PROPRIETARY INFORMATION" or if submitting the proposal or response electronically, as a separate electronic file that is named "PROPRIETARY INFORMATION". The bidder must submit a detailed written document showing that the release of the proprietary information would give a business advantage to named business competitor(s) and explain how the named business competitor(s) will gain an actual business advantage by disclosure of information. The mere assertion that information is proprietary or that a speculative business advantage might be gained is not sufficient. (See Attorney General Opinion No. 92068, April 27, 1992) THE BIDDER MAY NOT ASSERT THAT THE ENTIRE PROPOSAL IS PROPRIETARY. COST PROPOSALS WILL NOT BE CONSIDERED PROPRIETARY AND ARE A PUBLIC RECORD IN THE STATE OF NEBRASKA. The State will determine, in its sole discretion, if the disclosure of the information designated by the Bidder as proprietary would 1) give advantage to business competitors and 2) serve no public purpose. The Bidder will be notified of the State's decision. Absent a determination by the State that the information may be withheld pursuant to Neb. Rev. Stat. § 84-712.05, the State will consider all information a public record subject to disclosure. .

If the agency determines it is required to release proprietary information, the bidder will be informed. It will be the bidder's responsibility to defend the bidder's asserted interest in non-disclosure.

To facilitate such public postings, with the exception of proprietary information, the State of Nebraska reserves a royalty-free, nonexclusive, and irrevocable right to copy, reproduce, publish, post to a website, or otherwise use any contract, proposal, or response to this solicitation for any purpose, and to authorize others to use the documents. Any individual or entity awarded a contract, or who submits a proposal or response to this solicitation, specifically waives any copyright or other protection the contract, proposal, or response to the solicitation may have; and, acknowledges that they have the ability and authority to enter into such waiver. This reservation and waiver is a prerequisite for submitting a proposal or response to this solicitation, and award of a contract. Failure to agree to the reservation and waiver will result in the proposal or response to the solicitation being found non-responsive and rejected.

Any entity awarded a contract or submitting a proposal or response to the solicitation agrees not to sue, file a claim, or make a demand of any kind, and will indemnify and hold harmless the State and its employees, volunteers, agents, and its elected and appointed officials from and against any and all claims, liens, demands, damages, liability, actions, causes of action, losses,

judgments, costs, and expenses of every nature, including investigation costs and expenses, settlement costs, and attorney fees and expenses, sustained or asserted against the State, arising out of, resulting from, or attributable to the posting of the contract or the proposals and responses to the solicitation, awards, and other documents.

TABLE OF CONTENTS

REQUEST FOR PROPOSAL FOR CONTRACTUAL SERVICES ..... **i**

TABLE OF CONTENTS ..... **iii**

GLOSSARY OF TERMS ..... **v**

ACRONYM LIST ..... **x**

I. PROCUREMENT PROCEDURE **1**

A. GENERAL INFORMATION 1
B. PROCURING OFFICE AND COMMUNICATION WITH STATE STAFF AND EVALUATORS 1
C. SCHEDULE OF EVENTS 2
D. WRITTEN QUESTIONS AND ANSWERS 2
E. OPTIONAL PRE-PROPOSAL CONFERENCE 3
F. NOTICE OF INTENT TO ATTEND PRE-PROPOSAL CONFERENCE 3
G. NOTIFICATION OF INTENT TO SUBMIT A PROPOSAL ..... **Error! Bookmark not defined.**
H. SECRETARY OF STATE/TAX COMMISSIONER REGISTRATION REQUIREMENTS (Statutory) 3
I. ETHICS IN PUBLIC CONTRACTING 3
J. DEVIATIONS FROM THE REQUEST FOR PROPOSAL 3
K. SUBMISSION OF PROPOSALS 4
L. PROPOSAL PREPARATION COSTS 5
M. FAILURE TO COMPLY WITH REQUEST FOR PROPOSAL 5
N. PROPOSAL CORRECTIONS 5
O. LATE PROPOSALS 5
P. PROPOSAL OPENING 5
Q. REQUEST FOR PROPOSAL/PROPOSAL REQUIREMENTS 5
R. EVALUATION COMMITTEE 6
S. EVALUATION OF PROPOSALS 6
T. ORAL INTERVIEWS/PRESENTATIONS AND/OR DEMONSTRATIONS 7
U. BEST AND FINAL OFFER 7
V. REFERENCE AND CREDIT CHECKS 7
W. AWARD 7
X. DISCOUNTS 8
Y. PRICES 8
Z. COST CLARIFICATION 8
AA. ALTERNATE/EQUIVALENT PROPOSALS 8
BB. LUMP SUM OR ”ALL OR NONE” PROPOSALS 8
CC. REJECTION OF PROPOSALS 8
DD. RESIDENT BIDDER 8

II. TERMS AND CONDITIONS **9**

A. GENERAL 9
B. NOTIFICATION 10
C. BUYER’S REPRESENTATIVE 10
D. GOVERNING LAW (Statutory) 10
E. BEGINNING OF WORK 10
F. AMENDMENT 10
G. CHANGE ORDERS OR SUBSTITUTIONS 11
H. VENDOR PERFORMANCE REPORT(S) 11
I. NOTICE OF POTENTIAL CONTRACTOR BREACH 11
J. BREACH 12
K. NON-WAIVER OF BREACH 12
L. SEVERABILITY 12
M. INDEMNIFICATION 13
N. ATTORNEY'S FEES 14

O. PERFORMANCE BOND 14
P. ASSIGNMENT, SALE, OR MERGER 14
Q. CONTRACTING WITH OTHER NEBRASKA POLITICAL SUB-DIVISIONS OF THE STATE OR ANOTHER STATE 15
R. FORCE MAJEURE 15
S. CONFIDENTIALITY 15
T. EARLY TERMINATION 16
U. CONTRACT CLOSEOUT 16

III. CONTRACTOR DUTIES 18

A. INDEPENDENT CONTRACTOR / OBLIGATIONS 18
B. EMPLOYEE WORK ELIGIBILITY STATUS 19
C. COMPLIANCE WITH CIVIL RIGHTS LAWS AND EQUAL OPPORTUNITY EMPLOYMENT / NONDISCRIMINATION (Statutory) 19
D. COOPERATION WITH OTHER CONTRACTORS 19
E. PERMITS, REGULATIONS, LAWS 20
F. OWNERSHIP OF INFORMATION AND DATA / DELIVERABLES 20
G. INSURANCE REQUIREMENTS 20
H. ANTITRUST 23
I. CONFLICT OF INTEREST 23
J. STATE PROPERTY 23
K. SITE RULES AND REGULATIONS 24
L. ADVERTISING 24
M. NEBRASKA TECHNOLOGY ACCESS STANDARDS (Statutory) 24
N. DISASTER RECOVERY/BACK UP PLAN 24
O. DRUG POLICY 25
P. WARRANTY 25

IV. PAYMENT 26

A. PROHIBITION AGAINST ADVANCE PAYMENT (Statutory) 26
B. TAXES (Statutory) 26
C. INVOICES 26
D. INSPECTION AND APPROVAL 26
E. PAYMENT (Statutory) 26
F. LATE PAYMENT (Statutory) 26
G. SUBJECT TO FUNDING / FUNDING OUT CLAUSE FOR LOSS OF APPROPRIATIONS (Statutory) 27
H. RIGHT TO AUDIT (First Paragraph is Statutory) 27

V. PROJECT DESCRIPTION AND SCOPE OF WORK 28

A. Background and Project Scope 28
B. Composition of the Request for Proposal 29
C. Bidder Requirements: 29
D. General Requirements – Technical 30

VI. PROPOSAL INSTRUCTIONS 33

A. PROPOSAL SUBMISSION 33

Form A Bidder Proposal Point of Contact 36

Form B Notification of Intent to Attend Pre-Proposal Conference 37

REQUEST FOR PROPOSAL FOR CONTRACTUAL SERVICES FORM 38

GLOSSARY OF TERMS

Acceptance Test Procedure: Benchmarks and other performance criteria, developed by the State of Nebraska or other sources of testing standards, for measuring the effectiveness of products or services and the means used for testing such performance.

Addendum: Something to be added or deleted to an existing document; a supplement.

After Receipt of Order (ARO): After Receipt of Order.

Agency: Any state agency, board, or commission other than the University of Nebraska, the Nebraska State colleges, the courts, the Legislature, or any other office or agency established by the Constitution of Nebraska.

Agent/Representative: A person authorized to act on behalf of another.

Amend: To alter or change by adding, subtracting, or substituting.

Amendment: A written correction or alteration to a document.

Appropriation: Legislative authorization to expend public funds for a specific purpose. Money set apart for a specific use.

Automated Clearing House: (ACH) Electronic network for financial transactions in the United States

Award: All purchases, leases, or contracts which are based on competitive proposals will be awarded according to the provisions in the solicitation.

Best and Final Offer (BAFO): In a competitive proposal, the final offer submitted which contains the bidder's most favorable terms for price.

Bid Bond: An insurance agreement, accompanied by a monetary commitment, by which a third party (the surety) accepts liability and guarantees that the bidder will not withdraw the bid.

Bidder: A vendor who submits a proposal in response to a written solicitation.

Breach: Violation of a contractual obligation by failing to perform or repudiation of one's own promise.

Business: Any corporation, partnership, individual, sole proprietorship, joint-stock company, joint venture, or any other private legal entity.

Business Day: Any weekday, except State-recognized holidays.

Calendar Day: Every day shown on the calendar including Saturdays, Sundays, and State/Federal holidays.

Cancellation: To call off or revoke a purchase order or contract without expectation of conducting or performing it at a later time.

Change Order: Document that provides amendments to an executed purchase order or contract.

Collusion: An agreement or cooperation between two or more persons or entities to accomplish a fraudulent, deceitful, or unlawful purpose.

Commodities: Any equipment, material, supply or goods; anything movable or tangible that is provided or sold.

Commodities Description: Detailed descriptions of the items to be purchased; may include information necessary to obtain the desired quality, type, color, size, shape, or special characteristics necessary to perform the work intended to produce the desired results.

Competition: The effort or action of two or more commercial interests to obtain the same business from third parties.

Confidential Information: Unless otherwise defined below, "Confidential Information" shall also mean proprietary trade secrets, academic and scientific research work which is in progress and unpublished, and other information which if released would give advantage to business competitors and serve no public purpose (see Neb. Rev. Stat. §84-712.05(3)). In accordance with Nebraska Attorney General Opinions 92068 and 97033, proof that information is proprietary requires identification of specific, named competitor(s) who would be advantaged by release of the information and the specific

advantage the competitor(s) would receive.

Contract: An agreement between two or more parties creating obligations that are enforceable or otherwise recognizable at law; the writing that sets forth such an agreement.

Contract Administration: The administration of the contract which includes and is not limited to; contract signing, contract amendments and any necessary legal actions.

Contract Award: Occurs upon execution of the State document titled "Service Contract Award" by the proper authority.

Contract Management: The management of day to day activities at the agency which includes and is not limited to ensuring deliverables are received, specifications are met, handling meetings and making payments to the Contractor.

Contract Period: The duration of the contract.

Contractor: An individual or entity lawfully conducting business in the State, or licensed to do so, who provides goods or services to the State under the terms of a written solicitation.

Copyright: A property right in an original work of authorship fixed in any tangible medium of expression, giving the holder the exclusive right to reproduce, adapt and distribute the work.

Customer Service: The process of ensuring customer satisfaction by providing assistance and advice on those products or services provided by the Contractor.

Default: The omission or failure to perform a contractual duty.

Deviation: Any proposed change(s) or alteration(s) to either the terms and conditions or deliverables within the scope of the written solicitation or contract.

Evaluation: The process of examining an offer after opening to determine the bidder's responsibility, responsiveness to requirements, and to ascertain other characteristics of the offer that relate to determination of the successful award.

Evaluation Committee: Committee(s) appointed by the requesting agency that advises and assists the procuring office in the evaluation of proposals (offers made in response to written solicitations).

Extension: Continuance of a contract for a specified duration upon the agreement of the parties beyond the original Contract Period. Not to be confused with "Renewal Period".

Free on Board (F.O.B.) Destination: The delivery charges are included in the quoted price and prepaid by the vendor. Vendor is responsible for all claims associated with damages during delivery of product.

Free on Board (F.O.B.) Point of Origin: The delivery charges are not included in the quoted price and are the responsibility of the agency. Agency is responsible for all claims associated with damages during delivery of product.

Foreign Corporation: A foreign corporation that was organized and chartered under the laws of another state, government, or country.

Functional Element: An abstract building block that consists of a set of interfaces and operations on those interfaces to accomplish a task. Mapping between functional elements and physical implementations may be one-to-one, one-to-many or many-to-one.[1]

Installation Date: The date when the procedures described in "Installation by Contractor", and "Installation by State", as found in the solicitation, or contract, are completed.

Interested Party: A person, acting in their personal capacity, or an entity entering into a contract or other agreement creating a legal interest therein.

Invalid Proposal: A proposal that does not meet the requirements of the solicitation or cannot be evaluated against the other proposals.
Late Proposal: An offer received after the Opening Date and Time.

Licensed Software Documentation: The user manuals and any other materials in any form or medium customarily provided by the vendor to the users of the Licensed Software which will provide the State with sufficient information to operate, diagnose, and maintain the Licensed Software properly, safely, and efficiently.

Mandatory/Must: Required, compulsory, or obligatory.

May: Discretionary, permitted; used to express possibility.

Module (see System): A collection of routines and data structures that perform a specific function of software.

Must: See Mandatory/Must and Shall/Will/Must.

National Institute for Governmental Purchasing (NIGP): Source used for assignment of universal commodity codes to goods and services.

NENA Master Glossary: A guide for readers of NENA publications that defines terms, acronyms, and definitions associated with the 911 industry.

Non-responsive Proposal: A bid that does not conform to the requirements of the Request for Proposal.

Open Market Purchase: Authorization may be given to an agency to purchase items above direct purchase authority due to the unique nature, price, quantity, location of the using agency, or time limitations by the AS Materiel Division, State Purchasing Bureau.

Opening Date and Time: Specified date and time for the public opening of received, labeled formal proposals.

Outsourcing: The contracting out of a business process which an organization may have previously performed internally or has a new need for, to an independent organization from which the process is purchased back.

Payroll & Financial Center (PFC): The State of Nebraska's electronic procurement system of record.

Performance Bond: An insurance agreement, accompanied by a monetary commitment, by which a third party (the surety) accepts liability and guarantees that the Contractor fulfills any and all obligations under the contract.

Platform: A specific hardware and Operating System combination that is different from other hardware and Operating System combinations to the extent that a different version of the Licensed Software product is required to execute properly in the environment established by such hardware and Operating System combination.

Point of Contact (POC): The person designated to receive communications and to communicate.

Pre-Proposal Conference: A meeting scheduled for the purpose of clarifying a written solicitation and related expectations.

Product: Something that is distributed commercially for use or consumption and that is usually (1) tangible personal property, (2) the result of fabrication or processing, and (3) an item that has passed through a chain of commercial distribution before ultimate use or consumption.

Program Error: Code in Licensed Software which produces unintended results or actions, or which produces results or actions other than those described in the specifications. A program error includes, without limitation, any Critical Program Error.

Program Set: The group of programs and products, including the Licensed Software specified in the solicitation, plus any additional programs and products licensed by the State under the contract for use by the State.

Project: The total scheme, program, or method worked out for the accomplishment of an objective, including all documentation, commodities, and services to be provided under the contract.

Proposal: Bidder's response to a solicitation.

Proprietary Information: Proprietary information is defined as trade secrets, academic and scientific research work which is in progress and unpublished, and other information which if released would give advantage to business competitors and serves no public purpose (see Neb. Rev. Stat. § 84-712.05(3)). In accordance with Attorney General Opinions 92068 and 97033, proof that information is proprietary requires identification of specific named competitor(s) advantaged by release of the information and the demonstrated advantage the named competitor(s) would gain by the release of information.

Protest/Grievance: A complaint about a governmental action or decision related to a solicitation or resultant contract, brought by a bidder who has submitted a proposal response in connection with the award in question, to AS Materiel Division or another designated agency with the intention of achieving a remedial result.

Public Proposal Opening: The process of opening correctly submitted offers at the time and place specified in the written solicitation and in the presence of anyone who wished to attend.

Release Date: The date of public release of the written solicitation to seek offers.

Renewal Period: Optional contract periods subsequent to the original Contract Period for a specified duration with previously agreed to terms and conditions. Not to be confused with Extension.

Request for Proposal (RFP): A written solicitation utilized for obtaining competitive offers.

Responsible Bidder: A bidder who has the capability in all respects to perform fully and lawfully all requirements with integrity and reliability to assure good faith performance.

Responsive Bidder: A bidder who has submitted a proposal which conforms to all requirements of the solicitation document.

Shall/Will/Must: An order/command; mandatory.

Should: Expected; suggested, but not necessarily mandatory.

Software License: Legal instrument with or without printed material that governs the use or redistribution of licensed software.

Specifications: The detailed statement, especially of the measurements, quality, materials, and functional characteristics, or other items to be provided under a contract.

Statutory: These clauses are controlled by state law and are not subject to negotiation.

Subcontractor: Individual or entity with whom the contractor enters a contract to perform a portion of the work awarded to the contractor.

System (see Module): Any collection or aggregation of two (2) or more Modules that is designed to function, or is represented by the Contractor as functioning or being capable of functioning, as an entity.

Termination: Occurs when either Party, pursuant to a power created by agreement or law, puts an end to the contract prior to the stated expiration date. All obligations which are still executory on both sides are discharged but any right based on prior breach or performance survives.

Third Party: Any person or entity, including but not limited to fiduciaries, shareholders, owners, officers, managers, employees, legally disinterested persons, and subcontractors or agents, and their employees. It shall not include any entity or person who is an interested Party to the contract or agreement.

Trade Secret: Information, including, but not limited to, a drawing, formula, pattern, compilation, program, device, method, technique, code, or process that (a) derives independent economic value, actual or potential, from not being known to, and not being ascertainable by proper means by, other persons who can obtain economic value from its disclosure or use; and (b) is the subject of efforts that are reasonable under the circumstances to maintain its secrecy (see Neb. Rev. Stat. §87-502(4)).

Trademark: A word, phrase, logo, or other graphic symbol used by a manufacturer or contractor to distinguish its product from those of others, registered with the U.S. Patent and Trademark Office.

Upgrade: Any change that improves or alters the basic function of a product or service.

Vendor Performance Report: A report completed by the using agency and submitted to State Purchasing Bureau documenting products or services delivered or performed which exceed or fail to meet the terms of the purchase order, contract, and/or solicitation specifications.

Vendor: An individual or entity lawfully conducting business in the State,
Will: See Mandatory/Shall/Will/Must.

Work Day: See Business Day.

ACRONYM LIST

3GPP/3GPP2: 3rd Generation Partner Project, 3rd Generation Partner Project 2
ACL: Access Control List
AES: Advanced Encryption Standards
ALI: Automatic Location Identification
ANI: Automatic Number Identification
APCO/NENA: Association of Public Safety Communications Officials (APCO)
ASAP: Automated Secure Alarm Protocol
ATIS: Alliance for Telecommunications Industry Solutions
BCF: Border Control Function
BFD: Bidirectional Forwarding Detection
CAD: Computer-Aided Dispatch
CAS: Call-Associated Signaling
CHE: Call Handling Equipment
CJIS: Criminal Justice Information Services
COI – Certificate of Insurance
COOP: Continuity Of Operations Plan
CPE: Customer Premises Equipment
CPN: Calling Party Number
CSAA: Central Station Alarm Association
CSRIC: Communications Security, Reliability and Interoperability Council
DAS – Department of Administrative Services
DBMS: Database Management System
DDoS: Distributed Denial of Services
DOJ: Department of Justice
DRM: Data Rights Management
DSCP: Differentiated Services Code Point
Dsig: Digital Signature
DTMF: Dual-Tone Multi-Frequency
E911: Enhanced 911
ECaTS: Emergency Call Tracking System
ECRF: Emergency Call Routing Function
EIDD: Emergency Incident Data Document
EMS: Emergency Medical Services
ENP: Emergency Number Professional
EOS: End of Support
ESIND: Emergency Services IP Network Design
ESInet: Emergency Services IP Network
ES-NGN: Emergency Services Next Generation Network
ESRP: Emergency Services Routing Proxy
FCAPS: Fault, Configuration, Accounting, Performance, and Security
FCC: Federal Communications Commission
FOCR: Function of Code R
GIS: Geographic Information System
GMLC: Gateway Mobile Location Center
HELD: HTTP-Enabled Location Delivery
i3: National Emergency Number Association's designation for its Next Generation 911 system specifications and definitions
i3 PSAP: A Public Safety Answering Point equipped with a call handling system capable of connecting to and receiving calls from an i3 NGCS call routing system.
IDS: Intrusion Detection System
IETF: Internet Engineering Task Force
IGMP: Internet Group Management Protocol
IPS: Intrusion Prevention System
IPv4: Internet Protocol version 4
IPv6: Internet Protocol version 6
ITIL: Information Technology Infrastructure Library
IP: Internet Protocol
IPSR: Internet Protocol Selective Router
LDB: Location Database
LIS: Location Information Server
LNG: Legacy Network Gateway
LoST: Location-to-Service Translation Protocol
LPG: Legacy PSAP Gateways

LPN: Local Number Portability
LSRG: Legacy Selective Router Gateway
LVF: Location Validation Function
MIS: Management Information System
MLTS: Multi-Line Telephone System
MOS: Mean Opinion Score
MOA: Memorandum of Agreement
MOU: Memorandum of Understanding
MPC: Mobile Positioning Center
MRC: Monthly Recurring Charge
MSRP: Message Session Relay Protocol
MTBF: Mean Time Between Failure
MTTR: Mean Time To Repair
NAPT: Network Address and Port Translation
NAT: Network Address Translation
NCAS: non-call-associated signaling
NENA National Emergency Number Association
NENA i3: See i3 above
NERC: North American Electric Reliability Corporation
NIEM: National Information Exchange Model
NIST: National Institute of Standards and Technology
NG-SEC: Security for Next Generation 911
NGCS: Next Generation Core Services
NG911: Next Generation 911
NMIS: Network Management Information System
NMS: Network management system
NNP: National Number Portability
NOC: Network Operations Center
NTP: Network Time Protocol
OSI: Open Systems Interconnection
OSP: Originating Service Provider
PIDF-LO: Presence Information Data Format Location Object
PIM: Protocol Independent Multicast
POP: Point of Presence
PMP: Project Management Professionals
PRF: Policy Routing Function
PSAP: Public Safety Access Point
QA/QI: Quality Assurance / Quality Integrity
QoS: Quality of Service
RFC: Request for Comments
RFO: Reason For Outage
RSA: Rivest–Shamir–Adleman
RTT: Real-Time Text
SBC: Session Border Control
SCTP: Stream Control Transmission Protocol
SDO: Standards Development Organizations
SHA: Secure Hash Algorithm
SI: Spatial Interface
SIP: Session Initiation Protocol
SLA: Service Level Agreement
SMS: Short Messaging Service
SNMP: Simple Network Management Protocol
SOC: Security Operations Center
SOC 1: Service Organization Controls
SOI: Service Order Interface
SPB – State Purchasing Bureau
SS7: Signaling System Number 7
SSAE 16: Standards for Attestation Engagements Number 16
SSL: Secure Sockets Layer
TCP: Transmission Control Protocol
TLS: Transport Layer Security
TLS/TCP: Transport Layer Security over Transmission Control Protocol
TDM: Time-Division Multiplexing
TIA: Telecommunications Industry Association

UA: User Agents
UDP: User Datagram Protocol
UPS: Uninterruptible Power Supply
URI: Uniform Resource Identifier
VLAN: Virtual Local-Area Network
VPN: Virtual Private Network
VoIP: Voice over Internet Protocol
VoIP E2: An industry-standard interface between a VoIP positioning center and an ALI database server
VPN: Virtual Private Network
XACML: eXtensible Access Control Markup Language

I. PROCUREMENT PROCEDURE

A. GENERAL INFORMATION

The solicitation is designed to solicit proposals from qualified bidders who will be responsible for providing a Next Generation 911 Emergency Services IP Network (ESInet) and Next Generation Core Services (NGCS) at a competitive and reasonable cost. Terms and Conditions, Project Description and Scope of Work, and Proposal instructions Requirements may be found in Sections II through VI.

Proposals shall conform to all instructions, conditions, and requirements included in the solicitation. Prospective bidders should carefully examine all documents, schedules, and requirements in this solicitation, and respond to each requirement in the format prescribed. Proposals may be found non-responsive if they do not conform to the solicitation.

B. PROCURING OFFICE AND COMMUNICATION WITH STATE STAFF AND EVALUATORS

Procurement responsibilities related to this solicitation reside with State Purchasing Bureau. The point of contact (POC) for the procurement is as follows:

Name:	Annette Walton / Nancy Storant Buyer(s)
RFP	Next Generation 911 Emergency Services IP Network (ESInet) and Next Generation Core Services (NGCS)
Agency:	State Purchasing Bureau
Address:	1526 K Street, Suite 130 Lincoln, NE 68508
Telephone:	402-471-6500
E-Mail:	as.materielpurchasing@nebraska.gov

From the date the solicitation is issued until the Intent to Award is issued, communication from the bidder is limited to the POC listed above. After the Intent to Award is issued, the bidder may communicate with individuals the State has designated as responsible for negotiating the contract on behalf of the State. No member of the State Government, employee of the State, or member of the Evaluation Committee is empowered to make binding statements regarding this solicitation. The POC will issue any answers, clarifications or amendments regarding this solicitation in writing. Only the SPB or awarding agency can award a contract. Bidders shall not have any communication with, or attempt to communicate or influence any evaluator involved in this solicitation.

The following exceptions to these restrictions are permitted:

1. Contact made pursuant to pre-existing contracts or obligations;
2. Contact required by the schedule of events or an event scheduled later by the solicitation POC; and
3. Contact required for negotiation and execution of the final contract.

The State reserves the right to reject a bidder's proposal, withdraw an Intent to Award, or terminate a contract if the State determines there has been a violation of these procurement procedures.

C. SCHEDULE OF EVENTS

The State expects to adhere to the procurement schedule shown below, but all dates are approximate and subject to change.

ACTIVITY		DATE/TIME
1.	Release Solicitation	March 17, 2020
2.	Last day to submit Form B -"Notification of Intent to Attend Pre-Proposal Conference"	March 30, 2020
3.	Last day to submit written questions	March 29, 2020
4.	Optional Pre-Proposal Conference Location: State Purchasing Bureau 1526 K Street, Suite 130 Lincoln, NE 68508	April 1, 2020 10:00 AM – 12:00 PM CT
5.	Last day to submit written questions after Pre-Proposal Conference	April 7, 2020
6.	State responds to written questions through Solicitation "Addendum" and/or "Amendment" to be posted to the Internet at: http://das.nebraska.gov/materiel/purchasing.html	April 16, 2020
7.	Proposal Opening Location for mailed/hand delivered submissions: State Purchasing Bureau 1526 K Street, Suite 130 Lincoln, NE 68508 Electronic submissions: https://nebraska.sharefile.com/r-r11ba33e3ee24b63b	June 3, 2020 2:00: 00 PM Central Time
8.	Review for conformance to solicitation requirements	June 8, 2020
9.	Evaluation period	June 8, 2020 through June 29, 2020
10.	"Oral Interviews/Presentations and/or Demonstrations" (if required)	TBD –July 13-17
11.	Post "Notification of Intent to Award" to Internet at: http://das.nebraska.gov/materiel/purchasing.html	TBD
12.	Contract finalization period	TBD
13.	Contract award	TBD
14.	Contractor start date	TBD

D. WRITTEN QUESTIONS AND ANSWERS

Questions regarding the meaning or interpretation of any solicitation provision must be submitted in writing to State Purchasing Bureau and clearly marked "RFP Number 6264 Z1; Next Generation 911 Emergency Services IP Network (ESInet) and Next Generation Core Services (NGCS) Questions". The POC is not obligated to respond to questions that are received late per the Schedule of Events.

Bidders should present, as questions, any assumptions upon which the Bidder's proposal is or might be developed. Proposals will be evaluated without consideration of any known or unknown assumptions of a bidder. The contract will not incorporate any known or unknown assumptions of a bidder.

It is preferred that questions be sent via e-mail to as.materielpurchasing@nebraska.gov, but may be delivered by hand or by U.S. Mail. It is recommended that bidders submit questions using the following format.

Solicitation Section Reference	Solicitation Page Number	Question

Written answers will be posted at http://das.nebraska.gov/materiel/purchasing.html per the Schedule of Events.

E. OPTIONAL PRE-PROPOSAL CONFERENCE

A pre-proposal conference will be held per the Schedule of Events. Attendance at the pre-proposal conference is optional. Bidders may choose to attend in person or via Skype. If bidders choose to attend via Skype, they must submit a Notification of Intent to Attend Pre-Proposal (Form B) in order for SPB to provide access to the meeting. Bidders will have an opportunity to ask questions at the conference to assist in the clarification and understanding of the solicitation requirements. Questions that have a material impact on the solicitation or process, and questions that are relevant to all bidders, will be answered in writing and posted at http://das.nebraska.gov/materiel/purchasing.html. An answer must be posted to be binding on the State. The State will attempt to provide verbal answers to questions that do not impact the solicitation or process, and are only of interest to an individual bidder during the conference. If a bidder feels it necessary to have a binding answer to a question that was answered verbally, the question should be submitted in writing per the Schedule of Events.

F. NOTICE OF INTENT TO ATTEND PRE-PROPOSAL CONFERENCE

Bidders should notify the POC of their intent to attend (in person or via Skype) by submitting a "Notification of Intent to Attend the Pre-Proposal Conference Form" (see Form B) by hand-delivery, U.S. Mail, or email at as.materielpurchasing@nebraska.gov.

G. SECRETARY OF STATE/TAX COMMISSIONER REGISTRATION REQUIREMENTS (Statutory)

All bidders must be authorized to transact business in the State of Nebraska and comply with all Nebraska Secretary of State Registration requirements. The bidder who is the recipient of an Intent to Award may be required to certify that it has complied and produce a true and exact copy of its current (within ninety (90) calendar days of the intent to award) Certificate or Letter of Good Standing, or in the case of a sole proprietorship, provide written documentation of sole proprietorship and complete the United States Citizenship Attestation Form, available on the Department of Administrative Services website at http://das.nebraska.gov/materiel/purchasing.html. This must be accomplished prior to execution of the contract.

H. ETHICS IN PUBLIC CONTRACTING

The State reserves the right to reject proposals, withdraw an intent to award or award, or terminate a contract if a bidder commits or has committed ethical violations, which include, but are not limited to:

1. Offering or giving, directly or indirectly, a bribe, fee, commission, compensation, gift, gratuity, or anything of value to any person or entity in an attempt to influence the bidding process;
2. Utilize the services of lobbyists, attorneys, political activists, or consultants to influence or subvert the bidding process;
3. Being considered for, presently being, or becoming debarred, suspended, ineligible, or excluded from contracting with any state or federal entity:
4. Submitting a proposal on behalf of another Party or entity; and
5. Collude with any person or entity to influence the bidding process, submit sham proposals, preclude bidding, fix pricing or costs, create an unfair advantage, subvert the proposal, or prejudice the State.

The bidder shall include this clause in any subcontract entered into for the exclusive purpose of performing this contract.

Bidders shall have an affirmative duty to report any violations of this clause by the bidder throughout the bidding process, and throughout the term of this contract for the awarded bidder and their subcontractors.

I. DEVIATIONS FROM THE REQUEST FOR PROPOSAL

The requirements contained in the solicitation (Sections II thru VI) become a part of the terms and conditions of the contract resulting from this solicitation. Any deviations from the solicitation in Sections II through VI must be clearly defined by the bidder in its proposal and, if accepted by the State, will become part of the contract. Any specifically defined deviations must not be in conflict with the basic nature of the solicitation, requirements, or applicable state or federal laws or statutes. “Deviation”, for the purposes of this solicitation, means any proposed changes or alterations to either the contractual language or deliverables within the scope of this solicitation. The State discourages deviations and reserves the right to reject proposed deviations.

J. SUBMISSION OF PROPOSALS

The State is accepting either electronically submitted responses or paper responses for this RFP.

For bidders submitting electronic responses:

1. Bidders submitting electronically can upload the response here:
- **a.** https://nebraska.sharefile.com/r-r11ba33e3ee24b63b

2. The Technical, Cost Proposals, and Proprietary information should be uploaded as multiple separate and distinct files. If multiple proposals are submitted, the State will retain only the most recently submitted response. It is the bidder's responsibility to submit the proposal by the date and time indicated in the Schedule of Events. Electronic proposals must be received by SPB by the date and time of the proposal opening per the Schedule of Events. No late proposals will be accepted

3. ELECTRONIC PROPOSAL FILE NAMES
The bidder should clearly identify the uploaded RFP proposal files. Once uploaded, files are only available for 30 days after submitted. Please do not submit more than 30 days prior to bid opening. To assist in identification please use the following naming convention:
- **a.** RFP 6264 Z1 ABC Company Option (A, B, or C) (what option is being bid).
- **b.** If multiple files are submitted for one RFP proposal, add number of files to file names: RFP 6264 Z1 ABC Company Option (A, B or C) File 1 of 2.
- **c.** If multiple RFP proposals are submitted for the same RFP, add the proposal number to the file names: RFP 6264 Z1 ABC Company Proposal 1 Option (A, B, or C) File 1 of 2.

For bidders submitting paper/hard copy responses:

1. Bidders who are submitting a paper response should submit one proposal marked on the first page: "ORIGINAL". If multiple proposals are submitted, the State will retain only one copy marked "ORIGINAL" and destroy the other copies. The bidder is solely responsible for any variance between the copies submitted. Proposal responses should include the completed Form A, "Bidder Point of Contact". Proposals must reference the RFP number and the Option being bid. It is the bidder's responsibility to submit the proposal by the date and time indicated in the Schedule of Events. Sealed paper proposals must be received by SPB by the date and time of the proposal opening per the Schedule of Events. No late proposals will be accepted. Please note that the address label including the RFP number should appear on the face of each container or bidder's proposal response packet. If a recipient phone number is required for delivery purposes, 402-471-6500 should be used. The RFP number should be included in all correspondence.

2. The Technical, Cost Proposals, and proprietary information should be packaged separately (loose-leaf binders are preferred) on standard 8 ½" by 11" paper, except that charts, diagrams and the like may be on fold-outs which, when folded, fit into the 8 ½" by 11" format. Pages may be consecutively numbered for the entire proposal, or may be numbered consecutively within sections and be referenced in the text by the number within the section, and should be placed as close as possible to the referencing text.

The Technical Proposal should not contain any reference to dollar amounts. However, information such as data concerning labor hours and categories, materials, subcontracts and so forth, shall be considered in the Technical Proposal so that the bidder's understanding of the scope of work may be evaluated. The Technical Proposal shall disclose the bidder's technical approach in as much detail as possible, including, but not limited to, the information required by the Technical Proposal instructions. Bidder must use the State's Cost Proposal Form.

The State will not furnish packaging or sealing materials. It is the bidder's responsibility to ensure the solicitation is received either electronically or in a sealed envelope or container and submitted by the date and time indicated in the Schedule of Events. Proposals must be received in the State Purchasing Bureau by the date and time of the proposal opening per the Schedule of Events.

The Request for Proposal form must be manually signed in an indelible manner or by DocuSign and returned by the proposal opening date and time along with the bidder's Request for Proposal and any other requirements as stated in the Request for Proposal document in order for the bidder's Request for Proposal response to be evaluated.

It is the responsibility of the bidder to check the website for all information relevant to this Request for Proposal to include addenda and/or amendments issued prior to the opening date. Website address is as follows: http://das.nebraska.gov/materiel/purchasing.html.

Emphasis should be concentrated on conformance to the solicitation instructions, responsiveness to requirements, completeness, and clarity of content. If the bidder's proposal is presented in such a fashion that makes evaluation difficult or overly time consuming the State reserves the right to reject the proposal as non-responsive.

By signing the "Request for Proposal for Contractual Services" form, the bidder guarantees compliance with the provisions stated in this solicitation.

K. PROPOSAL PREPARATION COSTS

The State shall not incur any liability for any costs incurred by bidders in replying to this solicitation, including any activity related to bidding on this solicitation.

L. FAILURE TO COMPLY WITH REQUEST FOR PROPOSAL

Violation of the terms and conditions contained in this solicitation or any resultant contract, at any time before or after the award, shall be grounds for action by the State which may include, but is not limited to, the following:

1. Rejection of a bidder's proposal;
2. Withdrawal of the Intent to Award;
3. Withdrawal of the Award;
4. Negative Vendor Performance Report(s);
5. Termination of the resulting contract;
6. Legal action; and
7. Suspension of the bidder from further bidding with the State for the period of time relative to the seriousness of the violation, such period to be within the sole discretion of the State.

M. PROPOSAL CORRECTIONS

A bidder may correct a mistake in a proposal prior to the time of opening by either:

1. uploading a revised and completed RFP proposal if the original proposal was electronically submitted
  a. If a corrected RFP proposal is submitted, the file name(s) date/time stamped with latest date/time stamp will be accepted as final proposal. The corrected RFP file name(s) should be identified as Corrected Proposal #1, Corrected Proposal #2, etc. or
2. giving written notice to the State of
  a. intent to withdraw the proposal for modification or
  b. to withdraw the proposal completely.

Changing a proposal after opening may be permitted if the change is made to correct a minor error that does not affect price, quantity, quality, delivery, or contractual conditions. In case of a mathematical error in extension of price, unit price shall govern.

N. LATE PROPOSALS

Proposals received after the time and date of the proposal opening will be considered late proposals. Late proposals will not be returned or opened. The State is not responsible for proposals that are late or lost regardless of cause or fault.

O. PROPOSAL OPENING

The opening of proposals will be public and the bidders will be announced. Proposals **WILL NOT** be available for viewing by those present at the proposal opening. Proposals will be posted to the State Purchasing Bureau website once an Intent to Award has been posted to the website. Bidders may contact the State to schedule an appointment for viewing proposals after the Intent to Award has been posted to the website. Information identified as proprietary by the submitting bidder, in accordance with the RFP and state statute, will not be posted. If the State determines submitted information should not be withheld, in accordance with the Public Records Act, or if ordered to release any withheld information, said information may then be released. The submitting bidder will be notified of the release and it shall be the obligation of the submitting bidder to take further action, if it believes the information should not be released. Once proposals are opened, they become the property of the State of Nebraska and will not be returned.

P. REQUEST FOR PROPOSAL/PROPOSAL REQUIREMENTS

The proposals will first be examined to determine if all requirements listed below have been addressed and whether further evaluation is warranted. Proposals not meeting the requirements may be rejected as non-responsive. The requirements are:

1. Original Request for Proposal for Contractual Services form signed using an indelible method;
2. Clarity and responsiveness of the proposal;
3. Completed Corporate Overview;
4. Completed Sections II through IV;
5. Attachment C - Technical Requirements Option A, B, and/or C;

6. Proposed high-level project plan;
7. Schedule for the lifecycle of this project; and
8. Completed State Cost Proposal Template.

Q. EVALUATION COMMITTEE

Proposals are evaluated by members of an Evaluation Committee(s). The Evaluation Committee(s) will consist of individuals selected at the discretion of the State. Names of the members of the Evaluation Committee(s) will not be published prior to the intent to award.

Any contact, attempted contact, or attempt to influence an evaluator that is involved with this solicitation may result in the rejection of this proposal and further administrative actions.

R. EVALUATION OF PROPOSALS

All proposals that are responsive to the solicitation will be evaluated. Each evaluation category will have a maximum point potential. The State will conduct a fair, impartial, and comprehensive evaluation of all proposals in accordance with the criteria set forth below. Areas that will be addressed and scored during the evaluation include:

1. Corporate Overview should include but is not limited to:
   a. the ability, capacity, and skill of the bidder to deliver and implement the system or project that meets the requirements of the solicitation;
   b. the character, integrity, reputation, judgment, experience, and efficiency of the bidder;
   c. whether the bidder can perform the contract within the specified time frame;
   d. the quality of vendor performance on prior contracts;
   e. such other information that may be secured and that has a bearing on the decision to award the contract;
2. Technical Approach - Technical Requirements Option A, B, and/or C
3. Proposed high-level Project Plan
4. Schedule for the lifecycle of this project; and,
5. Cost Proposal.

Neb. Rev. Stat. §81-161 allows the quality of performance of previous contracts to be considered when evaluating responses to competitively bid solicitations in determining the lowest responsible bidder. Information obtained from any Vendor Performance Report (See Terms & Conditions, Section II. H.) may be used in evaluating responses to solicitations for goods and services to determine the best value for the State.

Neb. Rev. Stat. §73-107 allows for a preference for a resident disabled veteran or business located in a designated enterprise zone. When a state contract is to be awarded to the lowest responsible bidder, a resident disabled veteran or a business located in a designated enterprise zone under the Enterprise Zone Act shall be allowed a preference over any other resident or nonresident bidder, if all other factors are equal.

Resident disabled veterans means any person (a) who resides in the State of Nebraska, who served in the United States Armed Forces, including any reserve component or the National Guard, who was discharged or otherwise separated with a characterization of honorable or general (under honorable conditions), and who possesses a disability rating letter issued by the United States Department of Veterans Affairs establishing a service-connected disability or a disability determination from the United States Department of Defense and (b)(i) who owns and controls a business or, in the case of a publicly owned business, more than fifty percent of the stock is owned by one or more persons described in subdivision (a) of this subsection and (ii) the management and daily business operations of the business are controlled by one or more persons described in subdivision(a) of this subsection. Any contract entered into without compliance with this section shall be null and void.

Therefore, if a resident disabled veteran or business located in a designated enterprise zone submits a proposal in accordance with Neb. Rev. Stat. §73-107 and has so indicated on the solicitation cover page under "Bidder must complete the following" requesting priority/preference to be considered in the award of this contract, the following will need to be submitted by the bidder within ten (10) business days of request:

1. Documentation from the United States Armed Forces confirming service;
2. Documentation of discharge or otherwise separated characterization of honorable or general (under honorable conditions);
3. Disability rating letter issued by the United States Department of Veterans Affairs establishing a service-connected disability or a disability determination from the United States Department of Defense; and
4. Documentation which shows ownership and control of a business or, in the case of a publicly owned business, more than fifty percent of the stock is owned by one or more persons described in subdivision

(a) of this subsection; and the management and daily business operations of the business are controlled by one or more persons described in subdivision (a) of this subsection.

Failure to submit the requested documentation within ten (10) business days of notice will disqualify the bidder from consideration of the preference.

Evaluation criteria will be released with the solicitation.

S. ORAL INTERVIEWS/PRESENTATIONS AND/OR DEMONSTRATIONS

The State may determine after the completion of the Technical and Cost Proposal evaluation that oral interviews/presentations and/or demonstrations are required. Every bidder may not be given an opportunity to interview/present and/or give demonstrations; the State reserves the right, in its discretion, to select only the top scoring bidders to present/give oral interviews. The scores from the oral interviews/presentations and/or demonstrations will be added to the scores from the Technical and Cost Proposals. The presentation process will allow the bidders to demonstrate their proposal offering, explaining and/or clarifying any unusual or significant elements related to their proposals. Bidders' key personnel, identified in their proposal, may be requested to participate in a structured interview to determine their understanding of the requirements of this proposal, their authority and reporting relationships within their firm, and their management style and philosophy. Only representatives of the State and the presenting bidder will be permitted to attend the oral interviews/presentations and/or demonstrations. A written copy or summary of the presentation, and demonstrative information (such as briefing charts, et cetera) may be offered by the bidder, but the State reserves the right to refuse or not consider the offered materials. Bidders shall not be allowed to alter or amend their proposals.

Once the oral interviews/presentations and/or demonstrations have been completed, the State reserves the right to make an award without any further discussion with the bidders regarding the proposals received.

Any cost incidental to the oral interviews/presentations and/or demonstrations shall be borne entirely by the bidder and will not be compensated by the State.

T. BEST AND FINAL OFFER

If best and final offers (BAFO) are requested by the State and submitted by the bidder, they will be evaluated (using the stated BAFO criteria), scored, and ranked by the Evaluation Committee. The State reserves the right to conduct more than one Best and Final Offer. The award will then be granted to the highest scoring bidder. However, a bidder should provide its best offer in its original proposal. Bidders should not expect that the State will request a best and final offer.

U. REFERENCE AND CREDIT CHECKS

The State reserves the right to conduct and consider reference and credit checks. The State reserves the right to use third parties to conduct reference and credit checks. By submitting a proposal in response to this solicitation, the bidder grants to the State the right to contact or arrange a visit in person with any or all of the bidder's clients. Reference and credit checks may be grounds to reject a proposal, withdraw an intent to award, or rescind the award of a contract.

V. AWARD

The State reserves the right to evaluate proposals and award contracts in a manner utilizing criteria selected at the State's discretion and in the State's best interest. After evaluation of the proposals, or at any point in the solicitation process, the State of Nebraska may take one or more of the following actions:

1. Amend the solicitation;
2. Extend the time of or establish a new proposal opening time;
3. Waive deviations or errors in the State's solicitation process and in bidder proposals that are not material, do not compromise the solicitation process or a bidder's proposal, and do not improve a bidder's competitive position;
4. Accept or reject a portion of or all of a proposal;
5. Accept or reject all proposals;
6. Withdraw the solicitation;
7. Elect to rebid the solicitation;
8. Award single lines or multiple lines to one or more bidder; or,
9. Award one or more all-inclusive contracts.

The solicitation does not commit the State to award a contract. Once intent to award decision has been determined, it will be posted to the Internet at:
http://das.nebraska.gov/materiel/purchasing.html

Any protests must be filed by a bidder within ten (10) business days after the intent to award decision is posted to the Internet. Grievance and protest procedure is available on the Internet at:
http://das.nebraska.gov/materiel/purchasing.html

W. DISCOUNTS

Prices quoted shall be inclusive of ALL trade discounts. Cash discount terms of less than thirty (30) business days will not be considered as part of the proposal. Cash discount periods will be computed from the date of receipt of a properly executed claim voucher or the date of completion of delivery of all items in a satisfactory condition, whichever is later.

X. PRICES

Prices quoted shall be net, including transportation and delivery charges fully prepaid by the contractor, F.O.B. destination named in the solicitation. No additional charges will be allowed for packing, packages, or partial delivery costs. When an arithmetic error has been made in the extended total, the unit price will govern.

Prices submitted on the cost proposal form shall remain fixed for the initial term of the contract. Any request for a price increase subsequent to the initial term of the contract shall not exceed two percent (2%) of the previous Contract period. Increases will be cumulative across the remaining periods of the contract. Requests for an increase must be submitted in writing to the State Purchasing Bureau a minimum of 120 days prior to the end of the current contract period. Documentation may be required by the State to support the price increase.

The State reserves the right to deny any requested price increase. No price increases are to be billed to any State Agencies prior to written amendment of the contract by the parties.

The State will be given full proportionate benefit of any decreases for the term of the contract.

Y. COST CLARIFICATION

The State reserves the right to review all aspects of cost for reasonableness and to request clarification of any proposal where the cost component shows significant and unsupported deviation from industry standards or in areas where detailed pricing is required.

Z. ALTERNATE/EQUIVALENT PROPOSALS

Bidder may offer proposals which are at variance from the express specifications of the solicitation. The State reserves the right to consider and accept such proposals if, in the judgment of the Materiel Administrator, the proposal will result in goods and/or services equivalent to or better than those which would be supplied in the original proposal specifications. Bidder must indicate on the solicitation the manufacturer's name, number and shall submit with their proposal, sketches, descriptive literature and/or complete specifications. Reference to literature submitted with a previous proposal will not satisfy this provision. Proposals which do not comply with these requirements are subject to rejection. In the absence of any stated deviation or exception, the proposal will be accepted as in strict compliance with all terms, conditions and specification, and the bidder shall be held liable therefore.

AA. LUMP SUM OR "ALL OR NONE" PROPOSALS

The State reserves the right to purchase item-by-item, by groups or as a total when the State may benefit by so doing. Bidders may submit a proposal on an "all or none" or "lump sum" basis, but should also submit a proposal on an item-by-item basis. The term "all or none" means a conditional proposal which requires the purchase of all items on which proposals are offered and bidder declines to accept award on individual items; a "lump sum" proposal is one in which the bidder offers a lower price than the sum of the individual proposals if all items are purchased, but agrees to deliver individual items at the prices quoted.

BB. REJECTION OF PROPOSALS

The State reserves the right to reject any or all proposals, wholly or in part, in the best interest of the State.

CC. RESIDENT BIDDER

Pursuant to Neb. Rev. Stat. §§ 73-101.01 through 73-101.02, a Resident Bidder shall be allowed a preference against a Non-resident Bidder from a state which gives or requires a preference to Bidders from that state. The preference shall be equal to the preference given or required by the state of the Nonresident Bidders. Where the lowest responsible bid from a resident Bidder is equal in all respects to one from a nonresident Bidder from a state. The provision of this preference shall not apply to any contract for any project upon which federal funds would be withheld because of the provisions of this preference.

II. TERMS AND CONDITIONS

Bidders should complete Sections II through VI as part of their proposal. Bidders should read the Terms and Conditions and should initial either accept, reject, or reject and provide alternative language for each clause. The bidder should also provide an explanation of why the bidder rejected the clause or rejected the clause and provided alternate language. By signing the solicitation, bidder is agreeing to be legally bound by all the accepted terms and conditions, and any proposed alternative terms and conditions submitted with the proposal. The State reserves the right to negotiate rejected or proposed alternative language. If the State and bidder fail to agree on the final Terms and Conditions, the State reserves the right to reject the proposal. The State of Nebraska is soliciting proposals in response to this solicitation. The State of Nebraska reserves the right to reject proposals that attempt to substitute the bidder's commercial contracts and/or documents for this solicitation.

Bidders should submit with their proposal any license, user agreement, service level agreement, or similar documents that the bidder wants incorporated in the Contract. The State will not consider incorporation of any document not submitted with the bidder's proposal as the document will not have been included in the evaluation process. These documents shall be subject to negotiation and will be incorporated as addendums if agreed to by the Parties.

If a conflict or ambiguity arises after the Addendum to Contract Award have been negotiated and agreed to, the Addendum to Contract Award shall be interpreted as follows:

1. If only one Party has a particular clause then that clause shall control;
2. If both Parties have a similar clause, but the clauses do not conflict, the clauses shall be read together;
3. If both Parties have a similar clause, but the clauses conflict, the State's clause shall control.

A. GENERAL

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The contract resulting from this solicitation shall incorporate the following documents:

1. Request for Proposal and Addenda;
2. Amendments to the solicitation;
3. Questions and Answers;
4. Bidder's proposal (Solicitation and properly submitted documents);
5. The executed Contract and Addendum One to Contract, if applicable; and,
6. Amendments/Addendums to the Contract.

These documents constitute the entirety of the contract.

Unless otherwise specifically stated in a future contract amendment, in case of any conflict between the incorporated documents, the documents shall govern in the following order of preference with number one (1) receiving preference over all other documents and with each lower numbered document having preference over any higher numbered document: 1) Amendment to the executed Contract with the most recent dated amendment having the highest priority, 2) executed Contract and any attached Addenda, 3) Amendments to solicitation and any Questions and Answers, 4) the original solicitation document and any Addenda, and 5) the bidder's submitted Proposal.

Any ambiguity or conflict in the contract discovered after its execution, not otherwise addressed herein, shall be resolved in accordance with the rules of contract interpretation as established in the State of Nebraska.

B. NOTIFICATION

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

Contractor and State shall identify the contract manager who shall serve as the point of contact for the executed contract.

Communications regarding the executed contract shall be in writing and shall be deemed to have been given if delivered personally or mailed, by U.S. Mail, postage prepaid, return receipt requested, to the parties at their respective addresses set forth below, or at such other addresses as may be specified in writing by either of the parties. All notices, requests, or communications shall be deemed effective upon personal delivery or five (5) calendar days following deposit in the mail.

Either party may change its address for notification purposes by giving notice of the change, and setting forth the new address and an effective date.

C. BUYER'S REPRESENTATIVE

The State reserves the right to appoint a Buyer's Representative to manage (or assist the Buyer in managing) the contract on behalf of the State. The Buyer's Representative will be appointed in writing, and the appointment document will specify the extent of the Buyer's Representative authority and responsibilities. If a Buyer's Representative is appointed, the Contractor will be provided a copy of the appointment document, and is required to cooperate accordingly with the Buyer's Representative. The Buyer's Representative has no authority to bind the State to a contract, amendment, addendum, or other change or addition to the contract.

D. GOVERNING LAW (Statutory)

Notwithstanding any other provision of this contract, or any amendment or addendum(s) entered into contemporaneously or at a later time, the parties understand and agree that, (1) the State of Nebraska is a sovereign state and its authority to contract is therefore subject to limitation by the State's Constitution, statutes, common law, and regulation; (2) this contract will be interpreted and enforced under the laws of the State of Nebraska; (3) any action to enforce the provisions of this agreement must be brought in the State of Nebraska per state law; (4) the person signing this contract on behalf of the State of Nebraska does not have the authority to waive the State's sovereign immunity, statutes, common law, or regulations; (5) the indemnity, limitation of liability, remedy, and other similar provisions of the final contract, if any, are entered into subject to the State's Constitution, statutes, common law, regulations, and sovereign immunity; and, (6) all terms and conditions of the final contract, including but not limited to the clauses concerning third party use, licenses, warranties, limitations of liability, governing law and venue, usage verification, indemnity, liability, remedy or other similar provisions of the final contract are entered into specifically subject to the State's Constitution, statutes, common law, regulations, and sovereign immunity.

The Parties must comply with all applicable local, state and federal laws, ordinances, rules, orders, and regulations.

E. BEGINNING OF WORK

The bidder shall not commence any billable work until a valid contract has been fully executed by the State and the awarded bidder. The awarded bidder will be notified in writing when work may begin.

F. AMENDMENT

This Contract may be amended in writing, within scope, upon the agreement of both parties.

G. CHANGE ORDERS OR SUBSTITUTIONS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The State and the Contractor, upon the written agreement, may make changes to the contract within the general scope of the solicitation. Changes may involve specifications, the quantity of work, or such other items as the State may find necessary or desirable. Corrections of any deliverable, service, or work required pursuant to the contract shall not be deemed a change. The Contractor may not claim forfeiture of the contract by reasons of such changes.

The Contractor shall prepare a written description of the work required due to the change and an itemized cost sheet for the change. Changes in work and the amount of compensation to be paid to the Contractor shall be determined in accordance with applicable unit prices if any, a pro-rated value, or through negotiations. The State shall not incur a price increase for changes that should have been included in the Contractor's proposal, were foreseeable, or result from difficulties with or failure of the Contractor's proposal or performance.

No change shall be implemented by the Contractor until approved by the State, and the Contract is amended to reflect the change and associated costs, if any. If there is a dispute regarding the cost, but both parties agree that immediate implementation is necessary, the change may be implemented, and cost negotiations may continue with both Parties retaining all remedies under the contract and law.

In the event any product is discontinued or replaced upon mutual consent during the contract period or prior to delivery, the State reserves the right to amend the contract or purchase order to include the alternate product at the same price.

*****Contractor will not substitute any item that has been awarded without prior written approval of SPB*****

H. VENDOR PERFORMANCE REPORT(S)

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The State may document any instance(s) of products or services delivered or performed which exceed or fail to meet the terms of the purchase order, contract, and/or solicitation specifications. The State Purchasing Bureau may contact the Vendor regarding any such report. Vendor performance report(s) will become a part of the permanent record of the Vendor.

I. NOTICE OF POTENTIAL CONTRACTOR BREACH

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

If Contractor breaches the contract or anticipates breaching the contract, the Contractor shall immediately give written notice to the State. The notice shall explain the breach or potential breach, a proposed cure, and may include a request for a waiver of the breach if so desired. The State may, in its discretion, temporarily or permanently waive the breach. By granting a waiver, the State does not forfeit any rights or remedies to which the State is entitled by

law or equity, or pursuant to the provisions of the contract. Failure to give immediate notice, however, may be grounds for denial of any request for a waiver of a breach.

J. BREACH

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

Either Party may terminate the contract, in whole or in part, if the other Party breaches its duty to perform its obligations under the contract in a timely and proper manner. Termination requires written notice of default and a thirty (30) calendar day (or longer at the non-breaching Party's discretion considering the gravity and nature of the default) cure period. Said notice shall be delivered by Certified Mail, Return Receipt Requested, or in person with proof of delivery. Allowing time to cure a failure or breach of contract does not waive the right to immediately terminate the contract for the same or different contract breach which may occur at a different time. In case of default of the Contractor, the State may contract the service from other sources and hold the Contractor responsible for any excess cost occasioned thereby. OR In case of breach by the Contractor, the State may, without unreasonable delay, make a good faith effort to make a reasonable purchase or contract to purchase goods in substitution of those due from the contractor. The State may recover from the Contractor as damages the difference between the costs of covering the breach. Notwithstanding any clause to the contrary, the State may also recover the contract price together with any incidental or consequential damages defined in UCC Section 2-715, but less expenses saved in consequence of Contractor's breach.

The State's failure to make payment shall not be a breach, and the Contractor shall retain all available statutory remedies and protections.

K. NON-WAIVER OF BREACH

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The acceptance of late performance with or without objection or reservation by a Party shall not waive any rights of the Party nor constitute a waiver of the requirement of timely performance of any obligations remaining to be performed.

L. SEVERABILITY

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

If any term or condition of the contract is declared by a court of competent jurisdiction to be illegal or in conflict with any law, the validity of the remaining terms and conditions shall not be affected, and the rights and obligations of the parties shall be construed and enforced as if the contract did not contain the provision held to be invalid or illegal.

M. INDEMNIFICATION

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

1. GENERAL

The Contractor agrees to defend, indemnify, and hold harmless the State and its employees, volunteers, agents, and its elected and appointed officials ("the indemnified parties") from and against any and all third party claims, liens, demands, damages, liability, actions, causes of action, losses, judgments, costs, and expenses of every nature, including investigation costs and expenses, settlement costs, and attorney fees and expenses ("the claims"), sustained or asserted against the State for personal injury, death, or property loss or damage, arising out of, resulting from, or attributable to the willful misconduct, negligence, error, or omission of the Contractor, its employees, subcontractors, consultants, representatives, and agents, resulting from this contract, except to the extent such Contractor liability is attenuated by any action of the State which directly and proximately contributed to the claims.

2. INTELLECTUAL PROPERTY (Optional)

The Contractor agrees it will, at its sole cost and expense, defend, indemnify, and hold harmless the indemnified parties from and against any and all claims, to the extent such claims arise out of, result from, or are attributable to, the actual or alleged infringement or misappropriation of any patent, copyright, trade secret, trademark, or confidential information of any third party by the Contractor or its employees, subcontractors, consultants, representatives, and agents; provided, however, the State gives the Contractor prompt notice in writing of the claim. The Contractor may not settle any infringement claim that will affect the State's use of the Licensed Software without the State's prior written consent, which consent may be withheld for any reason.

If a judgment or settlement is obtained or reasonably anticipated against the State's use of any intellectual property for which the Contractor has indemnified the State, the Contractor shall, at the Contractor's sole cost and expense, promptly modify the item or items which were determined to be infringing, acquire a license or licenses on the State's behalf to provide the necessary rights to the State to eliminate the infringement, or provide the State with a non-infringing substitute that provides the State the same functionality. At the State's election, the actual or anticipated judgment may be treated as a breach of warranty by the Contractor, and the State may receive the remedies provided under this solicitation.

3. PERSONNEL

The Contractor shall, at its expense, indemnify and hold harmless the indemnified parties from and against any claim with respect to withholding taxes, worker's compensation, employee benefits, or any other claim, demand, liability, damage, or loss of any nature relating to any of the personnel, including subcontractor's and their employees, provided by the Contractor.

4. SELF-INSURANCE

The State of Nebraska is self-insured for any loss and purchases excess insurance coverage pursuant to Neb. Rev. Stat. § 81-8,239.01 (Reissue 2008). If there is a presumed loss under the provisions of this agreement, Contractor may file a claim with the Office of Risk Management pursuant to Neb. Rev. Stat. §§ 81-8,829 – 81-8,306 for review by the State Claims Board. The State retains all rights and immunities under the State Miscellaneous (§ 81-8,294), Tort (§ 81-8,209), and Contract Claim Acts (§ 81-8,302), as outlined in Neb. Rev. Stat. § 81-8,209 et seq. and under any other provisions of law and accepts liability under this agreement to the extent provided by law.

5. The Parties acknowledge that Attorney General for the State of Nebraska is required by statute to represent the legal interests of the State, and that any provision of this indemnity clause is subject to the statutory authority of the Attorney General.

N. ATTORNEY'S FEES

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

In the event of any litigation, appeal, or other legal action to enforce any provision of the contract, the Parties agree to pay all expenses of such action, as permitted by law and if ordered by the court, including attorney's fees and costs, if the other Party prevails.

O. PERFORMANCE BOND

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The Contractor maybe required to supply a bond executed by a corporation authorized to contract surety in the State of Nebraska, payable to the State of Nebraska, which shall be valid for the life of the contract to include any renewal and/or extension periods. The amount of the bond must be $500,000. The bond will guarantee that the Contractor will faithfully perform all requirements, terms and conditions of the contract. Failure to comply shall be grounds for forfeiture of bond as liquidated damages. Amount of forfeiture will be determined by the agency based on loss to the State. The bond will be returned when the contract has been satisfactorily completed as solely determined by the State, after termination or expiration of the contract.

P. ASSIGNMENT, SALE, OR MERGER

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

Either Party may assign the contract upon mutual written agreement of the other Party. Such agreement shall not be unreasonably withheld.

The Contractor retains the right to enter into a sale, merger, acquisition, internal reorganization, or similar transaction involving Contractor's business. Contractor agrees to cooperate with the State in executing amendments to the contract to allow for the transaction. If a third party or entity is involved in the transaction, the Contractor will remain responsible for performance of the contract until such time as the person or entity involved in the transaction agrees in writing to be contractually bound by this contract and perform all obligations of the contract.

Q. CONTRACTING WITH OTHER NEBRASKA POLITICAL SUB-DIVISIONS OF THE STATE OR ANOTHER STATE

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The Contractor may, but shall not be required to, allow agencies, as defined in Neb. Rev. Stat. §81-145, to use this contract. The terms and conditions, including price, of the contract may not be amended. The State shall not be contractually obligated or liable for any contract entered into pursuant to this clause. A listing of Nebraska political subdivisions may be found at the website of the Nebraska Auditor of Public Accounts.

The Contractor may, but shall not be required to, allow other states, agencies or divisions of other states, or political subdivisions of other states to use this contract. The terms and conditions, including price, of this contract shall apply to any such contract, but may be amended upon mutual consent of the Parties. The State of Nebraska shall not be contractually or otherwise obligated or liable under any contract entered into pursuant to this clause. The State shall be notified if a contract is executed based upon this contract.

R. FORCE MAJEURE

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

Neither Party shall be liable for any costs or damages, or for default resulting from its inability to perform any of its obligations under the contract due to a natural or manmade event outside the control and not the fault of the affected Party ("Force Majeure Event"). The Party so affected shall immediately make a written request for relief to the other Party, and shall have the burden of proof to justify the request. The other Party may grant the relief requested; relief may not be unreasonably withheld. Labor disputes with the impacted Party's own employees will not be considered a Force Majeure Event.

S. CONFIDENTIALITY

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

All materials and information provided by the Parties or acquired by a Party on behalf of the other Party shall be regarded as confidential information. All materials and information provided or acquired shall be handled in accordance with federal and state law, and ethical standards. Should said confidentiality be breached by a Party, the Party shall notify the other Party immediately of said breach and take immediate corrective action.

It is incumbent upon the Parties to inform their officers and employees of the penalties for improper disclosure imposed by the Privacy Act of 1974, 5 U.S.C. 552a. Specifically, 5 U.S.C. 552a (i)(1), which is made applicable by 5 U.S.C. 552a (m)(1), provides that any officer or employee, who by virtue of his/her employment or official position has possession of or access to agency records which contain individually identifiable information, the disclosure of which is prohibited by the Privacy Act or regulations established thereunder, and who knowing that disclosure of the specific material is prohibited, willfully discloses the material in any manner to any person or agency not entitled to receive it, shall be guilty of a misdemeanor and fined not more than $5,000.

T. EARLY TERMINATION

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The contract may be terminated as follows:

1. The State and the Contractor, by mutual written agreement, may terminate the contract at any time.

2. The State, in its sole discretion, may terminate the contract for any reason upon thirty (30) calendar day's written notice to the Contractor. Such termination shall not relieve the Contractor of warranty or other service obligations incurred under the terms of the contract. In the event of termination the Contractor shall be entitled to payment, determined on a pro rata basis, for products or services satisfactorily performed or provided.

3. The State may terminate the contract immediately for the following reasons:

- **a.** if directed to do so by statute;
- **b.** Contractor has made an assignment for the benefit of creditors, has admitted in writing its inability to pay debts as they mature, or has ceased operating in the normal course of business;
- **c.** a trustee or receiver of the Contractor or of any substantial part of the Contractor's assets has been appointed by a court;
- **d.** fraud, misappropriation, embezzlement, malfeasance, misfeasance, or illegal conduct pertaining to performance under the contract by its Contractor, its employees, officers, directors, or shareholders;
- **e.** an involuntary proceeding has been commenced by any Party against the Contractor under any one of the chapters of Title 11 of the United States Code and (i) the proceeding has been pending for at least sixty (60) calendar days; or (ii) the Contractor has consented, either expressly or by operation of law, to the entry of an order for relief; or (iii) the Contractor has been decreed or adjudged a debtor;
- **f.** a voluntary petition has been filed by the Contractor under any of the chapters of Title 11 of the United States Code;
- **g.** Contractor intentionally discloses confidential information;
- **h.** Contractor has or announces it will discontinue support of the deliverable; and,
- **i.** In the event funding is no longer available.

U. CONTRACT CLOSEOUT

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

Upon contract closeout for any reason the Contractor shall within 30 calendar days, unless stated otherwise herein:

1. Transfer all completed or partially completed deliverables to the State;
2. Transfer ownership and title to all completed or partially completed deliverables to the State;
3. Return to the State all information and data, unless the Contractor is permitted to keep the information or data by contract or rule of law. Contractor may retain one copy of any information or data as required to comply with applicable work product documentation standards or as are automatically retained in the course of Contractor's routine back up procedures;
4. Cooperate with any successor Contactor, person or entity in the assumption of any or all of the obligations of this contract;

5. Cooperate with any successor Contactor, person or entity with the transfer of information or data related to this contract;
6. Return or vacate any state owned real or personal property; and,
7. Return all data in a mutually acceptable format and manner.

Nothing in this Section should be construed to require the Contractor to surrender intellectual property, real or personal property, or information or data owned by the Contractor for which the State has no legal claim.

III. CONTRACTOR DUTIES

A. INDEPENDENT CONTRACTOR / OBLIGATIONS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

It is agreed that the Contractor is an independent contractor and that nothing contained herein is intended or should be construed as creating or establishing a relationship of employment, agency, or a partnership.

The Contractor is solely responsible for fulfilling the contract. The Contractor or the Contractor's representative shall be the sole point of contact regarding all contractual matters.

The Contractor shall secure, at its own expense, all personnel required to perform the services under the contract. The personnel the Contractor uses to fulfill the contract shall have no contractual or other legal relationship with the State; they shall not be considered employees of the State and shall not be entitled to any compensation, rights or benefits from the State, including but not limited to, tenure rights, medical and hospital care, sick and vacation leave, severance pay, or retirement benefits.

By-name personnel commitments made in the Contractor's proposal shall not be changed without the prior written approval of the State. Replacement of these personnel, if approved by the State, shall be with personnel of equal or greater ability and qualifications.

All personnel assigned by the Contractor to the contract shall be employees of the Contractor or a subcontractor, and shall be fully qualified to perform the work required herein. Personnel employed by the Contractor or a subcontractor to fulfill the terms of the contract shall remain under the sole direction and control of the Contractor or the subcontractor respectively.

With respect to its employees, the Contractor agrees to be solely responsible for the following:

1. Any and all pay, benefits, and employment taxes and/or other payroll withholding;
2. Any and all vehicles used by the Contractor's employees, including all insurance required by state law;
3. Damages incurred by Contractor's employees within the scope of their duties under the contract;
4. Maintaining Workers' Compensation and health insurance that complies with state and federal law and submitting any reports on such insurance to the extent required by governing law;
5. Determining the hours to be worked and the duties to be performed by the Contractor's employees; and,
6. All claims on behalf of any person arising out of employment or alleged employment (including without limit claims of discrimination alleged against the Contractor, its officers, agents, or subcontractors or subcontractor's employees).

If the Contractor intends to utilize any subcontractor, the subcontractor's level of effort, tasks, and time allocation should be clearly defined in the bidder's proposal. The Contractor shall agree that it will not utilize any subcontractors not specifically included in its proposal in the performance of the contract without the prior written authorization of the State.

The State reserves the right to require the Contractor to reassign or remove from the project any Contractor or subcontractor employee.

Contractor shall insure that the terms and conditions contained in any contract with a subcontractor does not conflict with the terms and conditions of this contract.

The Contractor shall include a similar provision, for the protection of the State, in the contract with any subcontractor engaged to perform work on this contract.

B. EMPLOYEE WORK ELIGIBILITY STATUS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The Contractor is required and hereby agrees to use a federal immigration verification system to determine the work eligibility status of employees physically performing services within the State of Nebraska. A federal immigration verification system means the electronic verification of the work authorization program authorized by the Illegal Immigration Reform and Immigrant Responsibility Act of 1996, 8 U.S.C. 1324a, known as the E-Verify Program, or an equivalent federal program designated by the United States Department of Homeland Security or other federal agency authorized to verify the work eligibility status of an employee.

If the Contractor is an individual or sole proprietorship, the following applies:

1. The Contractor must complete the United States Citizenship Attestation Form, available on the Department of Administrative Services website at http://das.nebraska.gov/materiel/purchasing.html.

2. The completed United States Attestation Form should be submitted with the solicitation response.

3. If the Contractor indicates on such attestation form that he or she is a qualified alien, the Contractor agrees to provide the US Citizenship and Immigration Services documentation required to verify the Contractor's lawful presence in the United States using the Systematic Alien Verification for Entitlements (SAVE) Program.

4. The Contractor understands and agrees that lawful presence in the United States is required and the Contractor may be disqualified or the contract terminated if such lawful presence cannot be verified as required by Neb. Rev. Stat. §4-108.

C. COMPLIANCE WITH CIVIL RIGHTS LAWS AND EQUAL OPPORTUNITY EMPLOYMENT / NONDISCRIMINATION (Statutory)

The Contractor shall comply with all applicable local, state, and federal statutes and regulations regarding civil rights laws and equal opportunity employment. The Nebraska Fair Employment Practice Act prohibits Contractors of the State of Nebraska, and their subcontractors, from discriminating against any employee or applicant for employment, with respect to hire, tenure, terms, conditions, compensation, or privileges of employment because of race, color, religion, sex, disability, marital status, or national origin (Neb. Rev. Stat. §48-1101 to 48-1125). The Contractor guarantees compliance with the Nebraska Fair Employment Practice Act, and breach of this provision shall be regarded as a material breach of contract. The Contractor shall insert a similar provision in all subcontracts for goods and services to be covered by any contract resulting from this solicitation.

D. COOPERATION WITH OTHER CONTRACTORS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

Contractor may be required to work with or in close proximity to other contractors or individuals that may be working on same or different projects. The Contractor shall agree to cooperate with such other contractors or individuals, and shall not commit or permit any act which may interfere with the performance of work by any other contractor or individual. Contractor is not required to compromise Contractor's intellectual property or proprietary information unless expressly required to do so by this contract.

E. PERMITS, REGULATIONS, LAWS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The contract price shall include the cost of all royalties, licenses, permits, and approvals, whether arising from patents, trademarks, copyrights or otherwise, that are in any way involved in the contract. The Contractor shall obtain and pay for all royalties, licenses, and permits, and approvals necessary for the execution of the contract. The Contractor must guarantee that it has the full legal right to the materials, supplies, equipment, software, and other items used to execute this contract.

F. OWNERSHIP OF INFORMATION AND DATA / DELIVERABLES

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The State shall have the unlimited right to publish, duplicate, use, and disclose all information and data developed or obtained by the Contractor on behalf of the State pursuant to this contract.

The State shall own and hold exclusive title to any deliverable developed as a result of this contract. Contractor shall have no ownership interest or title, and shall not patent, license, or copyright, duplicate, transfer, sell, or exchange, the design, specifications, concept, or deliverable.

G. INSURANCE REQUIREMENTS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The Contractor shall throughout the term of the contract maintain insurance as specified herein and provide the State a current Certificate of Insurance/Acord Form (COI) verifying the coverage. The Contractor shall not commence work on the contract until the insurance is in place. If Contractor subcontracts any portion of the Contract the Contractor must, throughout the term of the contract, either:

1. Provide equivalent insurance for each subcontractor and provide a COI verifying the coverage for the subcontractor;
2. Require each subcontractor to have equivalent insurance and provide written notice to the State that the Contractor has verified that each subcontractor has the required coverage; or,
3. Provide the State with copies of each subcontractor's Certificate of Insurance evidencing the required coverage.

The Contractor shall not allow any subcontractor to commence work until the subcontractor has equivalent insurance. The failure of the State to require a COI, or the failure of the Contractor to provide a COI or require subcontractor insurance shall not limit, relieve, or decrease the liability of the Contractor hereunder.

In the event that any policy written on a claims-made basis terminates or is canceled during the term of the contract or within one (1) year of termination or expiration of the contract, the contractor shall obtain an extended discovery or

reporting period, or a new insurance policy, providing coverage required by this contract for the term of the contract and one (1) year following termination or expiration of the contract.

If by the terms of any insurance a mandatory deductible is required, or if the Contractor elects to increase the mandatory deductible amount, the Contractor shall be responsible for payment of the amount of the deductible in the event of a paid claim.

Notwithstanding any other clause in this Contract, the State may recover up to the liability limits of the insurance policies required herein.

1. WORKERS' COMPENSATION INSURANCE

The Contractor shall take out and maintain during the life of this contract the statutory Workers' Compensation and Employer's Liability Insurance for all of the contactors' employees to be engaged in work on the project under this contract and, in case any such work is sublet, the Contractor shall require the subcontractor similarly to provide Worker's Compensation and Employer's Liability Insurance for all of the subcontractor's employees to be engaged in such work. This policy shall be written to meet the statutory requirements for the state in which the work is to be performed, including Occupational Disease. **The policy shall include a waiver of subrogation in favor of the State. The COI shall contain the mandatory COI subrogation waiver language found hereinafter**. The amounts of such insurance shall not be less than the limits stated hereinafter. For employees working in the State of Nebraska, the policy must be written by an entity authorized by the State of Nebraska Department of Insurance to write Workers' Compensation and Employer's Liability Insurance for Nebraska employees.

2. COMMERCIAL GENERAL LIABILITY INSURANCE AND COMMERCIAL AUTOMOBILE LIABILITY INSURANCE

The Contractor shall take out and maintain during the life of this contract such Commercial General Liability Insurance and Commercial Automobile Liability Insurance as shall protect Contractor and any subcontractor performing work covered by this contract from claims for damages for bodily injury, including death, as well as from claims for property damage, which may arise from operations under this contract, whether such operation be by the Contractor or by any subcontractor or by anyone directly or indirectly employed by either of them, and the amounts of such insurance shall not be less than limits stated hereinafter.

The Commercial General Liability Insurance shall be written on an **occurrence basis**, and provide Premises/Operations, Products/Completed Operations, Independent Contractors, Personal Injury, and Contractual Liability coverage. **The policy shall include the State, and others as required by the contract documents, Additional Insured(s). This policy shall be primary, and any insurance or self-insurance carried by the State shall be considered secondary and non-contributory**. **The COI shall contain the mandatory COI liability waiver language found hereinafter.** The Commercial Automobile Liability Insurance shall be written to cover all Owned, Non-owned, and Hired vehicles.

REQUIRED INSURANCE COVERAGE	
COMMERCIAL GENERAL LIABILITY	
General Aggregate	$2,000,000
Products/Completed Operations Aggregate	$2,000,000
Personal/Advertising Injury	$1,000,000 per occurrence
Bodily Injury/Property Damage	$1,000,000 per occurrence
Medical Payments	$10,000 any one person
Damage to Rented Premises (Fire)	$300,000 each occurrence
Contractual	Included
XCU Liability (Explosion, Collapse, and Underground Damage)	Included
Independent Contractors	Included
Abuse & Molestation	Included
If higher limits are required, the Umbrella/Excess Liability limits are allowed to satisfy the higher limit.	
WORKER'S COMPENSATION	
Employers Liability Limits	$500K/$500K/$500K
Statutory Limits- All States	Statutory - State of Nebraska
Voluntary Compensation	Statutory
COMMERCIAL AUTOMOBILE LIABILITY	
Bodily Injury/Property Damage	$1,000,000 combined single limit
Include All Owned, Hired & Non-Owned Automobile liability	Included
Motor Carrier Act Endorsement	Where Applicable
UMBRELLA/EXCESS LIABILITY	
Over Primary Insurance	$2,000,000 per occurrence
PROFESSIONAL LIABILITY	
All Other Professional Liability (Errors & Omissions)	$1,000,000 Per Claim / Aggregate
COMMERCIAL CRIME	
Crime/Employee Dishonesty Including 3rd Party Fidelity	$1,000,000
CYBER LIABILITY	
Breach of Privacy, Security Breach, Denial of Service, Remediation, Fines and Penalties	$10,000,000
MANDATORY COI SUBROGATION WAIVER LANGUAGE	
"Workers' Compensation policy shall include a waiver of subrogation in favor of the State of Nebraska."	
MANDATORY COI LIABILITY WAIVER LANGUAGE	
"Commercial General Liability & Commercial Automobile Liability policies shall name the State of Nebraska as an Additional Insured and the policies shall be primary and any insurance or self-insurance carried by the State shall be considered secondary and non-contributory as additionally insured."	

3. EVIDENCE OF COVERAGE

The Contractor shall furnish the Contract Manager, with a certificate of insurance coverage complying with the above requirements prior to beginning work at:

Public Service Commission
Attn: State 911 Director
PO Box 94927
Lincoln, NE 68509

These certificates or the cover sheet shall reference the RFP number, and the certificates shall include the name of the company, policy numbers, effective dates, dates of expiration, and amounts and types of coverage afforded. If the State is damaged by the failure of the Contractor to maintain such insurance, then the Contractor shall be responsible for all reasonable costs properly attributable thereto.

Reasonable notice of cancellation of any required insurance policy must be submitted to the contract manager as listed above when issued and a new coverage binder shall be submitted immediately to ensure no break in coverage.

4. DEVIATIONS

The insurance requirements are subject to limited negotiation. Negotiation typically includes, but is not necessarily limited to, the correct type of coverage, necessity for Workers' Compensation, and the type of automobile coverage carried by the Contractor.

H. ANTITRUST

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The Contractor hereby assigns to the State any and all claims for overcharges as to goods and/or services provided in connection with this contract resulting from antitrust violations which arise under antitrust laws of the United States and the antitrust laws of the State.

I. CONFLICT OF INTEREST

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

By submitting a proposal, bidder certifies that no relationship exists between the bidder and any person or entity which either is, or gives the appearance of, a conflict of interest related to this Request for Proposal or project.

Bidder further certifies that bidder will not employ any individual known by bidder to have a conflict of interest nor shall bidder take any action or acquire any interest, either directly or indirectly, which will conflict in any manner or degree with the performance of its contractual obligations hereunder or which creates an actual or appearance of conflict of interest.

If there is an actual or perceived conflict of interest, bidder shall provide with its proposal a full disclosure of the facts describing such actual or perceived conflict of interest and a proposed mitigation plan for consideration. The State will then consider such disclosure and proposed mitigation plan and either approve or reject as part of the overall bid evaluation.

J. STATE PROPERTY

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The Contractor shall be responsible for the proper care and custody of any State-owned property which is furnished for the Contractor's use during the performance of the contract. The Contractor shall reimburse the State for any loss or damage of such property; normal wear and tear is expected.

K. SITE RULES AND REGULATIONS

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The Contractor shall use its best efforts to ensure that its employees, agents, and subcontractors comply with site rules and regulations while on State or any government premises. If the Contractor must perform on-site work outside of the daily operational hours set forth by the State, it must make arrangements with the State or any government to ensure access to the facility and the equipment has been arranged. No additional payment will be made by the State on the basis of lack of access, unless the State fails to provide access as agreed to in writing between the State and the Contractor.

L. ADVERTISING

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The Contractor agrees not to refer to the contract award in advertising in such a manner as to state or imply that the company or its goods or services are endorsed or preferred by the State. Any publicity releases pertaining to the project shall not be issued without prior written approval from the State.

M. NEBRASKA TECHNOLOGY ACCESS STANDARDS (Statutory)

Contractor shall review the Nebraska Technology Access Standards, found at http://nitc.nebraska.gov/standards/2-201.html and ensure that products and/or services provided under the contract are in compliance or will comply with the applicable standards to the greatest degree possible. In the event such standards change during the Contractor's performance, the State may create an amendment to the contract to request the contract comply with the changed standard at a cost mutually acceptable to the parties.

N. DISASTER RECOVERY/BACK UP PLAN

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The Contractor shall have a disaster recovery and back-up plan, of which a copy should be provided upon request to the State, which includes, but is not limited to equipment, personnel, facilities, and transportation, in order to continue delivery of goods and services as specified under the specifications in the contract in the event of a disaster.

O. DRUG POLICY

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

Contractor certifies it maintains a drug free work place environment to ensure worker safety and workplace integrity. Contractor agrees to provide a copy of its drug free workplace policy at any time upon request by the State.

P. WARRANTY

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

Despite any clause to the contrary, the Contractor represents and warrants that its services hereunder shall be performed by competent personnel and shall be of professional quality consistent with generally accepted industry standards for the performance of such services and shall comply in all respects with the requirements of this Agreement. For any breach of this warranty, the Contractor shall, for a period of ninety (90) calendar days from performance of the service, perform the services again, at no cost to the State, or if Contractor is unable to perform the services as warranted, Contractor shall reimburse the State all fees paid to Contractor for the unsatisfactory services. The rights and remedies of the parties under this warranty are in addition to any other rights and remedies of the parties provided by law or equity, including, without limitation actual damages, and, as applicable and awarded under the law, to a prevailing party, reasonable attorneys' fees and costs.

IV. PAYMENT

A. PROHIBITION AGAINST ADVANCE PAYMENT (Statutory)

Neb. Rev. Stat. §§81-2403 states, "[n]o goods or services shall be deemed to be received by an agency until all such goods or services are completely delivered and finally accepted by the agency."

B. TAXES (Statutory)

The State is not required to pay taxes and assumes no such liability as a result of this solicitation. The Contractor may request a copy of the Nebraska Department of Revenue, Nebraska Resale or Exempt Sale Certificate for Sales Tax Exemption, Form 13 for their records. Any property tax payable on the Contractor's equipment which may be installed in a state-owned facility is the responsibility of the Contractor

C. INVOICES

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

Invoices for payments must be submitted by the Contractor to the agency requesting the services with sufficient detail to support payment. Public Service Commission State 911 Director 1200 N St. Lincoln, NE 68509. The terms and conditions included in the Contractor's invoice shall be deemed to be solely for the convenience of the parties. No terms or conditions of any such invoice shall be binding upon the State, and no action by the State, including without limitation the payment of any such invoice in whole or in part, shall be construed as binding or estopping the State with respect to any such term or condition, unless the invoice term or condition has been previously agreed to by the State as an amendment to the contract.

D. INSPECTION AND APPROVAL

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

Final inspection and approval of all work required under the contract shall be performed by the designated State officials.

The State and/or its authorized representatives shall have the right to enter any premises where the Contractor or subcontractor duties under the contract are being performed, and to inspect, monitor or otherwise evaluate the work being performed. All inspections and evaluations shall be at reasonable times and in a manner that will not unreasonably delay work.

E. PAYMENT (Statutory)

Payment will be made by the responsible agency in compliance with the State of Nebraska Prompt Payment Act (See Neb. Rev. Stat. §81-2403). The State may require the Contractor to accept payment by electronic means such as ACH deposit. In no event shall the State be responsible or liable to pay for any goods and services provided by the Contractor prior to the Effective Date of the contract, and the Contractor hereby waives any claim or cause of action for any such services.

F. LATE PAYMENT (Statutory)

The Contractor may charge the responsible agency interest for late payment in compliance with the State of Nebraska Prompt Payment Act (See Neb. Rev. Stat. §81-2401 through 81-2408).

G. SUBJECT TO FUNDING / FUNDING OUT CLAUSE FOR LOSS OF APPROPRIATIONS (Statutory)

The State's obligation to pay amounts due on the Contract for a fiscal years following the current fiscal year is contingent upon legislative appropriation of funds. Should said funds not be appropriated, the State may terminate the contract with respect to those payments for the fiscal year(s) for which such funds are not appropriated. The State will give the Contractor written notice thirty (30) calendar days prior to the effective date of termination. All obligations of the State to make payments after the termination date will cease. The Contractor shall be entitled to receive just and equitable compensation for any authorized work which has been satisfactorily completed as of the termination date. In no event shall the Contractor be paid for a loss of anticipated profit.

H. RIGHT TO AUDIT (First Paragraph is Statutory)

The State shall have the right to audit the Contractor's performance of this contract upon a thirty (30) calendar days' written notice. Contractor shall utilize generally accepted accounting principles, and shall maintain the accounting records, and other records and information relevant to the contract (Information) to enable the State to audit the contract. (Neb. Rev. Stat. §84-304 et seq.) The State may audit and the Contractor shall maintain, the Information during the term of the contract and for a period of five (5) years after the completion of this contract or until all issues or litigation are resolved, whichever is later. The Contractor shall make the Information available to the State at Contractor's place of business or a location acceptable to both Parties during normal business hours. If this is not practical or the Contractor so elects, the Contractor may provide electronic or paper copies of the Information. The State reserves the right to examine, make copies of, and take notes on any Information relevant to this contract, regardless of the form or the Information, how it is stored, or who possesses the Information. Under no circumstance will the Contractor be required to create or maintain documents not kept in the ordinary course of contractor's business operations, nor will contractor be required to disclose any information, including but not limited to product cost data, which is confidential or proprietary to contractor.

Accept (Initial)	Reject (Initial)	Reject & Provide Alternative within Solicitation Response (Initial)	NOTES/COMMENTS:

The Parties shall pay their own costs of the audit unless the audit finds a previously undisclosed overpayment by the State. If a previously undisclosed overpayment exceeds one-half of one percent (.5%) of the total contract billings, or if fraud, material misrepresentations, or non-performance is discovered on the part of the Contractor, the Contractor shall reimburse the State for the total costs of the audit. Overpayments and audit costs owed to the State shall be paid within ninety (90) days of written notice of the claim. The Contractor agrees to correct any material weaknesses or condition found as a result of the audit.

V. PROJECT DESCRIPTION AND SCOPE OF WORK


A. Background and Project Scope

The Nebraska Public Service Commission, State 911 Department (The Commission) is the statewide authority responsible for implementing and coordinating 911 service in the state. The Commission is seeking proposals for a statewide ESInet and NGCS to help advance Next Generation 911 (NG911) across the state.

Today, the local PSAPs manage and maintain independent relationships with 911 service provider and network providers. With this procurement, the Commission will establish and support a statewide ESInet and NGCS to provide 911 service to the regions throughout the state.

The state has 68 PSAPs that take approximately 1.13 million calls a year and serve a statewide population of 1.929 million people. The largest population centers are Douglas County (566,880) and Lancaster County (317,272). Many of the PSAPs throughout the state have joined together to form regions. Each region utilizes call-handling equipment (CHE) that operates in a host/remote configuration. The Commission is looking for the statewide ESInet to include physically redundant connections into each of the regional host systems. The current regional configuration is depicted in the diagram (Figure 1) below; however, it is anticipated that over the next 12 to 18 months, additional PSAPs will join one of the different regions or a new region may be formed. Updated regional information can be found on the Public Service Commission's website at www.psc.nebraska.gov.

FIGURE 1

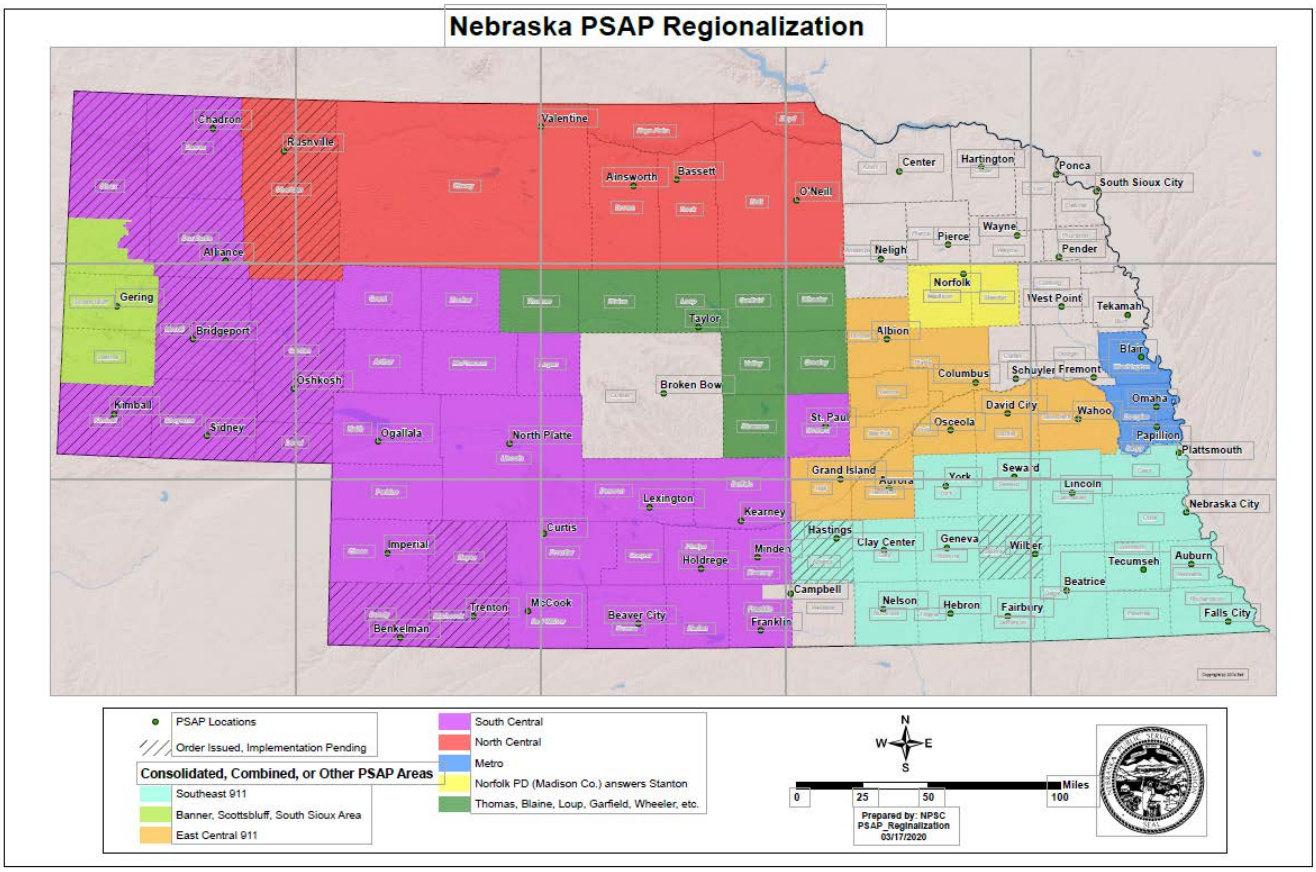

Estimated Regions (subject to change): South Central/Panhandle=Region 1, Southeast 911=Region 2, East Central 911 (including Custer County)=Region 3, Metro=Region 4, North Central=Region 5, Norfolk PD=North East=Region 6, Metro West (anticipated Dodge, Colfax, Cuming, and Burt Counties)=Region 7

B. Composition of the Request for Proposal

This RFP is composed of two elements: Emergency Services Internet Protocol [IP] Network (ESInet) and Next Generation Core Services (NGCS). Bidders may respond to a single element (Option A- ESInet or Option B - NGCS) or both elements (Option C – ESInet and NGCS. The State will evaluate all conforming proposals. A highest scoring bidder will be identified for each of the options (A, B, and C) The State reserved the right to award any and all options at its sole discretion.

The statewide NG911 initiative will focus on two primary areas, the ESInet and NGCS.

1. Option A: Deployment of an ESInet

With the deployment of a statewide ESInet, the Commission is seeking a solution that connects each regional host to the statewide ESInet. Key project elements for ESInet deployment include, but are not limited to:

- **a.** Deployment of a public safety-grade network that is monitored and managed to ensure security, reliability and high availability;
- **b.** Implementation of a network that is affordable and provides a consistent level of service to all PSAPs throughout the state;
- **c.** Development of a phased implementation approach that minimizes service impact to PSAP operations; and,
- **d.** Cooperation and coordination with the NGCS provider throughout and after implementation.

2. Option B: Deployment of Next Generation Core Services (NGCS)

The Commission is seeking an NG911 call-delivery system that provides highly available call routing and delivery to the regional end points throughout the state. Key project elements for NGCS deployment include but are not limited to:

- **a.** Deployment of monitored and managed core services that are redundant, resilient, sustainable, and provide an upgrade path to new technologies as NG911 services evolve;
- **b.** Transition to the use of Geographic Information System (GIS) data for geospatial call routing;
- **c.** Planned transition timelines that limit the overlap between the legacy selective router network and NGCS; and,
- **d.** The ability to support various types of requests for assistance including calls, text messages, video messages, additional data, etc.

3. Option C: Deployment of an ESInet and NGCS

Includes all requirements of both Option A and Option B.

Please note that proposals may be submitted for all of the desired services or a portion of the services based on Bidder capabilities. For example, a network provider may bid only the ESInet portion of the proposal and not the NGCS.

The Commission's intent is to release an RFP soon after the release of the ESInet/NGCS RFP that addresses the connectivity from the host locations to the regional PSAP locations.

C. Bidder Requirements:

1. Bidders should include with their response:

- **a.** Configuration Solution – A diagram showing the major components (hardware, software, and network layout) for the proposed system, accompanied by tables containing short descriptions of the diagrammed components in terms of their value or benefit to the Commission and the Public Safety Answering Points (PSAPs).
- **b.** Attachments – Cost Proposal, with a detailed description of its firm fixed pricing.
- **c.** Appendices – The Bidder may include appendices and reference them from within the proposal response. This is particularly appropriate for lengthy responses on a single subject. Understanding the intent of the Bidder shall be possible without the reading of the appendices.
- **d.** Brochures – Hardware, software, or service brochures may be submitted with response where appropriate.

D. General Requirements – Technical

1. General requirements – Commission Requirements

a. Industry Standards

The Commission seeks a standards-based solution that complies with nationally accepted standards and requirements applicable to ESInet architecture, security, and interface functionality. All aspects of the Bidder's proposed system design, deployment, operation, and security shall be in full compliance with the standards, requirements, and recommendations located in the Table 1: Adopted Standards. Standards Development Organizations (SDOs) include:

i. Association of Public Safety Communications Officials (APCO)
ii. The Monitoring Association (TMA)
iii. National Emergency Number Association (NENA)
iv. Alliance for Telecommunications Industry Solutions (ATIS)
v. Department of Justice (DOJ)
vi. Internet Engineering Task Force (IETF)
vii. North American Electric Reliability Corporation (NERC)
viii. National Institute of Standards and Technology (NIST)
ix. Telecommunications Industry Association (TIA)

Table 1: Adopted Standards

SDO	Standard ID	Standard Title	Standard Description	Latest Revision/ Release Date or The Most Current
ATIS	ATIS-0500017	Considerations for an Emergency Services Next Generation Network (ES-NGN)	Identifies standards and standards activities that are relevant to the evolution of emergency services networks in the context of next-generation telecommunications networks.	Version 1 June 2009
DOJ	CJISD-ITS-DOC-08140-5.6	Criminal Justice Information Services (CJIS) Security Policy	Provides information security requirements, guidelines, and agreements reflecting the will of law enforcement and criminal justice agencies for protecting the sources, transmission, storage, and generation of criminal justice information.	Version 5.6 June 5, 2017
IETF	RFC 3261	SIP: Session Initiation Protocol	Describes the SIP, an application-layer control (signaling) protocol for creating, modifying, and terminating sessions (including Internet telephone calls, multimedia distribution, and multimedia conferences) with one or more participants.	Version 1 July 7, 2002
IETF	RFC 3986	Uniform Resource Identifier (URI): Generic Syntax	Defines the generic URI syntax and a process for resolving URI references, along with guidelines and security considerations for the use of URIs on the Internet.	Version 1 January 2005
NENA/ APCO	REQ-001.1.2-2018	Next Generation 911 PSAP Requirements	Provides requirements for functions and interfaces between an i3 PSAP and NGCS, and among functional elements associated with an i3 PSAP.	Version 1.2 April 5, 2018
NENA/ APCO	INF-005	Emergency Incident Data Document (EIDD) Information Document	Provides a recommended list of data components, their relationships to each other, the data elements contained within each data component, and the registries that control the available values for appropriate data elements. Initiates the process to create a National Information Exchange Model (NIEM).	February 21, 2014 Scheduled to be replaced by a standards document

SDO	Standard ID	Standard Title	Standard Description	Latest Revision/ Release Date or The Most Current
NENA	STA-015.10-2018	Standard Data Formats for 911 Data Exchange & GIS Mapping	Establishes standard formats for Automatic Location Identification (ALI) data exchange between service providers and Database Management System (DBMS) providers, a GIS data model, a data dictionary, and formats for data exchange between the ALI database and PSAP controller equipment.	Version 10 August 12, 2018
NENA	STA-008.2-2014	Registry System Standard	Describes how registries (lists of values used in NG911 functional element standards) are created and maintained.	Version 2 October 6, 2014
NENA	STA-010.2-2016	Detailed Functional and Interface Specifications for the NENA i3 Solution	Builds upon prior NENA publications including i3 requirements and architecture documents and provides additional detail on functional standards.	Version 2 September 10, 2016
NENA	INF-016.2-2018	Emergency Services IP Network Design for NG911 (ESIND)	Provides information that will assist in developing the requirements for and/or designing an i3-compliant ESInet.	Version 1 April 5, 2018
NENA	75-001	Security for Next Generation 911 (NG-SEC)	Establishes the minimal guidelines and requirements for levels of security applicable to NG911 entities.	Version 1 February 6, 2010
NENA	INF-015.1-2016	NG911 Security Information Document	Provides mechanisms and best practices for cybersecurity for i3 systems	Version 1 December 8, 2016
NERC	CIP 002-CIP 009	Critical Infrastructure Protection	Addresses the security of cyber assets essential to the reliable operation of the nation's critical infrastructure.	Version 1 December 16, 2009
NIST	FIPS 140-33	Security Requirements for Cryptographic Modules	Specifies security requirements that will be satisfied by a cryptographic module utilized with a security system protecting sensitive but unclassified information.	Version 2 March 22, 2019
NIST	Cybersecurity Framework	Framework for Improving Critical Infrastructure Cybersecurity	Provides standards, guidelines, and best practices that promote the protection of critical infrastructure.	Version 1.1 April 16, 2018
TIA	TIA-942-A	Telecommunications Infrastructure Standard for Data Centers	Specifies the minimum requirements for telecommunications infrastructure of data centers and computer rooms, including single-tenant enterprise data centers and multi-tenant Internet-hosting data centers.	Revision A March 2014

As industry standards evolve, the Bidder's solution shall be upgraded to maintain compliance with the current version of established industry standards. The Bidder's solution shall support new ESInet, NGCS and security industry standards within 18 months of ratification of applicable industry standards at no additional cost to the State. Compliance requirements apply also to the supporting standards referenced within each standard. As solution updates are made to maintain compliance, the solution shall not abandon services or feature functionality in place at the time of the solution upgrade. The Bidder shall uncover any performance or feature changes prior to the upgrade and report them to the Commission for approval.

b. Public Safety-Grade Definition

The national standards listed in this document provide standards and requirements an IP network and core functions shall meet or exceed to be considered an ESInet. The term "public safety-grade" has been utilized to refer to this level of standards compliance; however, a universal definition of this term has not been proposed by a Standards Development Organization (SDO) or accepted by

the public safety community. For the purpose of the requirements associated with this ESInet and NGCS design and deployment, the following metric is used to define public safety-grade:

i. Reliability:
"Reliability" is the ability of a system or component to perform the required functions under stated conditions for a specified period of time. The traditional measure of system or component reliability is Mean Time Between Failure (MTBF). The required MTBF must result in system reliability of 0.99999 as recommended in NENA-INF-016.2-2018, Section 2.10.1.

ii. Availability:
"Availability" is the degree to which a system or component is operational and accessible when required for use. System availability is dependent upon the Mean Time to Repair (MTTR) calculation, which measures the time it takes to recover from component failure, a failed system upgrade, operator error, or other scheduled and unscheduled system interruption. Downtime must not exceed five (5) minutes per year, or 99.999 percent availability, as recommended in NENA-INF-016.2-2018, Section 2.10.1.

iii. Security:
Secure communications must be retained through the following measures, as recommended in NENA-INF-015.1-2016, Section 3.2:

- **a)** Rivest–Shamir–Adleman (RSA)-based public-key cryptography using X.509 certificates to authenticate elements, agencies, and agents. Mutual authentication must exist between both ends of a communication.
- **b)** An eXtensible Access Control Markup Language (XACML)-based Data Rights Management (DRM) system to control authorization.
- **c)** Advanced Encryption Standards (AES) based encryption to provide confidentiality.
- **d)** Secure Hash Algorithm (SHA)-based digest-based digital hashing to provide integrity protection.
- **e)** Dsig-based digital signatures to provide non-repudiation.

iv. Network Traffic Restrictions:

The established metrics in this definition can be achieved through system and component redundancy, diversity, resiliency, and other similar engineering methodologies. When the term "public safety-grade" is applied in this document, the Bidder shall describe how bidder's network and core service system and components for critical functions either meets or exceeds the standards-based, public safety-grade definition .

When this term is used in this document to describe the required level of service for the ESInet, and NGCS, functionality, the Bidder shall confirm that its service and components meet or exceed both the national standards listed in Table1 and the public safety-grade definition.

VI. PROPOSAL INSTRUCTIONS

This section documents the requirements that should be met by bidders in preparing the Technical and Cost Proposal. Bidders should identify the subdivisions of "Project Description and Scope of Work" clearly in their proposals; failure to do so may result in disqualification. Failure to respond to a specific requirement may be the basis for elimination from consideration during the State's comparative evaluation.

Proposals are due by the date and time shown in the Schedule of Events. Content requirements for the Corporate Overview, Technical and Cost Proposal are presented separately in the following subdivisions, format and order:

A. PROPOSAL SUBMISSION

1. CORPORATE OVERVIEW

The Corporate Overview section of the Technical Proposal should consist of the following subdivisions:

a. BIDDER IDENTIFICATION AND INFORMATION

The bidder should provide the full company or corporate name, address of the company's headquarters, entity organization (corporation, partnership, proprietorship), state in which the bidder is incorporated or otherwise organized to do business, year in which the bidder first organized to do business and whether the name and form of organization has changed since first organized.

b. FINANCIAL STATEMENTS

The bidder should provide financial statements applicable to the firm. If publicly held, the bidder should provide a copy of the corporation's most recent audited financial reports and statements, and the name, address, and telephone number of the fiscally responsible representative of the bidder's financial or banking organization.

If the bidder is not a publicly held corporation, either the reports and statements required of a publicly held corporation, or a description of the organization, including size, longevity, client base, areas of specialization and expertise, and any other pertinent information, should be submitted in such a manner that proposal evaluators may reasonably formulate a determination about the stability and financial strength of the organization. Additionally, a non-publicly held firm should provide a banking reference.

The bidder must disclose any and all judgments, pending or expected litigation, or other real or potential financial reversals, which might materially affect the viability or stability of the organization, or state that no such condition is known to exist.

The State may elect to use a third party to conduct credit checks as part of the corporate overview evaluation.

c. CHANGE OF OWNERSHIP

If any change in ownership or control of the company is anticipated during the twelve (12) months following the proposal due date, the bidder should describe the circumstances of such change and indicate when the change will likely occur. Any change of ownership to an awarded bidder(s) will require notification to the State.

d. OFFICE LOCATION

The bidder's office location responsible for performance pursuant to an award of a contract with the State of Nebraska should be identified.

e. RELATIONSHIPS WITH THE STATE

The bidder should describe any dealings with the State over the previous five (5 years. If the organization, its predecessor, or any Party named in the bidder's proposal response has contracted with the State, the bidder should identify the contract number(s) and/or any other information available to identify such contract(s). If no such contracts exist, so declare.

f. BIDDER'S EMPLOYEE RELATIONS TO STATE

If any Party named in the bidder's proposal response is or was an employee of the State within the past five (5) months, identify the individual(s) by name, State agency with whom employed, job title or position held with the State, and separation date. If no such relationship exists or has existed, so declare.

If any employee of any agency of the State of Nebraska is employed by the bidder or is a subcontractor to the bidder, as of the due date for proposal submission, identify all such persons

by name, position held with the bidder, and position held with the State (including job title and agency). Describe the responsibilities of such persons within the proposing organization. If, after review of this information by the State, it is determined that a conflict of interest exists or may exist, the bidder may be disqualified from further consideration in this proposal. If no such relationship exists, so declare.

g. CONTRACT PERFORMANCE

If the bidder or any proposed subcontractor has had a contract terminated for default during the past five (5) years, all such instances must be described as required below. Termination for default is defined as a notice to stop performance delivery due to the bidder's non-performance or poor performance, and the issue was either not litigated due to inaction on the part of the bidder or litigated and such litigation determined the bidder to be in default.

It is mandatory that the bidder submit full details of all termination for default experienced during the past five (5)) years, including the other Party's name, address, and telephone number. The response to this section must present the bidder's position on the matter. The State will evaluate the facts and will score the bidder's proposal accordingly. If no such termination for default has been experienced by the bidder in the past five (5) years, so declare.

If at any time during the past five (5) years, the bidder has had a contract terminated for convenience, non-performance, non-allocation of funds, or any other reason, describe fully all circumstances surrounding such termination, including the name and address of the other contracting Party.

h. SUMMARY OF BIDDER'S CORPORATE EXPERIENCE

The bidder should provide a summary matrix listing the previous projects similar to this solicitation in size, scope, and complexity. The State will use no more than three (3) narrative project descriptions submitted by the bidder during its evaluation of the proposal.

The bidder should address the following:

v. Provide narrative descriptions to highlight the similarities between the bidder's experience and this solicitation. Provide the number of ESInet and NGCS solutions implemented by the bidder that are in production today and lessons learned throughout the project that will be applied to the deployment of the Nebraska ESInet and NGCS solution. These descriptions should include:

- **a)** The time period of the project;
- **b)** The scheduled and actual completion dates;
- **c)** The bidder's responsibilities;
- **d)** For reference purposes, contracting entity name, contact name, contact title, contact email address, and contact telephone number. The Commission may request that references authorize a site visit and the opportunity to review event logs.); and
- **e)** Each project description should identify whether the work was performed as the prime Contractor or as a subcontractor. If a bidder performed as the prime Contractor, the description should provide the originally scheduled completion date and budget, as well as the actual (or currently planned) completion date and actual (or currently planned) budget.

vi. Contractor and subcontractor(s) experience should be listed separately. Narrative descriptions submitted for subcontractors should be specifically identified as subcontractor projects.

vii. If the work was performed as a subcontractor, the narrative description should identify the same information as requested for the Contractors above. In addition, subcontractors should identify what share of contract costs, project responsibilities, and time period were performed as a subcontractor.

i. SUMMARY OF BIDDER'S PROPOSED PERSONNEL/MANAGEMENT APPROACH

The bidder should present a detailed description of its proposed approach to the management of the project.

The bidder should identify the specific professionals who will work on the State's project if their company is awarded the contract resulting from this solicitation. The names and titles of the team proposed for assignment to the State project should be identified in full, with a description of the team leadership, interface and support functions, and reporting relationships. The primary work assigned to each person should also be identified. Project managers assigned to the project shall be certified Project Management Professionals (PMP) and are highly encouraged to possess the Emergency Number Professional (ENP) certification.

The bidder should provide resumes for all personnel proposed to work on the project. The State will consider the resumes as a key indicator of the bidder's understanding of the skill mixes required to carry out the requirements of the solicitation in addition to assessing the experience of specific individuals.

Resumes should not be longer than three (3) pages. Resumes should include, at a minimum, academic background and degrees, professional certifications, understanding of the process, and at least three (3) references (name, address, and telephone number) who can attest to the competence and skill level of the individual. Any changes in proposed personnel shall only be implemented after written approval from the State.

j. SUBCONTRACTORS

If the bidder intends to subcontract any part of its performance hereunder, the bidder should provide:

i. name, address, and telephone number of the subcontractor(s);
ii. specific tasks for each subcontractor(s);
iii. percentage of performance hours intended for each subcontract; and
iv. total percentage of subcontractor(s) performance hours.

2. TECHNICAL APPROACH

The technical approach section of the Technical Proposal should consist of the following subsections:

a. Understanding of the project requirements;
b. Proposed development approach;
c. Attachment C - Technical Requirements Option A, B, and/or C;
d. Proposed high-level project plan
e. Schedule for the lifecycle of this project; and
f. Cost Proposal

Form A
Bidder Proposal Point of Contact
Request for Proposal Number 6264 Z1

Form A should be completed and submitted with each response to this solicitation. This is intended to provide the State with information on the bidder's name and address, and the specific person(s) who are responsible for preparation of the bidder's response.

Preparation of Response Contact Information	
Bidder Name:	
Bidder Address:	
Contact Person & Title:	
E-mail Address:	
Telephone Number (Office):	
Telephone Number (Cellular):	
Fax Number:	

Each bidder should also designate a specific contact person who will be responsible for responding to the State if any clarifications of the bidder's response should become necessary. This will also be the person who the State contacts to set up a presentation/demonstration, if required.

Communication with the State Contact Information	
Bidder Name:	
Bidder Address:	
Contact Person & Title:	
E-mail Address:	
Telephone Number (Office):	
Telephone Number (Cellular):	
Fax Number:	

Form B
Notification of Intent to Attend Pre-Proposal Conference
Request for Proposal Number 6264 Z1

Bidder Name:	
Bidder Address:	
Contact Person:	
E-mail Address:	
Telephone Number:	
Fax Number:	
Number of Attendees:	

The "Notification of Intent to Attend Pre-Proposal Conference" form **should** be submitted to the State Purchasing Bureau via e-mail (as.materielpurchasing@nebraska.gov), hand delivered or US Mail by the date shown in the Schedule of Events.

REQUEST FOR PROPOSAL FOR CONTRACTUAL SERVICES FORM

By signing this Request for Proposal for Contractual Services form, the bidder guarantees compliance with the procedures stated in this Solicitation, and agrees to the terms and conditions unless otherwise indicated in writing and certifies that bidder maintains a drug free work place.

CONTRACTOR MUST COMPLETE THE FOLLOWING

Per Nebraska's Transparency in Government Procurement Act, Neb. Rev Stat § 73-603 DAS is required to collect statistical information regarding the number of contracts awarded to Nebraska Contractors. This information is for statistical purposes only and will not be considered for contract award purposes.

_____ NEBRASKA CONTRACTOR AFFIDAVIT: Bidder hereby attests that bidder is a Nebraska Contractor. "Nebraska Contractor" shall mean any bidder who has maintained a bona fide place of business and at least one employee within this state for at least the six (6) months immediately preceding the posting date of this Solicitation.

_____ I hereby certify that I am a Resident disabled veteran or business located in a designated enterprise zone in accordance with Neb. Rev. Stat. § 73-107 and wish to have preference, if applicable, considered in the award of this contract.

_____ I hereby certify that I am a blind person licensed by the Commission for the Blind & Visually Impaired in accordance with Neb. Rev. Stat. §71-8611 and wish to have preference considered in the award of this contract.

FORM MUST BE SIGNED USING AN INDELIBLE METHOD OR BY DOCUSIGN

FIRM:	
COMPLETE ADDRESS:	
TELEPHONE NUMBER:	
FAX NUMBER:	
DATE:	
SIGNATURE:	
TYPED NAME & TITLE OF SIGNER:	

Attachment A – Revision Two
PSAP Host EndPoints, Equipment, and Selective

PSAP Host Locations

Region	Site Name	Location
South Central Region	Buffalo County	2025 Avenue A Kearney, NE 68847
South Central Region	Dawson County	709 North Grant Street Lexington, NE 68850
Southeast Region	Windstream Data Center	1440 M Street Lincoln, NE 68508
Southeast Region	Windstream Data Center	5707 South 27th Street Lincoln, NE 68512
East Central Region	City of Columbus	2419 14th Street Columbus, NE 68601
East Central Region	Saunders County	387 N. Chestnut Wahoo, NE 68066
North Central Region	Boyd/Holt	200 North 4th Street O'Neill, NE 68763
North Central Region	Cherry County	365 N. Main Street Valentine, NE 69201
Metro Region	Douglas County	3603 N 156 St, Omaha, NE 68116
Metro Region	Pottawattamie County, IA	227 South 6th Street Council Bluffs, IA 50501
Northeast Region	Norfolk 911	202 North 7th Street Norfolk, NE 68701
Northeast Region	South Sioux City 911	701 West 29th Street South Sioux City, NE 68776
Metro West	Fremont/Dodge County 911	725 North Park Ave Fremont, NE 68025
Metro West	Colfax County 911	411 East 11th Street Schuyler, NE 68661

Selective Router Provider	**Location**
CenturyLink	Council Bluffs, Iowa
CenturyLink	Grand Island, Nebraska
CenturyLink	Norfolk, Nebraska
CenturyLink	Scottsbluff, Nebraska
Windstream	Lincoln, Nebraska

Attachment A - PSAP Host EndPoints, Equipment, and
Selective Router Locations

PSAP NAME	CPE TYPE	CPE MODEL
East Central Region		*Software Version*
Boone County	Emergency Call Works	Call Station 4.2.8.2.8S533
Butler County	Emergency Call Works	Call Station 4.2.8.2.85533
City of Columbus	Emergency Call Works	Call Station 4.2.8.2.85533
City of Grand Island	Emergency Call Works	Call Station 4.2.8.2.85533
Hamilton County	Emergency Call Works	Call Station 4.2.8.2.85533
Polk County	Emergency Call Works	Call Station 4.2.8.2.85533
Saunders County	Emergency Call Works	Call Station 4.2.8.2.85533
Metro Region		*Software Version*
Douglas County	Viper	Power 911 5.5.3
Sarpy County	Viper	Power 911 5.5.3
Washington County 911	Viper	Power 911 5.5.3
North Central		*Software Version*
Boyd-Holt Counties Joint E911	SolaCom	16.1.02 PAC II
Brown County	SolaCom	16.1.02 PAC II
Cherry County	SolaCom	16.1.02 PAC II
Rock County	SolaCom	16.1.02 PAC II
Sheridan County	SolaCom	16.1.02 PAC II
South Central		*Software Version*
Buffalo County	Viper	Positron 6.1 KB 6518 6.1.0.988
Chase County	Viper	Positron 6.1 KB 6518 6.1.0.988
Cheyenne County	Viper	Positron 6.1 KB 6518 6.1.0.988
City of Alliance	Viper	Positron 6.1 KB 6518 6.1.0.988
City of Holdrege	Viper	Positron 6.1 KB 6518 6.1.0.988
City of McCook	Viper	Positron 6.1 KB 6518 6.1.0.988
City of North Platte	Viper	Positron 6.1 KB 6518 6.1.0.988
Dawson County	Viper	Positron 6.1 KB 6518 6.1.0.988
Dundy County	Viper	Positron 6.1 KB 6518 6.1.0.988
Franklin County	Viper	Positron 6.1 KB 6518 6.1.0.988
Frontier County	Viper	Positron 6.1 KB 6518 6.1.0.988
Furnas County	Viper	Positron 6.1 KB 6518 6.1.0.988
Garden County	Viper	Positron 6.1 KB 6518 6.1.0.988
Hitchcock County	Viper	Positron 6.1 KB 6518 6.1.0.988
Howard County	Viper	Positron 6.1 KB 6518 6.1.0.988
Kearney County	Viper	Positron 6.1 KB 6518 6.1.0.988

Attachment A - PSAP Host EndPoints, Equipment, and
Selective Router Locations

Keith County	Viper	Positron 6.1 KB 6518 6.1.0.988
Kimball County	Viper	Positron 6.1 KB 6518 6.1.0.988
Morrill County	Viper	Positron 6.1 KB 6518 6.1.0.988
South East		*Software Version*
Cass County Sheriffs Office	Airbus/Vesta	R6.1 HF1
City of Beatrice	Airbus/Vesta	R6.1 HF1
City of Falls City	Airbus/Vesta	R6.1 HF1
City of Hastings	Airbus/Vesta	R6.1 HF1
City of Lincoln	Airbus/Vesta	R6.1 HF1
Clay County	Airbus/Vesta	R6.1 HF1
Fillmore County	Airbus/Vesta	R6.1 HF1
Jefferson County 911	Airbus/Vesta	R6.1 HF1
Johnson County	Airbus/Vesta	R6.1 HF1
Nemaha County	Airbus/Vesta	R6.1 HF1
Nuckolls County 911	Airbus/Vesta	R6.1 HF1
Otoe County Sheriff	Airbus/Vesta	R6.1 HF1
Saline County	Airbus/Vesta	R6.1 HF1
Seward County	Airbus/Vesta	R6.1 HF1
Thayer County Sheriff	Airbus/Vesta	R6.1 HF1
York County Sheriff	Airbus/Vesta	R6.1 HF1
Stand Alone		*Software Version*
Antelope County	Vesta	Airbus
Burt County	Viper	V-5.5.4.140 Power 911
Cedar County	Emergency Call Works	V 4.2.8.2.85533
City of Norfolk	Emergency Call Works	4.2
City of South Sioux City	Comtech/TCS Microdata	XSWITCH IP Controller & XT911 CPE
City of Wayne/Wayne County	Emergency Call Works	Call Station WM
Colfax County	Viper	V-5.5.4.149
Cuming County	Zetron Max	Call Taking 1.5.4.7
Custer County	Emergency Call Works	Motorola - 4.0.22
Dawes County	Viper	West Positron 5.1 Power 911 6.1
Dixon County	Emergency Call Works	R6.30
Dodge County 911 Board	Viper	5.5.3.118 West
Knox County	Emergency Call Works	Motorola Solution 4.2 Software
Mid Rivers 911 Center	Zetron	3300
Pierce County	Zetron	Max Call Taking
Region 26 Council	Emergency Call Works	Motorola
Scottsbluff County	Zetron	MAXX
Thurston County	Viper	

ATTACHMENT B – GIS DATA MODEL

Nebraska GIS Data Model (Microsoft Word Files

The Nebraska GIS data models are provided in the following links:

3-205. Street Centerlines

3-206. Address Points

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

Bidders are instructed to complete a Matrix for Emergency Services Internet Protocol (IP) network (ESInet). Bidders are required to describe in detail how bidder's proposed solution meets the conformance specification outlined within each Requirement. The matrix is used to document and evaluate bidder's response to the requirements.

The matrix should indicate how the bidder intends to comply with the requirement and the effort required to achieve that compliance. It is not sufficient for the bidder to simply state that it intends to meet the requirements of the RFP. PSC will consider any such response to the requirements in this RFP to be non-responsive and the bid may be rejected. The narrative should provide The Public Service Commission (PSC) with sufficient information to differentiate the bidder's business solution from other bidders' solutions. Bidder shall not refer to other sections as a response. Even if the response is an exact duplicate of a previous response, the details shall be provided in the same paragraph as the requirement. Bidder shall not include pricing information in the description and shall not refer the reader to pricing.

The bidder must ensure that the original requirement identifier and requirement description are maintained in the matrix as provided by PSC. Failure to maintain these elements may render the bid non-responsive and result in for rejection of the bidder.

The bidder's response to each of the below requirements shall include an indication on the level of compliance that can be met. (Complies, Complies Partially, Complies with Future Capability, Does Not Comply) Bidder shall respond by placing an "X" in only **one** checkbox per requirement. Failure to complete this process properly will be treated the same as "Does Not Comply," and may result in the rejection of the response form.

1. Complies: Bidder's proposal complies with the RFP requirements and the products/services are included in the base price, are currently developed, generally available, and successfully deployed. Responding with "Complies" or "Complies with Future Capability" shall mean the bidder's solution meets or exceeds the requirement regardless of any comments included as additional information.

2. Complies Partially: Bidder's proposal addresses the RFP requirements through another method that currently is developed and available for implementation (i.e., shall be generally available), or the solution complies with some, but not all of the requirements. Bidder is responsible for clearly explaining how the proposed solution does not fully comply.

3. Complies with Future Capability: The RFP requirements will be met with a capability delivered at a future date. This response shall include a calendar quarter and year in which the requirement will be met with a generally available product or service at no additional cost.

4. Does Not Comply: Bidder's proposal does not/cannot meet the specific RFP requirement.

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

Req Identifier	Requirement Description				
GEN-1	**General Requirements - Bidder Vision of NG911** The Commission is issuing this RFP for the purpose of selecting a qualified bidder that understands and can clearly demonstrate alignment with the industry's evolution to NENA i3 -compliant ESInet and NGCS solutions. Describe bidder's vision of NG911 and how bidder's vision aligns with NENA's i3 standard, bidder's approach to monitoring and supporting evolving standards and the bidder's level of involvement in standards development and Industry Collaboration Events (ICE).	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

GEN-2	**Proprietary Solutions and Standards** 1. Describe any use of proprietary standards, interfaces, or protocols in bidder's proposed solution. 2. Describe any patented technology in the proposed solution, who owns the patent and describe any licensing arrangements. Disclose any technological limitations, in the response.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

GEN-3	**System and Network Architecture** The Commission is seeking a Public Safety Grade Next Generation 911 System. System and network architecture, including the design and deployment of interface functions and security measures, shall comply with current NENA i3 requirements as established in NENA-STA-010.2-2016, NENA Detailed Functional and Interface Standards for the NENA i3 Solution. Describe how the solution meets or exceeds the requirements in Section V.D.1.b. of the RFP.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

GEN-4	**General Requirements – Capacity- Initial Design and Deployment** The bidder's initial design and deployment of the ESInet and NGCS elements, including all components and physical network segments, shall provide capacity that will support current and planned ESInet traffic and usage that occurs as a result of data sharing in, and between, all participating PSAPs, the Commission, and designated support agencies. Additionally, the system and network design shall allow for 50 percent traffic and usage growth for the life of the contract. All current and potential core functions and applications shall be considered, e.g., call-handling systems, CAD, logging, GIS data, streaming media, real-time text (RTT), IP traffic, traffic management systems, communications systems, and incident management systems. Describe how bidder's solution will meet or exceed the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

GEN-5	**Capacity - Scalable Deployment** As the Commission migrates toward a fully compliant NG911 environment, additional PSAP functions will transition to the systems and network. The bidder's systems and network solution shall be designed and deployed in a way that is easily scalable, with the capability to grow in both capacity and coverage without disruption in service. Describe in detail how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SEC 1	**Security - Cybersecurity** For the purposes of this RFP, cybersecurity (security) is considered to be the established systems and processes focused on protecting computers, networks, programs, and data from unintended or unauthorized access, modification, or destruction. **Security Requirements and Standards** The security requirements established in applicable standards listed in Section V.D.1. Table 1 of the RFP apply equally to all elements of the system requested in this RFP, including but not limited to components located in the following building types: 1. Data centers; 2. Network-housing structures ; and, 3. Regeneration sites and other buildings housing any element or device that is part of the overall system. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SEC 2	**Security Plan** A comprehensive security plan is a critical component of the Nebraska's NG911 network solution. Describe the security plan, including the 1. mitigation; 2. monitoring; 3. alerting and incident-response processes; and 4. provide information on specific hardware components and software systems incorporated in the proposed security plan. The proposed solution's security plan is required to utilize the latest NENA specifications and incorporate the intentions of the Communications Security, Reliability and Interoperability Council (CSRIC) and Task Force on Optimal PSAP Architecture (TFOPA) best practices.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SEC 3	**Security Compliance Matrix** Describe how the proposed solution addresses compliance in each of the following categories in NENA 75-502, NENA NG-SEC Audit Checklist.

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

Category
1. Senior Management Statement
2. Acceptable Use Policy
3. Authentication/Password Policy
4. Data Protection
5. Exception Request/Risk Assessment
6. Hiring Practices
7. Incident Response
8. Information Classification and Protection
9. Physical Security
10. Compliance Audits & Reviews
11. Network/Firewall/Remote Access
12. Security Enhancement Technical Upgrade
13. Technical Solutions Standards
14. Wireless Security

Bidder Detailed Response:

Any additional documentation can be inserted here:

SEC 4	**Predictive Analysis and Monitoring** Describe solution's capabilities to provide predictive analysis and modeling to combat security threats.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SEC 5	**Credentialing Process** Solution shall provide a process so that devices and carriers outside the IP network shall not have credentials, per NENA-STA-010.2-2016. Provide details regarding how the solution ensures that devices and carriers outside the IP network are not provided credentials.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SEC 6	**Third-Party Security Audits** Bidder shall allow for annual third-party security audits at the request and cost of the Commission. Describe bidder's current process for third party security audits.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SEC 7	**Physical Security** All structures outside the Commission's control that will house components of the ESInet and NGCS shall have security and access-control systems that ensure that only duly authorized individuals can access the areas housing the Commission's systems and network equipment. Any workstations or other equipment connected to, or capable of accessing, the ESInet and NGCS systems shall be housed in secured, access-controlled areas. Any devices, power distribution, and cross-connect panels feeding the cages or rooms housing the Commission's systems similarly shall be protected. Identify any elements that are not under the direct control of the bidder, and a description of the building's security and access-control systems shall be provided.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 1	**General Requirements – Network Operations Center (NOC)/Security Operations Center (SOC)**	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Centralized NOC/SOC All services and components deployed and interconnected as part of the solution shall be monitored 24 hours a day, 7 days a week, 365 days a year (24 x 7 x 365) by a centralized Network Operations Center (NOC) and Security Operations Center (SOC). These functions may be in separate buildings or combined in a single building located in the continental United States.				
	NOC/SOC Interoperability Contractor shall have the ability to communicate, troubleshoot and connect with other vendors NOCs should there be a different ESInet and NGCS provider. In addition, the Contractor shall interface with the NOCs that support the regions throughout the state. This shall include ebonding of the ticket systems to support transparency throughout the troubleshooting process.				
	NOC/SOC Operations Model Provide documentation including organizational structure and procedures that describe bidder's 1. NOC/SOC operations model, 2. Continuity Of Operations Plan (COOP), 3. problem and change management systems, 4. reporting systems, 5. escalation plan, and 6. conformance with best practices (Information Technology Infrastructure Library (ITIL) or equivalent methodology)) for service-delivery management. The Contractor shall confirm the requirement compliance of any interconnected network utilized by the Contractor not previously identified to the Commission.				
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 2	**NOC/SOC - Remote Connectivity Required** Contractor shall provide any network connectivity required to support Contractor's NOC/SOC services. Describe any remote connectivity required by the solution including, but not limited to, Virtual Private Network (VPN), phone-home connection, and tech support remote access.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 3	**NOC/SOC - Network Security Monitoring and Management** **Security Management Solution** The bidder's security management solution shall control access to network resources in accordance with public safety network security best practices such as NIST, NENA and the FCC to prevent sabotage, service interruption (intentional or unintentional) and the compromise of sensitive information. Security management shall comply with security- and data-integrity standards listed in Section V.D.1. Table 1 in the RFP, to monitor users logging into network resources and to refuse access to those who enter inappropriate access codes. The proposed IP network and systems shall support standard security policies that may include the use of firewall rules, Access -Control Lists (ACLs), Virtual Local-Area Networks (VLANs), VPNs, and Transport Layer Security (TLS) protocols to control network traffic and access. The systems shall support the use of software to detect and mitigate viruses, malware, and other attack vectors. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 4	**NOC/SOC - Connected Systems Compliance** Any system that connects to an IP network shall be required to comply with listed standards in Table 1, including security standards, and demonstrate compliance through an initial and recurring audit. **Security Reports and Recommendations** Contractor shall provide, within 30 days of the end of each calendar month, security summary reports and recommended improvements on a monthly basis (at a minimum), including incidents and incident response; building, facility, and network access reports, including failed attempts; and updates or changes to security systems and software. All related data shall be retained for the period of the contract and provided to the Commission electronically at the end of the contract. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 5	**NOC/SOC – Connected Systems Compliance** **Support for Similar Solutions** Provide details concerning how bidder provides security monitoring and management for similarly deployed production solution. Provide details, including drawings, which explain how the proposed solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 6	**NOC/SOC - Physical Access Monitoring and Management** Contractor shall track and log all physical access to structures housing IP network components serving the Commission or have the capability to obtain access logs for structures not under immediate control of the bidder. Reports may be requested and shall be made available for review upon request. All related data shall be retained for the period of the contract and provided to the Commission electronically at the end of the contract. Provide a detailed explanation of bidder's processes and procedures for logging physical access to ESInet /NGCS components, and how the bidder's solution generates the required reports.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 7	**NOC/SOC - Incident Management System** The bidder's incident management system shall log all support requests, both from users and those automatically generated. 1. Provide examples of monthly reports detailing tickets opened, pending, resolved, and closed. 2. Provide a matrix outlining Service Impact Levels in a detailed response, to include notification times and response times.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 8	**NOC/SOC - Change Management System** **Change Management Review System** Describe bidder's change management system and the ability to provide the Commission's program manager and designated PSAP representatives with the ability to review proposed change requests and the client approval process. The Contractor shall provide monthly reports detailing change tickets opened, pending, resolved, and closed.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 9	**NOC/SOC - Change Management System** **Change Management Tools** Provide detailed descriptions of any other tools bidder intends to use to provide access to the change management system, such as web portals and client software.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 10	**NOC/SOC – Change Management System** **Change Testing and Training Environment** A non-production ESInet replica / NGCS replica, test lab, or similar system shall be established to test, and exercise proposed upgrades, third-party interfaces, and applications prior to release in live production. This system also could be leveraged for training purposes. Provide detailed descriptions of how the solution satisfies this function in the change management process.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 11	**NOC/SOC – Change Management System** **Change Management Process** 1. Outline bidder's proposed change management process. The ITIL change management standard methods and procedures are preferred. 2. Include a description of the process for notifying the Commission and affected PSAPs. Notification shall be made no less than ten (10) business days in advance of the change, except in emergency situations, in which case notification shall be provided immediately. 3. Include explanation of solution's Fault, Configuration, Accounting, Performance, and Security (FCAPS) procedures. 4. Provide a detailed explanation describing how the proposed solution meets or exceeds the requirements for the ITIL and FCAPS processes.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 12	**NOC/SOC - Network Management System** **System and Network Management Software** Software packages are widely available for capturing, analyzing, and reporting the network's health based on the Simple Network Management Protocol (SNMP) traffic it receives. Provide the name and description of the management software that will be implemented including all functional modules associated with it (e.g., reporting, backup, and IP address management).	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 13	**NOC/SOC – Network Management System** **NMIS Interworking with Elements and Services** Provide a detailed explanation and associated drawings explaining how the proposed solution interworks with all of the various elements and services of the proposed systems and network elements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 14	**NOC/SOC - Network Event Logging** **System and Network Event Logging and Reporting** The network management system shall capture real-time and historical tracking of network and system events, as well as event resolution of the IP network and attached systems. This is for logging errors and statistical information related to the health of the network and attached systems. Events shall include, but are not limited to, hardware (power, processor, interface cards, ports), software (operating system errors, database errors, application errors and failures), network (Quality of Service (QoS), Mean Opinion Score (MOS), jitter, latency, and packet loss)). The events recorded in this section are not related to the event logging of 911 requests for service as part of NGCS Option B requirement NGCS 13 Event Logging. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 15	**NOC/SOC - Network Event Logging** **Management System Interface to Incident Management System** This system should be part of, or interfaced with, the bidder's incident management system, or contain cross-reference abilities. Contractor shall maintain historical information for the term of the contract and provide copies of the data to the Commission on request, and at the end of the contract. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 16	**NOC/SOC - Network Event Logging** **Interfacing Between Solutions** Provide a detailed explanation and associated drawings explaining bidder's processes, tools, and procedures for interfacing with the bidder's monitoring solutions.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 17	**NOC/SOC - Access to Technical Staff** 1. Detail the procedures by which bidder communicates with technical personnel from participating subcontractors, the Commission, and the participating PSAPs. 2. Specify the level of assistance required from such technical personnel to resolve service-related issues.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 18	**NOC/SOC - Notification** Specify how the bidder's NOC informs the Commission and the affected PSAPs or their designees of problems with the network, scheduled service and maintenance outages, and upgrades. Include all methods of notification used. Notifications for scheduled maintenance or outages shall be made no less than ten (10) business days in advance, except for emergency situations in which case, notification will be given immediately. Tickets related to the services delivered to subcontractors shall be forwarded automatically. Notification shall be provided via multiple communications means to the Commission and applicable PSAPs. Entities requiring notification may change, depending on the alarm or incident. Provide a detailed explanation explaining how the solution meets or exceeds the above requirements, including the methods of communications used.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 19	**NOC/SOC - Executive Dashboard** Contractor shall provide a web-based executive dashboard or similar tool, providing near real-time visibility of network status displayed geographically with service impact levels color-coded. Open ticket status shall be available to users through this dashboard. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 20	**NOC/SOC - Escalation Procedures** 1. Outline a detailed regional-level escalation process to be used during incidents that affect service, particularly those that result in critical service outages. 2. Describe how discrepancies in the perception of service level agreement (SLA) incident levels may be escalated and addressed. These procedures shall be maintained and accessible via an online portal. This escalation notification process shall be integrated with the notification processes described above, based on the problem reported.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NOC/ SOC 21	**NOC/SOC -Statement on Standards for Attestation Engagement Number 16** Bidder shall demonstrate compliance with the Statement on Standards for Attestation Engagements Number 16 (SSAE 16). The applicable report from an SSAE 16 engagement is the Service Organization Controls 1 (SOC 1) report. 1. If bidder is proposing services, provide a detailed explanation of how bidder has complied with SSAE 16 for similar solutions, and how this would be implemented with the Commission's NG911 implementation. 2. Provide with the detailed explanation and graphical representation explaining how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 22	**NOC / SOC - Configuration Backup and Restoration** 1. The bidder shall deploy and provide detailed descriptions of bidder and any subcontractors' capabilities to automatically or routinely back up configuration data and define the conditions under which the configuration of network elements, such as routers or switches, will be restored, and the process that will be used. A reporting process shall confirm regularly scheduled (e.g., monthly, quarterly) backup and restoration, and provide sufficient details on backup and restoration activity. 2. Describe the bidder's abilities to perform on-demand backups, such as at the end of a successful configuration change. A reporting process shall confirm on-demand backup and restoration and provide sufficient details on backup and restoration activity. 3. Describe bidder's COOP as it applies to the NGCS and delivery of 911 traffic via IP network to the respective host locations. 4. Provide a detailed explanation and any associated drawings explaining how the proposed processes and procedures provide the ability to manage these configuration backup and restoration processes in a manner that has no negative impact on the total Commission ESInet and NGCS solution.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NOC/ SOC 23	**NOC/SOC - Third-Party Management** The Commission is seeking the optimum value provided by best-of-class products and services integrated as part of the total IP network solution. This may present a situation where no single manufacturer or supplier can provide a public safety-grade, unified NOC/SOC accountable for all components, products, and services that comprise the Commission's total IP network solution. Consequently, the Commission may find it beneficial to have a third party provide that overarching NOC/SOC service. A third-party NOC/SOC provider may be responsible for functioning as an umbrella for monitoring all of the Contractor's products and services, including collaboration with the Contractor's NOC/SOC. To facilitate that capability, the third-party NOC/SOC shall have a view into all elements that are under SLAs. Bidder's NOC/SOC NMIS and/or incident-tracking tools shall have the ability to perform eBonding, which enables bidirectional data synchronization. 2. Provide a detailed narrative discussing bidders experience in providing access to third-party NOC/SOC, overarching support as well as for each of the requirements in Third-Party NOC/SOC Support below.				
	Bidder Response:				

1. In support of the Commission's consideration of such an option, bidder shall indicate the compliance level of experience in providing access to third-party NOC/SOC overarching support, as related to the requirements identified in the table below.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
Change management processes				
Coordinating and managing trouble tickets to resolution from bidder and multiple suppliers.				
Trouble ticket report management (reports may be daily, weekly, monthly, quarterly, or yearly).				
Notification processes for bidder and suppliers, and any other entities or people designated by the Commission.				
System alarm access in the form of SNMP or syslog data.				
Experience and processes for interworking of multiple public safety data system suppliers.				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SLA 1	**General Operations - Service Level Agreements** **System Capacities and Performance** 1. Provide capacity levels of each element of the IP Network This may be in terms of busy-hour calls, network bandwidth, or any other applicable measure. The proposed solution shall be capable of handling current and planned IP traffic and usage plus 50 percent capacity growth over the term of the contract. 2. Specify lead times required to increase capacities on each element of the IP network.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SLA 2	**Service Level Agreements - System Performance** **Network Latency** Specify the guaranteed maximum latency across the backbone network under a full-load condition, and include how that information will be gathered, calculated and provided to the Commission and the affected PSAPs.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SLA 3	**Service Level Agreements - System Performance** **Point of Presence (POP) to POP** Specify the guaranteed maximum latency from interconnection facility to interconnection facility, and include how that information will be gathered, calculated and provided to the Commission and the affected PSAPs.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SLA 4	**Service Level Agreements - System Performance** **POP to Endpoints** Specify the guaranteed maximum latency from interconnection facilities to the network interface device located at the entrance to the hosts' premises, and include how that information will be gathered, calculated and provided to the Commission and the affected PSAPs.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 5	**Service Level Agreements - System Performance** **Mean Opinion Score (MOS)** Bidder shall guarantee, in the response, a consistent MOS of 4.0 or better across all network links transporting media streams from interconnection facilities to the network interface device located at the entrance to the hosts' premises, and include how that information will be gathered, calculated and provided to the Commission and affected PSAPs monthly or as requested. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 6	**Service Level Agreements - System Performance** **Packet Loss** Specify the guaranteed maximum end-to-end packet loss across the network. This specification also shall include any loss characteristics associated with another carrier's network or any applicable wireless links, including how that information will be gathered, calculated and provided to the Commission and affected PSAPs monthly or as requested.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 7	**Service Level Agreements - System Performance** **Network Latency** Specify the guaranteed maximum end-to-end network latency across the network. This specification also shall include any latency associated with another carrier's network or any applicable wireless links, including how that information will be gathered, calculated and provided to the Commission and affected PSAPs monthly or as requested.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SLA 8	**Service Level Agreements - System Performance** **Jitter** Specify the guaranteed maximum end-to-end jitter across the network. This specification also shall include any jitter characteristics associated with another carrier's network or any applicable wireless links, including how that information will be gathered, calculated and provided to the Commission and affected PSAPs monthly or as requested.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 9	**Service Level Agreements - System Performance** **Network Traffic Convergence** Specify convergence protocols and the estimated or guaranteed network convergence time (less than 54 ms) of IP traffic at any point within the proposed solution, including how convergence information will be gathered, calculated and provided to the Commission and affected PSAPs monthly or as requested.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 10	**Service Level Agreements - System Performance** **Mean Time to Repair (MTTR)** Specify the MTTR characteristics of the proposed solution. These specifications shall reflect the end-to-end solution, as well as components or subsystems that are subject to failure. Include how MTTR information will be gathered, calculated and provided to the Commission and affected PSAPs.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 11	**Service Level Agreements - System Performance** **Mean Time Between Failures (MTBF)** Specify the MTBF characteristics of the proposed solution. These specifications shall reflect the end-to-end solution, as well as components or subsystems that are subject to failure. Include how MTBF information will be gathered, calculated and provided to the Commission and affected PSAPs.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 12	**Service Level Agreements - System Performance** **Network Reliability** Network reliability is defined as the ability for system end-points to effectively communicate with each other, and all associated data and information is exchanged in usable formats. An IP-based network looks at reliability as an overall redundancy design, rather than component by component. Specify in the response the overall reliability service level of the IP network, including all bidder-provided components and facilities.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 13	**Service Level Agreements - System Performance** **Network Availability** 1. Specify the service level offered as a percentage of time when the service is available, and the maximum period of total outage before remedies are activated. Availability is defined as MTBF/(MTBF+MTTR). 2. Include how system availability information will be gathered, calculated and provided to the Commission and affected PSAPs.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 14	**Service Level Agreements - System Performance** **End-of-Support Equipment** Contractor shall proactively replace, at Contractor's expense, any hardware that has reached end of support (EOS) no later than 90 calendar days prior to the manufacturer's EOS date. All equipment must be new and of current manufacture, not refurbished. Describe your procedures for End-of-Support Equipment.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SLA 15	**Service Level Agreements –** **SLAs for Incident Management** The Commission requires the Contractor to establish processes and procedures for supporting a NOC/SOC that can rapidly triage and manage reported network incidents. Bidder shall develop an ITIL compliant severity-level scale that includes levels one through four, with level one being the most severe incident. The top two levels shall capture all incidents affecting the level of service of one or more end-points. Include a description of incident severity-level attributes, including response and resolution times for each severity level, and how response and resolution times are measured.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 16	**Service Level Agreements –** **Outage Notification and Reason for Outage (RFO) Report** **Outage Summary and Lessons Learned** Provide a summary of FCC reportable outage situations that interrupted 911 service to bidder's clients over the past three years, where 911 calls were not delivered or not delivered to the appropriate PSAP as a result of the issue. The response shall include the deployment type (legacy, ESInet, and NGCS), month, year, duration, number of PSAPs or population impacted, number of PSAPs or population served by the impacted system, impacted system, and lessons learned from each outage. **Regulatory Compliance** Contractor shall comply with all applicable local, state, and federal outage and notification rules throughout the term of the contract.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 17	**Service Level Agreements –** **Outage Notification and Reason for Outage (RFO) Report** **Outage Notification** Contractor shall notify the Commission and affected PSAPs within a maximum 30 minutes of discovering an event or outage that may impact 911 services. All events that meet criteria for local, state, or federal reporting shall also be completed by the Contractor. At the time of initial notification, the Contractor shall convey all available information that may be useful in mitigating the effects of the event or outage, as well as a name, telephone number, ticket or reference number, and email address at which the service provider can be reached for follow-up. The Contractor is responsible for coordinating data gathering, troubleshooting and reporting on behalf of subcontractors. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 18	**Service Level Agreements –** **Outage Notification and Reason for Outage (RFO) Report** **Status Updates** The Contractor shall communicate any updated status information to the Commission and affected PSAPs no later than two hours after the initial contact, and at intervals no greater than two hours thereafter until normal 911 service is restored. This information shall include the nature of the outage, the best-known cause, the geographic scope of the outage, the estimated time for repairs, and any other information that may be useful to the management of the affected operations. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SLA 19	**Service Level Agreements –** **Outage Notification and Reason for Outage (RFO) Report** **Reason For Outage (RFO) Reporting** Following the restoration of normal 911 service, Contractor shall provide a preliminary RFO report to the Commission and affected PSAPs no later than three (3) calendar days after discovering the outage. An in-depth RFO report, including a detailed root-cause analysis, shall be provided to the Commission and affected PSAPs no later than ten (10) calendar days after discovering an outage. 1. Describe how bidder will comply with the notification and reporting requirements above. 2. Describe the NOC/SOC tools and techniques at bidder's disposal to ensure that bidder's various subcontractor perform troubleshooting and post-event analysis and provide associated reports.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 20	**Service Level Agreements –** **Outage Notification and Reason for Outage (RFO) Report** **PSAP Notifications** Outage notifications and follow-up analysis of outages are a critical element to understanding overall system health and preventing future service interruptions. Having awareness of issues that exist in a neighboring PSAP provides valuable insight into potential issues that may begin impacting another PSAP's operations. The Commission' is seeking an outage notification service that allows for each PSAP to elect the outage notification types and PSAPs for which it will receive outage notifications, outage updates and RFO reports. A web portal for authorized users to select/deselect outage notifications is required. Provide a detailed description of how bidder will support such an outage notification service.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

SLA 21	**Service Level Agreements –** **Media Contact** 1. Contractor shall provide a 24 x 7 spokesperson who will be available for media contact regarding ANY outage of 911 service due to any failure of 911 call delivery to the Commission's host equipment and to the affected PSAPs. **Government & Regulatory Contact** 2. Contractor shall provide a 24 x 7 representative who will be available for government and regulatory contact regarding ANY outage of 911 service due to any failure of 911 call delivery to the Commission's host equipment and to the affected PSAPs Describe bidder's experience in providing both a Media Contact and Government & Regulatory Contact for similar contracts.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 22	**Service Level Agreements –** **SLA Violations** An SLA violation shall have occurred whenever: A. The Contractor fails to meet any single performance level; or, B. The average of any single performance item over the preceding two-month period fails to meet the service level stated in response to requirements SLA 1 through SLA 22. Contractor shall deliver an SLA violations report to the Commission on a monthly basis. **SLA Reporting** Provide a detailed description of how bidder measures and reports incidents, including immediate notifications and regularly scheduled reports. SLA results shall be delivered to the Commission on the 10th business day of the month. The report shall include all performance items identified in the bidder's proposal and documented in contract negotiations.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

SLA 23	**Service Level Agreements –** **SLA Violation Financial Remedies** Contractor shall provide financial remedies to the Commission for each event in which service levels are not maintained. The Commission requires that all of the Contractor's network facilities, devices, and services will be measured on a rolling, 12-month calendar. Failure to meet SLAs shall be measured per service-affecting outage. Financial remedies shall be assessed for failure to meet SLAs. For service-affecting incidents, a 10 percent (10%) discount shall be accessed against the Monthly Recurring Charge (MRC) applicable to the source of the failure, whenever the initial period of resolution is exceeded. If the resolution period length of time doubles, then the discount shall increase to 20 percent of the MRC. If the resolution period length of time quadruples the initial period, then 50 percent of the MRC shall be assessed. The amount related to the damages is to be credited to the invoice for the month immediately following the violation. Bidder shall include how uptime information will be gathered, analyzed and provided to the Commission.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

Operational Scenarios
Safeguards shall be established to minimize the impact of human or system error. Describe bidder's risk-mitigation and issue-resolution strategies for the following hypothetical scenarios:

GEN SCEN 1	**Scenario 1** At 0300 hours, a series of SBC alarms previously unseen by the NOC staff on duty begin to increase in volume and frequency. At 0330, multiple critical alarms are received. At 0345, a few PSAPs start reporting garbled audio while others report an inability to obtain location information. At 0600, some PSAPs are reporting that they have not received a call in the last 15 minutes.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

GEN SCEN 2	**Scenario 2** All originating service providers in the state are connected directly via Signaling System Number 7 (SS7) protocol to the bidder's LNGs that serve the PSAPs in Nebraska, as well as others outside the Commission's footprint. Each LNG consistently processes about 10,000 calls per day, but each is capable of processing in excess of 100,000 calls per day. One of the LNGs experiences a catastrophic failure and is unable to process any calls. In a review of the prior day's logs, it is found that the two surviving LNGs only are processing 2,000 calls each.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

GEN SCEN 3	**Scenario 3** As part of normal data-maintenance procedures, the bidder has uploaded six minor recent changes. The bidder's Quality Assurance/Quality Integrity (QA/QI) process provides a discrepancy report detailing 15,000 errors resulting from the updated file.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

GEN SCEN 4	**Scenario 4** At 0700, the NOC has received an alarm reporting loss of connectivity for a single path to Host A. At 0705, the NOC contacts Host A to confirm the loss of connectivity. The PSAP has found that the link lights are off, but the system appears to be operational. At 0725, the redundant link appears to be bouncing for Host A. At 0900, the PSAP is reporting a decrease in typical call volume.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

PM 1	**Project Management and Ongoing Client Management Services** **Project Management Methodology** 1. Describe bidder's project management methodology and support structure. 2. Describe the daily, weekly, and monthly interactions during the migration. 3. Include a proposed high-level project plan. 4. Include a schedule for the through implementation of this project.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

PM 2	**Project Management and Ongoing Client Management Services** **Post-Deployment Client Management** Describe the post-deployment client management service, including client management reports, executive briefings and the fielding of ad hoc support requests.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

TRN 1	**General Requirements – Training** **Comprehensive Training** Contractor shall provide comprehensive training to designated Commission representatives responsible for varying layers of network/system monitoring and system maintenance. Describe bidder's training program for system implementation and ongoing operation and maintenance, including but not limited to the following topics: 1. user-configurable elements; 2. NOC/SOC procedures; 3. escalations; 4. trouble reporting; 5. help desk portal; 6. executive dashboard; and, 7. service monitoring tools. Training shall be available at the user level and delivered to the PSC and each region (up to 10) and also the train-the-trainer level (up to 25 individuals).	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

TRN 2	**General Requirements – Training** **Attendees and Curriculum** 1. Describe the number and types of attendees required to attend training, training curriculum, number of training attendees included in the proposed price, and the duration of the training program per attendee (expressed in hours per day and number of days), as well as the location of the training and whether such training is available online or onsite. Preference is given to training that can be conducted in an onsite setting for attendees. 2. Provide Examples of the proposed training plans. 3. Provide a sample of the training materials to be used. Training classes shall be recorded for future reference and training of new Commission and PSAP employees.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SRAR 1	**General Requirements – Service, Repair and Advance Replacement** The Commission shall not be responsible for the replacement and maintenance of hardware and software required to provide the NGCS or ESInet connectivity provided as part of the bidder's solution. The Contractor shall resolve all faults or malfunctions at no additional cost to the Commission. **Support Maintenance** 1. Describe in detail bidder's 24 x 7 x 365 maintenance support for the life of the contract. 2. Describe bidder's understanding of public safety maintenance windows and associated notification processes. 3. Describe bidder's problem resolution and change management processes, the supporting systems, and adherence to best practices, such as those described in the ITIL version 3 or most current version.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SRP 1	**General Requirements – Software Release Policy** **Scheduled Releases** **Frequency of Scheduled Releases** 1. Describe the frequency of scheduled software releases, the feature release testing process, and the decision-making processes involved in deciding what features and defect resolutions to include in a scheduled release. 2. Include a current roadmap of feature updates and additions with projected release by quarter and year.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SRP 2	**General Requirements – Software Release Policy** **Maintenance Releases** Describe the frequency of defect-resolution software releases, as well as the decision-making processes involved in selecting which software defects to fix.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SRP 3	**General Requirements – Software Release Policy** **Test Environment** Prior to install of new releases, bidder shall explain how Contractor replicates the production environment for software release testing to provide assurances that future software releases will not negatively impact PSAP operations.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SRP 4	**General Requirements – Software Release Policy** **Access to Defect Tracking System** Contractor shall provide the Commission with access to the Contractor's defect tracking system for the Commission to track the progress of defect resolutions. **Software Defect Tracking Process** Provide a detailed description of the software defect tracking process and describe how bidder will provide training for no more than ten (10) Commission staff prior to Final Acceptance Testing.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SRP 5	**General Requirements – Software Release Policy** **Software Defect Aging** Describe how service-affecting software defects are aged. If minor problems (from the Contractor's perspective) are not identified and resolved immediately, these minor problems can become major or critical problems. Describe in detail how/when this minor problem gets scheduled or automatically escalated, and the feedback mechanism in place for keeping the Commission informed.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

DOC 1	**General Requirements – Documentation** The Contractor shall provide the Commission with all pertinent documentation for the ESInet and/or NGCS connectivity provided as part of the Contractor's solution as implemented, No more than 30 days after completion of the network construction, and update the Commission as configurations change over the term of the contract. The required documentation shall include the following: **1.** Detailed project plan; **2.** Escalation procedures; **3.** Circuit identification; **4.** Single points of failure; **5.** Network path diversity drawings into each PSAP; **6.** Network path diversity drawings into each non-PSAP site or structure housing any element or device that is part of the overall system; **7.** PSAP backroom as-built drawings; **8.** PSAP demarcation point drawings; and, **9.** All user interface training and reference materials. **Network As-Built Documentation** Upon implementation, Contractor shall provide a network or solution diagram that clearly depicts the Contractor's solution as implemented. The Contractor shall provide all documentation in agreed-upon electronic format via a Contractor-hosted web portal. Please describe how bidder's solution meets or exceeds this requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

ESI 1	**Emergency Services IP Network (ESInet)** **Diversity** The network shall be designed with diverse entrances (e.g., east-west entrances) into specified buildings that are part of the ESInet. This requirement shall apply to the core network sites, including data centers and PSAPs specified in Attachment A - PSAP Host End-Point Locations, Equipment List and Selective Router Locations. Primary and redundant links shall not share common routes, trenches, or poles. If last-mile facility or building construction is required, bidder shall so indicate. If this is not possible at a given location, indicate how bidder intends to provide redundant and resilient connectivity to that location. Describe how bidder's solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

ESI 2	**Emergency Services IP Network (ESInet)** **Network Design** Bidder shall design the physical network using the most robust facilities available. Use of fiber-optics is the preferred method for connectivity due to available capacity (bandwidth) and increased reliability. Given the amount of fiber-optic facilities and interconnections between the fiber-optic networks in Nebraska, the ESInet design should include as much fiber as possible, not only on the transport side but on the access side as well. Describe the design of proposed network with specific details on connectivity.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

ESI 3	**Emergency Services IP Network (ESInet)** **No Single Points of Failure** The mission-critical ESInet shall be designed with no single points of failure. All equipment shall include redundant processors and power supplies and be supported by an uninterruptible power supply (UPS) system and alternate power source in a properly conditioned environment. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

ESI 4	**Emergency Services IP Network (ESInet)** **IPv4 and IPv6 Support** All network equipment shall be new and of current manufacture at the time of implementation. All servers, systems, routers, switches, and other network equipment shall support IPv4 and IpPv6 and have the capability to run dual protocol stacks. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

ESI 5	**Emergency Services IP Network (ESInet)** **Open Standards** Open standards-based protocols shall be used, and the use of proprietary routing protocols is prohibited. **Resiliency** Resiliency, or fast failover, may be achieved through the use of the Bidirectional Forwarding Detection (BFD) protocol as defined in IETF Request for Comments (RFC) 5880 and RFC 5881, or other standards-based, non-proprietary methods. Describe how the bidder's solution will achieve resiliency.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

ESI 6	**Emergency Services IP Network (ESInet)** **Multicast Routing and Switching** Routers and switches must support multicast routing and switching. The applicable base protocols are Internet Group Management Protocol (IGMP) and Protocol Independent Multicast (PIM). Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

ESI 7	**Emergency Services IP Network (ESInet)** **Quality of Service (QoS)** The network equipment shall support Quality of Service (QoS) marking for prioritizing traffic in the network using the Differentiated Services Code Point (DSCP) protocol. While the network can change DSCP values through rules, the values typically are set by the system or functional element that originates the traffic. Network routers and switches shall not be configured in such a manner as to change DSCP values set by originating functional elements. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

ESI 8	**Emergency Services IP Network (ESInet)** **ESInet Properties** The proposed ESInet shall be private, robust, scalable, secure, diverse, redundant, sustainable, and self-healing. Bidder shall propose a network solution for all host sites listed in Attachment A - PSAP Host End-Point Locations and any future identified regions throughout the term of the contract. Describe how the proposed system meets each of these individual requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

ESI 9	**Emergency Services IP Network (ESInet)** **Special Construction** Bidder is responsible for any fees incurred through system commissioning, construction permits, make-ready costs, and other subcontracted activity. **Use of Existing Network Assets** There is already a microwave network in place that may be used as a backup network, as well as other local and state-owned network assets that may be suitable for inclusion in the ESInet. The final network design may make use of any of these facilities that are determined by the bidder to be suitable for inclusion in the ESInet. The bidder may support the router configuration necessary to make use of these facilities. **Network Design Documentation** Provide a network or solution diagram that clearly depicts the bidder's proposed transitional and end-state designs for the ESInet.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

ESI 10	**Emergency Services IP Network (ESInet)** **Provide Network to Network Interface with Other IP Networks** Contractor shall provide an ESInet solution capable of interfacing with neighboring state and regional NG911 IP networks as they are established, and capable of transferring voice and data between PSAPs. Describe how the solution will meet these requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

ESI 11	**Emergency Services IP Network (ESInet)** **Provide Network to Network Interface with Other IP Networks** **Connecting to Other IP Networks** At such time as neighboring ESInets and NGCS systems are able to interconnect and exchange traffic, Contractor shall establish such connections and provide routing and security to allow traffic to be exchanged with neighboring ESInets and NGCS systems, regardless of the respective vendors of those systems. Describe how the solution meets or exceeds the above requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 1	**Next Generation Core Services Elements (NGCS)** Provide a network or solution diagram that clearly depicts the bidder's proposed transitional and end state for the Commission's ESInet and NGCS, taking into account the hosts and PSAPs listed in Attachment A - PSAP Host End-Point Locations. The following functional elements and services be included: a. Originating Service Provider (OSP) Connectivity; b. Legacy Network Gateway (LNG); c. Border Control Function (BCF); d. Emergency Services Routing Proxy (ESRP); e. Policy Routing Function (PRF); f. Emergency Call Routing Function (ECRF); g. Location Validation Function (LVF); h. Spatial Interface (SI); i. Location Database (LDB); j. Discrepancy Reporting; k. Logging and Recording; l. Time Server; m. Alarm Integration; and, n Message Session Relay Protocol (MSRP). **Originating Service Provider (OSP) Connectivity** **Due Authorization** Bidder shall possess a certificate of public necessity to operate as a telecommunications provider in the state of Nebraska. The Contractor shall provide a copy of current certificate of public necessity prior to award of contract. **Identification of Service Providers Connected to the Legacy Selective Router** Contractor shall be responsible for identifying and for connecting all wireline, wireless, Voice over IP (VoIP), telematics, and other third-party service providers currently connected to the existing legacy selective router. Contractor shall be responsible for updating this information quarterly for the term of the contract. Bidder shall identify each service provider that will be utilized by Contractor..	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 2	**Next Generation Core Services Elements (NGCS)** **Interconnection and Commercial Agreements, and Trunking** **Originating Service Provider (OSP) Connectivity** Contractor shall be responsible for negotiating interconnection or commercial agreements, and for data and network connection arrangements with each service provider identified in requirement NGCS 1. Interconnection or commercial agreements shall cover subjects including, but not limited to, split rate centers and cell sectors, tandem-to-tandem connections to legacy selective routers and NGCS, Local Number Portability (LNP), National Number Portability (NNP), and Function of Code R (FoCR). Describe the process and provide timelines for meeting the requirements of this section, as well as the expected process for resolution of disputes.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 3	**Next Generation Core Services Elements (NGCS)** **Originating Service Provider (OSP) Connectivity** **Management of OSP Connectivity** Contractor shall be responsible for managing moves, adds, changes, and deletions of the connections from the OSPs to the Contractor's systems for the term of the contract. Contractor shall allow for both Time-Division Multiplexing (TDM) and IP ingress to the network, proactively monitor these connections, and work with the respective service providers to resolve problems as they arise. Describe the process and provide timelines for meeting these requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 4	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **LNG Description** The LNG is a signaling and media interconnection point between callers in legacy call-originating networks, i.e., Enhanced 911 (E911), and the NENA NG911 i3 architecture. The LNG shall log all calls it receives and processes and shall permit the uploading of daily log files to a network monitoring and management system for analysis. The LNG shall allow for ad hoc uploads of log files for troubleshooting and incident response. All call activity on both the legacy side (TDM) and the IP side of the LNG shall be logged. The LNG shall have Intrusion Detection System (IDS)/ Intrusion Prevention System (IPS) functionality to detect and mitigate Distributed Denial of Services (DDoS) attacks from both the TDM side and the IP side. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

NGCS 5	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** Contractor shall provide redundant, resilient LNGs with legacy selective router gateway (LSRG) functionality to allow the legacy selective routers to transfer calls with Automatic Number Identification (ANI) and Automatic Location Identification (ALI) information to deployed NGCS and vice versa. Legacy functionality and components shall be in place and operational during the NG911 transitional phase until all 911 authorities and PSAPs served by the legacy selective router have completed the transition. Describe the steps bidder will take to meet the transition timelines and minimize overlapping network costs.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 6	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Previous Work on Similar Solutions** 1. Explain how bidder has worked with legacy OSPs with similar solutions on similar projects. 2. Submit specific plans for working with established legacy 911 service providers in Nebraska.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 7	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Traffic Engineering Process** Describe the process that will be utilized to analyze the current trunk engineering for 911 traffic, and to validate any applicable trunk rebalancing for public-safety grade service.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 8	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Location Information** The LNG shall obtain location information to define, create, populate and send the correct Presence Information Data Format Location Object (PIDF-LO) parameter to the correct ESRP or terminating PSAP, as described within NENA-STA-010.2-2016. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

	.				

NGCS 10	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Protocol Conversion** **External Interfaces** The LNG external interfaces shall comply with NENA-STA-010.2-2016, requirements SLA 1-23, and other applicable standards and requirements. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 11	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Baudot Code Transcoding** The bidder's BCF solution shall support transcoding of Baudot tones to real-time text (RTT), as described in IETF RFC 4103. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 12	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Callback Number** The LNG shall support obtaining the callback number associated with any pseudo ANI data that does not include the callback number. This may require the Contractor to obtain the callback number from the wireless or VoIP provider and may include additional recurring and non-recurring costs that are independent of this RFP. The Contractor shall be responsible for all recurring and non-recurring costs associated with this requirement. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 13	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Event Logging** The LNG shall facilitate logging of all significant events and 911 calls received and processed. Each call log shall contain all relevant parameters defined in Section 5.13.3 of NENA-STA-010.2-2016. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 14	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Extraction of Log Files** All LNG log files shall be capable of being extracted in near real-time and shall be in a format suitable for importing into a spreadsheet or word-processing program. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 15	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **High-Availability Design** The LNG solution shall be deployed in a high-availability design to meet public safety-grade resiliency and redundancy requirements, Section V.D.1.b. (General Requirements – Technical – Public Safety Grade). Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 16	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Legacy Selective Router Gateway (LSRG) Functionality** The LSRG functionality shall support selective transfer, commonly referred to as "star code" transfers, made by legacy PSAPs for calls destined for the NextGen911 PSAPs or to neighboring legacy PSAPs outside of the ESInet. Describe how bidder's LNG solution provides for LSRG functionality.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 17	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Proposed LNG Locations** Provide the proposed locations for hosting the primary LNGs for the NextGen911 system, including the data center tier level for the host sites.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 18	**Next Generation Core Services Elements (NGCS)** **Legacy Network Gateway (LNG)** **Charges for Dual Service** The bidder shall be responsible for meeting the timelines outlined above in requirement NGCS 2 and 3. If the transition from the legacy selective routers to NGCS exceeds the committed timeline, and is attributable to the acts or omissions of the Contractor, the Contractor will accept responsibility for financial support of the legacy network until such time as the full transition is complete. Describe how bidder's solution meets this requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

NGCS 19	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **BCF Description** The BCF shall provide logical network security functions between external networks and the ESInet, and between the ESInet and PSAP networks. The BCF is responsible for numerous functions, including the following: a. Border firewall; b. VPN; c. IDS/IPS; d. Session Border Control (SBC); e. Opening and closing of pinholes; f. Limiting access to critical components through the use of VLANs; g. Call admission control; h. Media transcoding; i. Signaling protocol normalization and interworking; j. Network Address Translation (NAT); k. Codec negotiation; l. Support for QoS and priority markings; and, m. Media proxy. Provide details, including drawings, describing how the proposed BCF meets or exceeds all functions listed above and the requirements described in NENA-STA-010.2-2016, as well as additional firewall requirements described in NENA 04-503, NENA-INF-015.1-2016, and NENA 75-001, or the next subsequent version of the NENA documents listed that are publicly available at the proposal release date.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 20	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **High-Availability Design** The BCF solution shall be deployed in a manner to achieve 99.999 percent availability. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 21	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **Auditing of System Log Files** Management of the BCF shall include continuous auditing of the system log files for anomalies, and processes for responding to and managing security incidents. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here

NGCS 22	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **Silence Suppression Detection** The BCF shall be capable of detecting when silence suppression is present in the 911 call and of disabling silence suppression if it is detected in the call. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 23	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **SIP Call Mediation** The BCF shall mediate all incoming 911 calls from VoIP providers to Session Initiation Protocol (SIP) calls and should be done in accordance with NENA-STA-010.2-2016. Any specific variations or non-compliance with this requirement shall be identified and documented below. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 24	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **Event Logging** The BCF shall provide the functionality to maintain logs of all 911 sessions and all additional BCF logging and recording requirements, as specified in NENA-STA-010.2-2016. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 25	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **NAT/NAPT Detection and Mediation** Provide details on how the proposed Session Border Control (SBC) will recognize that a Network Address Translation (NAT) or Network Address and Port Translation (NAPT) has been performed on Open Systems Interconnection (OSI) Layer 3, but not above, and correct the signaling message for SIP.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 26	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **IPv4/IPv6 Interworking** Provide details on how the proposed SBC shall enable interworking between networks utilizing IPv4 and IPv6 through the use of dual stacks, selectable for each SBC interface, based on NENA-STA-010.2-2016. All valid IPv4 addresses and parameters shall be translated to/from the equivalent IPv6 values.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 27	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **SIP Support Over Multiple Protocols** Provide details on how the proposed SBC shall support SIP over the following protocols: 1. Transmission Control Protocol (TCP), 2. User Datagram Protocol (UDP), 3. Transport Layer Security over TCP (TLS-over-TCP), and 4. Stream Control Transmission Protocol (SCTP). Protocols supported shall be selectable for each SBC interface to external systems. These transport layer protocols are generated and terminated at each interface to external systems.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 28	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **Packet Prioritization Based on Session Type** Provide details on how the proposed SBC shall be capable of populating the Layer 3 headers, based on call/session type (e.g., 911 calls) in order to facilitate priority routing of the packets.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 29	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **Encryption of Unencrypted Calls** Provide details on how the proposed SBC supports encryption for calls that are not protected entering the ESInet, based on NENA-STA-010.2-2016.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 30	**Next Generation Core Services Elements (NGCS)** **Border Control Function (BCF)** **BCF Elements** 1. Provide details, including drawings, describing the different BCF elements that the proposed solution comprises. 2. As part of the details, identify all of the elements and/or interfaces to be provided by the Commission and/or PSAPs to the bidder.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 31	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **ESRP Description** The ESRP routes a call to the next hop. It also evaluates the originating policy rules set for the queue the call arrives on, extracts the location of the caller from the SIP signaling, queries the Emergency Call Routing Function (ECRF) for the nominal next-hop route, evaluates the route based on policy rules and queue states of the downstream entity queues, and then forwards the call to the resulting next hop. Bidder's proposed ESRP must meet or exceed NENA-STA-010.2-2016. Describe how the proposed solution meets or exceeds the standards.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 32	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **Transition to Geospatial Routing** Bidder understands that all PSAPs and regions may not be ready for geospatial routing on day one of operations and shall provide tabular routing services, also known as Internet Protocol Selective Routing (IPSR), until such time as PSAPs and regions are ready for geospatial routing. In bidder's separate cost proposal response, indicate the pricing difference between tabular and geospatial routing. Describe the process for transitioning each PSAP or region from tabular routing to geospatial routing as PSAP's becomes ready and the manner in which the solution provides for routing by both means simultaneously.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 33	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **Policy Routing Function (PRF) Description** The PRF is a required function of the ESRP. The ESRP interacts with the PRF to determine the next hop of a call or event. Before the ESRP sends the call to the next hop, it first queries the PRF to check the status of the next hop to determine if a unique routing rule or policy is in place that would direct the call to another location. The destination of the next hop is typically a queue. The PRF monitors the downstream queues of ESRPs for active understanding of the entity's queue status. Describe how the solution meets or exceeds the standards.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 34	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **PRF Policy Store and User Interface** The PRF shall allow defining of policy rules for distributing a wide range of calls in an efficient manner. 1. Describe the solution's Policy Store and the PSAP's ability to effect changes to the PRF. 2. Describe the user interface, role-based authentication, the ability of each PSAP or region to manage PSAP's own policy rules, and the types of policy rules available at the time of proposal submission, as well as those on the product roadmap. Roadmap items must include an estimated time of feature availability.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 35	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **Next-Hop Queues** A next-hop queue may be a Uniform Resource Identifier (URI) that routes the call to an interactive multimedia response system (as described in IETF RFC 4240) that plays an announcement (in the media negotiated by the caller) and potentially accepts responses via Dual-Tone Multi-Frequency (DTMF) signaling or other interaction protocols. Describe how the bidder's solution implements next-hop queueing.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 36	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **High-Availability Design** The ESRP/PRF solution shall be designed with resiliency and redundancy to provide a minimum of 99.999 percent availability. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 37	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF)** **Keep-Alive Signaling Between Elements** Provide an explanation of how the proposed ESRPs use the SIP "options" transactions for maintaining "keep -alive" signaling between ESRPs, LNGs, Legacy PSAP Gateways (LPGs) and session recording services.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 38	**Next Generation Core Services Elements (NGCS)** **Emergency Service Routing Proxy (ESRP) and Policy Routing Function (PRF** **TCP/TLS Implementation** The upstream interface on the proposed non-originating ESRPs shall implement Transmission Control Protocol/Transmission Layer Security (TCP/TLS), but shall be capable of fallback to UDP, as described in NENA-STA-010.2-2016. Stream Control Transmission Protocol (SCTP) support is optional. The ESRP shall maintain persistent TCP and TLS connections to the downstream ESRPs or User Agents (UA) that it serves. Provide detailed documentation describing how the non-originating ESRP interface supports TCP/TLS with fallback to UDP.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 39	**Next Generation Core Services Elements (NGCS)** **NENA Compliance Chart** Provide a description of how the proposed ESRPs meet or exceed all functional requirements below as defined in NENA-STA-010.2-2016, which are listed below.				
	Bidder Response:				

Any additional documentation can be inserted here:

	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
Overview Section 5.2.1.1				
Call Queueing Section 5.2.1.2				

Queue State Event Package Section 5.2.1.3				
De-queue Registration Event Package Section 5.2.1.				
Policy Routing Function Section 5.2.1.5				
ESRP Notify Event Package Section 5.2.1.6				
INVITE Transaction Processing Section 5.2.1.7				
BYE Transaction Processing Section 5.2.1.8				
CANCEL Transaction Processing Section 5.2.1.9				
OPTIONS Transaction Processing Section 5.2.1.10				
Upstream Call Interface Section 5.2.2.1				
Downstream Call Interface Section 5.2.2.2				
ECRF Interface Section 5.2.2.3				
Location Information Server (LIS) Dereference Interface Section 5.2.2.4				
Additional Data Interfaces Section 5.2.2.5				
ESRP, PSAP, Call-Taker State Notification and Subscriptions Section 5.2.2.6				
Time Interface Section 5.2.2.7				
Logging Interface Section 5.2.2.8				
Data Structures Section 5.2.3				
Policy Elements Section 5.2.4				
Provisioning Section 5.2.5				

NGCS 40	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** Describe how the ECRF interfaces with other ECRF solutions which may interface with the bidder's solution. Awarded Contractor shall coordinate with other ECRF solution providers to ensure interoperability between the respective solutions.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 41	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **ECRF Description** The ECRF shall be designed according to NENA-STA-010.2-2016 and be implemented using diverse, reliable and secure IP connections. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 42	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **High-Availability Design** Bidder shall supply an ECRF function that meets a minimum of 99.999 percent availability. Describe how the solution meets or exceeds the above requirements**.**	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 43	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Accessibility by Outside Functional Elements** Contractors providing an ECRF shall ensure that it is accessible from outside the ESInet and that the ECRF permits querying by an IP client/endpoint, an LNG, an ESRP in a next-generation emergency services network, or by some combination of these functions. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 44	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Accessibility Inside the ESInet** Contractor shall provide an ECRF accessible inside an ESInet, which shall permit querying from any PSAP (or future entity authorized to connect to the ESInet) inside the ESInet. ECRFs provided by other entities may have their own policies regarding who may query them. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 45	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Origination Network ECRF** An origination network may use an ECRF, or a similar function within its own network, to determine an appropriate route—equivalent to what would be determined by the authoritative ECRF—to the correct ESInet for the emergency call. Describe the functionality of such an ECRF equivalent and document where this functional element resides within the proposed solution.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 46	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Routing Query Interface** The ECRF shall support a routing query interface that can be used by an endpoint, ESRP or PSAP to request location-based routing information from the ECRF. Additionally, it shall support both iterative and recursive queries to external ECRF sources. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 47	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **LoST Protocol Support** The ECRF shall interface with the Location-to-Service Translation (LoST) protocol (as described in IETF RFC 5222) and support LoST queries via the ESRP, PSAP CHE, or any other permitted IP host. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 48	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Query Rate-Limiting** The proposed ECRF shall allow for rate-limiting queries from sources other than the proposed ESRP(s), and provide logging of all connections, connection attempts, and LoST transactions. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 49	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Supported Functions** The ECRF shall support each of the following items. Describe how the solution meets or exceeds each of the requirements below:	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
Logging of all connections, connection attempts, data updates, ECRF query results, and LoST transactions				
Location error identification.				
Updates from the SI in near real-time with no degradation of LoST services				
Routing of calls based on geographic coordinates, geodetic shapes, and civic addresses				
Utilization of common GIS boundaries, including, but not limited to, PSAP, law enforcement, fire and emergency medical services (EMS).				
Permitting of LoST queries for find service request association with each layer.				
Compliance with NENA 02-010 and NENA 02-014.				
Dynamic updates to GIS without disruption of the ECRF.				
Validation of GIS updates before they are provisioned into the ECRF.				

NGCS 50	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **User Interface and Provisioning** Define bidder's method for: 1. provisioning the ECRF; 2. updating the ECRF (including the frequency of updates); 3. validating data provisioning; 4. performing error logging; 5. performing gap and overlap analysis; and 6. supporting LoST queries from ESRPs, the PSAP CHE, and other authorized hosts within the ESInet. 7. Provide a clear description of the functionality of the ECRF; list features and capabilities; 8. describe the error handling, default mechanisms, and logging; and 9. provide an overview of deployment recommendations to achieve 99.999 percent reliability.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 51	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Hierarchical Integration with Other ECRFs** The ESInet will be part of an overall hierarchical plan that includes interconnectivity to other regions and ECRFs. Provide details regarding bidder's vision for how this interconnection will include replicas of ECRF/LVF at different levels of the hierarchy, as well as access/origination networks.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 52	**Next Generation Core Services Elements (NGCS)** **Emergency Call Routing Function (ECRF)** **Forest Guide** Provide explanations of any tradeoffs between aggregations of data at higher-level ECRFs versus the use of Forest Guides (as defined in NENA-INF-009.1-2014) to refer requests between ECRFs that possess different levels of data. As part of that explanation, provide details on how the appropriate ECRF/LVF data will be managed and provisioned for use in overload and backup routing scenarios in the current environment, and any dependencies that might impact provisioning.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 53	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** An LVF is a LoST protocol server where civic location information for every call originating endpoint is validated against the SI-provisioned GIS data Describe how the LVF solution interfaces with other LVF solutions which may interface with bidder's solution. Contractor shall coordinate with other LVF solution providers to ensure interoperability between the respective solutions.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 54	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** **LVF Description** The SI is responsible for provisioning and updating the information used for location validation in the LVF, which shall contain a standardized interface to the SI. Describe how the LVF solution meets the above requirements**.**	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 55	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** **Location Validation** The LVF shall be available to validate civic locations at the time a wireline device is ordered— e.g., Service Order Interface (SOI) validation—when a nomadic device is connected to the network, and when a PSAP or other authorized entity makes a civic location validation request. The LIS/LDB shall be allowed to periodically revalidate the civic location information against the GIS data contained within the LVF. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 56	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** **High-Availability Design** The LVF shall support all functionality as defined in NENA-STA-010.2-2016, shall be designed with resiliency and redundancy to provide a minimum of 99.999 percent availability, and shall be provisioned with the same data as the ECRF. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 57	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** **Public-Facing LVF** Outline options for a public-facing LVF provisioned for use by service providers outside the ESInet.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 58	**Next Generation Core Services Elements (NGCS)** **Location Validation Function (LVF)** **User Interface and Security** Describe the functionality of the proposed LVF solution in sufficient detail to address the requirements outlined in NENA-STA-010.2-2016, with particular attention to: 1. the arrangement of the proposed components; 2. user interface and features; 3. and security aspects.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 59	**Next Generation Core Services Elements (NGCS)** **Spatial Interface (SI)** **SI Description** The SI is responsible for provisioning and updating authoritative GIS data to the ECRF, the LVF, the map viewer, the PSAP tactical map display, CAD systems, and similar applications that consume GIS data. GIS data provisioned by the SI shall undergo data-quality and data-integrity checks to ensure that the data complies with all applicable requirements of NENA 02-010, NENA 02-014, and Attachment B of NENA-STA-010.2-2016. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 60	**Next Generation Core Services Elements (NGCS)** **Spatial Interface (SI)** **Web Feature Service and Updates** The SI shall convert the GIS data into the format (data structure and projection) used by the ECRF and LVF, in real-time or near real-time, using a web feature service. The SI shall be able to provision and perform incremental updates, in near real-time, to the ECRF, LVF, the map viewer service, the PSAP tactical map display and similar applications that consume GIS data. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 61	**Next Generation Core Services Elements (NGCS)** **Spatial Interface (SI)** **Data Provisioning and Validation** Describe the functionality of the proposed SI solution in sufficient detail to explain the validation of GIS data and data updates prior to provisioning into the ECRF and LVF, along with the means of real-time or near real-time provisioning of incremental updates to the GIS data provisioned to the ECRF and LVF.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 62	**Next Generation Core Services Elements (NGCS)** **Spatial Interface (SI)** **Use of the Commission's GIS Data Model** 1. Describe how the bidder's solution will use the Commission's GIS data model (Attachment B) without modification to the schema. 2. Define bidder's processes and methods to receive and incorporate the updated SI datasets. 3. Describe bidder's proposed workflow for receiving GIS updates from regions to allow for a smooth transition. 4. Describe all security and monitoring aspects, and any additional features supported by the proposed SI.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 63	**Next Generation Core Services Elements (NGCS)** **Location Database (LDB)** Describe how the solution interfaces with other LDB solutions which may participate in or interface with bidder's solution. Contractor shall coordinate with other LDB solution providers to ensure interoperability between the respective solutions. Also explain how the proposed solution would deal with multiple ALI/MSAG databases and the locations where ALI steering may be in place.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 64	**Next Generation Core Services Elements (NGCS)** **Location Database (LDB)** **LDB Description** A LDB serves as both a legacy ALI database and as a LIS in an i3-compliant NG911 environment. The LDB retains all of the current information, functionality, and interfaces of today's ALI, but also can utilize the new protocols required in an NG911 deployment. The LDB supports the protocols for legacy ALI query and ALI query service, the protocols required to obtain information for wireless calls by querying the mobile positioning center (MPC) or Gateway Mobile Location Center (GMLC), and the protocols required for i3 location information retrieval and conveyance, such as HTTP-Enabled Location Delivery (HELD) or other proprietary protocols. Describe the functionality of the proposed LDB, including additional features and capabilities, error handling, FoCR capabilities, logging and deployment recommendations in detail to address the requirements outlined, with particular attention to the arrangement of the proposed components, user interface, and features, and security aspects.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

The LDB shall meet the following requirements:	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
Shall support all relevant sections of NENA 02-010, 02-011, 02-015, 04-005, 08-501 and 08-502 related to ALI Database Management System (DBMS).				
Shall be capable of assuming the role of a location DBMS as defined in NENA-INF-008.2-2013, NENA NG9 1-1 Transition Plan Considerations.				
Shall support NENA standards J-036, E2, E2+, non-call-associated signaling (NCAS) and call-associated signaling (CAS).				
Shall be able to provide LIS functionality and interfaces as defined in NENA-STA-010.2-2016				
Shall be able to seamlessly interact with a NENA i3-compliant ECRF, as described in NENA-STA-010.2-2016.				
Shall be able to dereference a location by reference, as defined in NENA-STA-010.2-2016.				
Shall be able to dereference requests for additional information, as defined in NENA-STA-010.2-2016.				
Shall be able to interface simultaneously with multiple wireless callers.				
Shall be able to interface simultaneously with multiple remote ALI databases.				
Shall automatically detect, import and validate customer records (SOI records).				
Shall have the ability to be used simultaneously by both NG911-capable and E911 capable PSAPs.				
Shall allow different PSAPs to use different ALI formats based on individual needs.				

Shall utilize LVFs to validate civic addresses.					
Shall support PIDF-LO location data formatting as defined in NENA-STA-010.2-2016.					
Shall periodically reevaluate the location information using LVF functions within the system.					
Shall be able to communicate with NG911 functional elements using the SIP and HELD protocols.					
Shall be able to provide a PIDF-LO based on both the wireless and VoIP E2 response.					
Shall be able to dereference additional data requests.					
Shall consistently respond to all requests within 400 milliseconds (ms).					

NGCS 65	**Next Generation Core Services Elements (NGCS)** **Location Database (LDB)** **Integration of Multi-Line Telephone System Data** The LDB shall support the Integration of Multi-Line Telephone System (MLTS) databases. As part of this migration, Contractor shall be responsible for migrating records from the current MLTS databases to the LDB. Provide details on the database migration process and the user interface for management of these MLTS data records.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 66	**Next Generation Core Services Elements (NGCS)** **Discrepancy Reporting** 1. Provide details regarding the proposed solution's report functions for notifying PSAPs any time a discrepancy is detected concerning the BCF, ESRP, PRF, ECRF, LVF, and SI. As part of the detail, explain how a report will be sent for the purpose of reporting the discrepancy to multiple responding PSAPs, as determined by the Commission. Discrepancy reporting is outlined in Section 4.7 of NENA-STA-010.2-2016. 2. Describe the functionality of the proposed discrepancy reporting function in sufficient detail to address the requirements outlined, with particular attention to the user interface and features, and the security aspects.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 67	**Next Generation Core Services Elements (NGCS)** **Event Logging and Management Information System (MIS)** PSAPs may have a variety of logging recorders capable of recording SIP traffic and associated media. PSAPs will use the Emergency Call Tracking System (ECaTS) for call logging and capture event details. The Commission will gather statistical data from PSAPs through ECaTS. Describe how the solution interfaces with logging recorders and ECaTS.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 68	**Next Generation Core Services Elements (NGCS)** **Event Logging and Management Information System (MIS)** **Event Logging Description** Extensive logging of NG911related events, transactions, media, and operations is required. All log entries shall be accurately time-stamped. Logging must include all elements in the call flow including logging of NG911related events within ESInets, the NGCS, the PSAP, and related operations, and is a standardized function used throughout ESInets, NG911 functional elements, and PSAPs. Logged events include ingress and egress to an ESInet, ingress, and egress to a PSAP, all steps involved in call processing, and processing of all forms of media. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 69	**Next Generation Core Services Elements (NGCS)** **Event Logging and Management Information System (MIS)** **Integration with Call-Handling Equipment** 1. Describe how bidder's event-logging solution may integrate with the each PSAP's call-handling equipment, to provide a complete, end-to-end view of a call. 2. Describe how the Commission can gain access to information in the event-logging solution. 3. Describe the requirements of the PSAP's call-handling equipment, software license agreements, and interfaces required to support integration with the bidder's event-logging solution.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 70	**Next Generation Core Services Elements (NGCS)** **Event Logging and Management Information System (MIS)** **Access to Event Logging Data** 1. Describe how the PSAPs and the Commission will gain access via role-based authentication to the event-logging solution data and run statistical and other MIS reports. The PSAP is the custodian of such data for purposes of the Nebraska Public Records Statutes, Neb. Rev. Stat. §§ 84-712 to 84 712.09. The PSAP is responsible for maintaining such data pursuant to the PSAP record-retention schedule applicable to such data as provided in the Nebraska Public Record Statutes, Neb. Rev. Stat. §§ 84 1201 to 84 1229. The state is implementing the ECaTS MIS solution statewide. Upon deployment, the Contractor shall coordinate with ECaTS, the state, and the PSAPs to deliver event logging data to the ECaTS solution. An existing data-sharing agreement (DSA) between the state and the PSAPs governs what data the state may access along with notifications of records requests. This DSA will govern data collected by the NGCS and ESInet provider whether that data is delivered to ECaTS or directly to the state or PSAPs. 2. Describe the reports, MIS tools, and performance metrics made available to each PSAP, the user interface for retrieving or receiving reports, role-based authentication to limit access to data and reports, and the ability to customize reports based on individual PSAP needs. These reports may be used as a basis for changes to bandwidth and capacity. The required reports and metrics will include, but is not limited to: a. Timing b. Call-delivery time c. Call-processing time between elements d. Volumes e. Call volumes by call type f. Alternate-routed calls g. Text-to-911 h. All NGCS element usage volumes i. Bandwidth/trunk utilization j. Calls per trunk k. Trunk utilization l. Circuit utilization	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 71	**Next Generation Core Services Elements (NGCS)** **Event Logging and Management Information System (MIS)** **NENA Standards Compliance** The bidder's proposed logging solution shall meet the requirements set forth in NENA-STA-010.2-2016. **Third-Party Certification Fees** Bidder is responsible for any third-party certification fees. Describe how the solution meets or exceeds these above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 72	**Next Generation Core Services Elements (NGCS)** **Network Time Protocol (NTP) and Time Source** Bidder's solution shall sync with existing time sources to maintain consistent time stamps across the network and systems. Describe how bidder's solution complies with this requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 73	**Next Generation Core Services Elements (NGCS)** **Network Time Protocol (NTP) and Time Source** **Master Clock Description** The bidder shall provide redundant, resilient network-attached Stratum 2 time sources ("master clocks") capable of supplying standard time to all systems, network devices, and functional elements that comprise the ESInet and the NGCS. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 74	**Next Generation Core Services Elements (NGCS)** **Network Time Protocol (NTP) and Time Source Accessibility by PSAP Equipment** The master clock time source(s) shall be accessible to the PSAPs for synchronizing call-handling systems and other related systems. All systems, network devices, and functional elements shall support the use of the NTP for maintaining system clock accuracy. Describe how the solution meets or exceeds the above requirements.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 75	**Next Generation Core Services Elements (NGCS)** **NG911 Application Integration** Bidder shall describe other NG911 applications, additional data integrations, and personal safety applications that may be integrated with the NGCS solution. The bidder's system must be capable of integration with Additional Data Repositories (ADR), Identity-Searchable Additional Data Repositories (IS-ADR) or commercial third-party LIS, as described in NENA STA-010.2-2016, within two years of the deployment of the first PSAP. Describe how the solution will accomplish integration, information storage, and use/transmission of data to PSAP CHE.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 76	**Next Generation Core Services Elements (NGCS)** **Message Session Relay Protocol Text (MSRP) Integration** The PSAPs have deployed short messaging service (SMS)-to-911 service. 1. Describe the ability to integrate existing web-based and MSRP-integrated SMS-to-911 and Real-Time Text (RTT) services into the solution. 2. Explain whether the solution supports location-by-reference and/or location-by-value. This requirement is for the integration of text messaging with MSRP and not a requirement for procuring text services.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 77	**Next Generation Core Services Elements (NGCS)** **1. Make-Busy Functionality** Some PSAPs have a physical make-busy switch that can be activated in the event of an emergency evacuation. Bidder's solution shall support this functionality to all PSAPS.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	2. Ringdown Functionality Bidders' solution shall support ringdown functionality, either through the call-handling system or through the NGCS.				
	3. Near-Simultaneous Transfer The solution shall support near-simultaneous conference and transfer capability, with up to at least 12 parties in the conference. This feature shall allow transfer or conference buttons to be programmed to automatically establish a conference with multiple parties. For instance, one button at a police department might establish a conference between the police, fire, and EMS PSAPs and the original caller, without having to add each additional party individually. Describe how bidder's solution meets or exceeds these requirements.				
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 78	**Next Generation Core Services Elements (NGCS)** **PSAP Interfaces and Backroom Equipment Requirements** **Support of PSAP Interfaces** Bidder's solution shall have the ability to support PSAP interfaces specified in NENA STA-010.2-2016, Section 4, including the following: a. SIP calls b. NGCS call delivery c. Web services d. All baseline media and multimedia (as described in NENA STA-010.2-2016, Section 4) e. NTP time services interface, accurate to 1 ms f. Transport layer security g. Discrepancy reporting Describe the functionality of the PSAP interfaces in detail to address the requirements outlined above, with particular attention to the user interface, additional features, and security aspects.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

NGCS 79	**Next Generation Core Services Elements (NGCS)** **PSAP Interfaces and Backroom Equipment Requirements** **Support of Call Handling Equipment (CHE) Platforms** 1. Provide a list of CHE platforms for which bidder has successfully implemented the interfaces listed above in a live production environment, noting any interfaces that have not yet been tested with each CHE vendor/model. 2. Where interfaces with CHE vendors/models have yet to be deployed and/or tested, please describe the integration testing process that the bidder will perform prior to acceptance testing of the solution. 3. Describe the physical interface handoff required at the PSAP CHE demarcation point.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

NGCS 80	**Next Generation Core Services Elements (NGCS)** **Transfer to 7/10-Digit Numbers** The bidder's solution shall be capable of transferring 911 calls to 7 or 10-digit numbers with the Calling Party Number (CPN). Describe how the solution meets or exceeds this requirement.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

SVAL-1	**Service Validation** Throughout the life of the contract, upon request of the Commission, Bidder shall allow for network testing and validation by a third-party entity, to verify that the service(s) and/or solution(s) are in compliance with the contract's scope.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Attachment "C"
Option C Revision One
Technical Requirements
Public Service Commission ESInet
Request for Proposal Number 6264 Z1

OPTIONAL SERVICE

NGCS 81	**Next Generation Core Services Elements (NGCS)** **OPTIONAL SERVICES** **NG911 Applications and Alarm Integration** **Alarm Integration Description** NG911 provides for the capability to have alarm companies integrate directly with the ESInet and use the NGCS for routing of the alarm and associated data. Describe bidder's experience with integrating alarms, sensors, and other non-interactive call types with bidder's NGCS solution and include separate pricing.	Comply	Partially Comply	Complies with Future Capability	Does Not Comply
	Bidder Response:				

Any additional documentation can be inserted here:

Attachment D Nebraska PSAP Trunk Positions and Call Volume Info

PSAP NAME	How Many 911 Trunks	Number of Actual Call Taker Seats	Annual Call Volume (2019)*
Antelope County	2	2	
Boone County	2	2	
Boyd-Holt Counties Joint E911	2	3	
Brown County	2	2	
Buffalo County	16	8	
Burt County	2	2	
Butler County	2	2	
Cass County Sheriff's Office	4	4	
Cedar County	2	2	
Chase County	2	2	
Cherry County	2	3	
Cheyenne County	3	2	
City of Alliance	3	4	
City of Beatrice	4	3	
City of Columbus	4	4	
City of Falls City	2	2	
City of Grand Island	5	4	
City of Hastings	4	3	
City of Holdrege	4	2	
City of Lincoln	14	18	
City of McCook	4	2	
City of Norfolk	4	3	
City of North Platte	6	4	
City of South Sioux City	4	4	
City of Wayne and Wayne County	2	2	
Clay County	2	2	
Colfax County	3	2	
Cuming County	3	2	
Custer County	3	3	
Dawes County	2	2	
Dawson County	5	4	
Dixon County	2	2	
Dodge County 911 Board	6	4	
Douglas County	28	13	
Dundy County	1	1	
Fillmore County	2	2	
Franklin County	2	1	
Frontier County	2	2	
Furnas County	2	2	
Garden County	2	2	
Hamilton County	3	3	
Hitchcock County	3	1	
Howard County Communications	2	2	
Jefferson County 911	3	3	

Attachment D Nebraska PSAP Trunk Positions and Call Volume Info

Johnson County	2	2	
Kearney County	2	2	
Keith County	2	3	
See Cherry County **~~Keya Paha County~~**			
Kimball County	3	2	
Knox County	2	2	
See Hamilton County **~~Merrick County~~**			
Mid Rivers 911 Center	2	2	
Morrill County	2	2	
Nance County	2	1	
Nemaha County	3	2	
Nuckolls County 911	2	2	
Otoe County Sheriff	5	2	
Pierce County	2	2	
Polk County	2	2	
Region 26 Council	3	3	
Rock County	2	2	
Saline County	2	2	
Sarpy County	17	10	
Saunders County	3	3	
Scottsbluff County	8	4	
Seward County Communications	3	4	
Sheridan County	2	2	
Thayer County Sheriff	2	2	
Thurston County	2	2	
Washington County 911	4	3	
York County Sheriff	3	3	
	259	**208**	

*Annual call volume numbers will be provided with responses to the next round of questions on May 7.

Attachment E - Data Sharing Agreement

Between

Nebraska Public Service Commission

And

[Name of PSAP]

Participants: This Data Sharing Agreement ("DSA") is entered into by and between the Nebraska Public Service Commission ("Commission") and [Name of PSAP] ("PSAP").

Purpose: The purpose of this DSA is to describe the sharing of certain data between the Commission and the PSAP and the authority and responsibilities of the Commission and PSAP regarding those data.

Effective Date: This DSA will become effective upon the last date of execution by a party hereto, as stated on the signature page.

Product/Service Description

Emergency Call Tracking System ("ECaTS") is a service which collects and provides reporting and analytics of 9-1-1 call data. ECaTS consists of a data repository, information technology tools and services to organize, manage, manipulate, analyze and secure the data within the repository, and professional and technical expertise to manage, protect, and conduct studies on those data. ECaTS will install a small Remote Data Distribution Module ("RDDM") buffer box at the PSAP (or at the related host location) and connect it to the Call Handling Equipment ("CHE") Call Detail Record ("CDR") (outgoing information only) port. This information will be encrypted and delivered via the internet to ECaTS for processing and reporting.

The goal of the Commission is to use ECaTS data to optimize call routing and delivery, monitor the efficiency of the 9-1-1 Service System in Nebraska and conduct studies to facilitate the implementation of Next Generation 9-1-1. Data collected and analyzed via ECaTS will be used to develop a better understanding of the operational characteristics and trends associated with the delivery of 9-1-1 calls statewide, and provide a baseline of data for comparison as Next Generation 9-1-1 functionality is implemented.

Data Ownership, Retention, and Requests

The PSAP is the owner of the data collected by ECaTS. The PSAP is the custodian of such data for purposes of the Nebraska Public Records Statutes, Neb. Rev. Stat. §§ 84-712 to 84-712.09. The Commission will notify the PSAP of any public records request received by the Commission with respect to any data that is subject to this DSA. Public records requests received by ECaTS for access to ECaTS data will be forwarded to the PSAP for an appropriate response.

ECaTS will not delete the PSAP's data without permission of the PSAP, the PSAP is responsible for maintaining such data pursuant to the PSAP record retention schedule applicable to such data as provided in the Nebraska Public Record Statutes, Neb. Rev. Stat. §§ 84-1201 to 84-1229.

Access to Information

Each authorized user will have a unique User ID and Password that will be required to obtain access to ECaTS data and reports via the ECaTS web portal.

The PSAP will have access to all ECaTS reports, and the Commission will have access to the following ECaTS summary reports:

- **Call Summary Report** – Provides authorized users with a Call Volume Count based on a date range including total calls per day, total calls answered and total calls abandoned.
- **Calls per Hour** – Provides total call volume (number of 911 calls), but broken up into each hour of each day for the specified range of time.
- **Top Busiest Hours** – Identifies the date and time (hour of day) when the PSAPs experienced the highest volume of calls.
- **Calls by Circuit** – Provides a breakdown of total call volume by circuit and/or by Trunk for the specified period of time.
- **Circuit Utilization** - The report reflects the amount of time that one or more circuits in each trunk group are utilized simultaneously. The report gives the percentage to the sixth nearest decimal to ensure accurate rounding of statistics.
- **Class of Service** – Provides a breakdown of 911 calls based on their Class of Service (i.e.: Wireless Phase 2, VOIP, Business, Centrex, etc.).
- **Outage** – The Outage Report provides outage data for a selected date range. This report provides the duration time (down time) of the outage and the trouble ticket number that relates to the outage.
- **Wireless Call Sector** – Provides a report for all wireless call sectors whose calls were transferred more than a certain percentage of the time, possibly indicating a miss-configured cellular tower face.
- **Wireless Transfer Summary** - The Wireless Transfer Summary report will look at the total number of calls that a PSAP/destination received from a particular tower, sector and carrier. The report will then consider the total number of calls transferred from that tower, sector and carrier. Based on the PSAP/destination that each call was transferred to, the report will provide the overall percentage of calls received from that tower, sector and carrier that were transferred to the Transfer PSAP/destination.

Connectivity

PSAP will provide access of the ECaTS RDDM to their existing internet service provider for the limited purpose of delivering CDR information from the PSAP to ECaTS.

Financial Responsibilities

The Commission will pay for a standard set of ECaTS related services, including hardware configuration and installation and the monthly maintenance fee. Additional product functionality may be available for purchase by the PSAP directly from ECaTS, at the PSAP's expense.

The Commission will also pay for required CDR licenses, the RDDM and technical

support, setup, and installation of the RDDM. The RDDM, power cord, and serial cable will be the property of the Commission. The PSAP will provide CDR data to the RDDM at no cost.

The Commission's obligation to pay amounts due are contingent upon legislative appropriation of funds. In the event that the Nebraska Legislature fails to appropriate or authorize the expenditure of sufficient funds to provide for the payments referenced in this agreement, the Commission may terminate this agreement with respect to those payments for the fiscal year or years for which such funds are not appropriated. The Commission will give the PSAP prior written notice of any such termination.

Term

This DSA will be in effect for a period of two years and will automatically renew annually until terminated or superseded by another agreement.

Any change impacting this DSA shall be communicated to the other party sixty (60) days prior to the intended date of change and shall become effective upon agreement in writing by the other party.

Either the Commission or the PSAP may terminate this DSA upon sixty (60) days written notice to the other party. To be effective, a termination notice must state expressly that the DSA is being terminated, summarize the reason for termination, and affirm that the terminating party has made appropriate arrangements for retention of existing ECaTS data.

Governing Law

This DSA will be governed by and construed in accordance with the laws of the State of Nebraska.

PSAP	The Commission
Address	Address
City, State, ZIP	City, State, ZIP
Signer's Printed Name	Signer's Printed Name
Signer's Title/position	Signer's Title/position
Email	Email
Phone	Phone

Date	Date

Instructions To Bidders

General

- All cells are locked except those allowing input (shaded green).
- **Do not attempt to edit formula cells**. Any attempt to edit a formula may cause bidder's entire response to be rejected.
- Tabs will contain cells for Non-Recurring Costs (NRC) and Monthly Recurring Charges (MRC).
- Follow the instructions for each Tab.
- Save as an Excel file and give it a unique name, using the following format: "**Company XYZ XXXX Z1 Cost Proposal Option C ESInet and NGCS**".
- Print the workbook (not just the worksheets) to verify content of each tab. Also, verify that all data can be seen in each cell.
- Include the saved Excel file when submitting the RFP response package to the Nebraska State Purchasing Bureau.
- If more rows are needed in each region, you can insert additional rows.
- Each sheet is divided into the 7 regions. Enter pricing information for each region based on bidders implementation plan.
- All PSAPs and regions may not be ready for geospatial routing on day one of operations and Bidder shall provide tabular routing services, also known as Internet Protocol Selective Routing (IPSR), until such time as PSAPs and regions are ready for geospatial routing. Be sure the cost proposal response indicates the pricing difference between tabular and geospatial routing.
- Include pricing for Optional NGCS services on the Optional Svc tab.

NRC Milestones

- Milestone Payments - NRC payments will be made as structured on the NRC Milestones Tab.As each region is completed on each tab, it is calculated into the total milestone. **Bidders should prepare their cost proposal to reflect the timeline submitted with Bidder's Implementation Plan.**

Summary Tab

- As the name implies, this tab contains the totals from the ESInet, **Legacy Network Gateway (LNG)**, **Border Control Function (BCF)**, **Emergency Services Routing Proxy and Policy Routing Function (ESRP & PRF)**, **Emergency Call Routing Function and Location Validation Function (ECRF & LVF)**, **Spatial Interface (SI)**, **Location Database (LDB)** and **Miscellaneous (MISC) tabs.**
- Enter the Bidder name and date in the designated cells. This information automatically populates the other tabs.
- All other cells are locked.

ESInet Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Emergency Services IP Network services (hardware, software, connectivity, training, maintenance, etc.) for each region. Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly per person amounts in cents**. The monthly amounts are automatically multiplied by the population of the region and by 12 months.

LNG Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Legacy Network Gateway services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the region's population.

BCF Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Border Control Function services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

ESRP & PRF Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Emergency Services Routing Proxy and Policy Routing Function services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

ECRF & LVF Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Emergency Call Routing Function and Location Validation Function services (hardware, software, connectivity, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

SI Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information for Spatial Interface services (hardware, software, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

LDB Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Location Database services (hardware, software, training, maintenance, etc.). Add rows for each region as needed.
- Enter the NRC in whole dollars and the **MRC in monthly amounts per person amounts in cents**. The monthly amounts are automatically multiplied by 12 and the Region's population.

MISC Tab

- Change the free form "Bidder Input" labels as needed and enter the pricing information **in each region** for Miscellaneous services that are not part of one of the above functional elements or that may not have been covered in the RFP but are required in order to complete the project. Add rows for each region as needed.

ESInet Milestones	
Milestone 1: **Region 1** regional host connection and testing acceptance	0.00
Milestone 2: **Region 2** regional host connection and testing acceptance	0.00
Milestone 3: **Region 3** regional host connection and testing acceptance	0.00
Milestone 4: **Region 4** regional host connection and testing acceptance	0.00
Milestone 5: **Region 5** regional host connection and testing acceptance	0.00
Milestone 6: **Region 6** regional host connection and testing acceptance	0.00
Milestone 7: **Region 7** regional host connection and testing acceptance	0.00
TOTAL	0.00

NGCS Milestones	
Milestone 1: **Region 1** deployments complete	0.00
Milestone 2: **Region 2** deployments complete	0.00
Milestone 3: **Region 3** deployments complete	0.00
Milestone 4: **Region 4** deployments complete	0.00
Milestone 5: **Region 5** deployments complete	0.00
Milestone 6: **Region 6** deployments complete	0.00
Milestone 7: **Region 7** deployments complete	0.00
TOTAL	0.00

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name															
Date (MM/DD/YYYY):															
Next Generation Core Services	**INITIAL CONTRACT PERIOD**														
	YEAR 1		**YEAR 2**		**YEAR 3**		**YEAR 4**		**YEAR 5**		**YEAR 6**	**YEAR 7**	**YEAR 8**	**YEAR 9**	**YEAR 10**
	NRC	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**
ESInet	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LNG	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
BCF	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ESRP & PRF	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
ECRF & LVF	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
SI	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
LDB	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
MISC	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Total	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

Project Totals	**Year 1**	**Year 2**	**Year 3**	**Year 4**	**Year 5**	**Year 6**	**Year 7**	**Year 8**	**Year 9**	**Year 10**
Yearly Totals (NRC+MRC)	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Initial Contract (5 Year NRC+MRC)	0.00									
+ Optional Year 6 (6 Year NRC+MRC)	0.00									
+ Optional Years 7 (7 Year NRC+MRC)	0.00									
+ Optional Years 8 (8 Year NRC+MRC)	0.00									
+ Optional Years 9 (9 Year NRC+MRC)	0.00									
+ Optional Years 10 (10 Year NRC+MRC)	0.00									

State Population	
	2019 Estimates
Region One - ~~SE~~ SC	259,183
Region Two - ~~SC~~ SE	512,126
Region Three - Metro	772,006
Region Four - NC	28,227
Region Five - EC	180,423
Region Six - NE	114,203
Region Seven - Metro West	63,100
Total Population	1,929,268

Bidder Name:	0
Date (MM/DD/YYYY):	1/0/1900

	INITIAL CONTRACT PERIOD														
Emergency Services IP Network	**YEAR 1**		**YEAR 2**		**YEAR 3**		**YEAR 4**		**YEAR 5**		**Year 6**	**Year 7**	**Year 8**	**Year 9**	**Year 10**
	NRC	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**
Region One Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC REGION 1 TOTAL	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC REGION 2 TOTAL	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC REGION 3 TOTAL	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC REGION 4 TOTAL	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC REGION 5 TOTAL	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC REGION 6 TOTAL	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC REGION 7 TOTAL	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ESInet Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name:	0														
Date (MM/DD/YYYY):	1/0/1900														
	INITIAL CONTRACT PERIOD														
Legacy Network Gateway	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
Bidder Input															
Bidder Input															
Bidder Inpur															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
LNG Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

Bidder Name:	0														
Date (MM/DD/YYYY):	1/0/1900														
	INITIAL CONTRACT PERIOD														
Border Control Function	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
Bidder Input															
Bidder Input															
Bidder Inpur															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
BCF Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

Bidder Name:	0														
Date (MM/DD/YYYY):	1/0/1900														
Emergency Services Routing Proxy & Policy Routing Function	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
Bidder Input															
Bidder Input															
Bidder Inpur															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ESRP & PRF Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

Bidder Name:	0														
Date (MM/DD/YYYY):	1/0/1900														
Emergency Call Routing Function & Location Validation Function	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
Bidder Input															
Bidder Input															
Bidder Inpur															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
ECRF & LVF Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

Bidder Name:	0														
Date (MM/DD/YYYY):	1/0/1900														
Spatial Interface	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
Bidder Input															
Bidder Input															
Bidder Inpur															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
SI Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

6264 Z1 Cost Proposal Option C ESInet NGCS Revision One

Bidder Name:	0
Date (MM/DD/YYYY):	1/0/1900

Location Database	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
Bidder Input															
Bidder Input															
Bidder Inpur															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
LDB Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

Bidder Name:	0														
Date (MM/DD/YYYY):	1/0/1900														
Miscellaneous	INITIAL CONTRACT PERIOD														
	YEAR 1		YEAR 2		YEAR 3		YEAR 4		YEAR 5		Year 6	Year 7	Year 8	Year 9	Year 10
	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	NRC	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]	MRC[1]
Region One Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
Bidder Input															
Bidder Input															
Bidder Inpur															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
MISC Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

Bidder Name:	0
Date (MM/DD/YYYY):	1/0/1900

Optional Svc for NGCS	**INITIAL CONTRACT PERIOD**														
	YEAR 1		**YEAR 2**		**YEAR 3**		**YEAR 4**		**YEAR 5**		**Year 6**	**Year 7**	**Year 8**	**Year 9**	**Year 10**
	NRC	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**NRC**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**	**MRC[1]**
Region One Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 1 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Two Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 2 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Three Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 3 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Four Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 4 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Five Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 5 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Six Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 6 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Region Seven Milestone															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
Bidder Input															
NRC/MRC Region 7 Total	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Opt. Svc NGCS Total	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**	**0.0000**

EVALUATION CRITERIA

RFP NUMBER 6264 Z1 Option C - ESInet and NGCS
Opening Date: June 3, 2020

Proposal Requirements
The proposals will first be examined to determine if all requirements listed below have been addressed and whether further evaluation is warranted. Proposals not meeting the requirements may be rejected as non-responsive. The requirements are:

1. Original Request for Proposal for Contractual Services form signed using an indelible method;
2. Clarity and responsiveness of the proposal;
3. Completed Corporate Overview;
4. Completed Sections II through IV;
5. Attachment C - Technical Requirements Option C
6. Proposed high-level project plan
7. Schedule for the lifecycle of this project; and
8. Completed State Cost Proposal Template.

Evaluation Criteria
All responses to this Request for Proposal, which fulfill all proposal requirements, will be evaluated. Each category will have a maximum possible point potential. Areas that will be addressed and scored during the evaluation include:

Evaluation Criteria	Possible Points
Part 1 — Corporate Overview	400
Part 2 — Technical Approach	2840
Part 3 — Cost Proposal Points	500
Total Points without Oral Interviews	3740
Oral Interviews, (if required)	900
Total Points with Oral Interviews	4640

Part 4 – Cost Proposal Points
Cost points should be calculated as follows:

1. Establish lowest cost submitted – lowest cost submitted receives the maximum points.
2. To assign points to all others, the following formula should be followed:
   Lowest Cost Submitted ÷ Cost Submitted x Maximum Possible Cost Points = Cost Points to Award (see samples below)

	Formula	Sample	Sample	Sample
	Lowest Cost Submitted	$100,000	$100,000	$100,000
÷	Cost Submitted	$100,000	$200,000	$150,000
x	Maximum Possible Cost Points	40	40	40
=	Points To Award	40	20	26.7